

MECCANO



(TRADE MARKS. 296321, 12633, 10274, 884/25, 2913)

INSTRUCTIONS

BOOK No. 1

3/6

Copyright by MECCANO LIMITED, LIVERPOOL, throughout the world

No. 26

OVERSEAS EDITION

wonder
Inexper

A M
t
correspo
happy

The
Clubs an
articles
from M

The
dealer c
free. V

A TALK WITH NEW MECCANO BOYS



MECCANO OUTFITS contain accurately-made and highly-finished engineering parts with which any known mechanical movement may be reproduced in model form. With Meccano you can accomplish more than with any other constructional toy, for no other system has its possibilities. No study is needed to enable you to build models with Meccano—the genius is in the Meccano parts.

“You never come to the end of Meccano fun. There is always more ahead—always some new, ingenious and interesting model to build. Each one, as it is completed, “tuned up,” and set going, brings a joy and satisfaction beyond anything that you have ever previously experienced.

As you progress in Meccano you obtain a greater variety of parts, Gear-Wheels, Pulley-Wheels, Worm-Wheels, Couplings, Cranks, and all manner of perfectly-made real engineering parts. These enable you to construct complicated mechanical movements without any difficulty. The most

wonderful feature of Meccano is that it is *real engineering*; it is fascinating and delightful and yet so simple that even an inexperienced boy may join in the fun without first having to study or learn anything.

THE LIFE OF A MECCANO BOY

A MECCANO boy is the happiest boy in the world. He builds models from the Meccano Instruction books; invents new models; joins the Meccano Guild and a Meccano Club and by wearing the Guild badge proclaims himself to be the friend of millions of other Meccano boys all over the world. He reads the *Meccano Magazine* regularly and corresponds with his friend the Editor when he feels like it. Time never hangs heavily on his hands and he is too busy and happy to grumble.

The *Meccano Magazine* is the Meccano boy's newspaper. It tells him of the latest Meccano models; what Meccano Clubs are doing; how to correspond with other Meccano boys; the Competitions that are running, etc. It contains interesting articles on engineering and electrical subjects, and deals with many other topics of interest to boys, including suggestions from Meccano boys for new Meccano parts and correspondence columns in which the Editor replies to his readers' enquiries.

The subscription rate to the *Meccano Magazine* is 3/6 for six issues or 7/- for twelve issues, post free. Your Meccano dealer can also supply it at 6d. per copy. If desired, we shall be pleased to send you a copy of the current issue for 7d. post free. Write to the Editor, *Meccano Magazine*, Binns Road, Liverpool, enclosing a remittance for this amount.





MECCANO GUILD
MEMBER'S CERTIFICATE.

THE MECCANO GUILD

THE MECCANO GUILD is an organisation for boys, started at the request of boys and conducted as far as possible by boys. The Guild is a great fraternal organisation of which all Meccano boys should become members, for its primary object is to bring them together. The Guild makes these boys feel that they are all members of a great brotherhood, each trying to help the others to get the very best out of life and it cannot fail to have a profound effect for good on the lives of its members.

MECCANO CLUBS

MECCANO CLUBS are founded and established under the guidance of the Guild Secretary at Headquarters and at the present time there are active Clubs in over one hundred towns and villages in the United Kingdom and in many countries Overseas. Each Club has its Leader, Secretary, Treasurer, and other officials all of whom, with the exception of the Leader, are boys. Write for information how to form a club, if there is no club near you.

Special awards are given to Club members for good work in connection with their Club and medallions are awarded in connection with the Recruiting Campaign, full particulars of which will be sent on request.

HOW TO BUILD WITH MECCANO

FOLLOW the instructions closely at first, and build the models just as you see them. Then take each model and try to improve our design. Every model can be made in a dozen different ways. Screw up all the nuts and bolts firmly and you will find that you can play with the trucks, cranes, signals, etc., and obtain many hours of fun.

For convenience Meccano parts are sold in nine Outfits of varying size, numbered 00 to 7. The quality and finish of the parts are of the same high standard throughout the series, but as the Outfits increase in size they contain larger quantities and greater varieties of parts. Each Outfit may be converted into the one next higher by the purchase of an Accessory Outfit (see page 208). Thus, if a No. 2 is the first Outfit bought, it may be converted into a No. 3 by adding to it a No. 2A. A No. 3A would then convert it into a No. 4 and so on up to No. 7. In this way, no matter with what Outfit you commence, you may build it up by degrees to a No. 7.

The separate Meccano parts may be bought at any time in any quantity (see price list).



SPECIAL MERIT MEDALLIONS.




RECRUITING MEDALLION.

These Models can be made with MECCANO Outfit No. 0.

5


Trucks and Luggage Carts

Model No. 1
Flat Truck

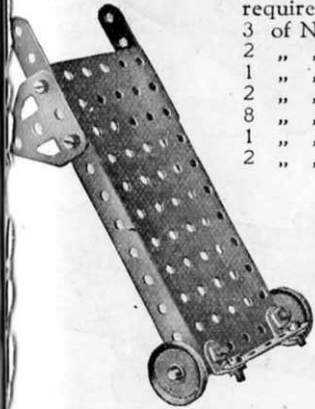


Parts
required:
3 of No. 5
2 " " 12
1 " " 16
2 " " 22
8 " " 37
1 " " 52
2 " " 126A

Model No. 2
Truck with Sides

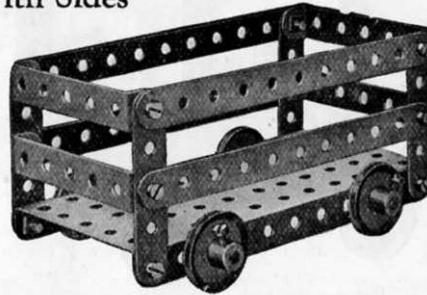


Parts required:
4 of No. 2 | 4 of No. 22
4 " " 5 | 12 " " 37
2 " " 16 | 4 " " 48A
1 of No. 52

Model No. 3
Luggage Cart

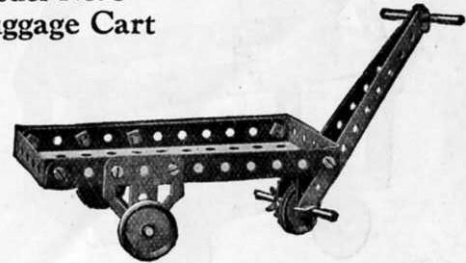


Parts required:
2 of No. 2 | 9 of No. 37
1 " " 16 | 1 " " 44
2 " " 17 | 2 " " 48A
3 " " 22 | 1 " " 52
4 " " 35 | 2 " " 126A

Model No. 4
Truck

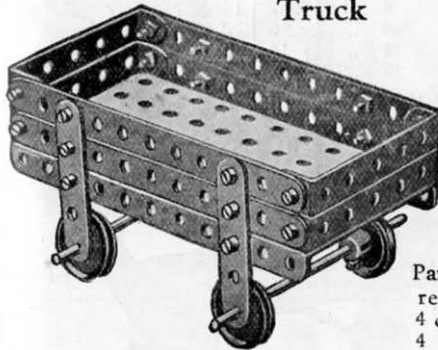


Parts
required:
4 of No. 2
4 " " 5
2 " " 16
4 " " 22
16 " " 37
4 " " 48A
1 " " 52

Model No. 5
Luggage Truck

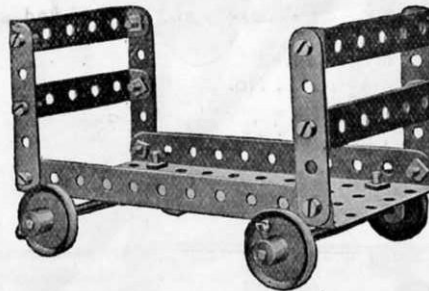

Parts required:
4 of No. 5 | 16 of No. 37
2 " " 16 | 4 " " 48A
4 " " 22 | 1 " " 52


Model No. 6
Barrow

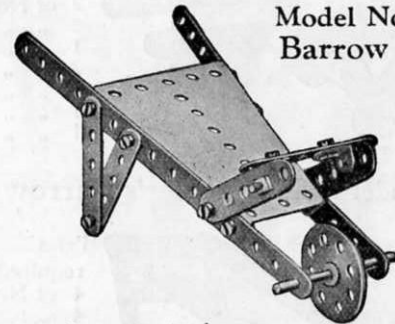

Parts required:
2 of No. 2 | 1 of No. 24
9 " " 5 | 2 " " 35
2 " " 12 | 14 " " 37
1 " " 17 | 1 " " 54

These Models can be made with MECCANO Outfit No. 0.


Model No. 7
Covered Truck

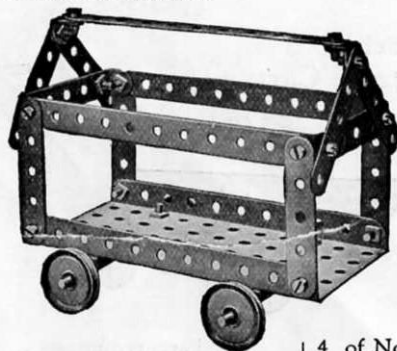

Parts required:			4 of No. 22
3 of No. 2	2 of No. 12	4 " "	37
8 " "	5 " "	4 " "	48A
		1 " "	52


Trucks and Luggage Carts (continued)

Model No. 8 Timber Truck

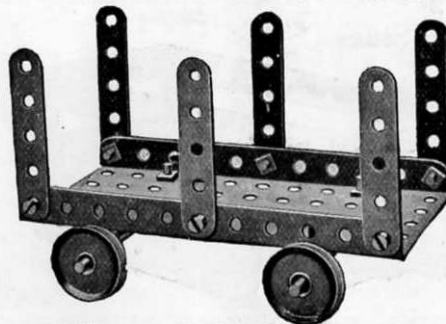


Parts required:			6 of No. 5	10 of No. 37
2 " "	16 " "	2 " "	48A	
4 " "	22 " "	1 " "	52	

Model No. 9
Flat Truck

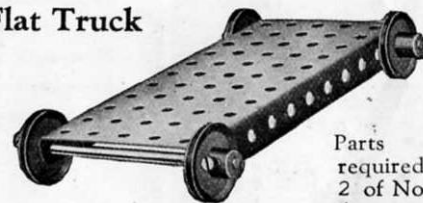


Parts required:			2 of No. 16
4 " "	" "	22	
1 " "	" "	52	

Model No. 12
Luggage Cart

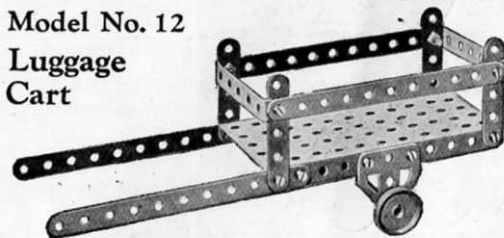


Parts required:			4 of No. 2	14 of No. 37
4 " "	5 " "	2 " "	48A	
1 " "	16 " "	1 " "	52	
2 " "	22 " "	2 " "	126A	

Model No. 10
Luggage Barrow

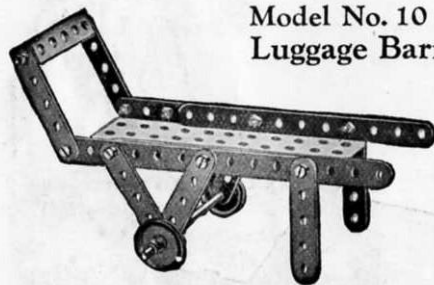


Parts required:			2 of No. 2
8 " "	" "	5	
1 " "	" "	16	
2 " "	" "	22	
10 " "	" "	37	
1 " "	" "	48A	
1 " "	" "	52	

Model No. 11 Timber Truck

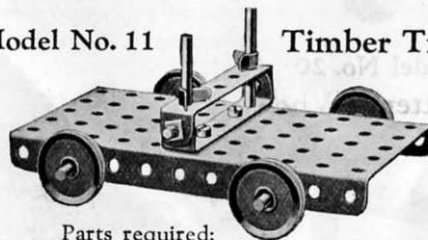

Parts required:			2 of No. 16	4 of No. 35
2 " "	17 " "	4 " "	37	
4 " "	22 " "	2 " "	48A	
		1 of No. 52		

Model No. 13 Coster's Barrow

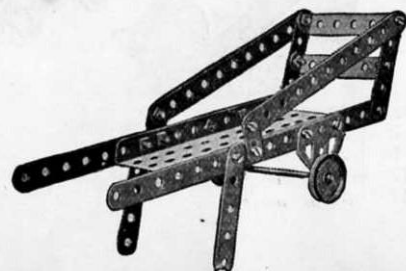

Parts required:			4 of No. 2
4 " "	" "	5	
1 " "	" "	16	
2 " "	" "	22	
16 " "	" "	37	
2 " "	" "	48A	
1 " "	" "	52	
2 " "	" "	126A	

Model No. 14 Timber Drag



Parts required:			4 of No. 2	2 of No. 16	8 of No. 37
2 " "	11 " "	4 " "	22	4 " "	48A

Model No. 15
Bath Chair



Parts required:			1 of No. 16	13 of No. 37
2 " "	" "	17	1 " "	44
2 of No. 2	3 " "	22	3 " "	48A
6 " "	5 " "	35	1 " "	52

Model


Model
Railv
Signa

Par
req
3
7
2
2
2
2
1
4
21
1
1

These Models can be made with MECCANO Outfit No. 0.


7

Model No. 16 Go Chair

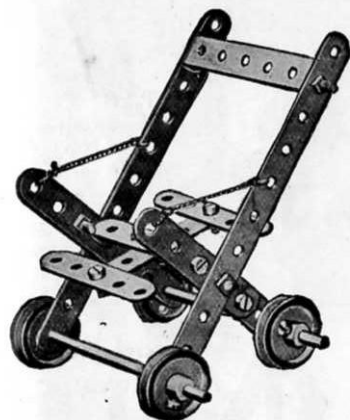


Parts
required:
2 of No. 2
7 " " 5
2 " " 16
4 " " 22
11 " " 37
2 " " 48A

Model No. 17 Well Windlass

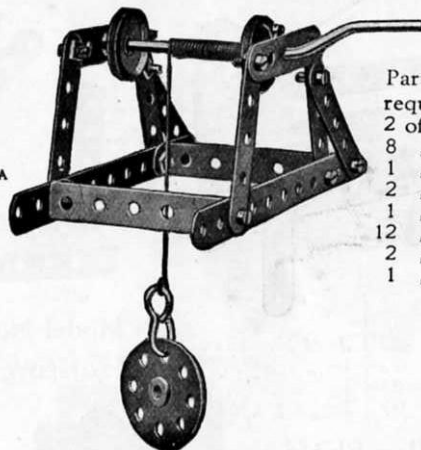

Parts
required:
2 of No. 2
8 " " 5
1 " " 19
2 " " 22
1 " " 24
12 " " 37
2 " " 48A
1 " " 57

Model No. 18
See-Saw

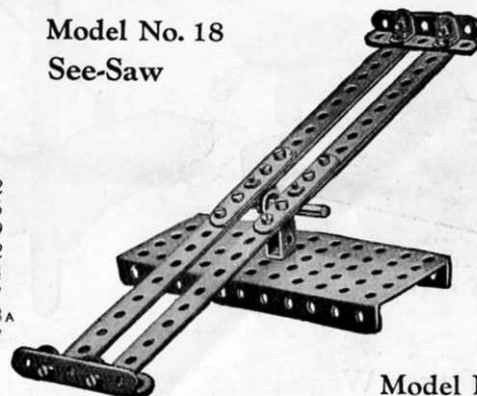

Parts
required:
4 of No. 2
6 " " 5
6 " " 12
1 " " 17
15 " " 37
1 " " 44
1 " " 52

Potter's Wheel
(underneath view)


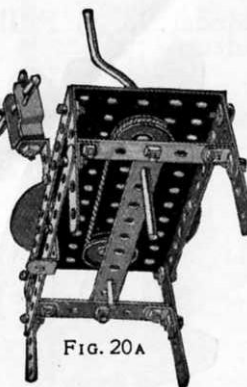


FIG. 20A

Parts required:

3 of No. 2	2	1 of No. 24
4 " " 5	2	35
1 " " 16	17	" " 37
1 " " 19	1	" " 44
2 " " 22	3	" " 48A
1 of No. 52		

Model No. 21
Cot

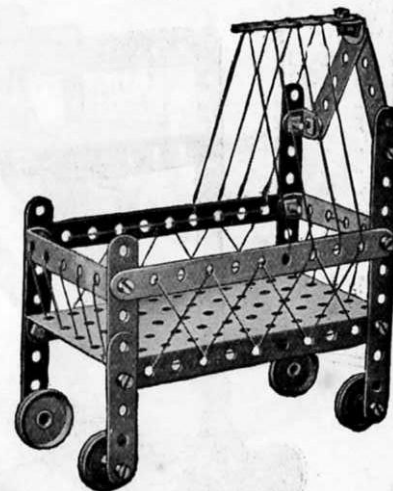


Parts required:

4 of No. 2	4 of No. 22
7 " " 5	18 " " 37
3 " " 12	2 " " 48A
1 of No. 52	

Model No. 19
Railway
Signal

Parts
required:
3 of No. 2
7 " " 5
2 " " 10
2 " " 11
2 " " 12
2 " " 17
2 " " 22
1 " " 23
4 " " 35
21 " " 37
1 " " 52
1 " " 126A

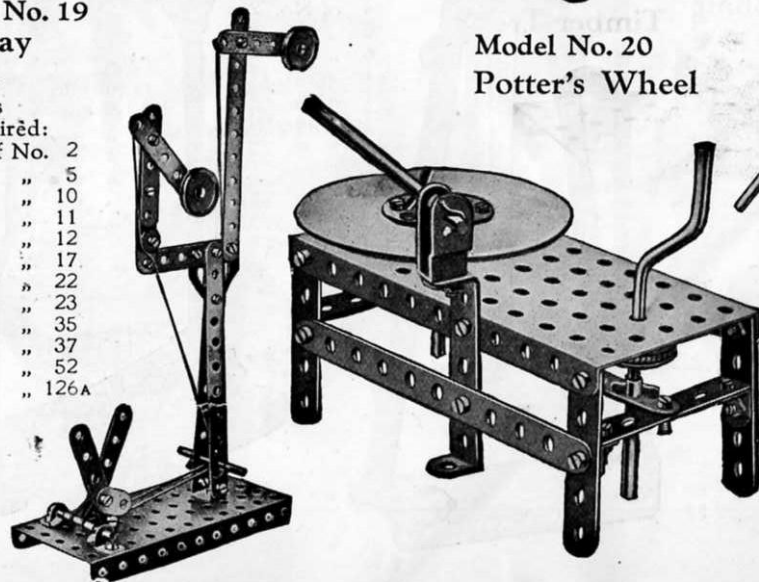


Model No. 20
Potter's Wheel

No. 37
" 44
" 48A
" 52

These Models can be made with MECCANO Outfit No. 0.

Model No. 22 Scales

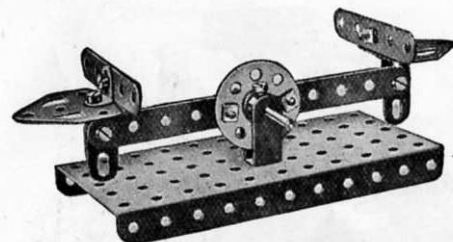


Parts required:		
1 of No. 2	2 of No. 12	1 of No. 44
2 " " 5	1 " " 17	1 " " 52
2 " " 10	1 " " 24	2 " " 126A
	9 " " 37	


Model No. 25 Tower Wagon

Parts required:

4 of No. 2	2
8 " " 5	
2 " " 16	
1 " " 17	
1 " " 19	
4 " " 22	
1 " " 23	
4 " " 35	
24 " " 37	
1 " " 52	
1 " " 54	
1 " " 57	
2 " " 126A	

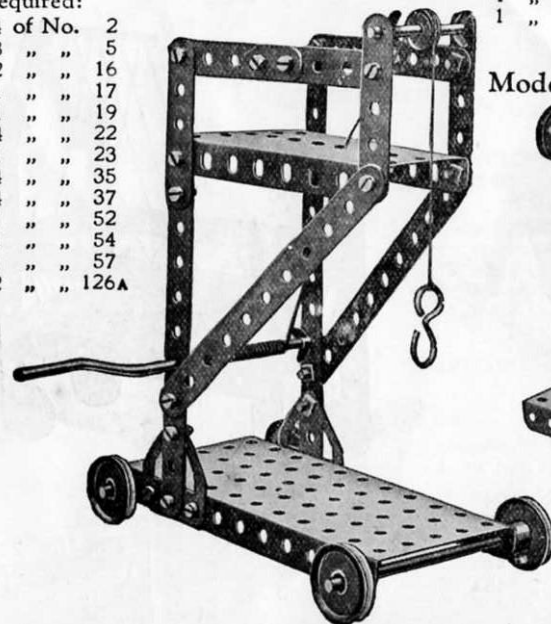


Model No. 23
Gangway

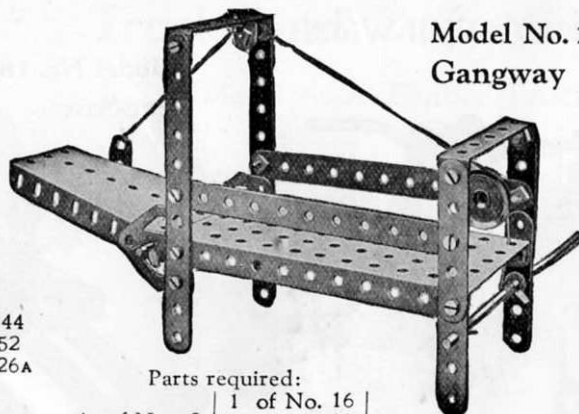

Parts required:


4 of No. 2	1 of No. 16	
4 " " 5	1 " " 19	
1 " " 10	1 " " 22	2 of No. 48A
1 " " 12	1 " " 23	1 " " 52
	4 " " 35	1 " " 54
	18 " " 37	2 " " 126A

Model No. 26 Pulley Shaft

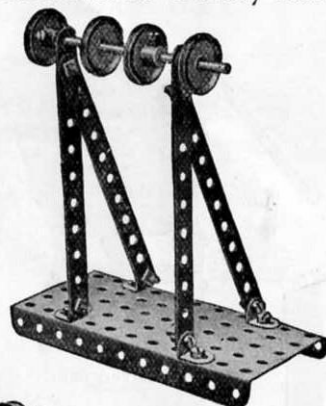


Parts required:		
4 of No. 2	10 of No. 37	
4 " " 12	2 " " 38	
1 " " 16	1 " " 52	
4 " " 22		

Model No. 24
Level
Crossing
Barrier

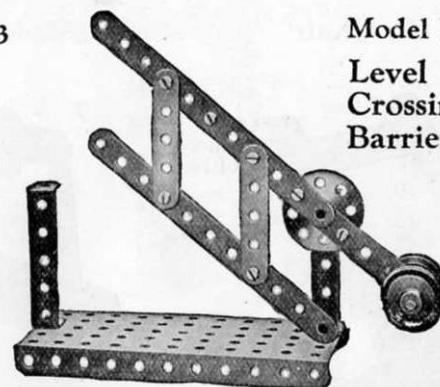

Parts required:		
3 of No. 2		
2 " " 5		
1 " " 17		
4 " " 22		
1 " " 24		
10 " " 37		
2 " " 48A		
1 " " 52		


Model No. 27
Hoisting Block

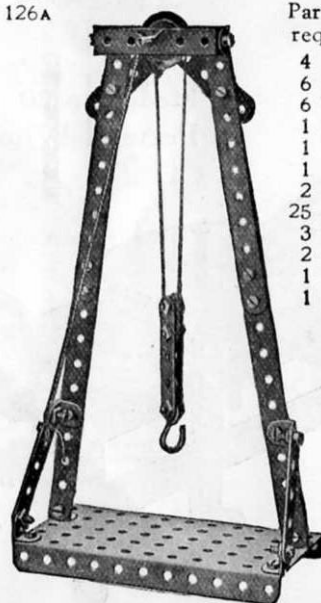

Parts required:

4 of No. 2	5
6 " " 12	
6 " " 17	
1 " " 22	
1 " " 23	
2 " " 35	
25 " " 37	
3 " " 38	
2 " " 48A	
1 " " 52	
1 " " 57	

Model No. 28
Railway
Signal

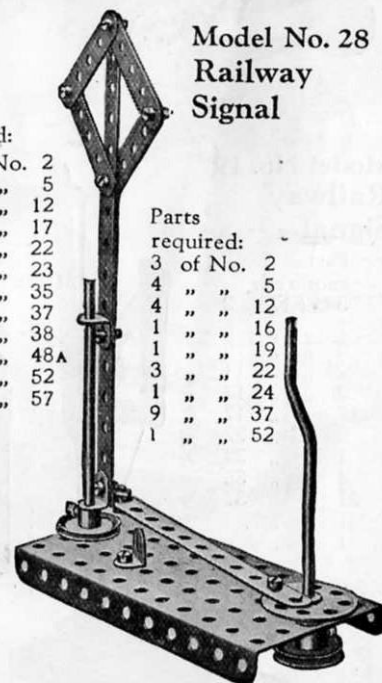


Parts required:		
3 of No. 2		
4 " " 5		
4 " " 12		
1 " " 16		
1 " " 19		
3 " " 22		
1 " " 24		
9 " " 37		
1 " " 52		

These Models can be made with MECCANO Outfit No. 0.


9

Model No. 29 Drilling Machine

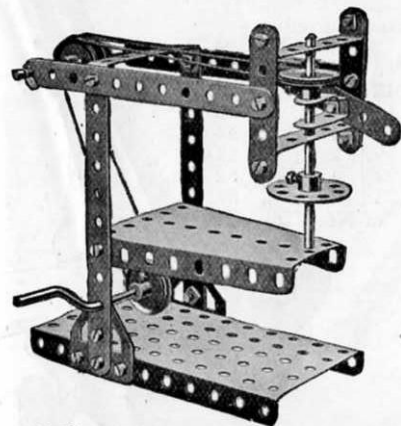


Parts required:		
4 of No.	2	
3 "	5	
1 "	11	
2 "	16	
1 "	19	
4 "	22	
1 "	24	
4 "	35	
19 "	37	
1 "	44	
3 "	48A	
1 "	52	
1 "	54	
2 "	126A	

Model No. 30 Jib Crane

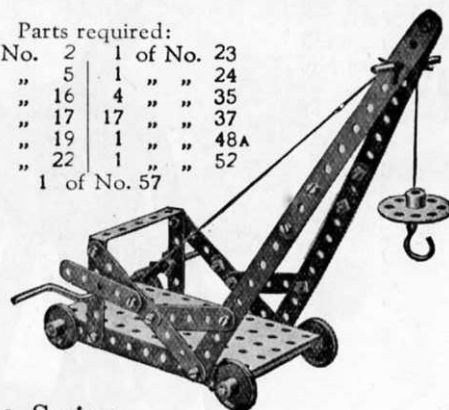


Parts required:		
4 of No.	2	1 of No. 23
9 "	5	1 " " 24
2 "	16	4 " " 35
1 "	17	17 " " 37
1 "	19	1 " " 48A
4 "	22	1 " " 52
1 of No. 57		

Model No. 31 Rock Drill

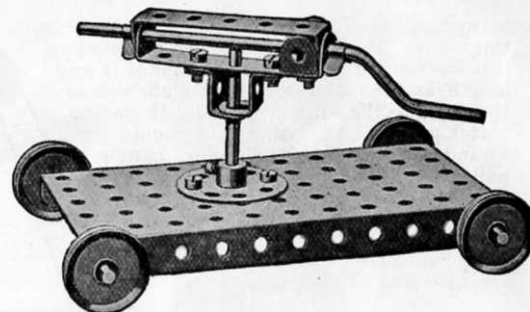


Parts required:		
1 of No.	19	4 of No. 37
4 "	22	2 " " 48A
1 "	24	1 " " 52
2 "	35	2 " " 125

Model No. 33 Swing

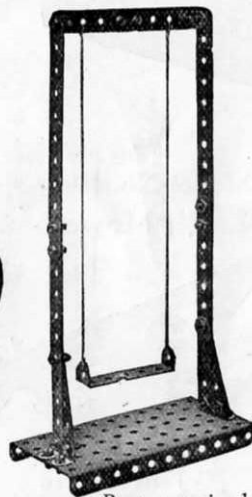


Parts required:		
4 of No.	2	20 of No. 37
4 "	5	1 " " 48A
6 "	12	1 " " 52

Model No. 34 Ore Crusher

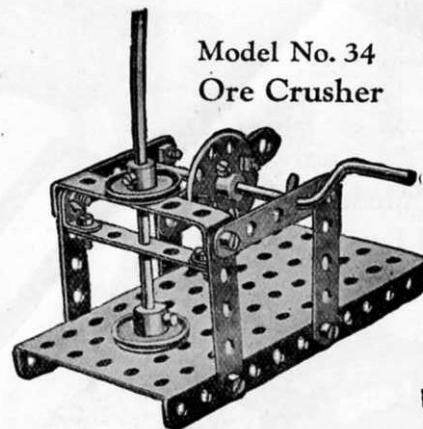


Parts required:		
6 of No.	5	1 of No. 24
2 "	10	2 " " 35
1 "	16	10 " " 37
1 "	19	2 " " 48A
2 "	22	1 " " 52

Model No. 35 Buffing Spindle

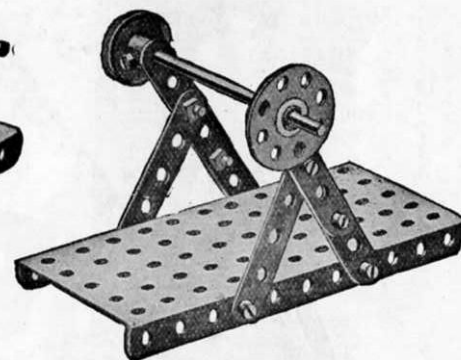

Parts required:		
6 of No.	5	1 of No. 24
1 "	16	8 " " 37
1 "	22	1 " " 52

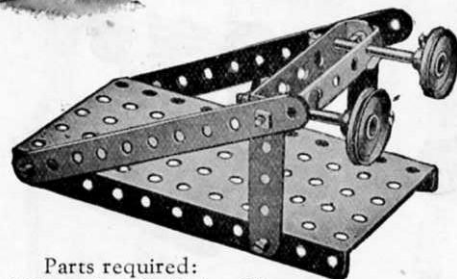FIG. 29A
(Detail of
Drilling
Machine)Model No. 32
Buffers


Parts required:		
2 of No.	2	2 of No. 35
2 "	5	6 " " 37
2 "	17	2 " " 48A
2 "	22	1 " " 52

Model No. 36 Telfer Span


Many hours of enjoyment may be obtained from this model. The illustration shows exactly how it is worked. The cords may be made to any length, and the load carried from one side of the room to the other. In order to give a better grip, the operating cord should be wound twice round the crank handle pulley. The body of the telfer should be screwed down to a solid base with ordinary wood screws, and the pulley bracket screwed in a suitable position on the opposite side of the room.

Parts required:



4	of No.	2
6	" "	5
4	" "	12
1	" "	16
1	" "	17
1	" "	19
4	" "	22
6	" "	35
14	" "	37
1	" "	44
2	" "	48A
1	" "	52
1	" "	54

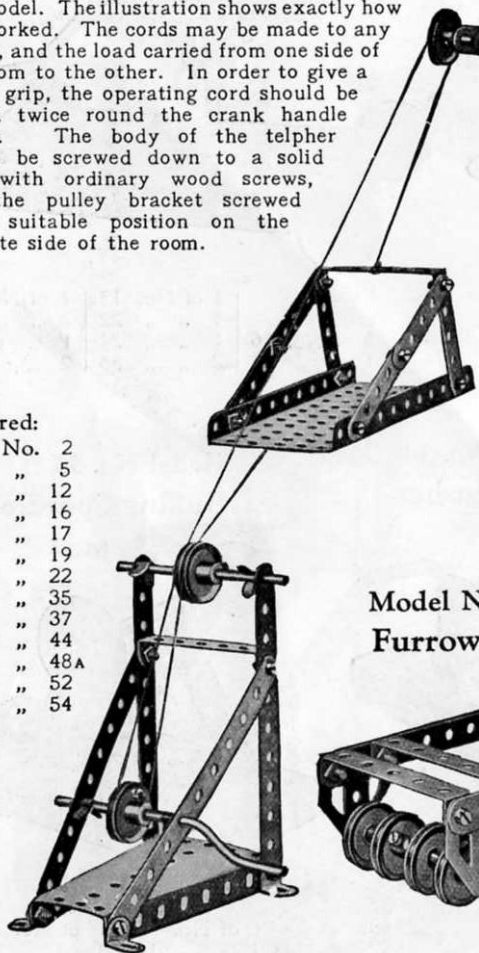**Model No. 37 Windmill****Parts**


4	of No.	2
4	" "	5
1	" "	16
1	" "	19
2	" "	22
1	" "	24
4	" "	35
12	" "	37
2	" "	48A
1	" "	52

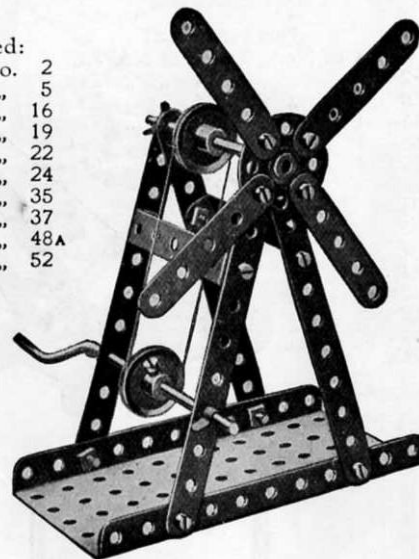**Model No. 38 Swivelling Crane****Parts required:**


2	of No.	2	1	of No.	24
4	" "	5	4	" "	35
4	" "	12	18	" "	37
2	" "	16	4	" "	38
2	" "	17	1	" "	44
1	" "	19	2	" "	48A
4	" "	22	1	" "	52
1	" "	23	1	" "	57
			1	of No.	125

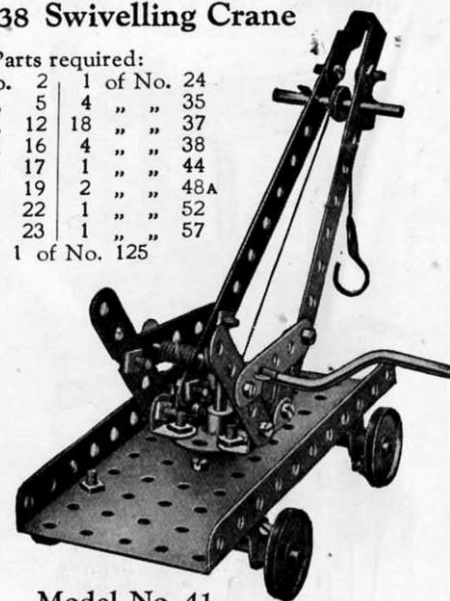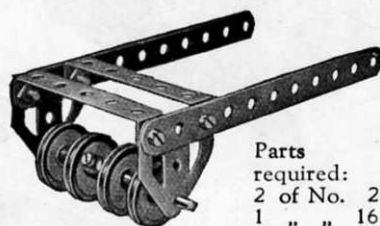**Model No. 39 Furrow Roller****Parts**

2	of No.	2
1	" "	16
4	" "	22
4	" "	37
2	" "	48A
2	" "	126A

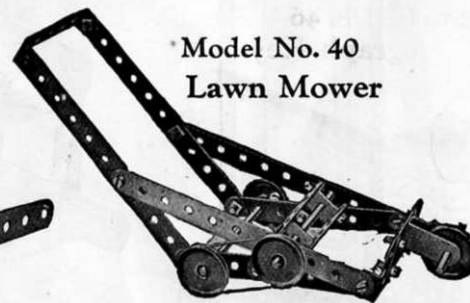Model No. 40 Lawn Mower**Parts required**

4	of No.	2	1	of No.	17
7	" "	5	4	" "	22
2	" "	11	19	" "	37
2	" "	16	1	" "	44
			3	of No.	48A

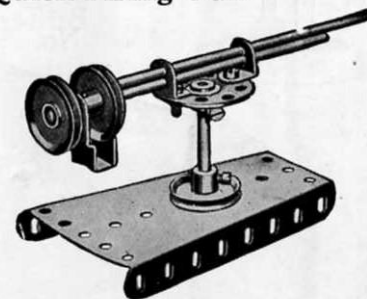Model No. 41 Quick-Firing Gun**Parts required:**

2	of No.	12	1	of No.	24
2	" "	16	4	" "	37
1	" "	17	1	" "	44
			1	of No.	54

These Models can be made with MECCANO Outfit No. 0.


11

Model No. 42 Swivelling Crane


The sector plate of the Crane in this model is pivoted to the base with a fast pulley above and below.

Parts required:

4 of No. 2	21 of No. 37
7 " " 5	3 " " 38
2 " " 12	1 " " 44
2 " " 17	1 " " 48A
1 " " 19	1 " " 52
4 " " 22	1 " " 54
1 " " 23	1 " " 57
2 " " 35	2 " " 126A

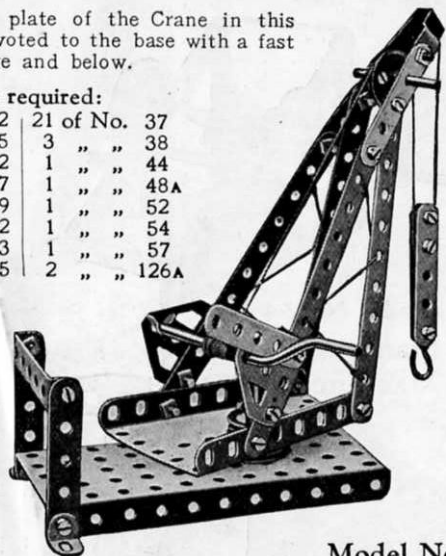

Model No. 43 Ticca Gharry

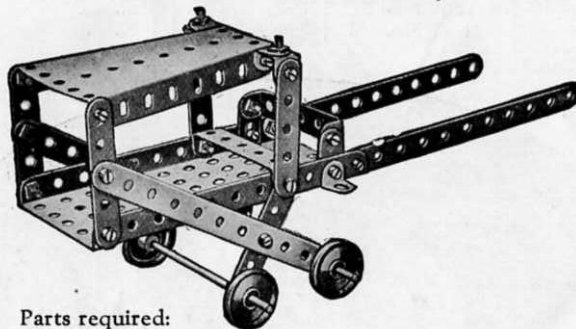


Parts required:

4 of No. 2	2 of No. 16
6 " " 5	4 " " 22
2 " " 10	22 " " 37
6 " " 12	1 " " 52
1 of No. 54	

Model No. 44

Watch Stand


Parts required:	
2 of No. 2	
1 " " 23	
10 " " 37	
1 " " 52	
1 " " 57	
1 " " 125	
2 " " 126A	

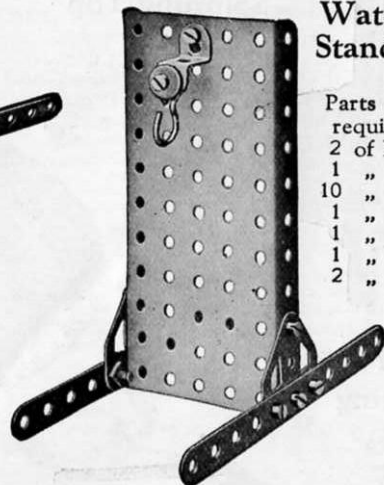


Model No. 45 Coronation Chair

Parts required:

4 of No. 2
9 " " 5
2 " " 10
2 " " 12
19 " " 37
2 " " 48A
1 " " 52

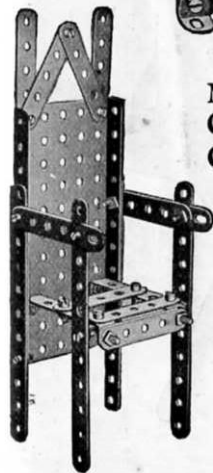


Model No. 46 Telegraph Key

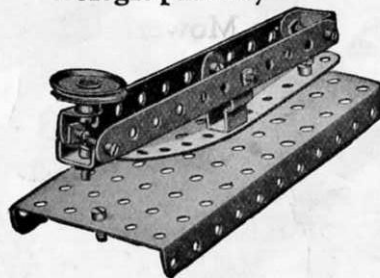

Parts required:

3 of No. 2	1 of No. 22
1 " " 10	11 " " 37
2 " " 11	1 " " 44
1 " " 12	1 " " 52

Model No. 47 Sawing Machine

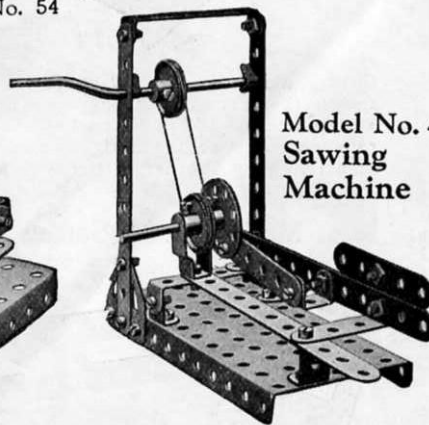


Parts required:

4 of No. 2	1 of No. 24
3 " " 3	2 " " 35
4 " " 12	23 " " 37
1 " " 17	1 " " 44
1 " " 19	2 " " 48A
2 " " 22	1 " " 52
2 of No. 126A	

Model No. 48 Gong

Parts required:


4 of No. 2
1 " " 5
3 " " 12
1 " " 16
1 " " 22
7 " " 37
1 " " 52
1 " " 54

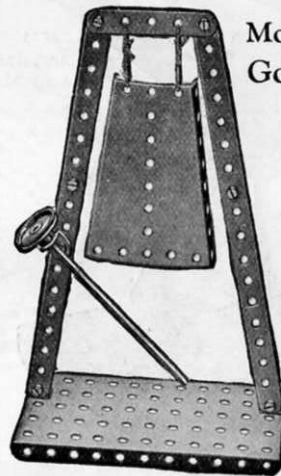

No. 24
" 37
" 44


These Models can be made with MECCANO Outfit No. 0.

Model No. 49
Spinning Top

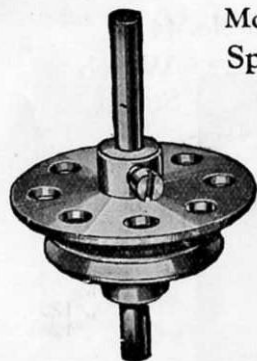

Parts
required:
1 of No. 17
1 " " 22
1 " " 24


Model No. 52
Punching
Machine

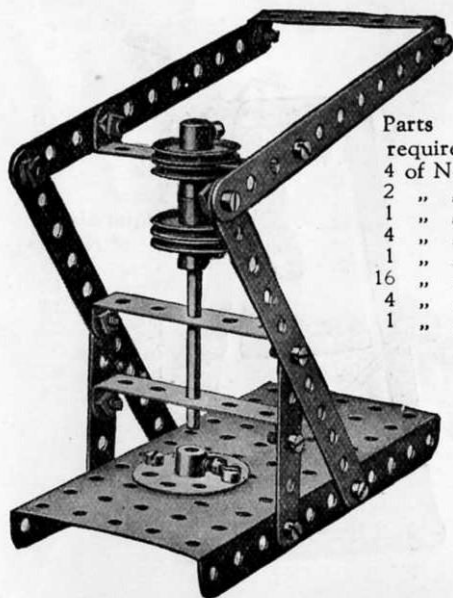

Parts
required:
4 of No. 2
2 " " 5
1 " " 16
4 " " 22
1 " " 24
16 " " 37
4 " " 48A
1 " " 52


Model No. 50 Roulette Wheel

Parts	5 of No. 5	1 of No. 24
required:	1 " " 16	5 " " 37
1 of No. 2	3 " " 22	1 " " 52

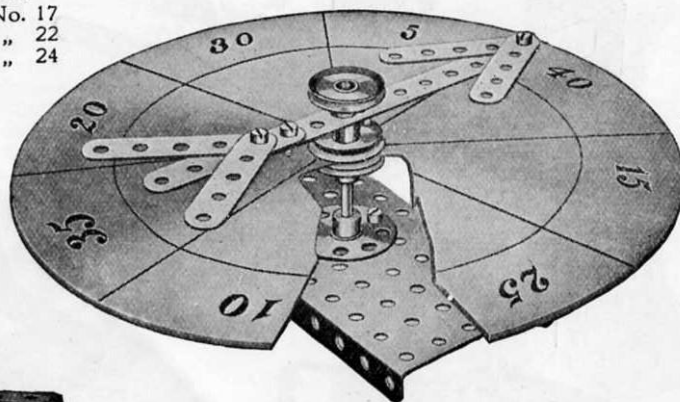


Cut out a circular piece of cardboard and mark as shown to form scoring board. This is clamped between two 1" pulley wheels. The pointer revolves freely on the upright spindle and is held in position by another 1" pulley wheel.

Model No. 53 Settee

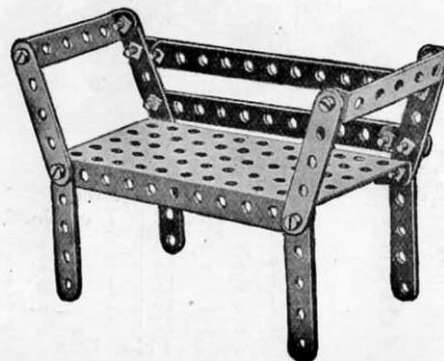


Parts
required:
2 of No. 2
8 " " 5
3 " " 10
15 " " 37
2 " " 48A
1 " " 52

Model No. 51
Mechanical Hammer

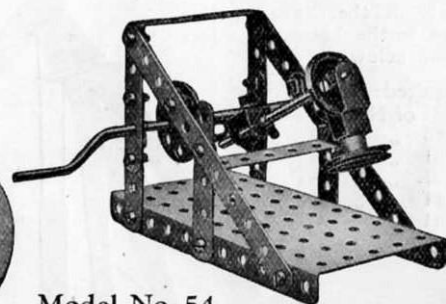

Parts
required:
2 of No. 2
6 " " 5
1 " " 11
1 " " 12
1 " " 16
1 " " 19
2 " " 22
1 " " 24
4 " " 35
18 " " 37
1 " " 44
3 " " 48A
1 " " 52


Model No. 54
Stamping
Machine

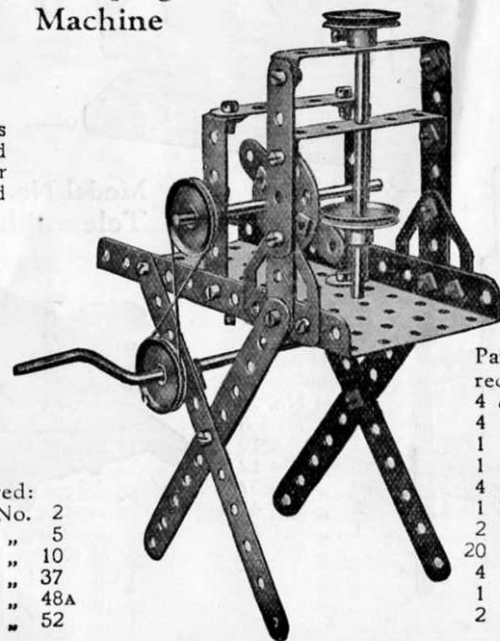


Parts
required:
4 of No. 2
4 " " 5
1 " " 16
1 " " 19
4 " " 22
1 " " 24
2 " " 35
20 " " 37
4 " " 48A
1 " " 52
2 " " 126A

Model No. 55
Anchor

Parts
required:
2 of No. 2
3 " " 5
4 " " 10
4 " " 12
11 " " 37
1 " " 57

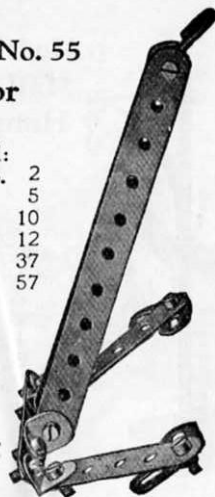


Model No. 56
Devil Wall

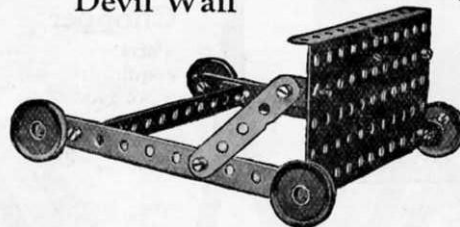


Parts required:
3 of No. 2 | 4 of No. 22
2 " " 5 | 18 " " 37
6 " " 12 | 1 " " 52

Model No. 57
Invalid Chair

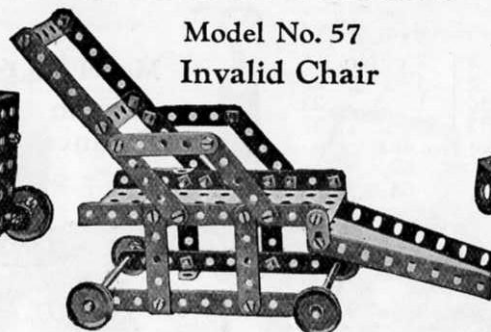

Parts
required:
2 of No. 10 | 4 of No. 48A
2 " " 16 | 1 " " 52
4 of No. 2 | 4 " " 22 | 1 " " 54
6 " " 5 | 24 " " 37


Model No. 58
Grill

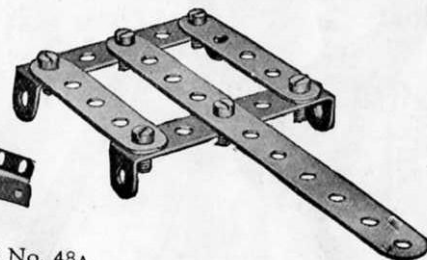


Parts required:
1 of No. 2 | 6 of No. 37
2 " " 5 | 2 " " 48A

Model No. 59
Bogie Car

Parts
required:
4 of No. 2
3 " " 5
4 " " 10
2 " " 16
4 " " 22
18 " " 37

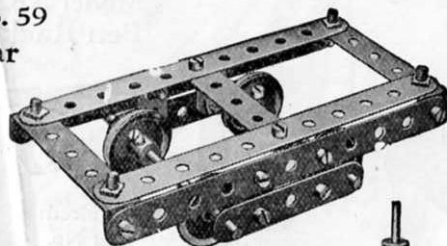


Model No. 60 **Fire Stand**

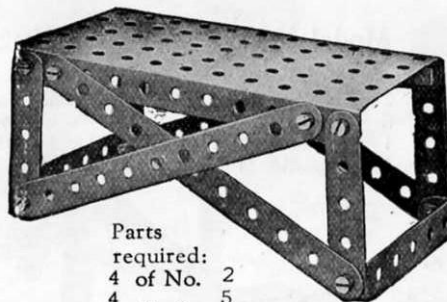


Parts
required:
4 of No. 2
4 " " 5
12 " " 37
2 " " 48A
1 " " 52

Model No. 61
Cutlery Rest

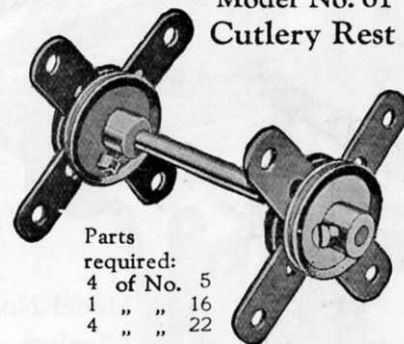


Parts
required:
4 of No. 5
1 " " 16
4 " " 22

Model No. 62
Battleship

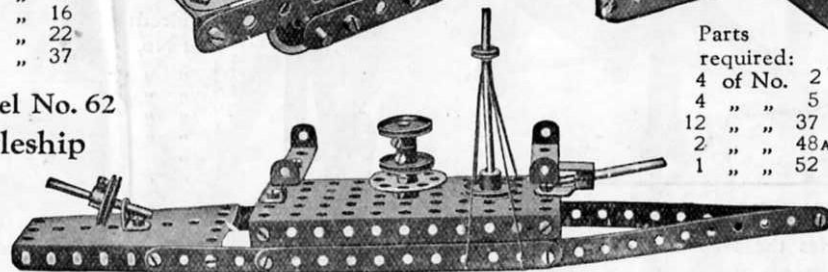

Parts required:
4 of No. 2 | 1 of No. 16 | 1 of No. 24 | 2 of No. 48A
3 " " 5 | 2 " " 17 | 3 " " 35 | 1 " " 52
4 " " 10 | 4 " " 22 | 19 " " 37 | 1 " " 54
1 " " 12 | 1 " " 23 | 1 " " 44 | 1 " " 125

Model No. 63
Lorry

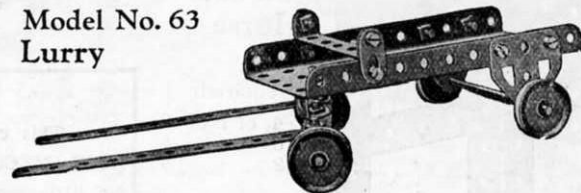


Parts required:
2 of No. 2 | 2 of No. 16 | 2 of No. 48A
2 " " 10 | 4 " " 22 | 1 " " 52
1 " " 11 | 12 " " 37 | 2 " " 126A

14

These Models can be made with MECCANO Outfit No. 0.


Model No. 64
Sailing
Boat

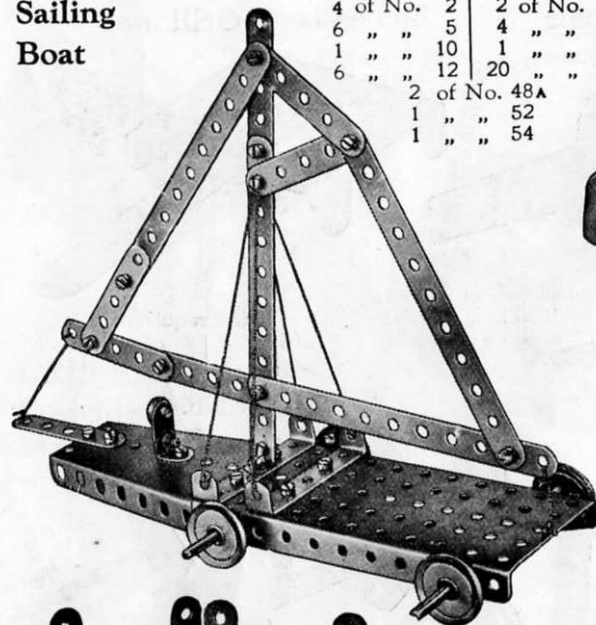

Parts required:

4 of No.	2	2 of No.	16
6 " "	5	4 " "	22
1 " "	10	1 " "	23
6 " "	12	20 " "	37
	2 of No.	48A	
	1 " "	52	
	1 " "	54	

Model No. 65
Roman
Balance

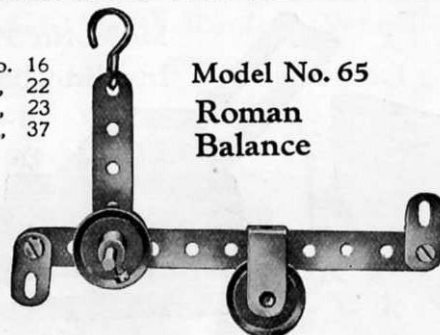


Parts required:

1 of No.	2	3 of No.	22
1 " "	5	3 " "	37
2 " "	10	1 " "	44
1 " "	17	1 " "	57

Model No. 68 Shipyard Bogie

Parts required:


2 of No.	2	2 of No.	22
5 " "	5	10 " "	37
1 " "	12	2 " "	48A
1 " "	16	1 " "	52

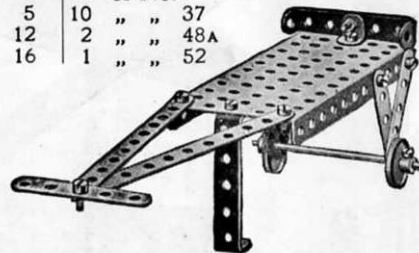

Model No. 69
Clothes
Horse

Parts required:

4 of No.	2
6 " "	5
12 " "	37

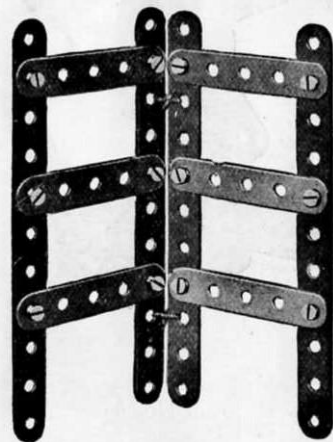


Model No. 66
Vegetable
Chopper

Parts

required:


4 of No.	2
4 " "	5
18 " "	37
4 " "	48A

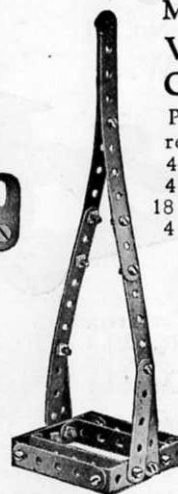

Model No. 67
Mail-Bag
Hanger

Parts required:


4 of No.	2
4 " "	12
10 " "	37
1 " "	48A
1 " "	52
1 " "	57

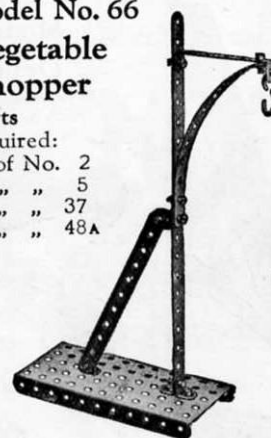

Model No. 70
Pen Rack

Parts required:

4 of No.	2
4 " "	5
4 " "	10
19 " "	37
4 " "	48A
1 " "	52
1 " "	57

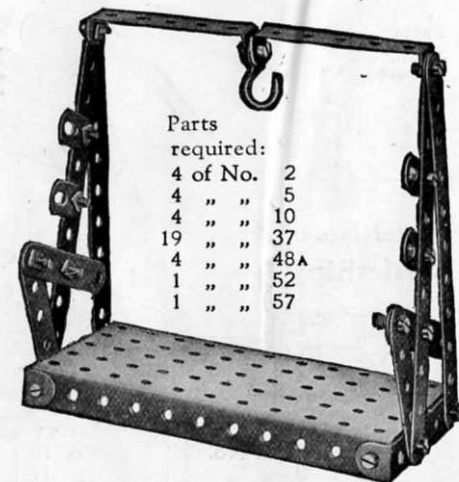

HOW TO CONTINUE


This completes the Models which may be made with MECCANO Outfit No. 0. The next Models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 0A Accessory Outfit, the price of which will be found in the list at the end of the Manual.

These Models can be made with MECCANO Outfit No. 1, or No. 0 and No. 0A.

15

No. 67
ag
c


Model No. 101
Tandem Car

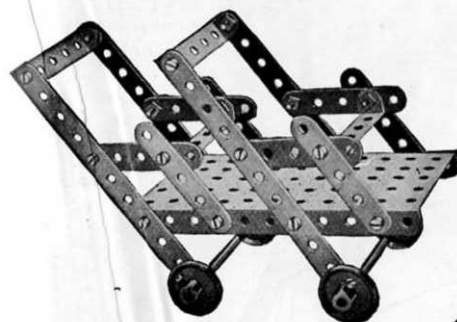


Parts required:
4 of No. 2 | 20 of No. 37
8 " " 5 | 4 " " 48A
2 " " 16 | 1 " " 52
4 " " 22

Model No. 102
Travelling Ladder

Parts required:
6 of No. 2
4 " " 5
2 " " 16
4 " " 22
16 " " 37
4 " " 48A
1 " " 52

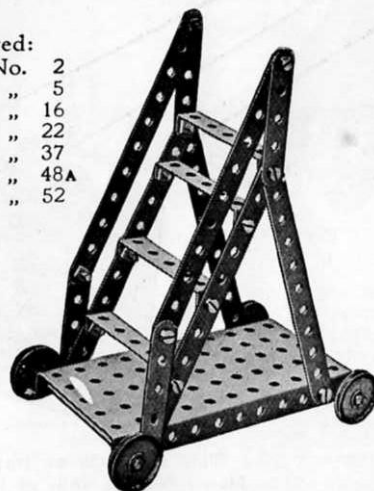


Model No. 103
Step Ladder

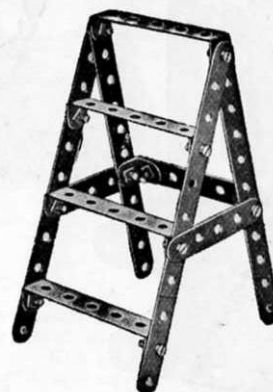

Parts required:
4 of No. 2 | 10 of No. 37
3 " " 5 | 4 " " 48A
2 " " 12

Model No. 104
Swivelling Crane

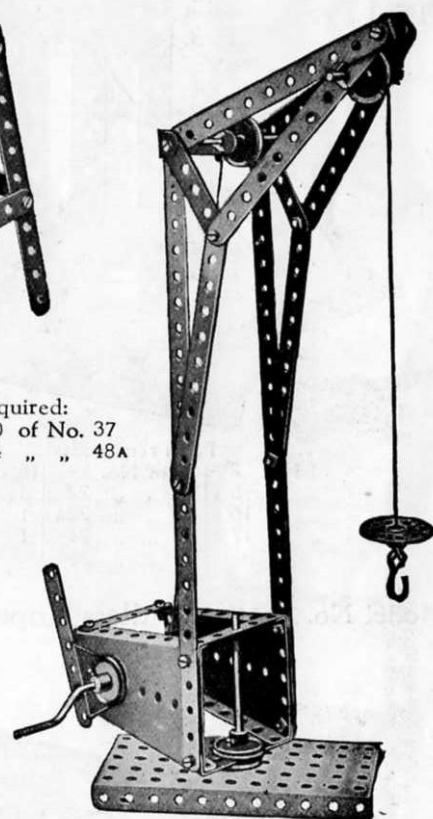

Model No. 105
Travelling Jib Crane



Parts required:
2 of No. 1
3 " " 2
2 " " 5
2 " " 16
1 " " 17
1 " " 19
4 " " 22
2 " " 22A
1 " " 24
5 " " 35
15 " " 37
1 " " 48A
1 " " 52
1 " " 54
1 " " 57



Model No. 106
Swing

Parts required:
4 of No. 1
1 " " 2
6 " " 5
4 " " 12
12 " " 37
3 " " 48A
1 " " 52

Parts required:
2 of No. 1 | 1 of No. 11 | 2 of No. 22A | 3 of No. 48A
6 " " 2 | 1 " " 16 | 1 " " 24 | 1 " " 52
1 " " 3 | 2 " " 17 | 4 " " 35 | 2 " " 54
4 " " 5 | 1 " " 19 | 18 " " 37 | 1 " " 57
4 " " 22 | 1 " " 44


These Models can be made with MECCANO Outfit No. 1, or No. 0 and No. 0A.

Model No. 107
Automatic
Dial Press




Parts required:		
4 of No. 2	1 of No. 19	18 of No. 37
7 " " 5	4 " " 22	3 " " 48A
2 " " 16	2 " " 22A	1 " " 52
1 " " 17	1 " " 24	1 " " 54
	7 " " 35	

Model No. 109 **Endless Rope**
Railway

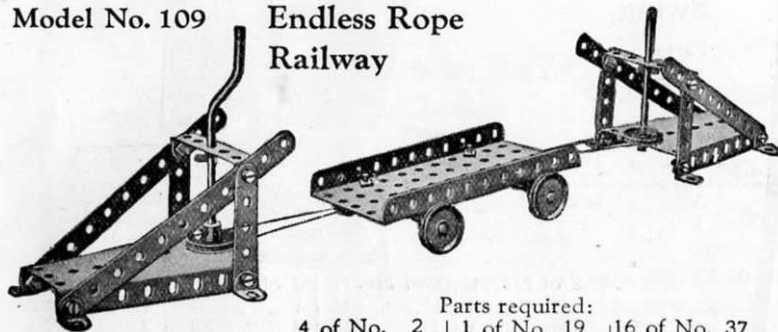

Parts required:		
4 of No. 2	1 of No. 19	16 of No. 37
4 " " 5	4 " " 22	4 " " 48A
8 " " 12	2 " " 22A	1 " " 52
3 " " 16	4 " " 35	2 " " 54


Model No. 108
Telpher Span

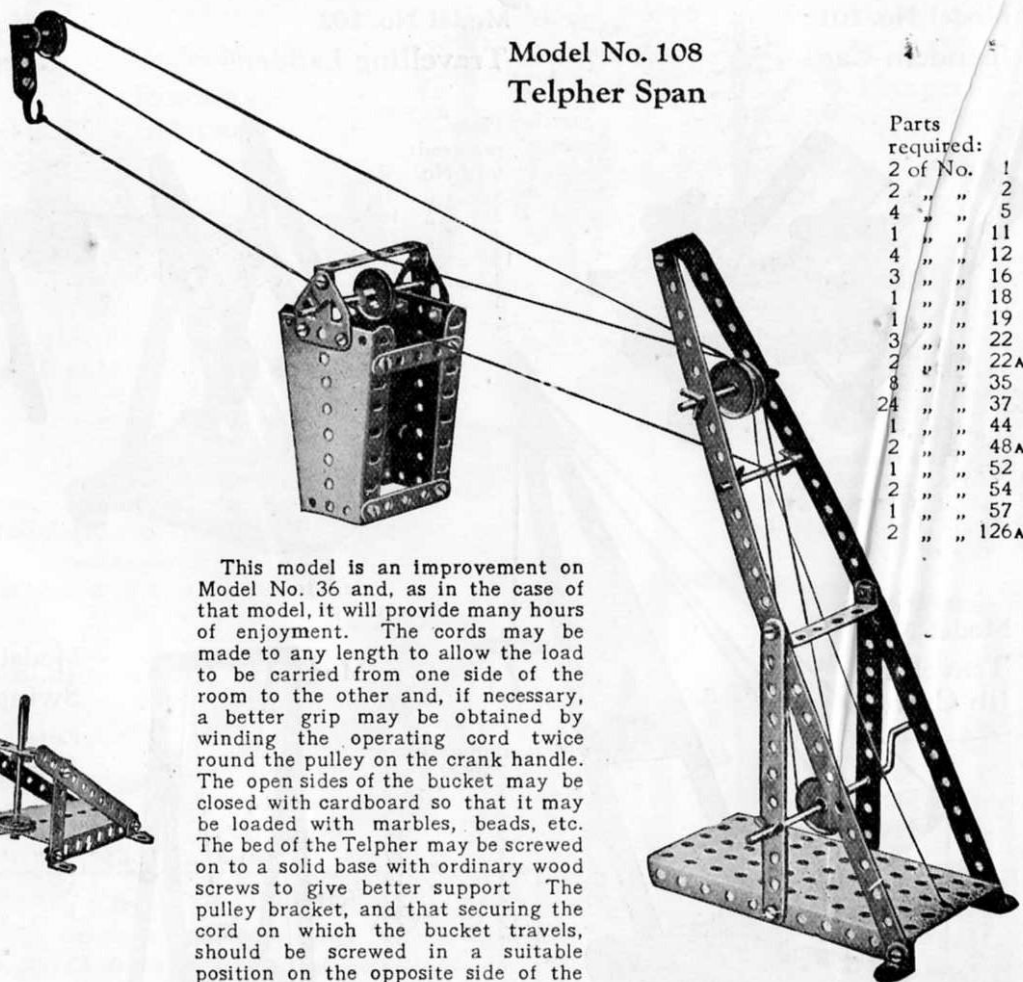

Parts required:		
2 of No. 1		
2 " " 2		
4 " " 5		
1 " " 11		
4 " " 12		
3 " " 16		
1 " " 18		
1 " " 19		
3 " " 22		
2 " " 22A		
8 " " 35		
24 " " 37		
1 " " 44		
2 " " 48A		
1 " " 52		
2 " " 54		
1 " " 57		
2 " " 126A		

This model is an improvement on Model No. 36 and, as in the case of that model, it will provide many hours of enjoyment. The cords may be made to any length to allow the load to be carried from one side of the room to the other and, if necessary, a better grip may be obtained by winding the operating cord twice round the pulley on the crank handle. The open sides of the bucket may be closed with cardboard so that it may be loaded with marbles, beads, etc. The bed of the Telpher may be screwed on to a solid base with ordinary wood screws to give better support. The pulley bracket, and that securing the cord on which the bucket travels, should be screwed in a suitable position on the opposite side of the room.


Model No. 110 Snow Plough

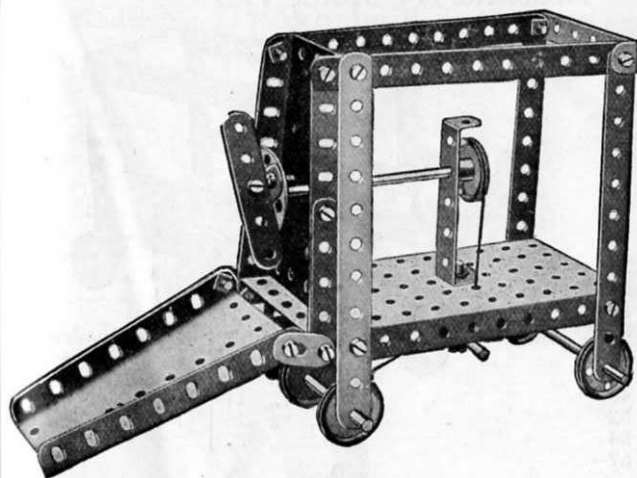

Parts required:


6 of No. 2	1 of No. 24
3 " " 5	4 " " 35
2 " " 10	19 " " 37
1 " " 12	1 " " 44
3 " " 16	2 " " 48A
1 " " 17	1 " " 52
4 " " 22	2 " " 54
2 " " 22A	

FIG. 110A

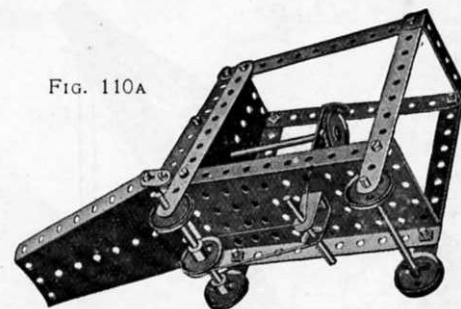

The construction of the framework of this model presents no difficulty. The sector plate forming the plough is loosely pivoted on the bolts 1. The axle 2 is mounted in the front sector plate and the $2\frac{1}{2}$ " double angle strip 3. A $2\frac{1}{2}$ " strip 4 is bolted by angle brackets to a bush wheel on the front of the axle and forms a dispersing propeller for the snow after it has risen up the inclined sector plate. A continuous cord 5 is passed round a 1" pulley 6 and round the short axle 7 and a 1" pulley on the propeller axle. In this way, as the plough is moved along the ground, the propeller is revolved.

Model No. 111 Dinner Wagon

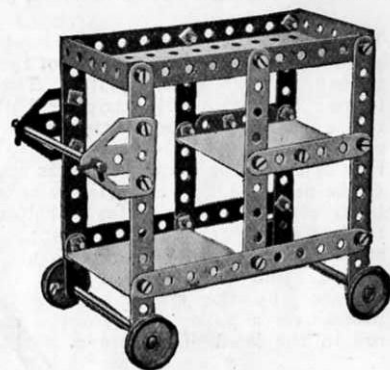


Parts required:

6 of No. 2	2 of No. 35
8 " " 5	22 " " 37
4 " " 12	4 " " 48A
3 " " 16	1 " " 52
4 " " 22	2 " " 126A

The two lower platforms are constructed out of pieces of ordinary cardboard, their outer edges resting on $2\frac{1}{2}$ " bent strips and their inner edges on angle brackets.

Model No. 112 Roundabout

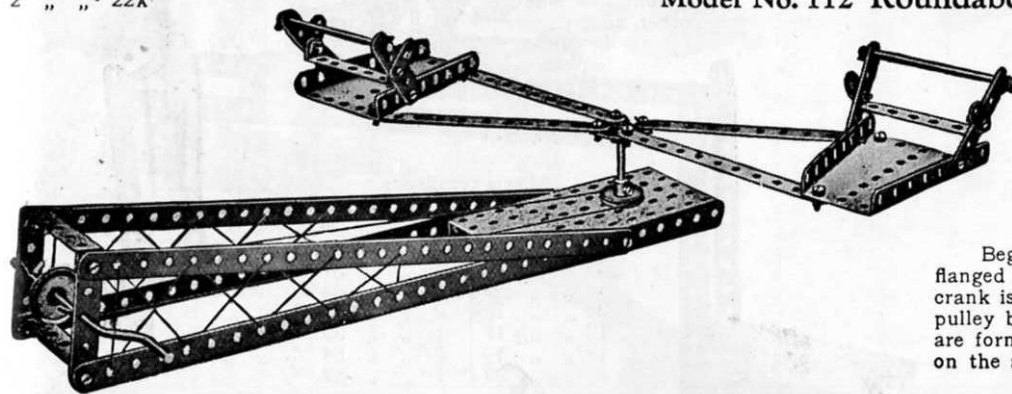

Parts required:


4 of No. 1	1 of No. 17	22 of No. 37
4 " " 2	1 " " 19	4 " " 48A
6 " " 5	3 " " 22	1 " " 52
4 " " 10	1 " " 24	2 " " 54
2 " " 16	6 " " 35	

Begin to build this model by making the platform from a flanged plate and $12\frac{1}{2}$ " strips. The drive from the pulley on the crank is taken to a 1" pulley fast on a spindle 2, another similar pulley being secured to the spindle beneath the plate. The arms are formed of four $5\frac{1}{2}$ " strips and bolted to a bush wheel 1 fast on the spindle.

These Models can be made with MECCANO Outfit No. 1, or No. 0 and No. 0A.

Model No. 113 Swivelling Jib Crane


The fixed base of this crane is a perforated flanged plate 1 and the swivelling base of the crane is formed by two sector plates. The jib is formed from two 12½" strips 2 bolted to the ends of the front sector plate, two other 12½" strips 3 being bolted to the tops of the strips 2 and two cross strips 4, the outer ends of these latter strips being stayed by the strips 5 bolted to the back sector plate. The upper structure of the crane swivels about a rod, and the winding rope operated by the crank handle, passes over a pulley on a short rod in the head of the crane.

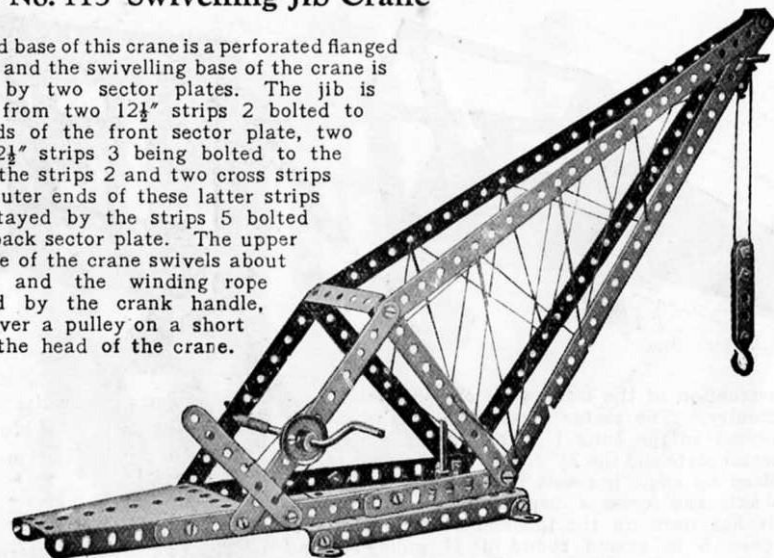

Parts
required:

4	of No.	1
6	" "	2
1	" "	3
2	" "	5
1	" "	10
1	" "	11
4	" "	12
2	" "	17
1	" "	19
3	" "	22
1	" "	22A
1	" "	23
3	" "	35
20	" "	37
3	" "	38
1	" "	48A
1	" "	52
2	" "	54
1	" "	57


Model No. 114 Motor Van

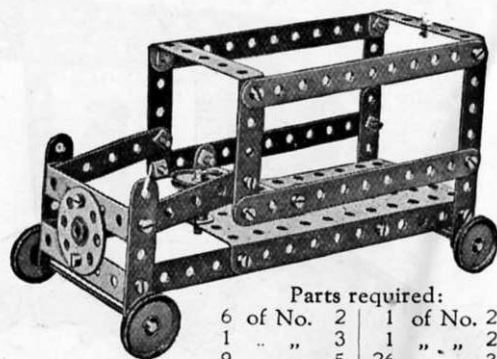

Parts required:

6	of No.	2	1	of No.	22A
1	" "	3	1	" "	24
9	" "	5	26	" "	37
1	" "	11	5	" "	48A
2	" "	16	1	" "	52
4	" "	22			


Model No. 115 Band Saw

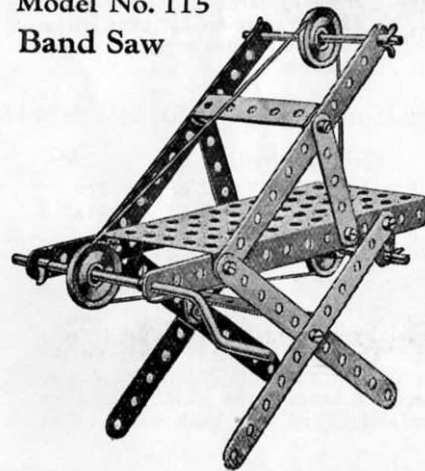

Parts
required:

6	of No.	2
4	" "	5
2	" "	10
2	" "	16
1	" "	19
3	" "	22
6	" "	35
10	" "	37
2	" "	48A
1	" "	52

Model No. 116 Overhead Crane

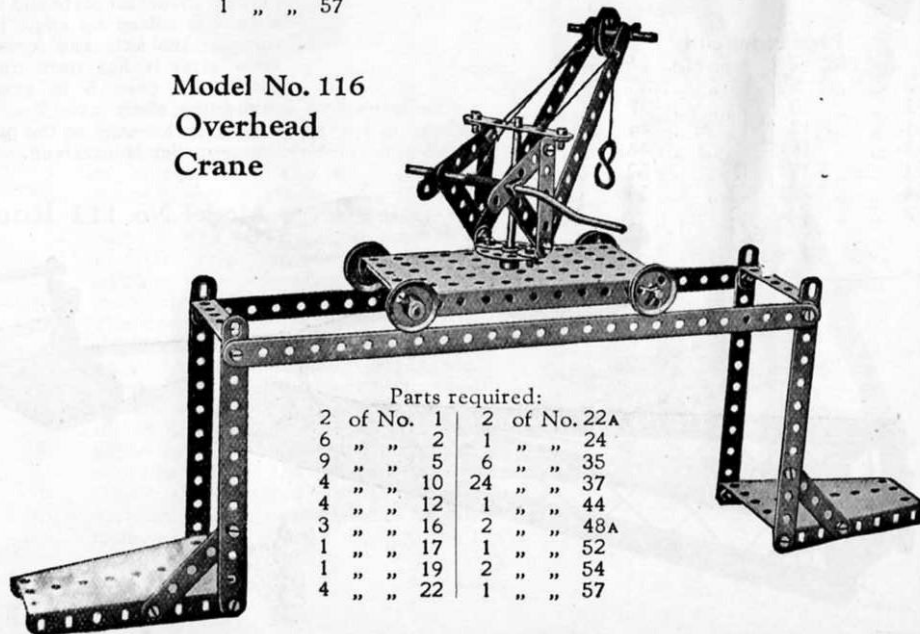


Parts required:

2	of No.	1	2	of No.	22A
6	" "	2	1	" "	24
9	" "	5	6	" "	35
4	" "	10	24	" "	37
4	" "	12	1	" "	44
3	" "	16	2	" "	48A
1	" "	17	1	" "	52
1	" "	19	2	" "	54
4	" "	22	1	" "	57

These Models can be made with MECCANO Outfit No. 1, or No. 0 and No. 0A.


19

Model No. 117 Windmill

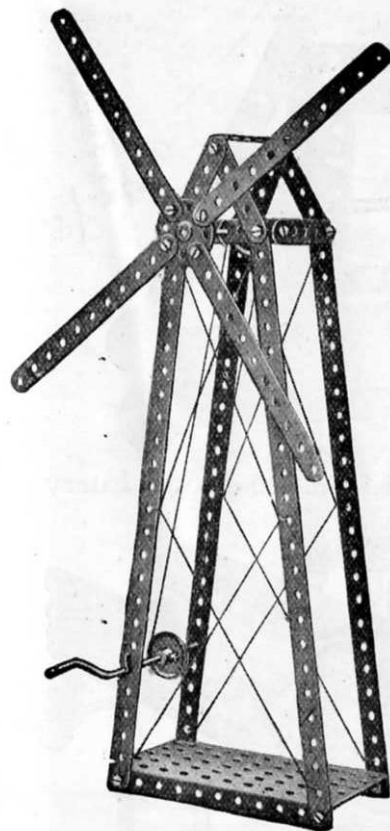

Parts required:

4 of No.	1	2 of No.	22
4 "	2	1 "	24
7 "	5	4 "	35
2 "	12	20 "	37
1 "	16	3 "	48A
1 "	19	1 "	52

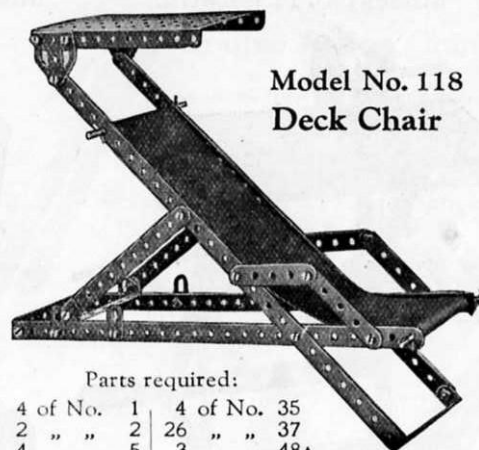


Model No. 118
Deck Chair

Parts required:

4 of No.	1	4 of No.	35
2 "	2	26 "	37
4 "	5	3 "	48A
4 "	10	1 "	52
2 "	16	2 "	126A


Model No. 120
Bed Table

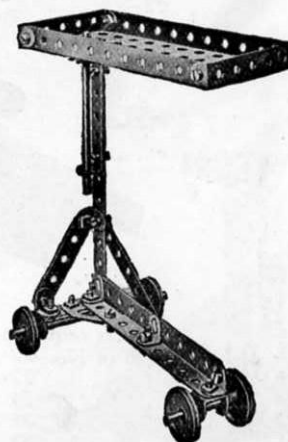

Parts required:

3 of No.	2
1 "	3
1 "	5
1 "	11
5 "	12
2 "	16
1 "	17
4 "	22
1 "	24
21 "	37
4 "	48A
1 "	52
1 "	126A


Model No. 119 Jib Crane

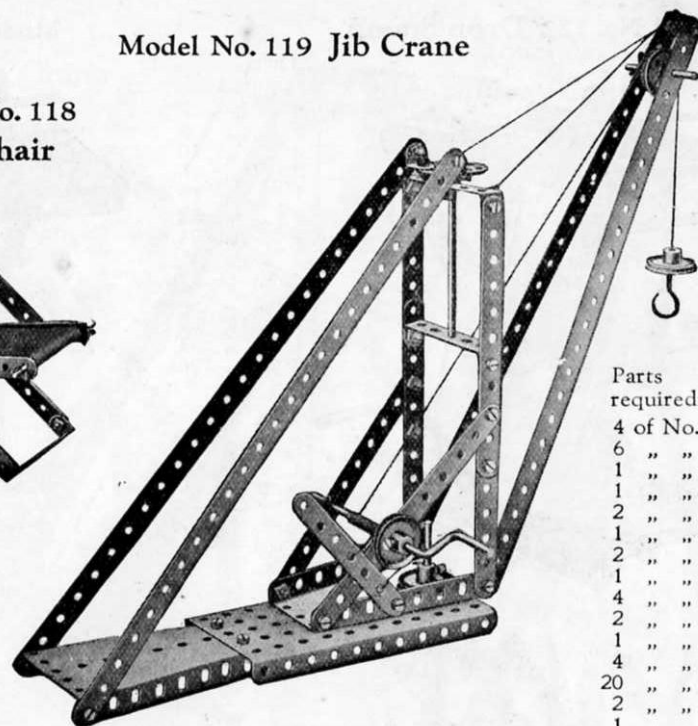

Parts required:

4 of No.	1
6 "	2
1 "	3
1 "	11
2 "	12
1 "	16
2 "	17
1 "	19
4 "	22
2 "	22A
1 "	24
4 "	35
20 "	37
2 "	48A
1 "	52
2 "	54
1 "	57

Model No. 121 Hatchet

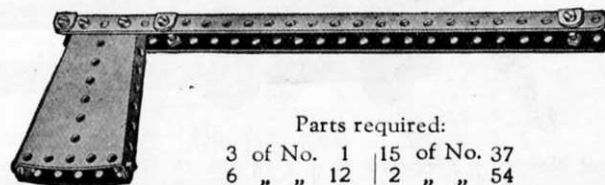


Parts required:

3 of No.	1	15 of No.	37
6 "	12	2 "	54

These Models can be made with MECCANO Outfit No. 1, or No. 0 and No. 0A.

Model No. 122 Drop Stamp

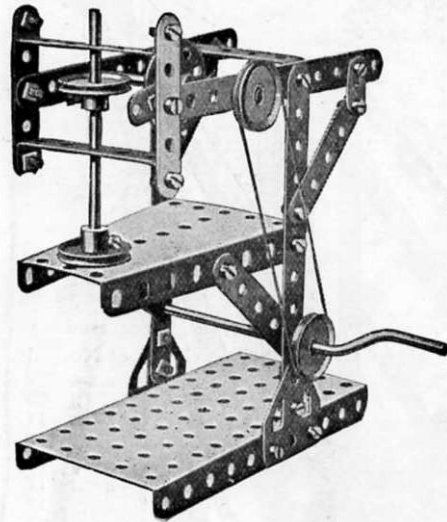


Parts required	
4 of No.	2
6 " "	5
3 " "	10
2 " "	16
1 " "	19
4 " "	22
1 " "	24
2 " "	35
27 " "	37
3 " "	48A
1 " "	52
1 " "	54
2 " "	126A

Model No. 123 Lathe




Parts required:			
6 of No.	2	1 of No.	24
4 " "	12	17 " "	37
1 " "	17	1 " "	44
1 " "	19	2 " "	48A
3 " "	22	1 " "	52

Model No. 124 Tip Wagon

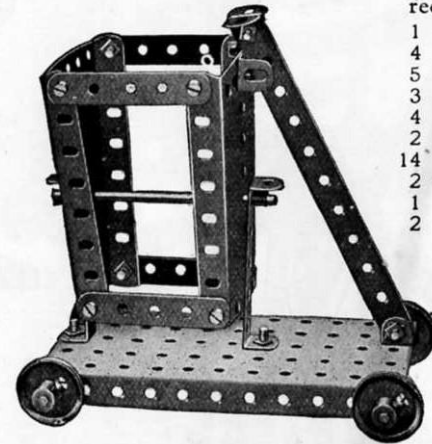


Parts required:	
1 of No.	2
4 " "	5
5 " "	12
3 " "	16
4 " "	22
2 " "	35
14 " "	37
2 " "	48A
1 " "	52
2 " "	54

Model No. 125 Mountain Transport

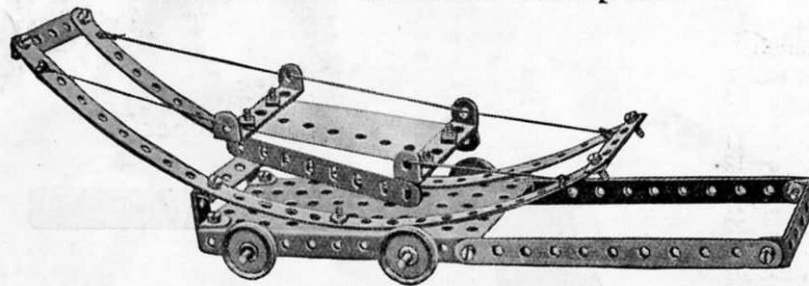

Parts required:									
2 of No.	1	3 of No.	5	2 of No.	16	18 of No.	37	1 of No.	52
2 " "	2	4 " "	12	4 " "	22	2 " "	48A	1 " "	54

Model No. 126 Motor Lorry

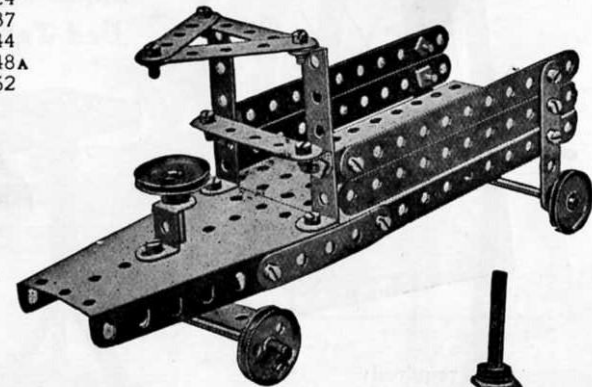

Parts required:					
4 of No.	2	3 of No.	22	3 of No.	38
8 " "	5	2 " "	22A	3 " "	48A
4 " "	12	1 " "	24	1 " "	52
2 " "	16	2 " "	35	1 " "	54
1 " "	17	25 " "	37	2 " "	125





FIG. 126A

These Models can be made with MECCANO Outfit No. 1, or No. 0 and No. 0A.

Model No. 127 Jib Crane


Parts required:	
2 of No. 1	
5 " " 2	
12 " " 5	
16 " " 12	
22 " " 16	
35 " " 22	
37 " " 35	
48A " " 37	
52 " " 48A	
54 " " 52	
1 " " 54	
1 " " 18A	
1 " " 19	
1 " " 22	
2 " " 22A	
1 " " 23	
1 " " 24	
6 " " 35	
22 " " 37	
2 " " 38	
1 " " 44	
3 " " 48A	
1 " " 52	
1 " " 57	
2 " " 125	
2 " " 126A	

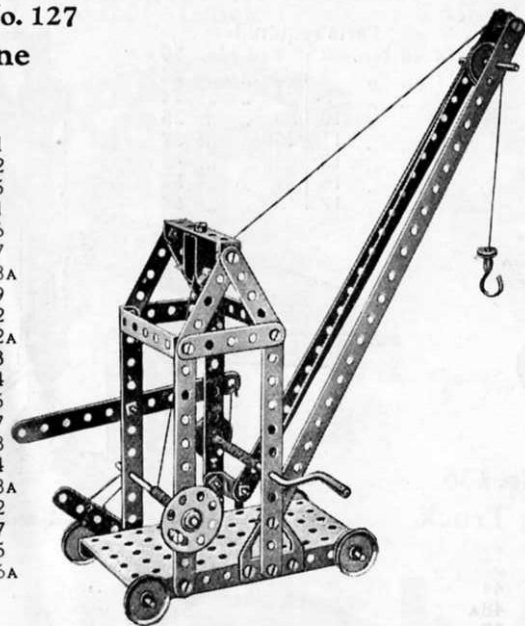


Model No. 128 Double Action Crane

A feature of this crane is that, by the arrangement of the cords on the crank handle, one load may be raised whilst the other is being lowered.


Parts required:	
4 of No. 1	3 of No. 48A
4 " " 2	1 " " 52
2 " " 16	2 " " 54
1 " " 19	1 " " 57
3 " " 22	
2 " " 22A	
1 " " 24	
6 " " 35	
22 " " 37	
1 " " 44	

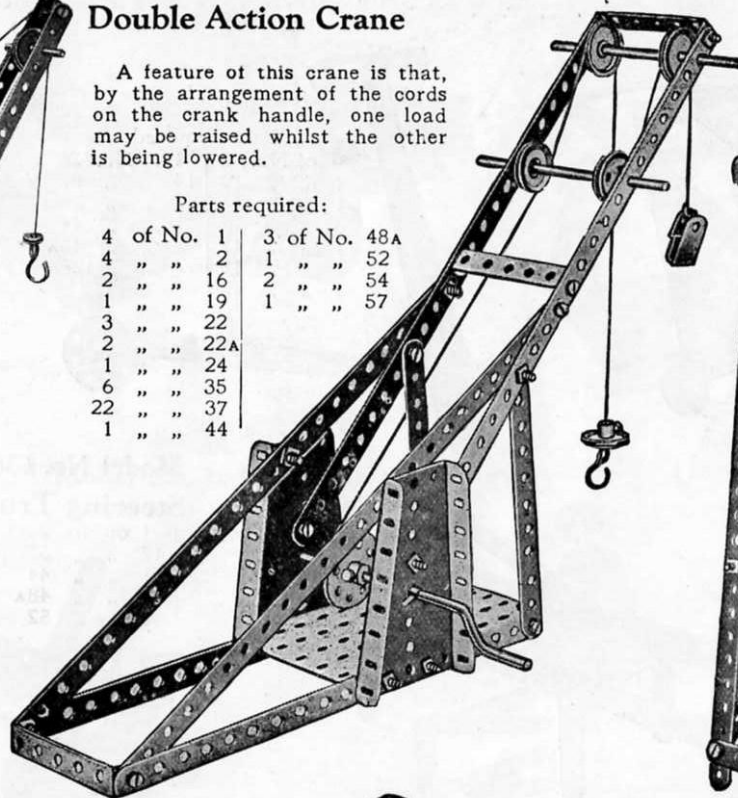


Model No. 129 Fire Alarm

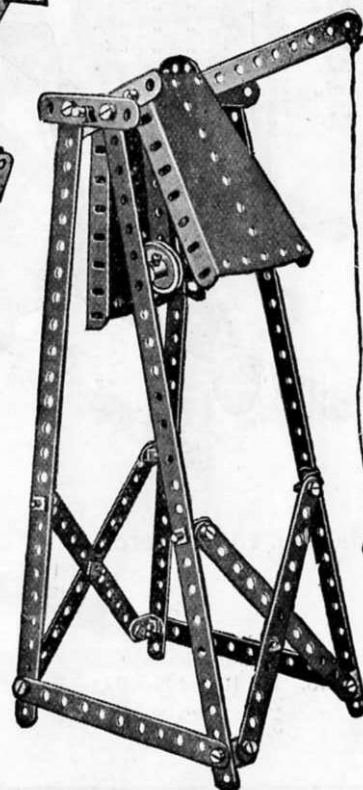

Model No. 130 Rowing Boat

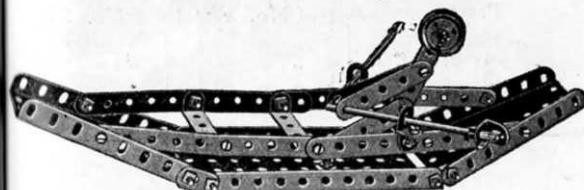

Parts required:	
4 of No. 2	2 of No. 16
5 " " 5	1 " " 18A
4 " " 10	2 " " 22A
7 " " 12	4 " " 35
	24 " " 37
	4 of No. 38
	3 " " 48A
	1 " " 52
	2 " " 54

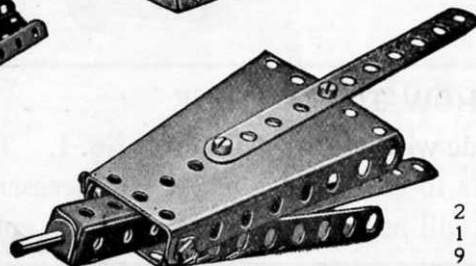

Model No. 131 Bellows


Parts required:	
2 of No. 2	4 of No. 48A
1 " " 17	2 " " 54
9 " " 37	
Parts required:	
4 of No. 1	1 of No. 22
7 " " 2	1 " " 24
1 " " 3	4 " " 35
3 " " 5	27 " " 37
8 " " 12	2 " " 54
1 " " 16	

These Models can be made with MECCANO Outfit No. 1, or No. 0 and No. 0A.

Model No. 132 Invalid Chair

Parts required:


4 of No. 2	13 of No. 37
2 " " 5	1 " " 44
2 " " 16	2 " " 48A
1 " " 18	1 " " 52
2 " " 22	
1 " " 22A	
1 " " 24	
4 " " 35	

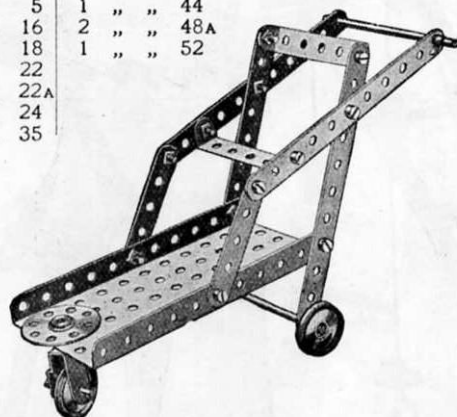

Model No. 133 Scooter

Parts required:


5 of No. 2	1 of No. 24
1 " " 10	14 " " 37
1 " " 11	2 " " 38
3 " " 12	1 " " 44
1 " " 17	1 " " 48A
1 " " 18	2 " " 126A
1 " " 22	

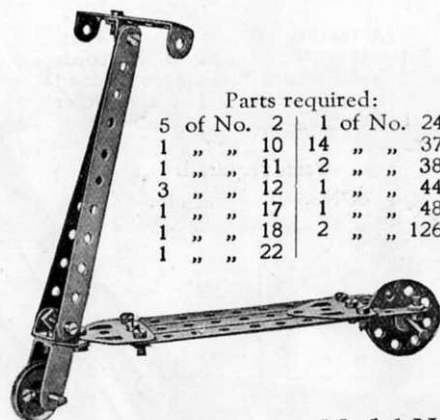

Model No. 134 Forge Bellows

Parts required:


4 of No. 2	1 of No. 19
1 " " 3	2 " " 22
2 " " 5	1 " " 24
2 " " 10	5 " " 35
1 " " 11	25 " " 37
2 " " 12	3 " " 48A
2 " " 16	1 " " 52
1 " " 17	2 " " 54

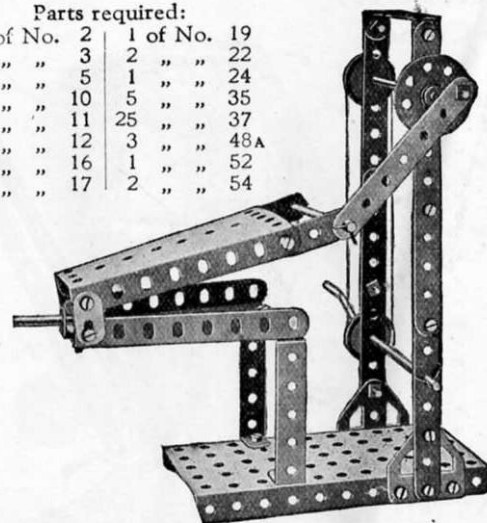

Model No. 135 Stretcher

Parts required:


2 of No. 1	10 of No. 37
2 " " 2	2 " " 48A
6 " " 5	1 " " 52

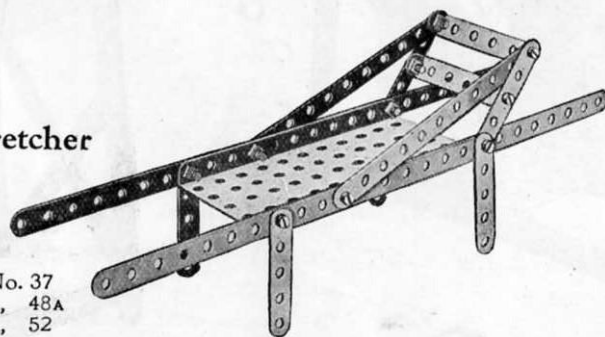

Model No. 136 Steering Truck

Parts required:

4 of No. 5	1 of No. 17	18 of No. 37
2 " " 10	3 " " 22	2 " " 38
2 " " 16	2 " " 22A	4 " " 48A
	1 " " 24	1 " " 52
	2 " " 35	2 " " 126A

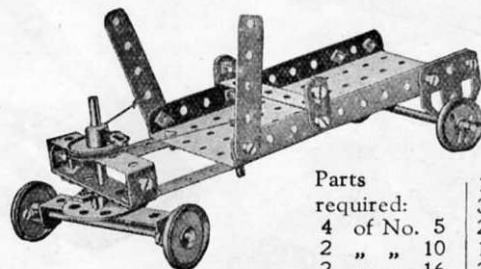


HOW TO CONTINUE

This completes the Models which may be made with MECCANO Outfit No. 1. The next Models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 1A Accessory Outfit, the price of which will be found in the List at the end of the Manual.

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.


Model No. 201 Truck

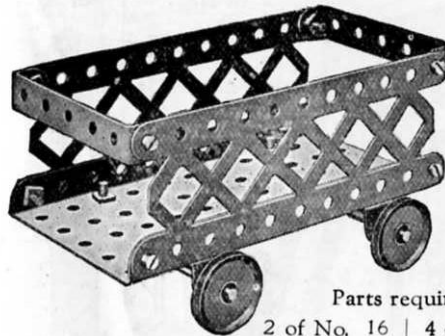

Parts required:

2 of No. 16	4 of No. 48A
4 " " 22	1 " " 52
12 " " 37	2 " " 100


Model No. 202 Revolving Truck

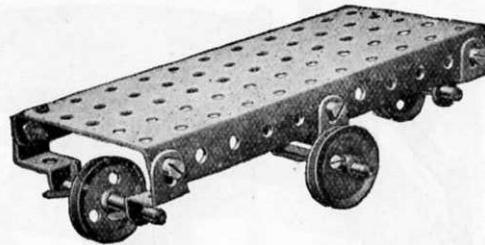

Parts required:

2 of No. 10	2 of No. 22	6 of No. 37
1 " " 16	2 " " 22A	1 " " 52
2 " " 17	4 " " 35	4 " " 125


Model No. 203 Lathe

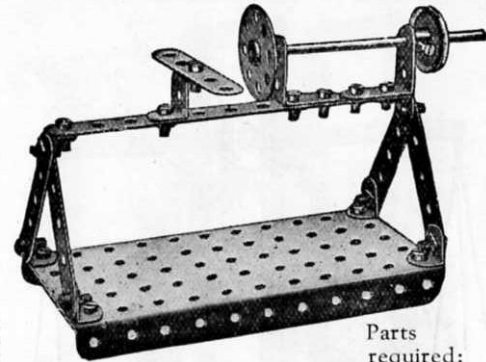

Parts required:

1 of No. 2
5 " " 5
6 " " 12
2 " " 12A
1 " " 16
1 " " 22
1 " " 24
17 " " 37
1 " " 52
1 " " 125

Model No. 204 Turntable Gangway

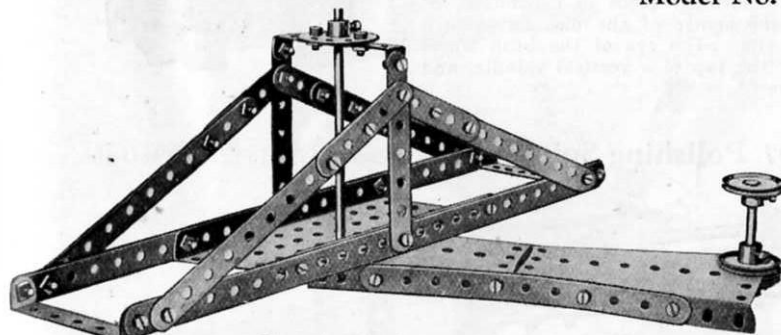


Parts required:

2 of No. 1	4 of No. 22
6 " " 2	1 " " 24
2 " " 3	34 " " 37
4 " " 5	3 " " 48A
1 " " 15A	1 " " 52
1 " " 17	2 " " 54

FIG. 204A


(underneath view)

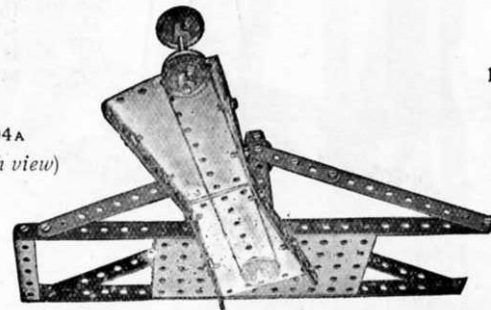

The side frames of the gangway are made of $12\frac{1}{2}$ " strips bolted by means of $2\frac{1}{2}$ " bent strips to parallel strips below. The side frames are connected by a perforated flanged plate, to the underside of which is bolted a bush wheel fitted with a rod on which is mounted a 1" pulley (See Fig. 204A). The rod passes through one of the end holes of the sector plate which is connected by diagonal strips to another sector plate. Through the end hole of the latter a rod is threaded carrying two 1" pulleys from one of which an operating cord passes through the pulley mounted on the under side of the flanged plate. In this way the Gangway may be rotated by an operating spindle.

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.

Model No. 205 Scales

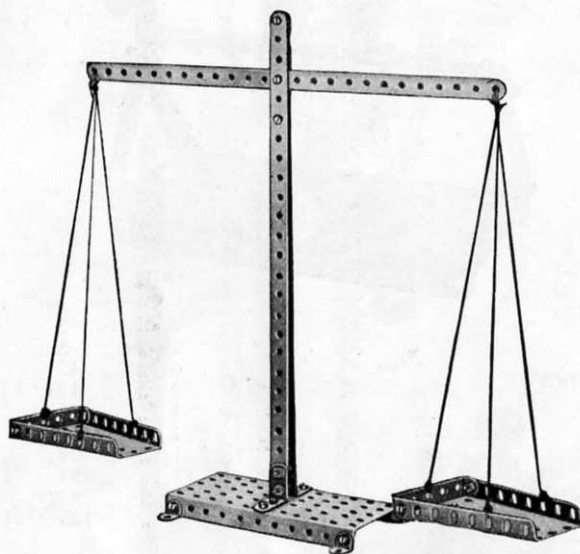


Parts required:

3 of No. 1	4 of No. 38
4 " " 12	2 " " 48A
2 " " 12A	1 " " 52
19 " " 37	2 " " 54

The slot is formed by inserting 2 washers on the bolts above and below the beam. These washers hold the strips composing the standard at the required distance apart to give the beam free play.

Model No. 206 Joy Wheel

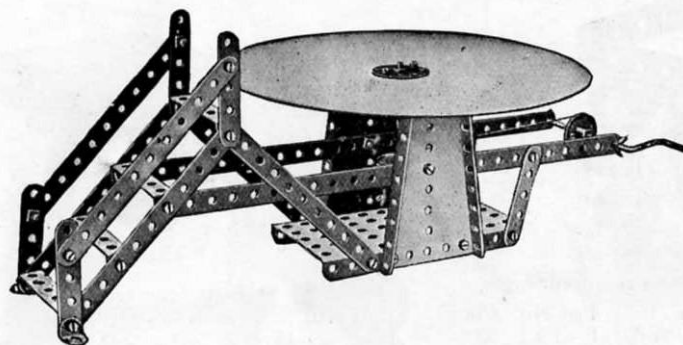

The driving mechanism and construction of the framework of this model are clearly brought out in Fig. 206A. Cut out a circular piece of cardboard, 8" in diameter, and in the centre of the disc fix a bush wheel by nuts and bolts. The eye of the bush wheel is then threaded over the top of a vertical spindle, and secured by its set-screw.

Parts required:

2 of No. 1	1 of No. 22A
6 " " 2	1 " " 24
6 " " 5	2 " " 35
2 " " 12	28 " " 37
1 " " 15A	5 " " 48A
1 " " 19	1 " " 52
3 " " 22	2 " " 54


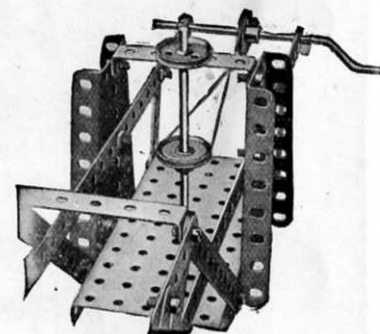


FIG. 206A

Model No. 207 Polishing Spindle

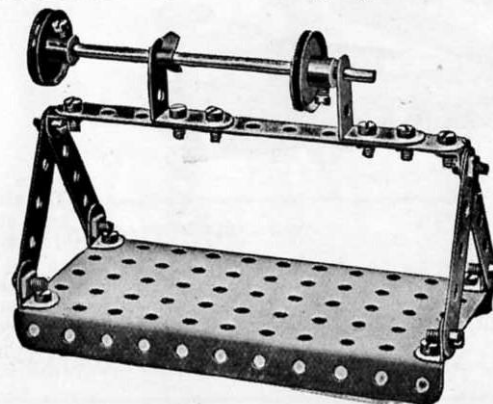

Parts required:


1 of No. 2	1 of No. 15A
4 " " 5	2 " " 22
6 " " 12	1 " " 35
2 " " 12A	16 " " 37
1 of No. 52	

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.


25

Model No. 208 Pit Head Gear

Parts required:	
4 of No.	1
5 " "	2
2 " "	3
2 " "	5
2 " "	12
1 " "	16
1 " "	19
3 " "	22
2 " "	35
25 " "	37
5 " "	48A
1 " "	52
2 " "	54

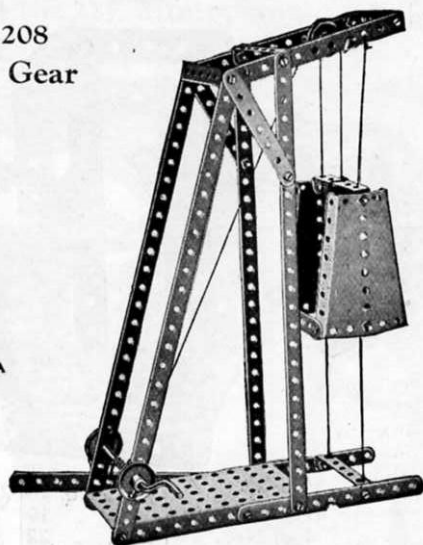


Model No. 209 Gangway

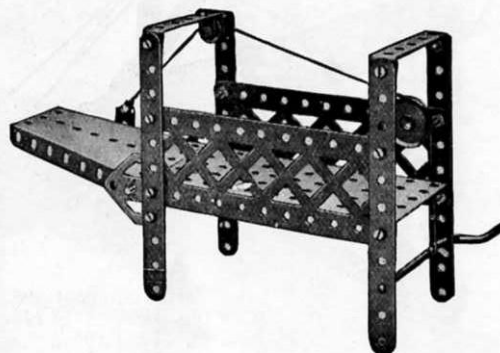

Parts required:

4 of No.	2	1 of No.	22	1 of No.	52
1 " "	10	1 " "	23	1 " "	54
1 " "	12	4 " "	35	2 " "	100
1 " "	16	17 " "	37	2 " "	126A
1 " "	19	2 " "	48A		

Model No. 211 Motor Truck

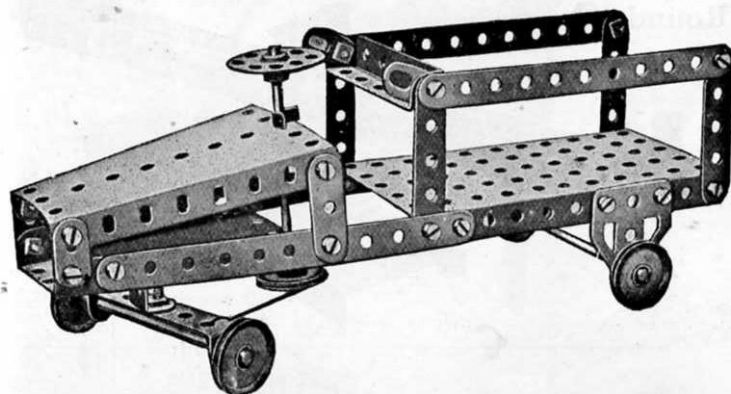

Parts required:

4 of No.	2
4 " "	5
2 " "	6A
4 " "	10
1 " "	11
3 " "	16
3 " "	22
2 " "	22A
1 " "	24
3 " "	35
26 " "	37
3 " "	48A
1 " "	52
2 " "	54
2 " "	126A

Model No. 210 Ladder on Wheels



Parts required:


6 of No.	1	24 of No.	37
4 " "	5	6 " "	48A
2 " "	16	1 " "	52
4 " "	20		

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.

Model No. 212 Cot on Wheels


Parts
required:

2	of No.	2
7	" "	5
3	" "	12
4	" "	22
18	" "	37
2	" "	48A
2	" "	100

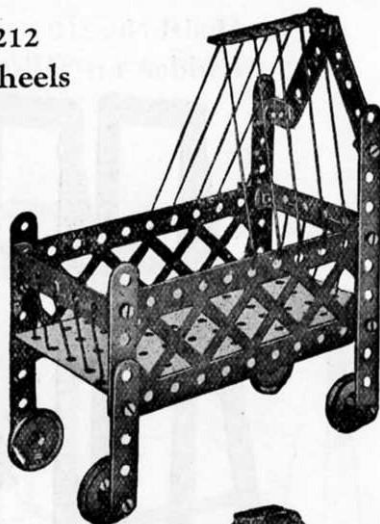

Model No. 213


Monoplane

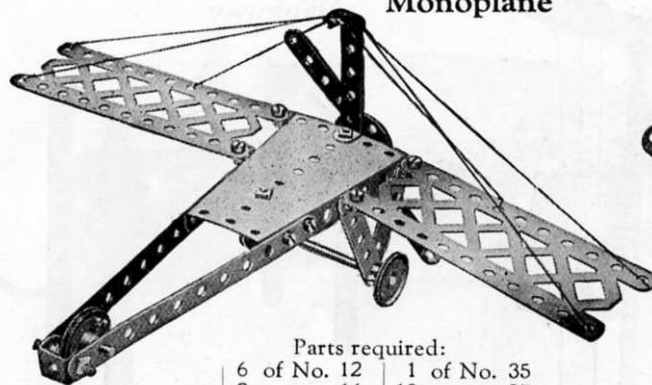

Parts required:

2	of No.	2	6	of No.	12	1	of No.	35
2	" "	16	2	" "	16	18	" "	37
1	" "	18A	1	" "	18A	1	" "	48A
3	" "	22	3	" "	22	1	" "	54
1	" "	24	1	" "	24	2	" "	100


Model No. 214 Double Drop Hammer

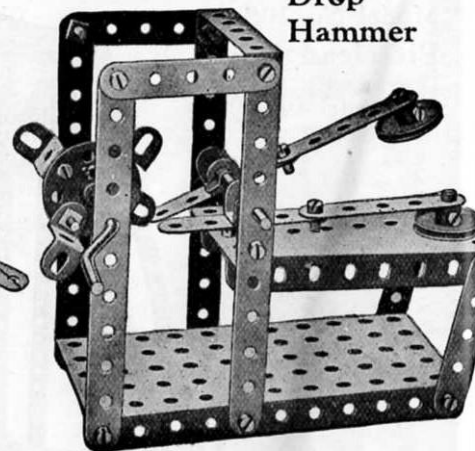

Parts
required:

4	of No.	2	1	of No.	16	25	of No.	37
8	" "	5	1	" "	19	2	" "	48A
2	" "	11	2	" "	22	1	" "	52
			1	" "	24	1	" "	54
			6	" "	35	4	" "	125


Model No. 215 Tipping Motor Wagon

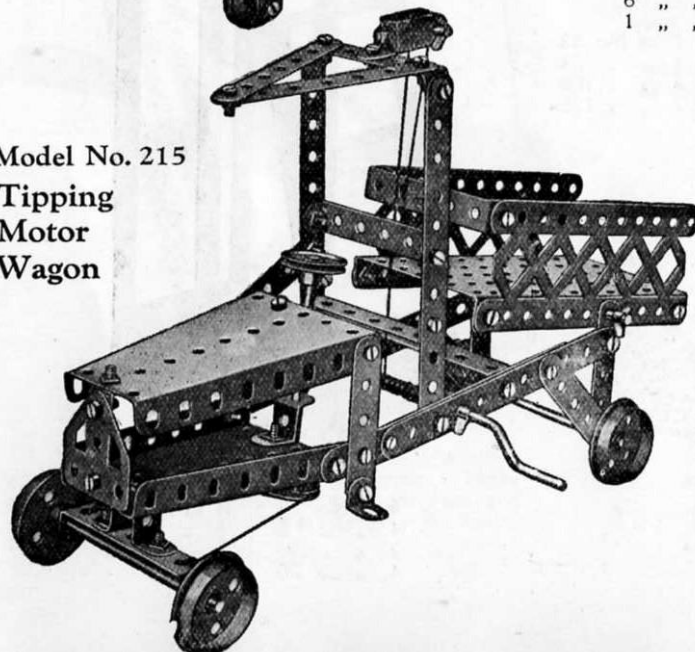

Parts
required:

6	of No.	2
2	" "	3
7	" "	5
1	" "	10
4	" "	12
4	" "	16
1	" "	18A
1	" "	19
4	" "	20
2	" "	22
1	" "	23
7	" "	35
43	" "	37
2	" "	38
1	" "	44
1	" "	45
6	" "	48A
1	" "	52
2	" "	54
2	" "	100
2	" "	125
1	" "	126A

Model No. 216 Roundabout Seesaw

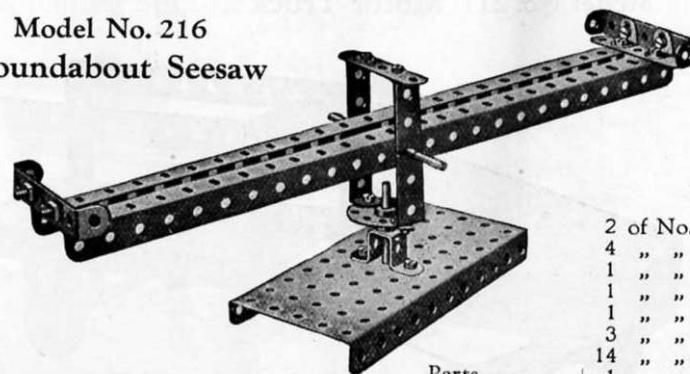

Parts
required:

3	of No.	5
1	" "	8
4	" "	12
1	" "	16
1	" "	17
1	" "	24
3	" "	35
14	" "	37
1	" "	45
4	" "	48A
1	" "	52

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.

27

Model No. 217 Monoplane

Parts required:		2 of No. 3	1 of No. 18A
8	" "	5	4 " " 22
10 of No. 1		2 " " 11	2 " " 22A
14 " " 2		8 " " 12	1 " " 24
		1 " " 15A	4 " " 35
		2 " " 17	55 " " 37
			1 " " 45
			5 " " 48A



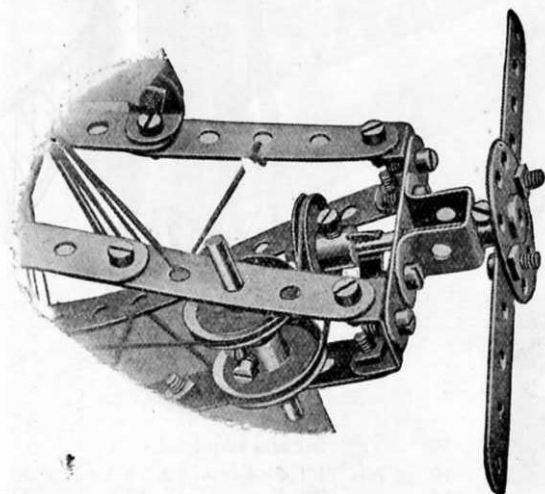


FIG. 217A


Model No. 218 Travelling Jib Crane

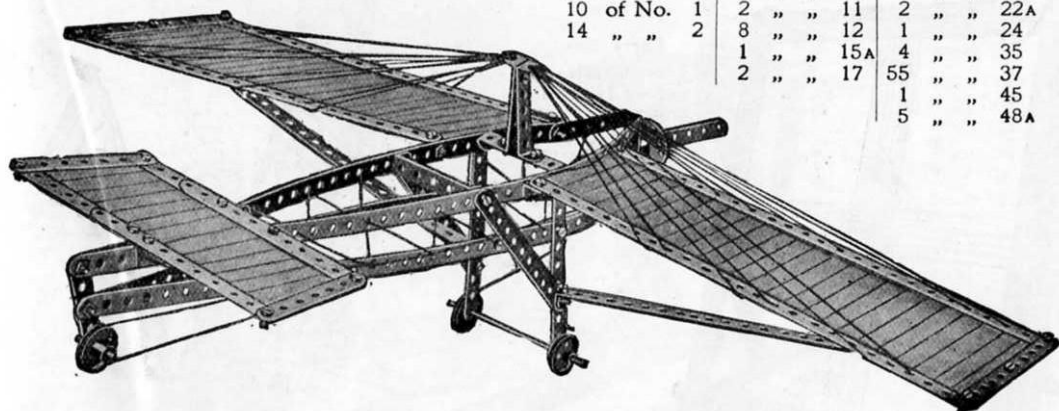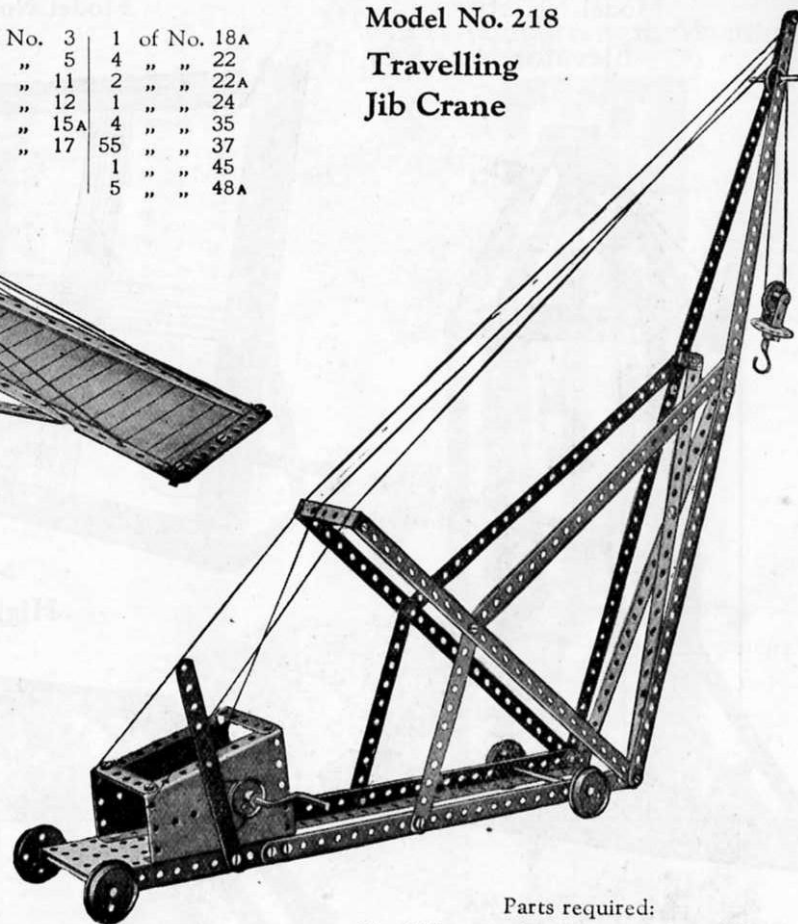

Parts required:		2 of No. 17	35 of No. 37
10 of No. 1		1 " " 19	1 " " 44
3 " " 2		4 " " 20	1 " " 48A
3 " " 5		2 " " 22	1 " " 52
2 " " 8		4 " " 22A	2 " " 54
4 " " 12		1 " " 24	1 " " 57
2 " " 16		5 " " 35	

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.


Model No. 219
Elevator

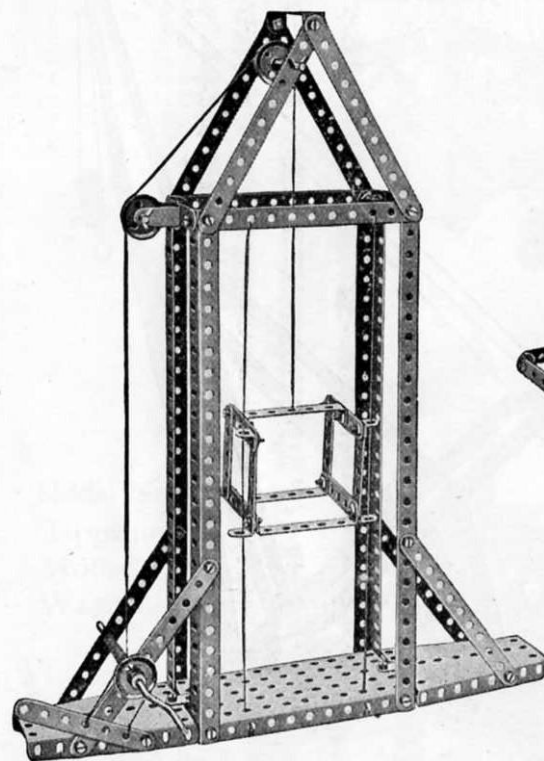

Parts required:

10 of No. 2	1 of No. 16	38 of No. 37
1 " " 3	1 " " 18A	1 " " 44
10 " " 5	1 " " 19	4 " " 48A
4 " " 8	1 " " 22	1 " " 52
2 " " 10	2 " " 22A	2 " " 54
4 " " 12	5 " " 35	


Model No. 220 Mat Frame

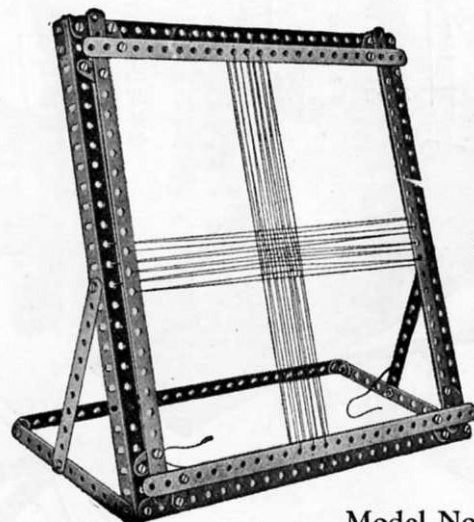

Parts required:

5 of No.	1
4 " "	2
4 " "	8
8 " "	10
2 " "	12
2 " "	12A
36 " "	37


Model No. 222
High-Level Bridge

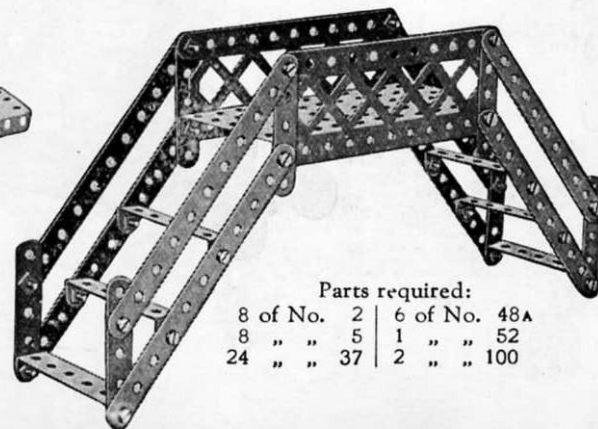

Parts required:

8 of No. 2	6 of No. 48A
8 " " 5	1 " " 52
24 " " 37	2 " " 100

Model No. 221
Windmill

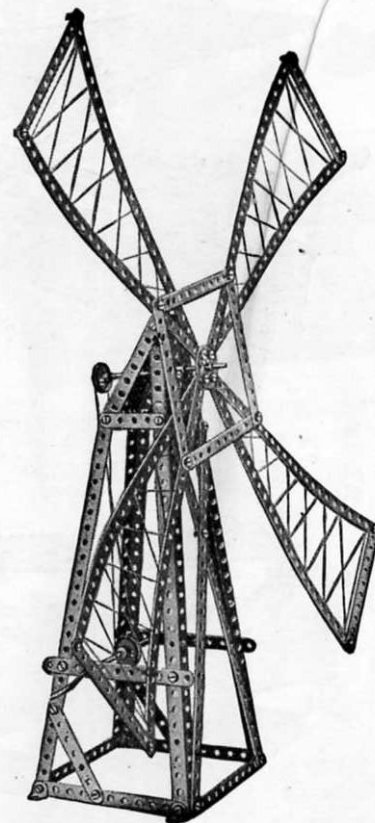


Parts required:

10 of No. 1	4 of No. 12	4 of No. 35
14 " " 2	1 " " 15	47 " " 37
2 " " 3	1 " " 19	1 " " 45
2 " " 5	2 " " 22	2 " " 54
4 " " 8	1 " " 24	

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.

29


Model No. 223 Coal Sifter

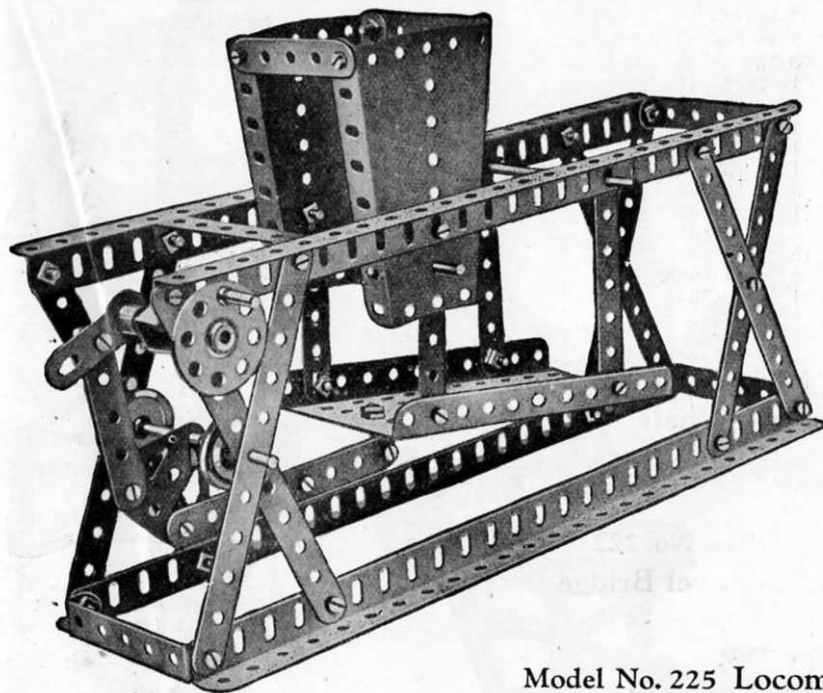

Parts required:

8 of No.	2
2 " "	3
7 " "	5
4 " "	8
1 " "	12
3 " "	16
1 " "	17
2 " "	22
1 " "	24
6 " "	35
38 " "	37
1 " "	45
4 " "	48A
1 " "	52
2 " "	54
1 " "	62
1 " "	115
1 " "	126A


Model No. 225 Locomotive

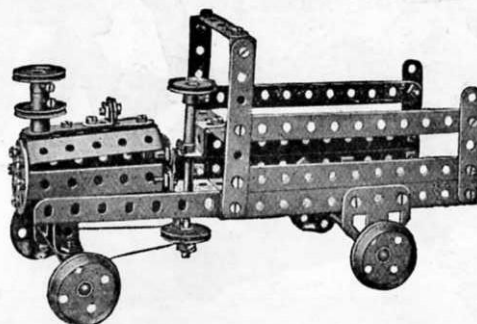

Parts required:

4 of No.	2	1 of No.	24
2 " "	3	2 " "	35
6 " "	5	47 " "	37
3 " "	10	1 " "	45
7 " "	12	6 " "	48A
3 " "	16	1 " "	52
1 " "	17	1 " "	54
4 " "	20	1 " "	62
4 " "	22	2 " "	125
1 " "	23	2 " "	126A

Model No. 224 Try-your-strength Machine

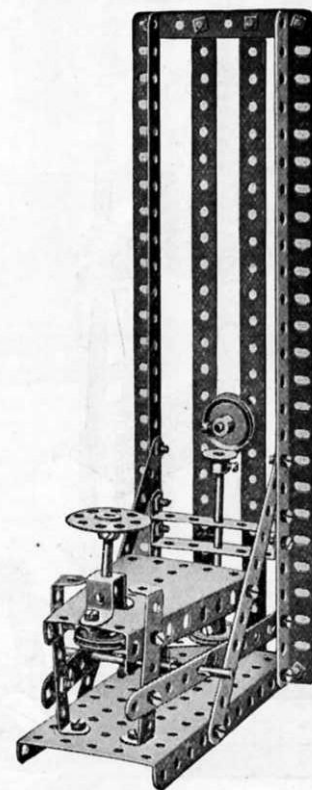


Parts required:

2 of No.	1	1 of No.	17	12 of No.	38
5 " "	2	1 " "	18A	1 " "	45
2 " "	3	4 " "	22	4 " "	48A
2 " "	8	1 " "	24	1 " "	52
1 " "	11	4 " "	35	1 " "	54
2 " "	16	30 " "	37	1 " "	126A

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.


Model No. 226 Candy Puller

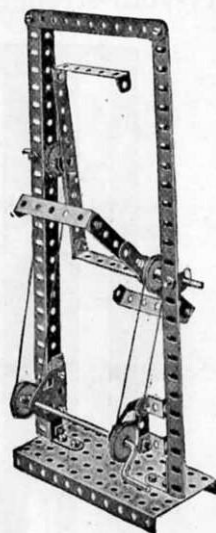

Parts required:

3	of No.	2
2	"	8
2	"	12
2	"	12A
2	"	17
1	"	19
4	"	22
2	"	35
26	"	37
10	"	38
4	"	48A
1	"	52
2	"	62
4	"	125
2	"	126A

Model No. 227 Carrier Tricycle

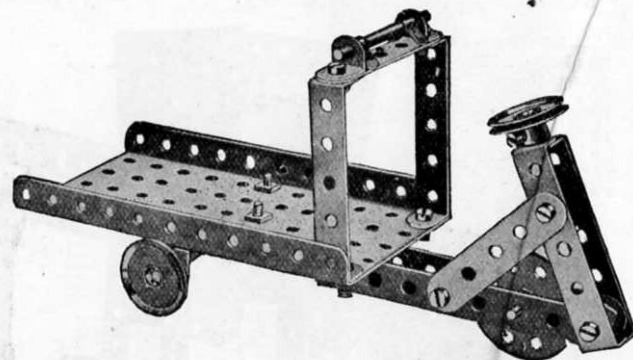

Parts required:

2	of No.	2
3	"	5
1	"	11
2	"	12
1	"	16
1	"	17
1	"	18A
3	"	22
1	"	24
2	"	35
15	"	37
5	"	48A
1	"	52

Model No. 229 Baby Chair



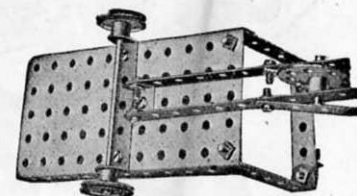


FIG. 227A
(underneath view)

Model No. 228 Hay Tedder

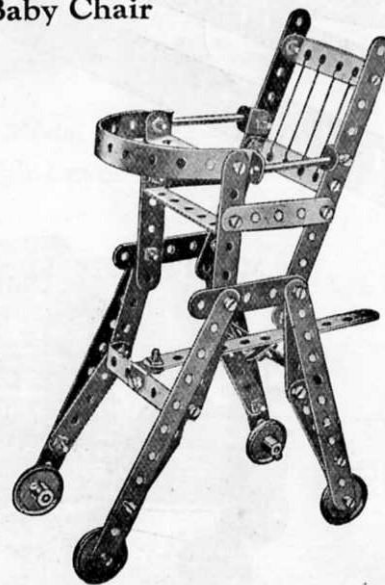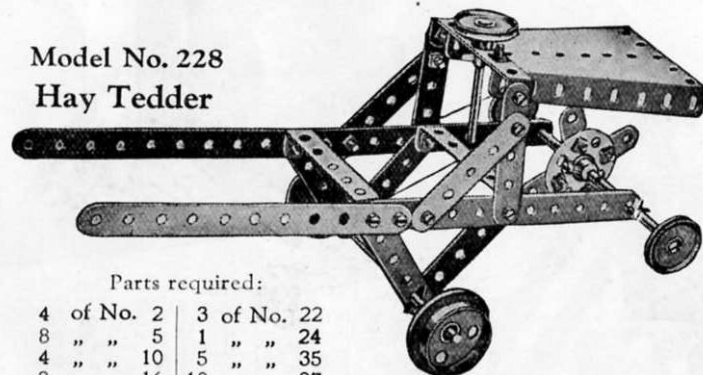

Parts required:

4	of No.	2	3	of No.	22
8	"	5	1	"	24
4	"	10	5	"	35
3	"	16	18	"	37
1	"	17	3	"	48A
2	"	20	1	"	54

Parts required:

8	of No.	2
2	"	3
12	"	5
6	"	12
2	"	17
4	"	22
31	"	37
6	"	48A


Model
Anti-
Gun

5 of No.
2
2
2
1

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.


31

Model No. 230 Motor Van

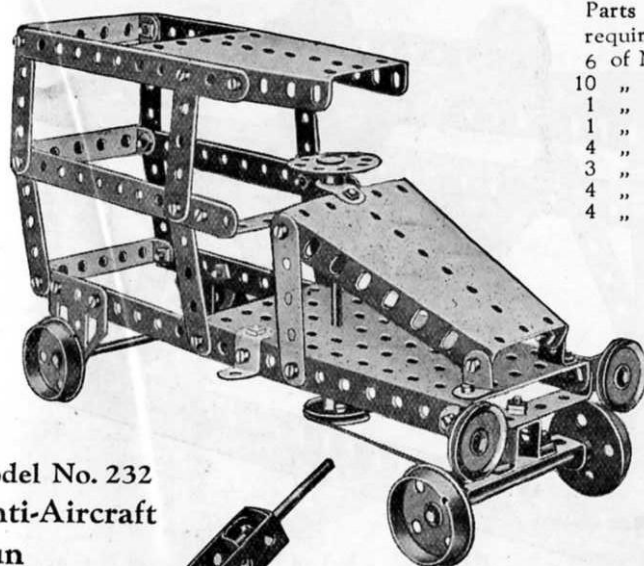


Parts required:		
6	of No.	2
10	" "	5
1	" "	10
1	" "	11
4	" "	12
3	" "	16
4	" "	20
4	" "	22
1 of No. 24		
38	" "	37
1	" "	44
6	" "	48A
1	" "	52
2	" "	54
2	" "	125
2	" "	126A

Model No. 231
Stamping Mill

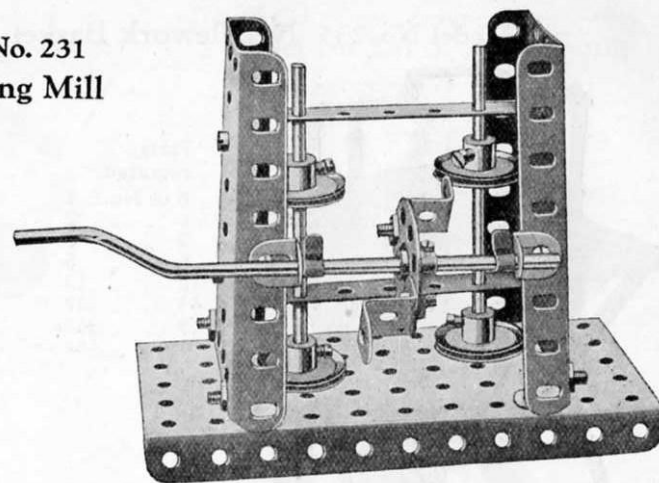


Parts required:		
2	of No.	3
10	" "	12
2	" "	16
1	" "	19
4	of No.	22
1	" "	24
2	" "	35
16	" "	37
1	of No.	52
2	" "	54
2	" "	125

Model No. 232
Anti-Aircraft
Gun

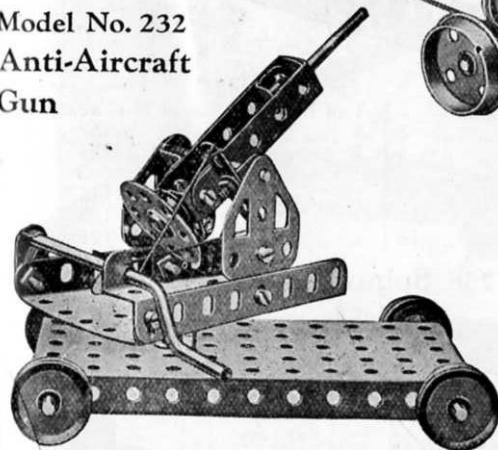


Parts required:		
5	of No.	10
2	" "	11
2	" "	16
2	" "	17
1	" "	19
4	of No.	22
1	" "	24
4	" "	35
12	" "	37
2	" "	48A
1	of No.	52
1	" "	54
4	" "	125
2	" "	126A

Model No. 233 Smoothing Iron

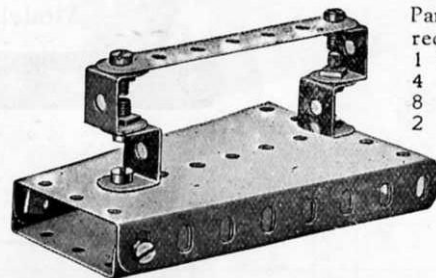

Parts required:		
1	of No.	3
4	" "	11
8	" "	37
2	" "	54

Model No. 234 Coaster

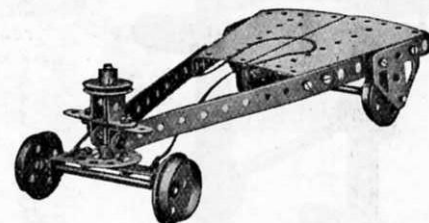

Parts required:		
2	of No.	2
1	" "	5
2	" "	12
1	" "	15
1	" "	16
1	of No.	17
4	" "	20
1	" "	22
1	" "	24
16	" "	37
6	of No.	38
1	" "	45
1	" "	48A
2	" "	54
2	" "	126A


These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.

Model No. 235 Needlework Basket




Parts required:		
6 of No.		1
6 "	"	2
2 "	"	3
6 "	"	5
12 "	"	12
45 "	"	37
3 "	"	48A
1 "	"	52

Model No. 236 Sifter

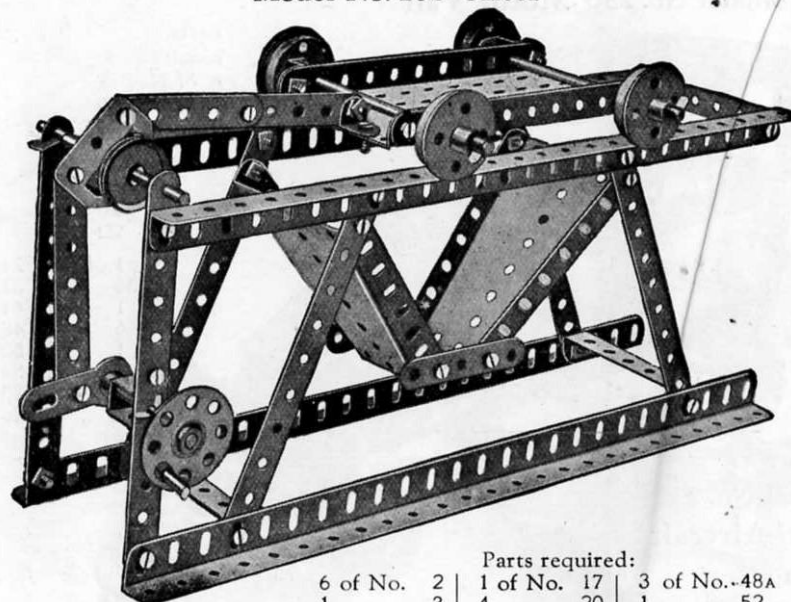


Parts required:		
6 of No.	2	1 of No. 17
1 "	3	4 "
4 "	5	2 "
4 "	8	1 "
1 "	12	7 "
2 "	15	34 "
1 "	16	1 "
		3 of No. 48A
		1 "
		2 "
		1 "
		1 "
		4 "
		1 "

Model No. 237 Towel Rail

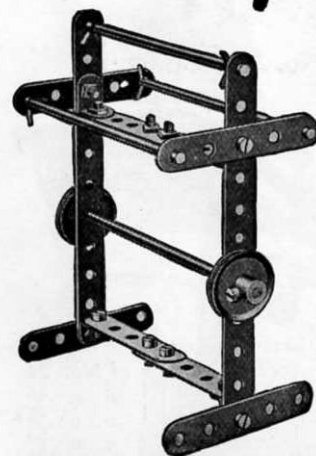


Parts required:		
2 of No.		2
8 "	"	5
4 "	"	12
1 "	"	15
4 "	"	16
2 "	"	22
6 "	"	35
12 "	"	37

Model No. 238 Spinning Top

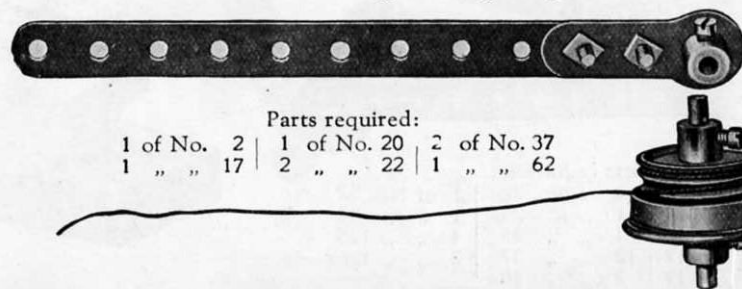


Parts required:		
1 of No.	2	1 of No. 20
1 "	17	2 "
		2 of No. 37
		1 "

Model No. 239 Seashore Aeroplage

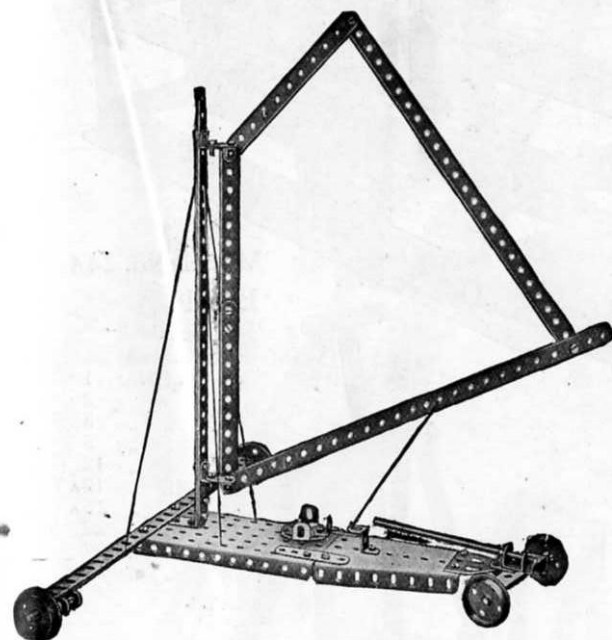

Parts required:


4 of No. 1	1 of No. 12A	33 of No. 37
3 " " 2	1 " " 15	1 " " 38
2 " " 5	1 " " 16	1 " " 48A
1 " " 8	2 " " 17	1 " " 52
3 " " 10	4 " " 20	1 " " 54
3 " " 11	1 " " 24	1 " " 125
7 " " 12	6 " " 35	1 " " 126A

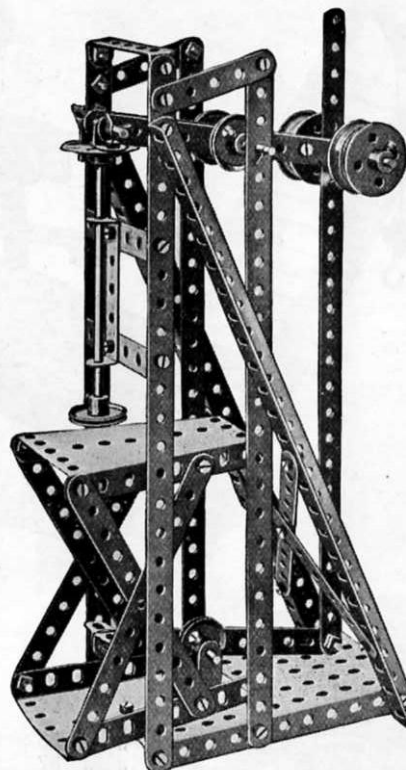Model No. 240
Embossing Machine

Parts required:

5 of No. 1	2 of No. 16	44 of No. 37
9 " " 2	1 " " 17	1 " " 44
2 " " 5	1 " " 18A	4 " " 48A
2 " " 8	4 " " 20	1 " " 52
2 " " 11	4 " " 22	2 " " 54
4 " " 12	1 " " 24	
1 " " 15	4 " " 35	

Model No. 241 Dinner Gong

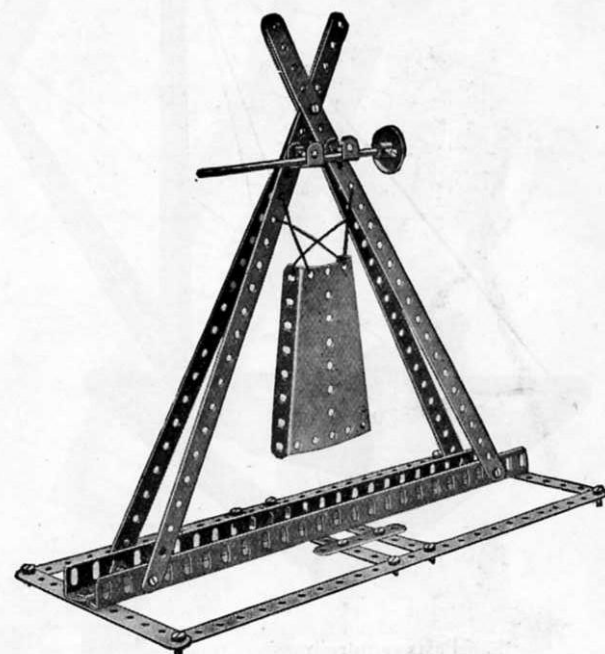


Parts required:

6 of No. 1	1 of No. 15
4 " " 2	1 " " 22
2 " " 5	27 " " 37
2 " " 8	1 " " 54
2 " " 11	

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.


Model No. 242 Dwarf Derrick

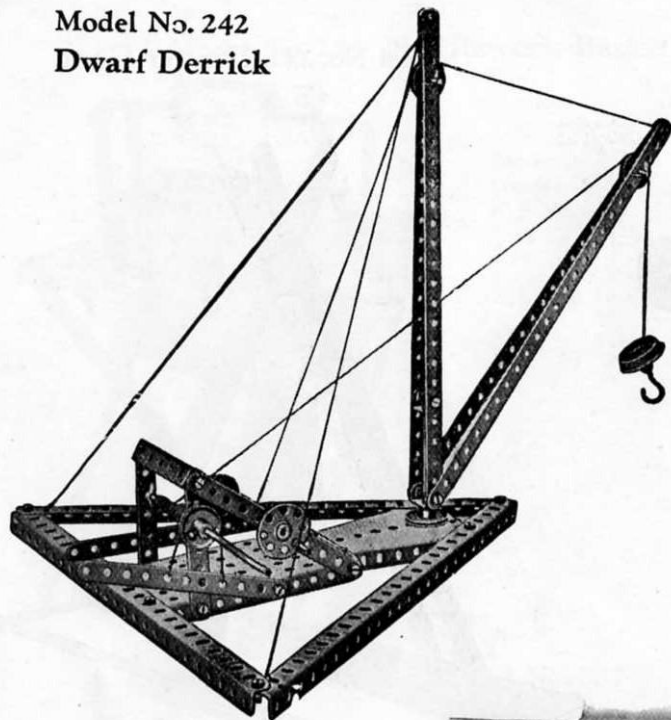

Parts required:

4 of No. 1	2 of No. 22A
4 " " 2	1 " " 24
2 " " 3	6 " " 35
3 " " 8	23 " " 37
2 " " 11	4 " " 38
2 " " 16	1 " " 48A
2 " " 18A	1 " " 52
1 " " 19	1 " " 54
1 " " 20	1 " " 57
4 " " 22	1 " " 115

Model No. 243 Mechanical Hammer

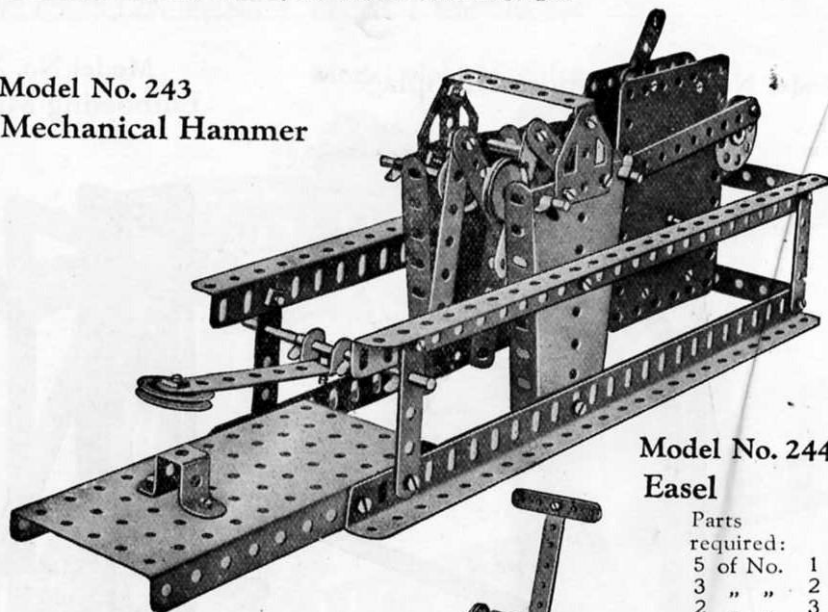

Parts required:

2 of No. 2	
1 " " 3	
6 " " 5	
4 " " 8	
1 " " 11	
1 " " 12	
3 " " 16	
4 " " 22	
1 " " 22A	
1 " " 24	
8 " " 35	
32 " " 37	
1 " " 45	
3 " " 48A	
1 " " 52	
2 " " 54	
2 " " 126A	

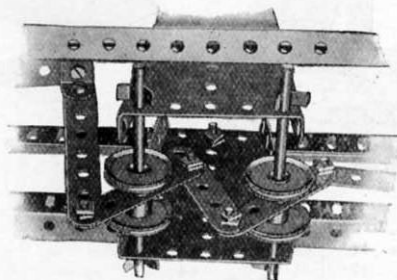



FIG. 243A

Clockwork Motor
(not included in Outfit)

Model No. 244 Easel

Parts required:

5 of No. 1	
3 " " 2	
2 " " 3	
3 " " 5	
4 " " 12	
2 " " 12A	
1 " " 15A	
2 " " 22	
19 " " 37	
4 " " 38	

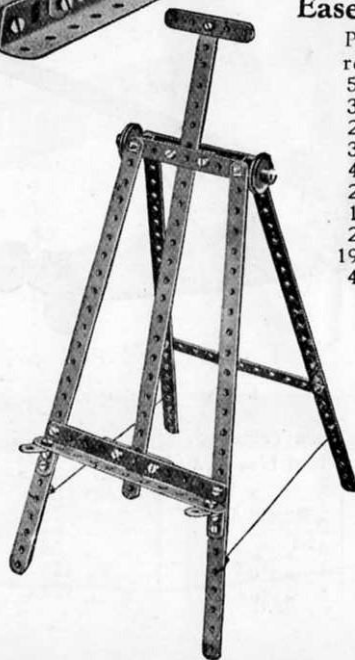

Model No. 245 Extending Ladder on Running Carriage

Parts
required:

	of No.	
2	1	
8	2	
1	3	
7	5	
4	8	
5	12	
4	16	
1	18A	
1	19	
4	20	
4	22	
1	22A	
1	24	
6	35	
47	37	
2	38	
1	44	
1	45	
7	48A	
1	52	
2	54	
1	115	
2	125	
2	126A	

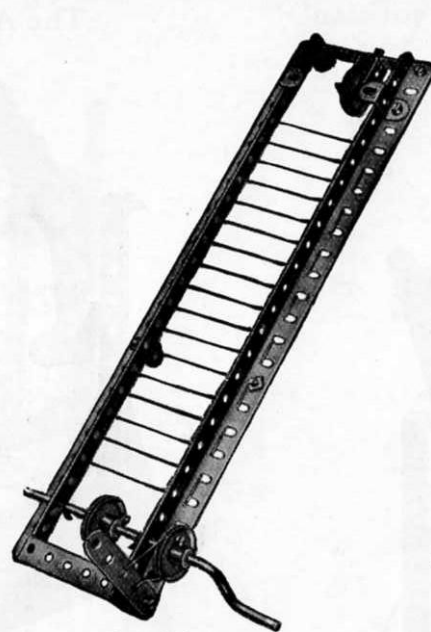
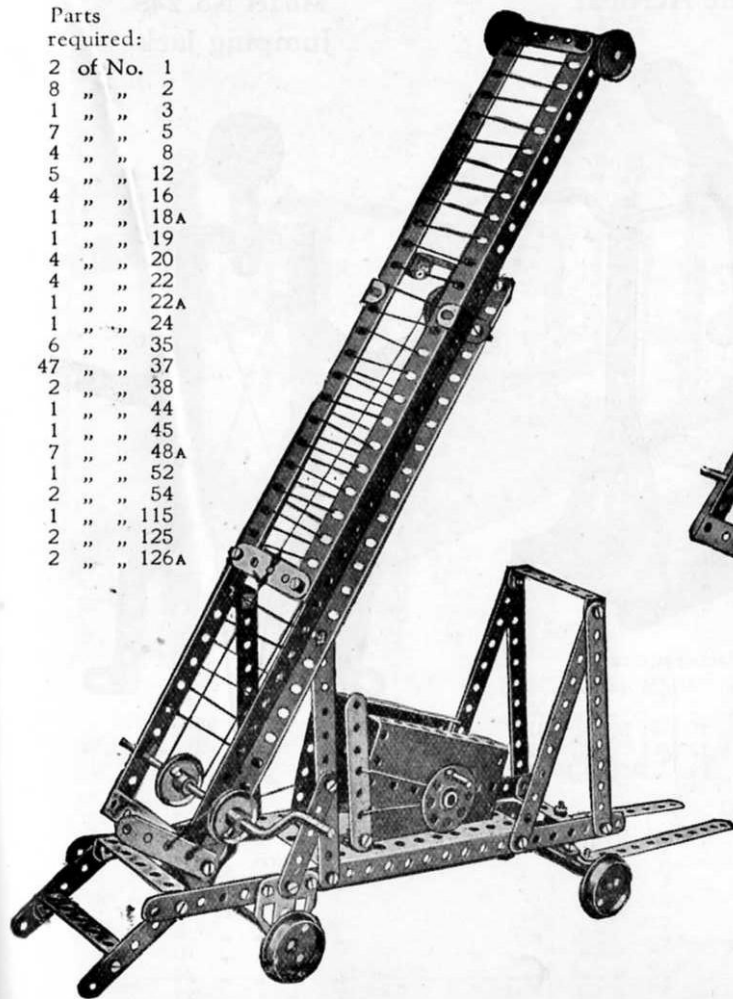


FIG. 245A

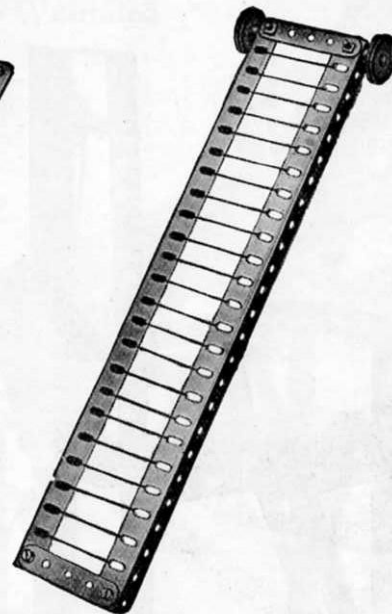



FIG. 245B

The bed of the lower carriage framework is formed by bolting two $12\frac{1}{2}$ " strips to the sides of a large flanged plate, and two sector plates bolted to the flanged plate by their flanges to form the sides, and a bearing for the spindle carrying the operating cord attached to the bottom of the ladder to raise it from a horizontal position; and the strips 1 form a support for the ladder when in this horizontal position. Angle brackets 2, Fig. 245A, form pivots for the lower part of the ladder, and are carried from the supports 3. The upper part of the ladder, Fig. 245, is slideably guided and retained on the lower ladder by reversed brackets 4. The extension of the ladder is effected by the cranked spindle round a pulley on which (and another pulley at the top of the framework) the cord is passed, the ends being secured to the lower part of the slideable ladder.

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.


Model No. 246 Ferry Gangway

The vertical standard 1 is built up from two angle girders, the slotted holes overlapping to form a channel section girder.

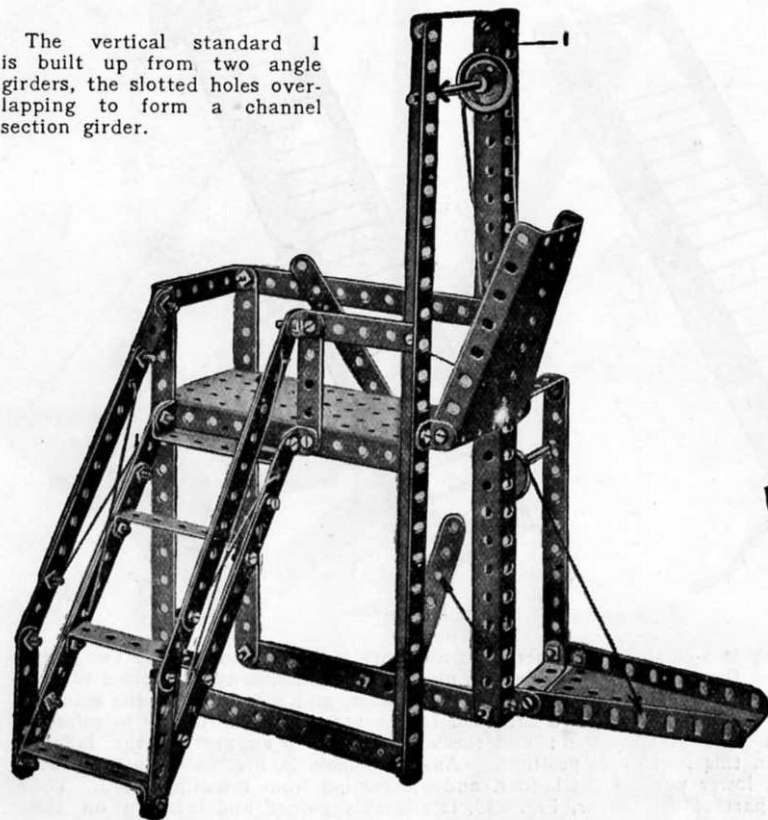

Parts required:			
14 of No. 2	2	6 of No. 12	1 of No. 45
2 " " 3	2	" " 16	8 " " 48A
6 " " 5	2	" " 22	1 " " 52
3 " " 8	2	" " 35	2 " " 54
2 " " 10	54	" " 37	


Model No. 247 The Acrobat

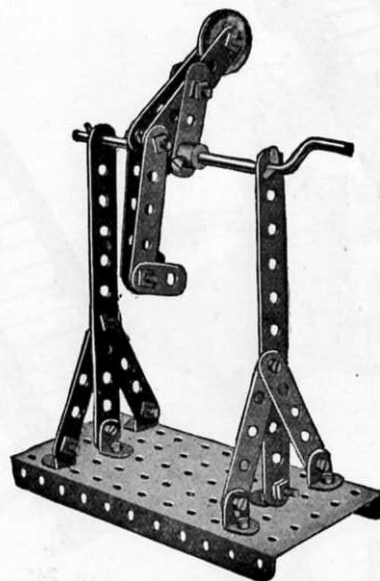

Parts required:

2 of No. 2	2	1 of No. 22A
8 " " 5	2	" " 35
2 " " 10	21	" " 37
6 " " 12	1	" " 52
1 " " 19	2	" " 62

Model No. 248 Jumping Jack

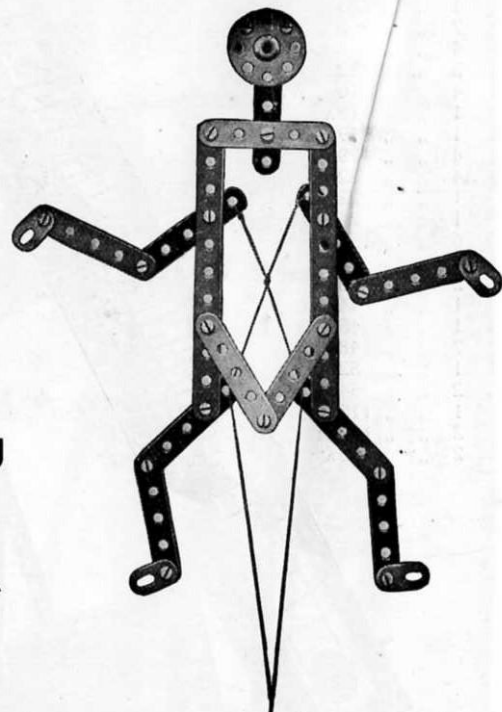


Parts

required	
2 of No. 2	2
12 " " 5	5
4 " " 10	10
1 " " 24	24
18 " " 37	37

These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.


Model No. 249 Turnstile

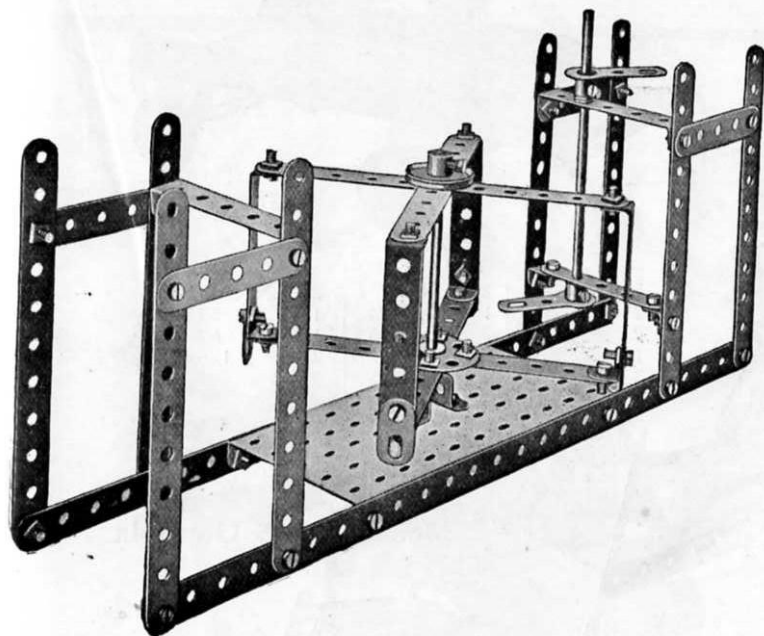

Parts required:			
2 of No.	1	1 of No.	24
10 "	2	42 "	37
9 "	5	2 "	38
4 "	10	1 "	45
2 "	12	6 "	48A
1 "	15	1 "	52
1 "	15A	2 "	62
2 "	22		


Model No. 251
Cutting
Machine

Parts required:			
7 of No.	2		
1 "	3		
1 "	5		
4 "	12		
14 "	37		
1 "	48A		
1 "	52		

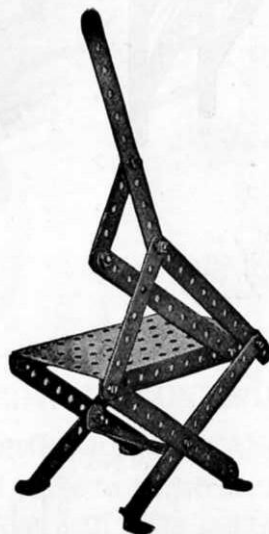

Model No. 250
Chair for Wounded

Parts required:			
6 of No.	2		
2 "	3		
10 "	5		
2 "	11		
2 "	16		
4 "	22		
21 "	37		
2 "	48A		
1 "	52		

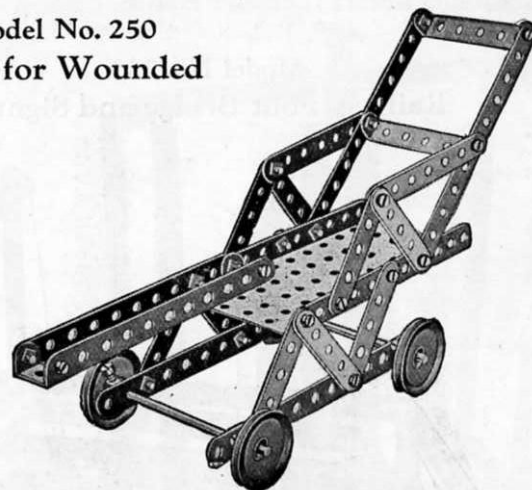

Model No. 252
Magic Sector Plates


Parts required:			
2 of No.	11		
1 "	17		
2 "	35		
6 "	37		
2 "	54		



When the cord is held vertically the magic sector plates will fall or stop at the bidding of the owner. If the cord is held without tension the plates will fall, but the instant the cord is tightened they will stop dead. The cord is wrapped once around the rod which passes through the centre holes of the sector plates.


These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.

Model No. 253
Railway Foot Bridge and Signals

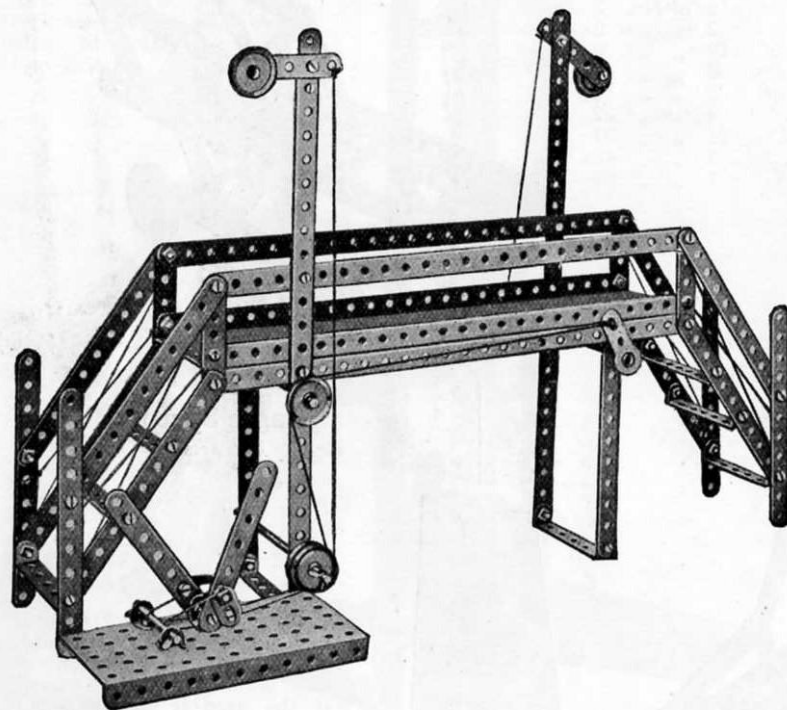


Parts required:					
4 of No.	1	1 of No.	11	2 of No.	22A
14 " "	2	2 " "	12	6 " "	35
2 " "	3	1 " "	15A	50 " "	37
8 " "	5	2 " "	16	8 " "	48A
2 " "	8	1 " "	17	1 " "	52
2 " "	10	3 " "	22	1 " "	62

Model No. 254 Motor Van

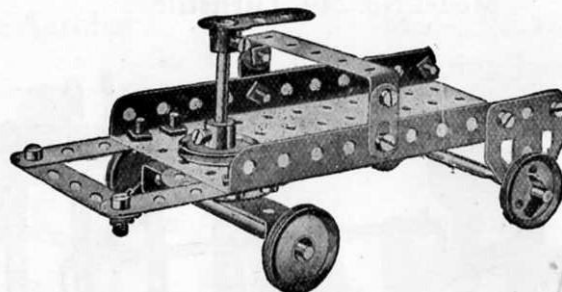

Parts required:					
3 of No.	5	2 of No.	22A	2 of No.	48A
2 " "	10	1 " "	24	1 " "	52
2 " "	16	2 " "	35	1 " "	62
1 " "	17	16 " "	37	2 " "	126A
3 " "	22	2 " "	38		


Model No. 255 Gondola

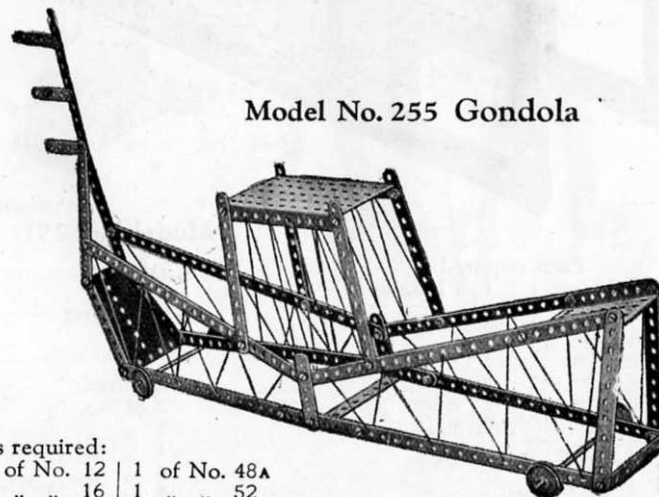

Parts required:					
8 of No.	1	2 of No.	12	1 of No.	48A
9 " "	2	2 " "	16	1 " "	52
1 " "	3	4 " "	22	2 " "	54
5 " "	5	29 " "	37		


These Models can be made with MECCANO Outfit No. 2, or No. 1 and No. 1A.

Model No. 256 Roundabout

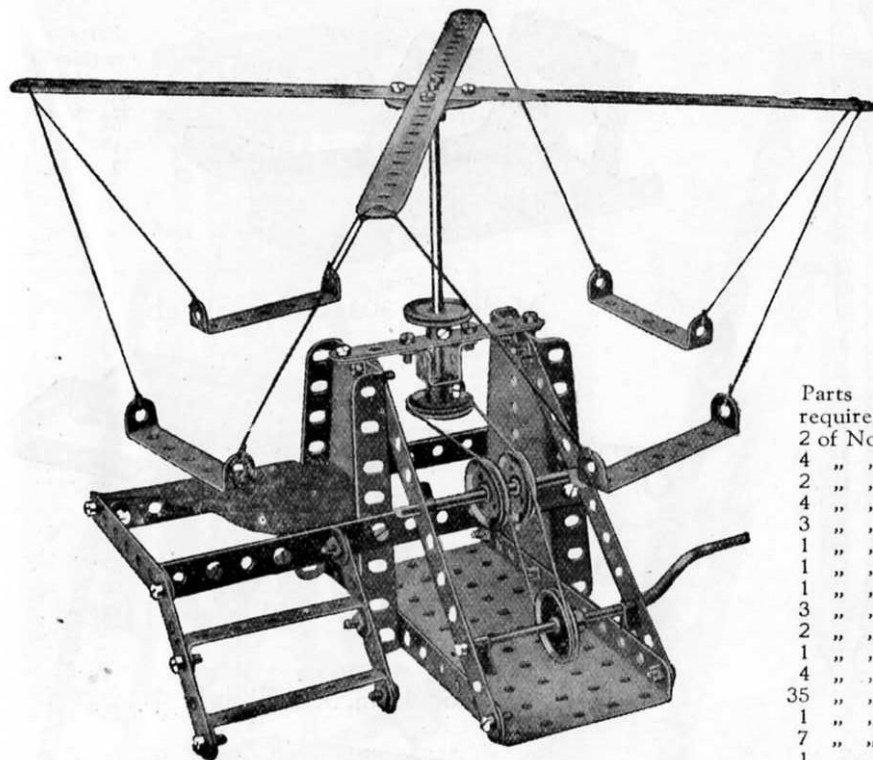

Parts required:	
2 of No.	1
4 " "	2
2 " "	3
4 " "	5
3 " "	12
1 " "	15
1 " "	16
1 " "	19
3 " "	22
2 " "	22A
1 " "	24
4 " "	35
35 " "	37
1 " "	45
7 " "	48A
1 " "	52
2 " "	54

Model No. 257 Beam Scales

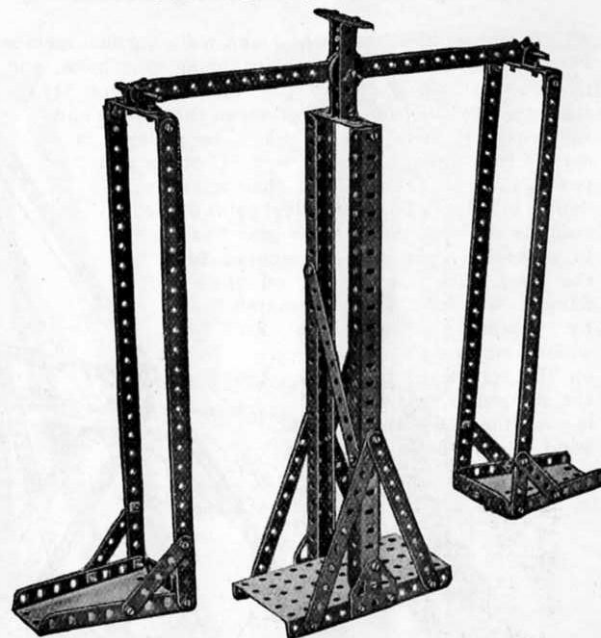

Parts required:	
5 of No.	1
6 " "	2
7 " "	5
4 " "	8
6 of No.	12
2 " "	17
2 " "	22A
6 " "	35
48 " "	37
5 of No.	48A
1 " "	52
2 " "	54
2 " "	126A


HOW TO CONTINUE

This completes the Models which may be made with MECCANO Outfit No. 2. The next Models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 2A Accessory Outfit, the price of which will be found in the List at the end of the Manual.

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.


Model No. 301 Rotating Crane

The lower horizontal ribs 1 and main vertical members 2 are made of angle girders overlapping nine holes, and the diagonal ties 3 of two $12\frac{1}{2}$ " strips and one $5\frac{1}{2}$ " strip, the $12\frac{1}{2}$ " strips being overlapped three holes and the lower $5\frac{1}{2}$ " strip seven holes. The pulley 4 is carried in a nosing made of two $5\frac{1}{2}$ " strips and two $12\frac{1}{2}$ " strips connected at their apex by a double bracket. The rear swivel point of the crane is made by bolting the gear box 5 to a double bent strip 6 secured to the floor. The crane runs on the flanged wheels 7 and is rotated by means of the worm 8 which engages a pinion 9 on the spindle of one of the flanged wheels and is rotated by the hand wheel 10.

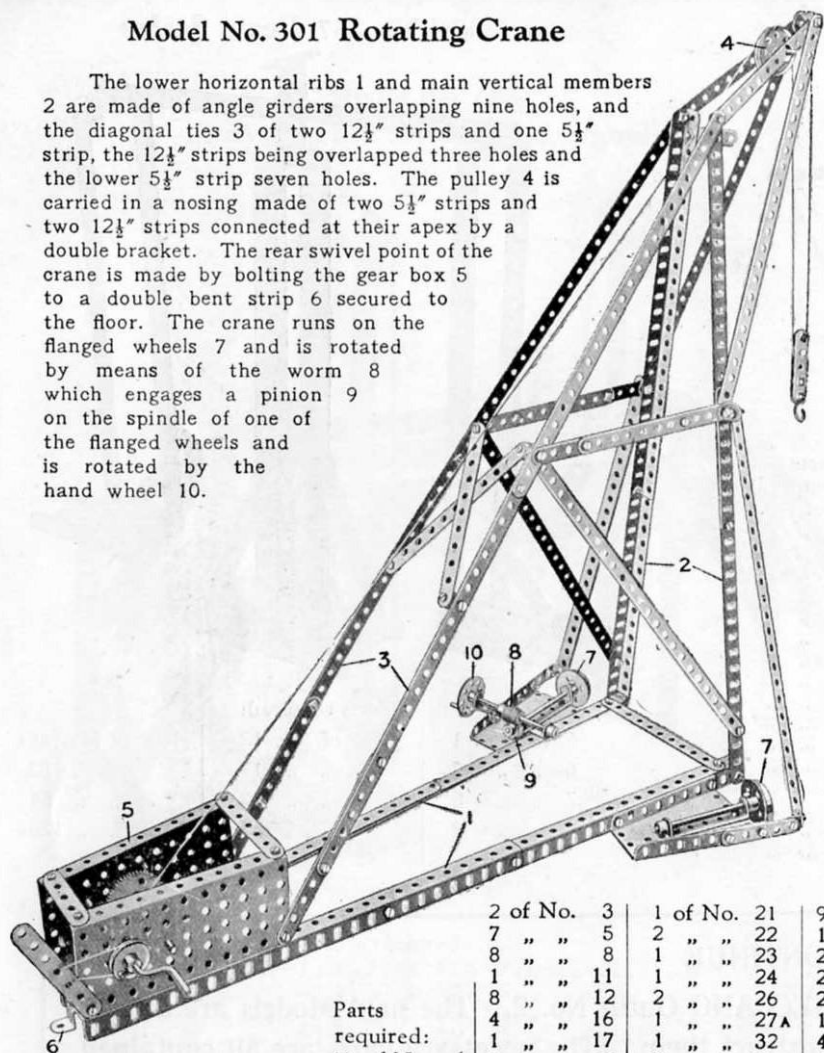


	2 of No.	3	1 of No.	21	9 of No.	38
	7	" "	5	2	" "	45
	8	" "	8	1	" "	48A
	1	" "	11	1	" "	52
Parts	8	" "	12	2	" "	54
required:	4	" "	16	1	" "	57
	1	" "	17	1	" "	59
10 of No.	1	" "	19	2	" "	115
11	" "	2	20	70	" "	125

Model No. 302 Toboggan

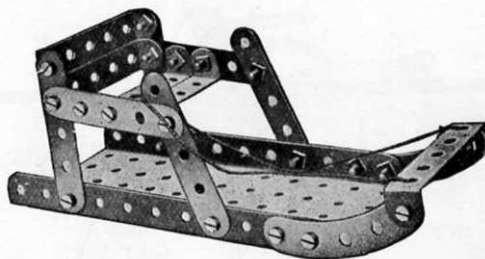


Parts			
required:			
6	of	No.	5
20	"	"	37
5	"	"	48 ^A
1	"	"	52
2	"	"	90

Model No. 303 Horse Sleigh

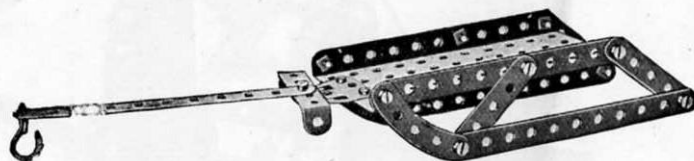

Parts required:		
3 of No. 2	13 of No. 37	1 of No. 57
4 " " 5	1 " " 48A	2 " " 90
1 " " 23	1 " " 52	1 " " 126A

Model No. 304 Sleigh

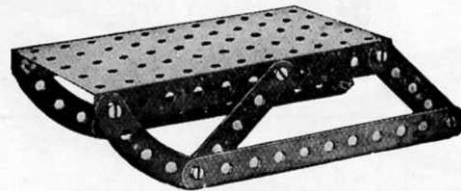

Parts required:	
2 of No. 2	
4 of No. 5	1 of No. 52
10 " " 37	2 " " 90

This Model can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

41

Model No. 305 Tower Wagon

Parts required:	
6 of No.	1
2 "	4
10 "	5
8 "	8
2 "	12
2 "	15A
4 "	16
4 "	20
1 "	22A
1 "	24
1 "	26
1 "	32
4 "	35
72 "	37
8 "	38
10 "	48A
2 "	52
3 "	59
1 "	98
2 "	100
1 "	115
2 "	126A

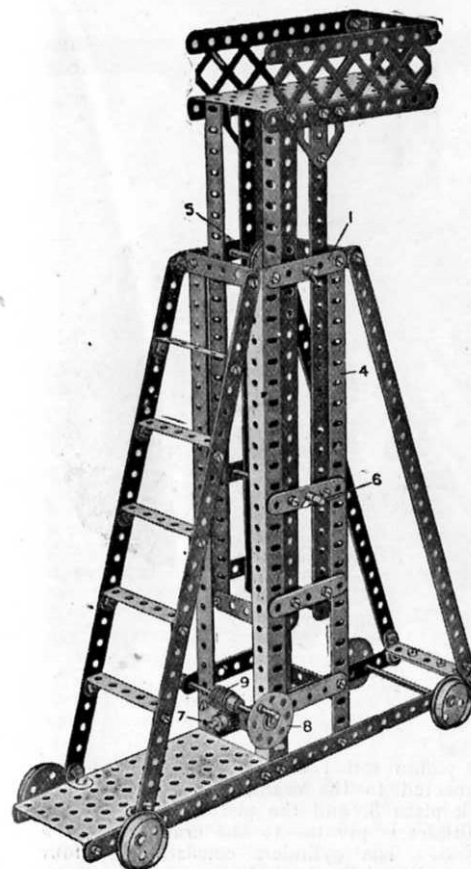


FIG. 305

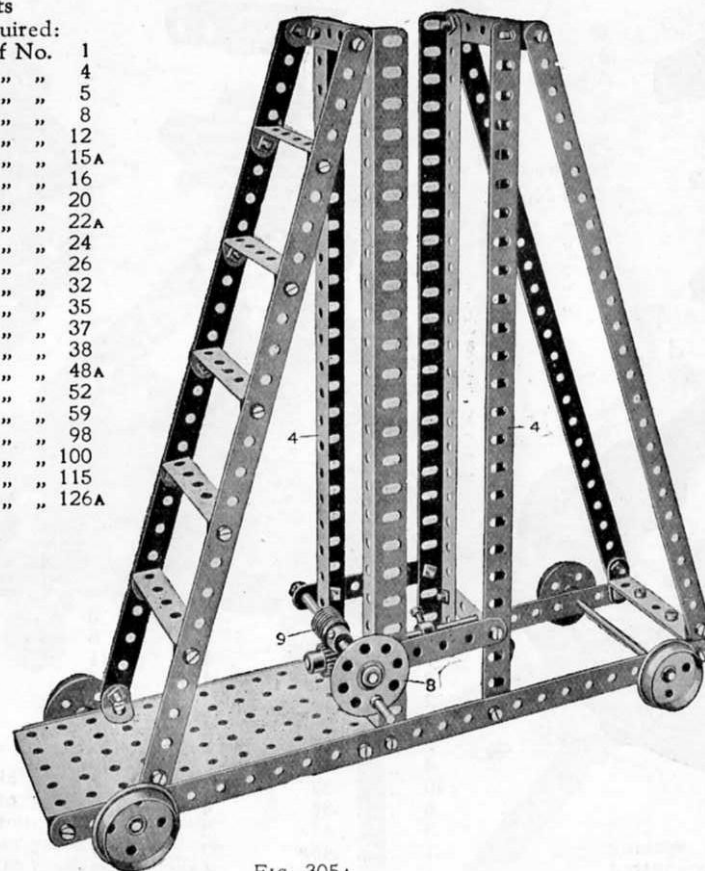


FIG. 305A


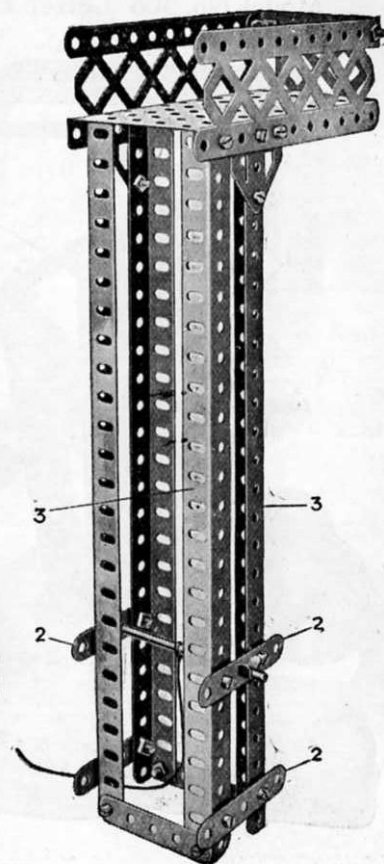


FIG. 305B

Begin the construction of this model by building up the platform, Fig. A, the tie strips 1 being left off as shown in order to be able to insert the rising and falling tower, Fig. B. The strips are then bolted on. The guide strips 2 are bolted to the girder 3 of the tower with washers beneath the strips. This gives the necessary clearance and enables the strips to rise easily up the faces of the girders 4 of the fixed lower part of the tower. The tower is raised by means of a cord which passes over a pulley 5 and is fastened to a rod 6, the other end of the cord winding on a rod 7 rotated by a hand wheel 8 on the spindle of the worm 9.

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

Model No. 306 Letter Balance

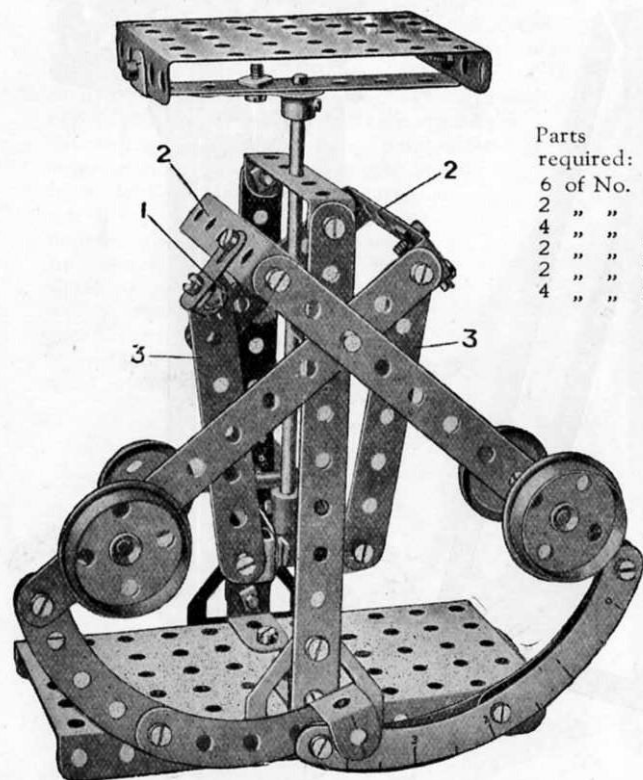

Parts
required:

6 of No.	2
2 "	3
4 "	5
2 "	10
2 "	11
4 "	12

The connection at 1 of the rocking arms 2 to the thrust strips 3 is locknuttet to give a free pivotal action, and similarly the pivotal connections 5 of the strips 3 to the lever strips 4 are locknuttet to give free play.

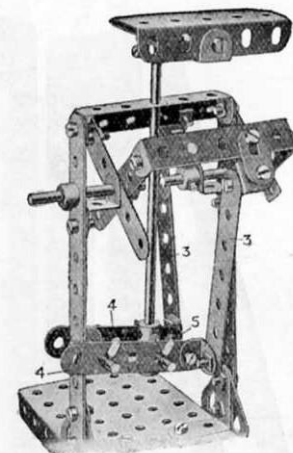



FIG. 306A

2 of No.	12A
1 "	15
2 "	17
2 "	18A
2 "	20
2 "	22
4 "	35
40 "	37
6 "	38
3 "	48A
1 "	48B
1 "	52
1 "	53
4 "	59
1 "	62
1 "	63
4 "	90
2 "	125
2 "	126A

Parts
required:

2 of No.	3
2 "	5
4 "	11
4 "	12
2 "	12A
2 "	15
2 "	19
1 "	19B
4 "	20
4 "	22
3 "	35
50 "	37
6 "	48A
2 "	52
3 "	53
2 "	59
1 "	63
1 "	102
1 "	116
4 "	125

Model No. 307 Oscillating Steam Engine

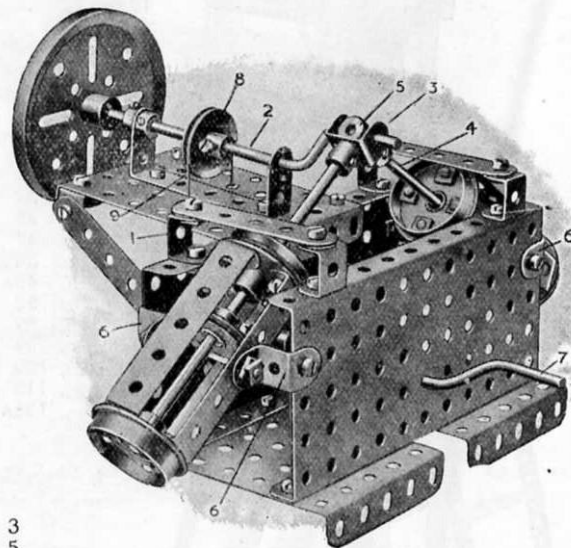

The piston rod 1 of one cylinder is pivotally connected to the crank rod 2 by means of a fork piece 3, and the piston rod 4 of the other cylinder is pivoted to the crank rod by a coupling 5. The cylinders consisting of four strips are enclosed by flanged wheels at the ends, and are pivoted on $\frac{1}{2}$ " reversed brackets 6. The model is operated from the handle rod 7, a pulley on the rear end of which is coupled to the pulley 8 by a cord 9.

this
illustr
side
bolte
end
flang
the l
 $\frac{1}{2}$ " r
main
flang
girde

are b
which
the w
benea

with
of the
and M

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

43

Model No. 308 Railway Wagon Swivel Crane


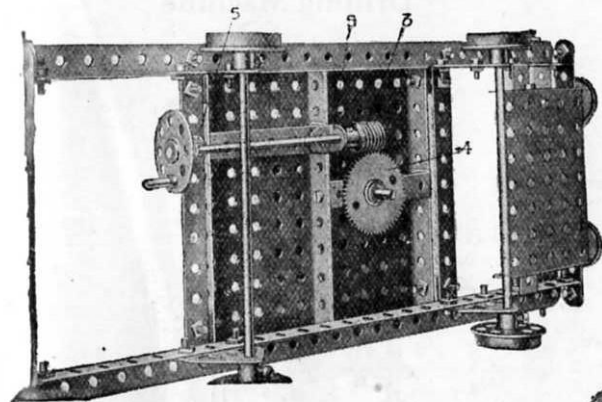


FIG. 308A

The construction of the base in this model may be followed from the illustration. It will be seen that each side consists of two angle girders bolted together and connected at the end to $5\frac{1}{2}$ " strips, while two $3\frac{1}{2} \times 2\frac{1}{2}$ " flanged plates are secured between the lower angle girders by means of $\frac{1}{2}$ " reversed angle brackets. The main platform is built up from $5\frac{1}{2} \times 2\frac{1}{2}$ " flanged plates resting upon the upper girders.

The flanges of the sector plates 1 are bolted to the 3" pulley wheel 2 upon which the crane swivels, and the spindle of the pulley wheel is rotated by the worm 3 engaging the gear wheel 4 (Fig. 308A). In order to bring the worm centrally over the teeth of the gear wheel 4, washers are placed beneath the angle brackets 5 in which the spindle of the worm is journalled.


Several improvements will probably suggest themselves in connection with this model, such as the addition of ball-bearings in the swivel base of the crane (see Standard Mechanism Nos. 104 and 105), train couplings, and Meccano spring buffers in place of the 1" pulleys shown.

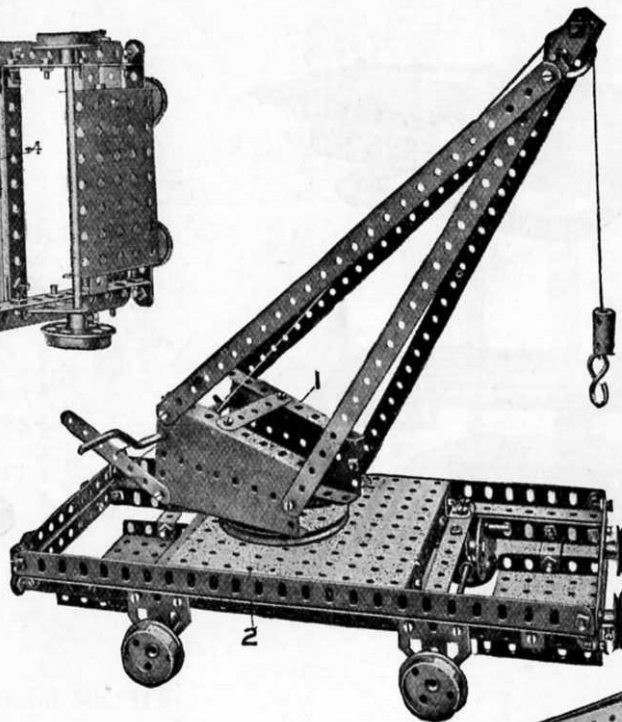

Parts required:

4 of No. 1	1 of No. 19	2 of No. 38
6 " " 2	1 " " 19B	2 " " 48A
1 " " 3	4 " " 20	2 " " 52
2 " " 5	4 " " 22	2 " " 53
4 " " 8	1 " " 22A	2 " " 54
1 " " 11	1 " " 24	1 " " 57
14 " " 12	1 " " 27A	3 " " 59
2 " " 15	1 " " 32	1 " " 63
1 " " 15A	3 " " 35	1 " " 115
2 " " 17	70 " " 37	4 " " 125
		4 " " 126A

Model No. 309 Crossbow

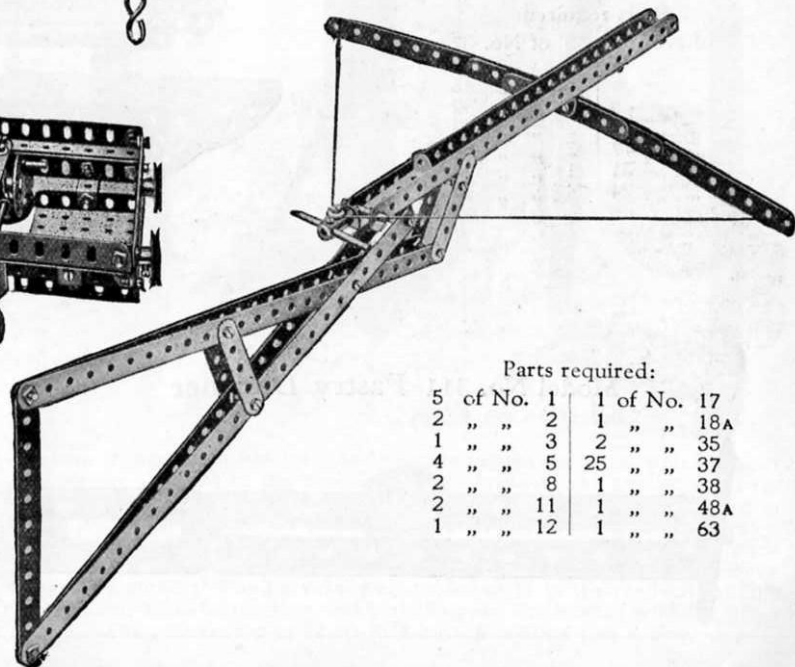


Parts required:

5 of No. 1	1 of No. 17
2 " " 2	1 " " 18A
1 " " 3	2 " " 35
4 " " 5	25 " " 37
2 " " 8	1 " " 38
2 " " 11	1 " " 48A
1 " " 12	1 " " 63

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

Model No. 310 Bob Sleigh

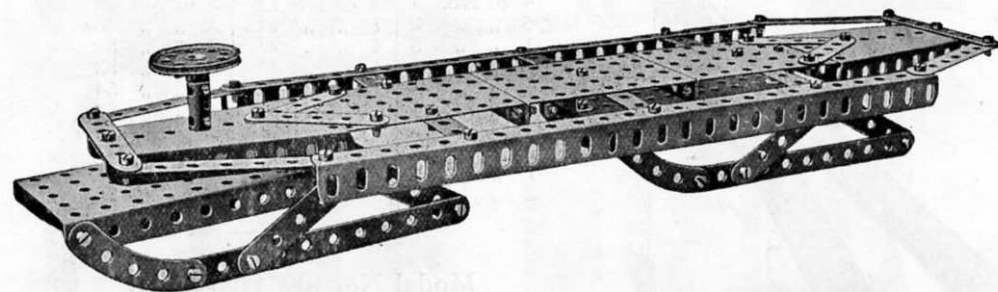

Parts required:

7 of No.	2	55 of No.	37
6 " "	3	2 " "	38
12 " "	5	1 " "	45
2 " "	8	2 " "	52
2 " "	11	3 " "	53
1 " "	17	2 " "	54
1 " "	21	1 " "	63
1 " "	24	4 " "	90


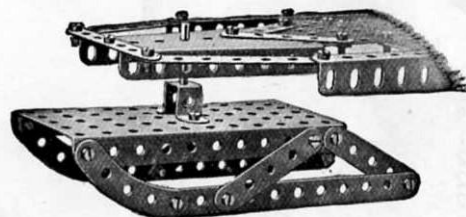


FIG. 310A


Model No. 311 Pastry Designer

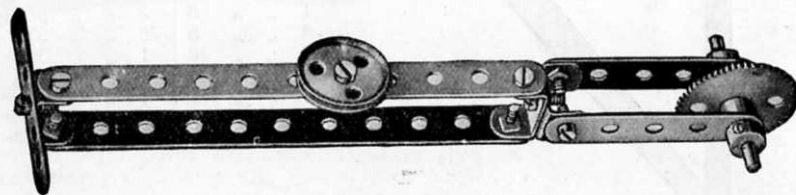

Parts required:

2 of No.	2
3 " "	5
3 " "	11
1 " "	17
1 " "	22A
1 " "	27A
9 " "	37
2 " "	59

Model No. 312 Drilling Machine

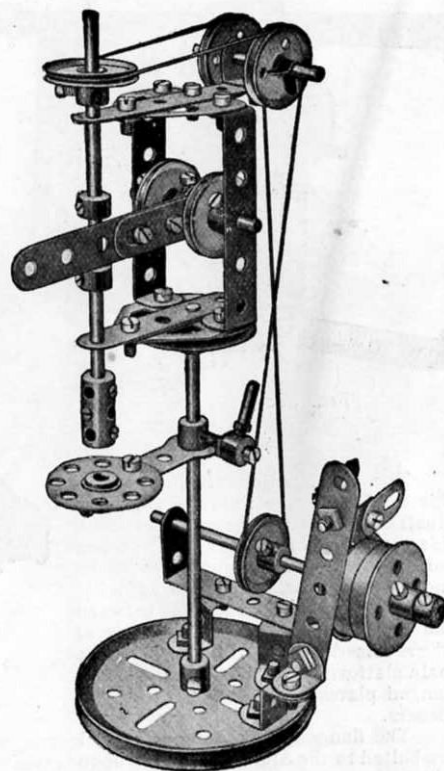


Parts required:

2 of No.	4	2 of No.	20	2 of No.	48A
2 " "	5	1 " "	21	5 " "	59
2 " "	10	4 " "	22	2 " "	62
2 " "	11	2 " "	22A	1 " "	63
1 " "	12	1 " "	24	1 " "	111
1 " "	15	2 " "	35	1 " "	115
2 " "	15A	21 " "	37	3 " "	125
2 " "	17	1 " "	44	2 " "	126A
1 " "	19B	1 " "	46		

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

Model No. 313 Coffee Grinder

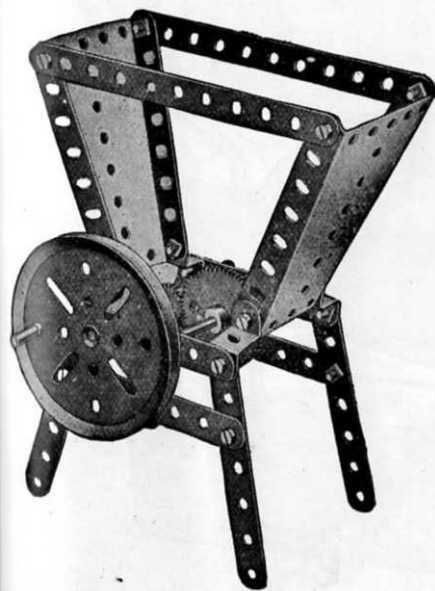


Parts
required:

2	of No.	2
6	" "	3
2	" "	4
2	" "	16
1	" "	19B
1	" "	26
1	" "	27A
16	" "	37
2	" "	54
3	" "	59
1	" "	115
4	" "	125

Model No. 315 Rattle

Parts required:


2	of No.	4	6	of No.	37
2	" "	5	1	" "	48A
2	" "	12	2	" "	59
1	" "	15	1	" "	63
2	" "	26			

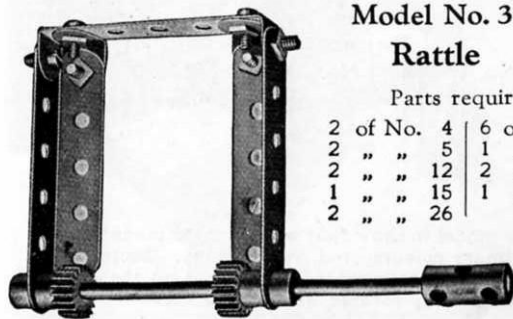

Model No. 314 Demonstration Scales

Parts
required:


3	of No.	1
4	" "	2
6	" "	3
1	" "	4
2	" "	5
8	" "	8
4	" "	11
6	" "	12
2	" "	12A
2	" "	17
1	" "	18A
1	" "	22
2	" "	35
58	" "	37
1	" "	44
2	" "	52
2	" "	53
2	" "	59
2	" "	62
4	" "	90
1	" "	125
3	" "	126A

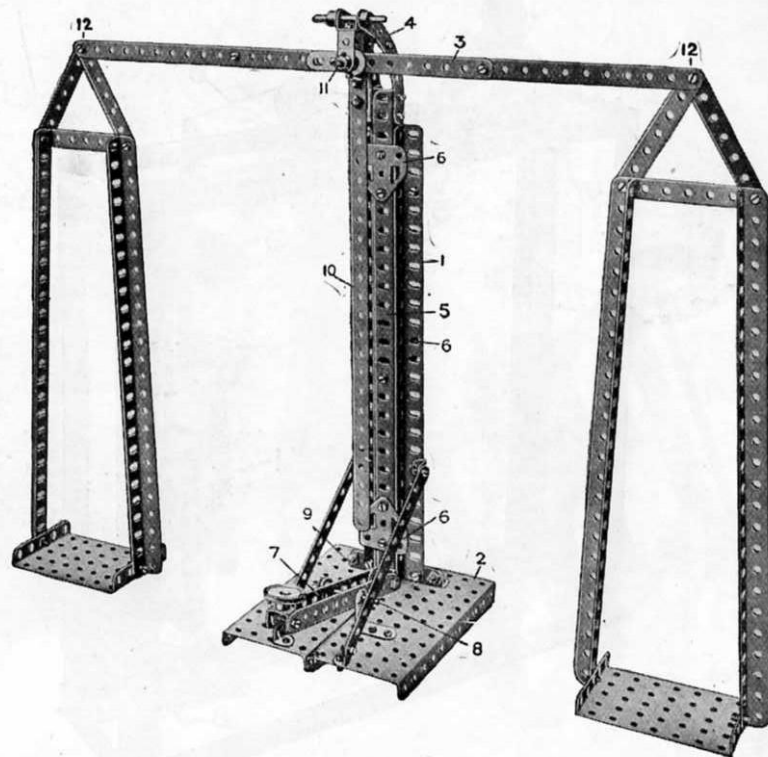

The only feature of this model which needs description is the standard, which is built up of two angle girders 1 bolted to the base 2 by angle brackets and spaced apart at the top by a 2½" strip obliquely disposed. The balance lever 3 is pivotally carried in curved strips 4 bolted to the top of two angle girders 5 sliding between the girders 1. The girders 5 are themselves bolted together and in order to guide them as they slide vertically flat trunnions 6 are bolted at the front and rear. The balance is raised by depressing the lever 8 pivoted at 9 and pivotally connected at 11 to the vertically sliding girders 5. The indicator 10 is bolted to a crank at the rear, the boss of which is fitted on the pivot rod 11. The connections at 12 are lock-nutted to allow free action.

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

Model No. 316 Drop the Nigger

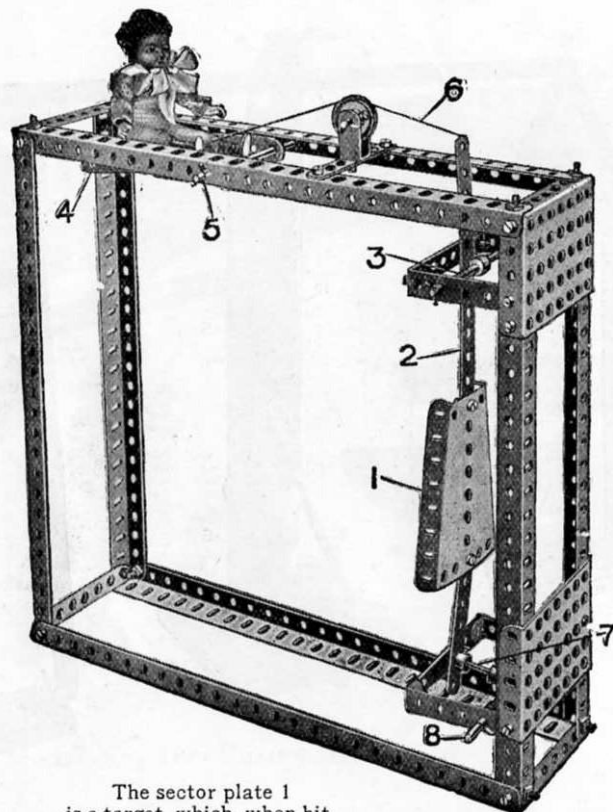


Parts required:

1	of No.	1
6	" "	3
8	" "	8
1	" "	12
3	" "	15A
1	" "	17
1	" "	22
6	" "	35
33	" "	37
1	" "	44
4	" "	48A
2	" "	53
2	" "	54
3	" "	59
1	" "	63

The sector plate 1 is a target, which, when hit, allows the nigger to be dropped. The plate 1 is carried on the strip 2 pivoted at 3, and the weight of the nigger supported on another sector plate 4 pivoted at 5 by means of the cord 6 keeps the lower end of the strip 2 hard against a short rod 7 pivoted at 8. When the target is hit and knocked back the rod 7 is released and falls about its pivot, allowing the sector plate 4 with the nigger to drop.

Model No. 317 Newton's Disc

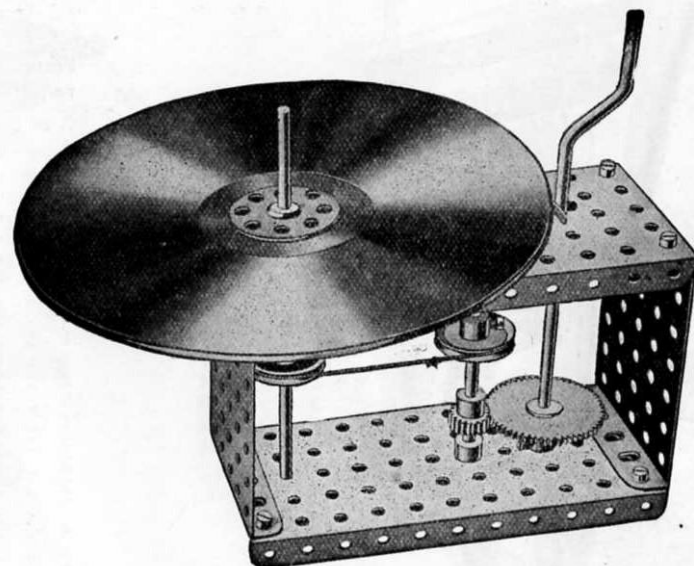

Parts required:

1 of No. 15	1 of No. 24	8 of No. 37
1 " " 15A	1 " " 26	2 " " 52
1 " " 19	1 " " 27A	2 " " 53
2 " " 22	2 " " 35	4 " " 59

This is a model to show that white light is made up of the three primary colours—red, yellow, blue. Sectors of these three colours are mounted or painted on the disc, which, if then quickly rotated, shows as white.

2 of
4 "
4 "
1 "
3 "
1 "
2 "
1 "
1 "
4 "
1 "

This Model can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

47

Model No. 318 Railway Breakdown Crane

Parts required:

2 of No. 1	1 of No. 23	1 of No. 54
4 " " 2	1 " " 24	1 " " 57
4 " " 11	1 " " 26	2 " " 59
1 " " 12	1 " " 32	1 " " 63
3 " " 15A	4 " " 35	1 " " 115
1 " " 16	36 " " 37	4 " " 126A
2 " " 17	5 " " 38	1 " " 147A
1 " " 19	2 " " 48A	1 " " 147B
1 " " 19B	2 " " 48B	1 " " 148
4 " " 20	2 " " 52	
1 " " 22A	3 " " 53	

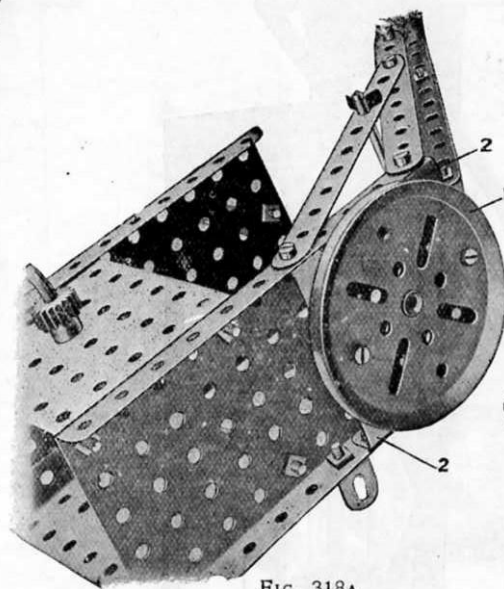
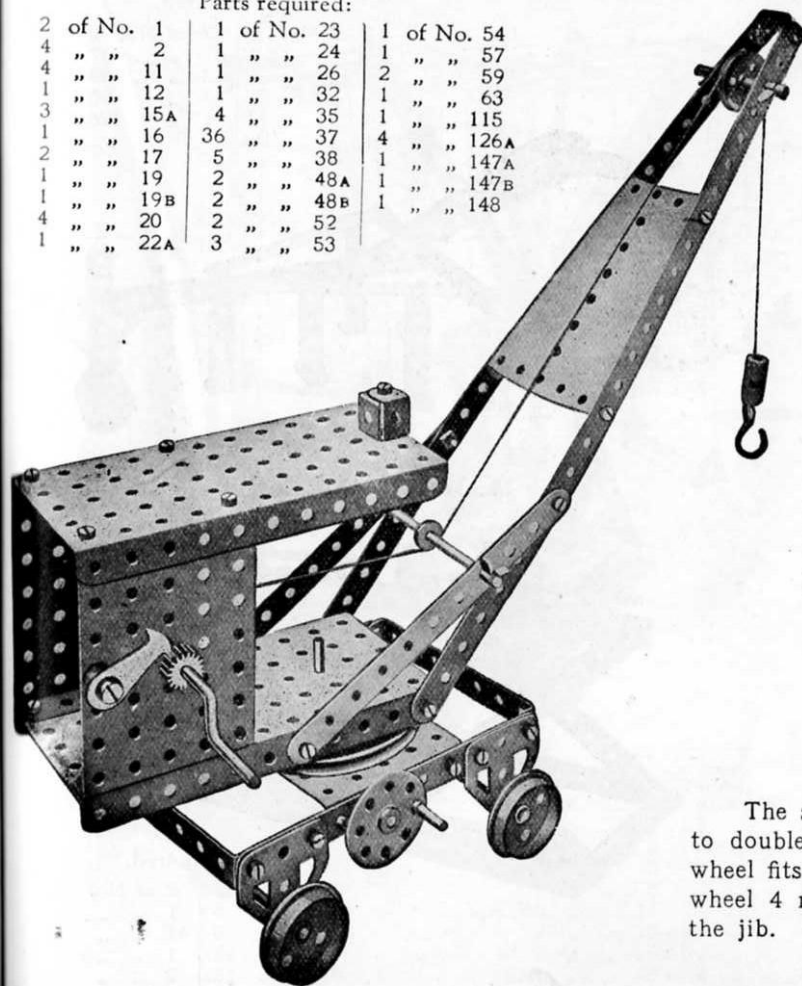


FIG. 318A

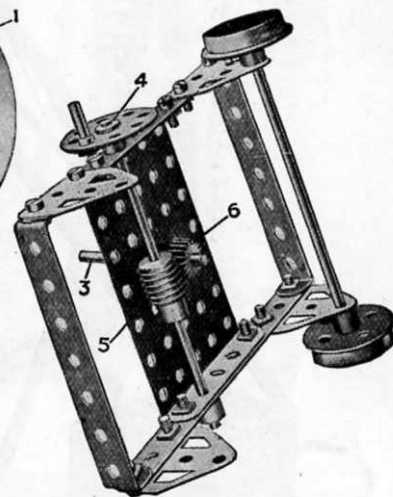


FIG. 318B


The swivelling action is obtained by bolting a 3" pulley 1 to double angle strips 2 on the jib frame. The boss of this wheel fits over the rod 3 and is secured to the rod. The hand wheel 4 rotates the worm 5, engaging the pinion 6 to swivel the jib.

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

Model No. 319 Pit Head Gear

Parts required:


10 of No.	1	6 of No.	35
10 "	2	74 "	37
4 "	3	2 "	52
2 "	4	3 "	53
8 "	8	2 "	54
10 "	12	3 "	59
1 "	15	1 "	62
3 "	15A	2 "	100
1 "	17		
1 "	19		
1 "	19B		
1 "	22		
1 "	26		
1 "	27A		

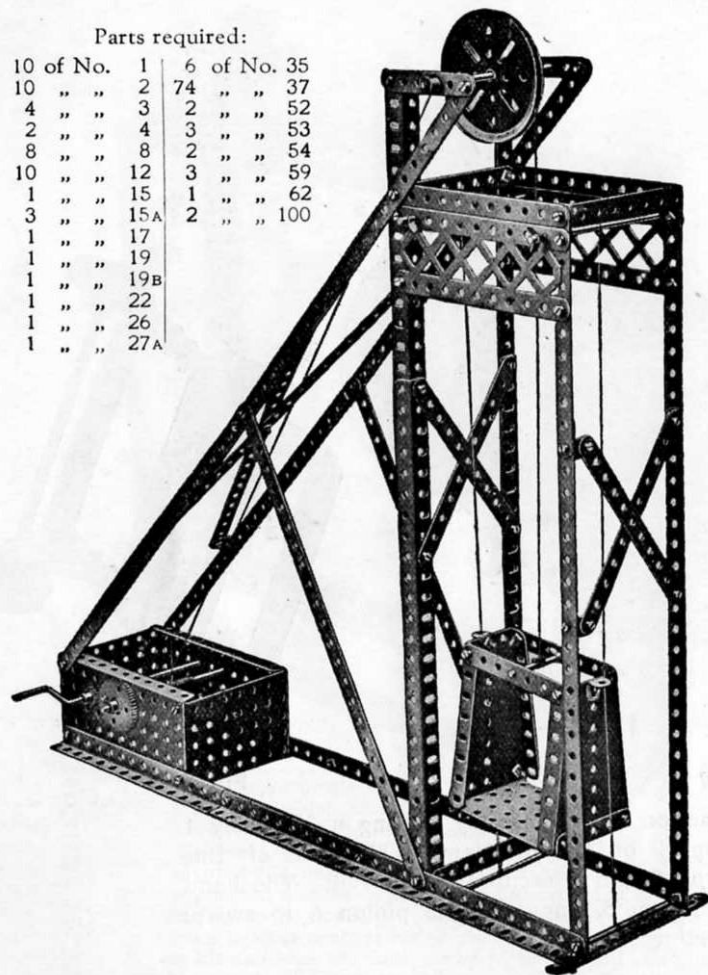

Model No. 320 Scarifier

Parts required:


7 of No.	2	2 of No.	22
1 "	3	31 "	37
4 "	5	2 "	38
1 "	10	2 "	90
14 "	12	1 "	126A
1 "	18A		

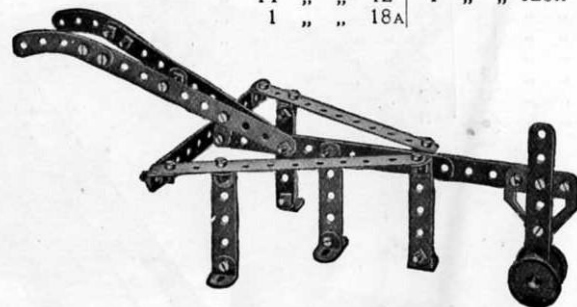

Model No. 321 Lathe

Parts required:

8 of No.	2	2 of No.	20
10 "	5	1 "	22
4 "	8	41 "	37
2 "	12A	1 "	46
1 "	15A	2 "	48A
1 "	16		

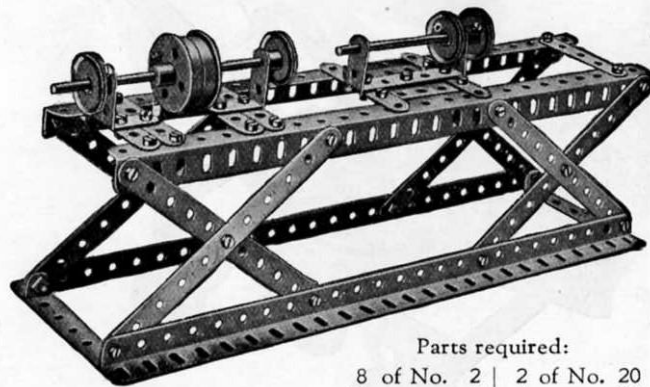


These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

49


Model No. 322 Roundabout

Model No. 323 Swing

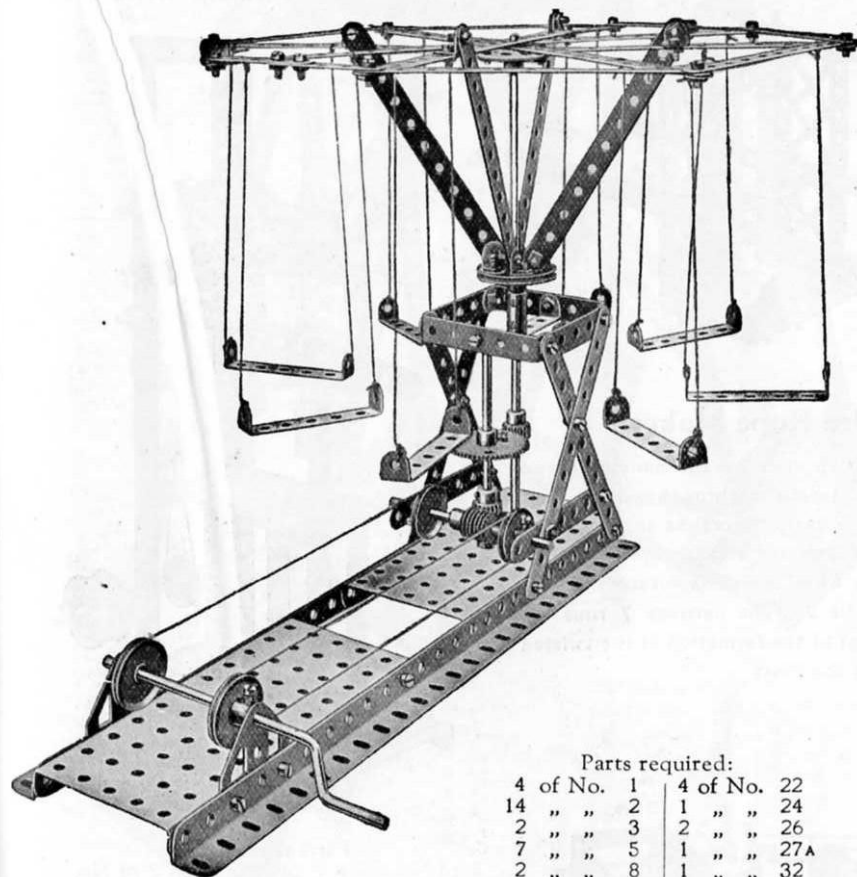

Parts required:

4 of No. 1	4 of No. 22
14 " " 2	1 " " 24
2 " " 3	2 " " 26
7 " " 5	1 " " 27A
2 " " 8	1 " " 32
10 " " 12	54 " " 37
2 " " 15	10 " " 48A
1 " " 15A	2 " " 52
1 " " 16	3 " " 59
1 " " 19	1 " " 63
1 " " 21	2 " " 126A

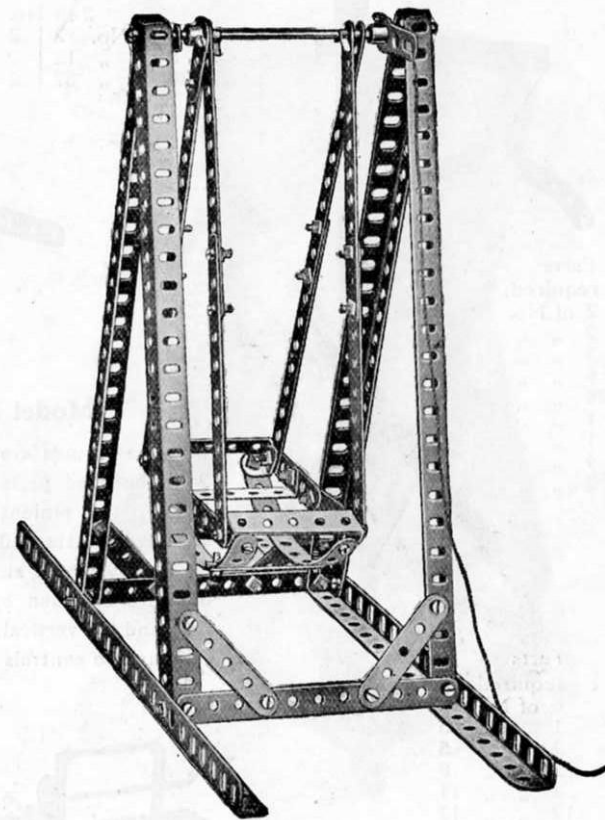


Parts required:

12 of No. 2	1 of No. 15
9 " " 5	2 " " 35
6 " " 8	43 " " 37
2 " " 11	4 " " 48A
4 " " 12	2 " " 62

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

Model No. 324 Railway Gauge

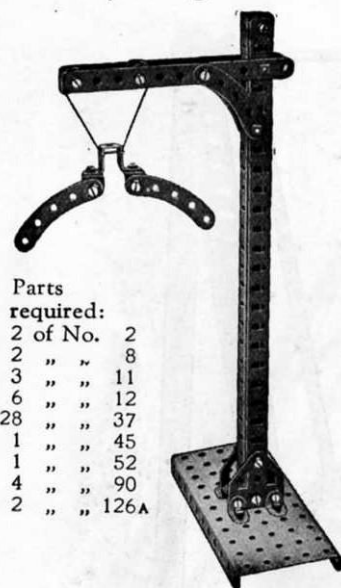


Parts
required:
2 of No. 2
2 " " 8
3 " " 11
6 " " 12
28 " " 37
1 " " 45
1 " " 52
4 " " 90
2 " " 126A

Parts
required:
6 of No. 2
1 " " 3
2 " " 5
2 " " 8
3 " " 11
12 " " 12
2 " " 15
3 " " 15A
2 " " 19
4 " " 20
1 " " 24
2 " " 26
1 " " 27A
3 " " 35
50 of No. 37
1 " " 45
2 " " 48A
2 " " 52
3 " " 53
4 " " 59
2 " " 62
4 " " 126A

Model No. 325 Chinese Palanquin


Parts required:

2 of No. 1	
4 of No. 2	2 of No. 48A
8 " " 12	2 " " 53
30 " " 37	2 " " 100

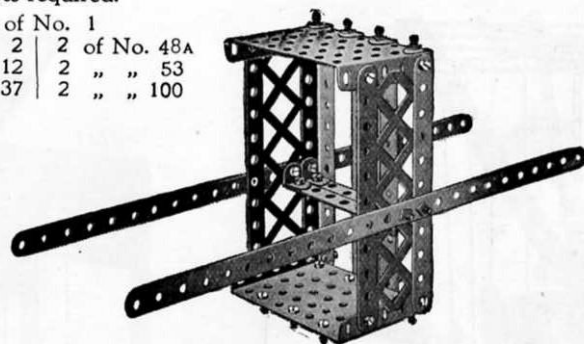


Model No. 327 Wire Rope Maker

The strands are twisted from both ends by the handles 1 and 2 of the fixed parts. The handle 1 rotates through a large gear wheel 3 two pinions 4 on the rods 5 carrying cranks to which the strands are attached. The other ends of the strands are connected to a double bent strip 6 on a bush wheel which is rotated in the opposite direction by a crank handle 2. The carriage 7 runs on rails and the vertical rod 8 is kept just at the formation of the twisted rope and so controls the tightness of the twist.

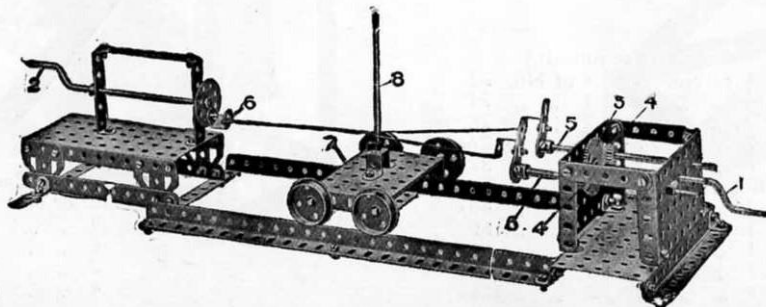

Model No. 326 Boring Machine

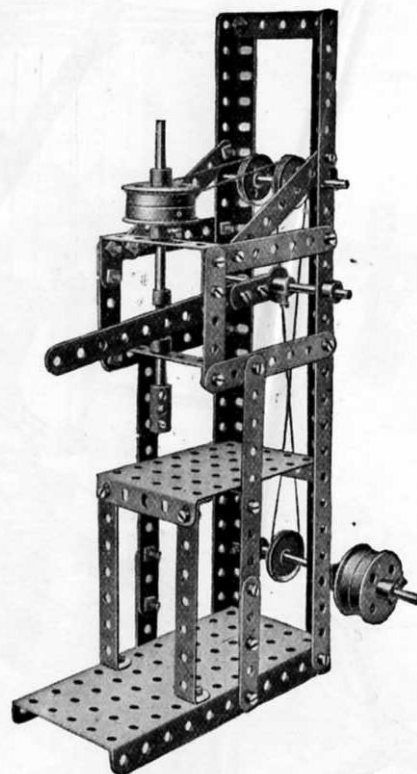


Parts required:
3 of No. 2
6 " " 3
5 " " 5
2 " " 8
2 " " 11
2 " " 15
2 " " 16
4 of No. 20
1 " " 22
2 " " 22A
3 " " 35
38 " " 37
1 " " 46
2 " " 48A
2 of No. 48B
1 " " 52
1 " " 53
4 " " 59
1 " " 62
1 " " 63

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

51

Model No. 328 Lawn Swing

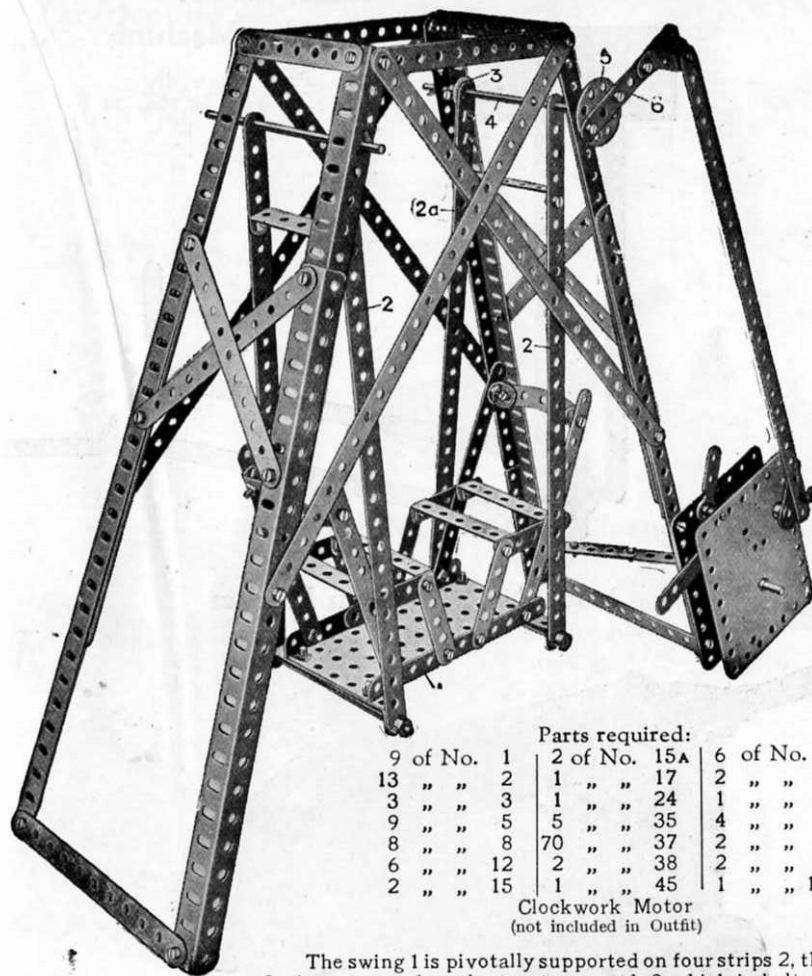


Parts required:		
9 of No. 1	2 of No. 15A	6 of No. 48A
13 " " 2	1 " " 17	2 " " 48B
3 " " 3	1 " " 24	1 " " 52
9 " " 5	5 " " 35	4 " " 59
8 " " 8	70 " " 37	2 " " 62
6 " " 12	2 " " 38	2 " " 90
2 " " 15	1 " " 45	1 " " 115

Clockwork Motor
(not included in Outfit)

The swing 1 is pivotally supported on four strips 2, the far strip 2a is connected at the top to a crank 3 which is bolted to a rod 4 and at the front end of this rod is a wheel 5 to which is bolted a strip 6 to the motor spindle.


Model No. 329 Oil Cake Chopper

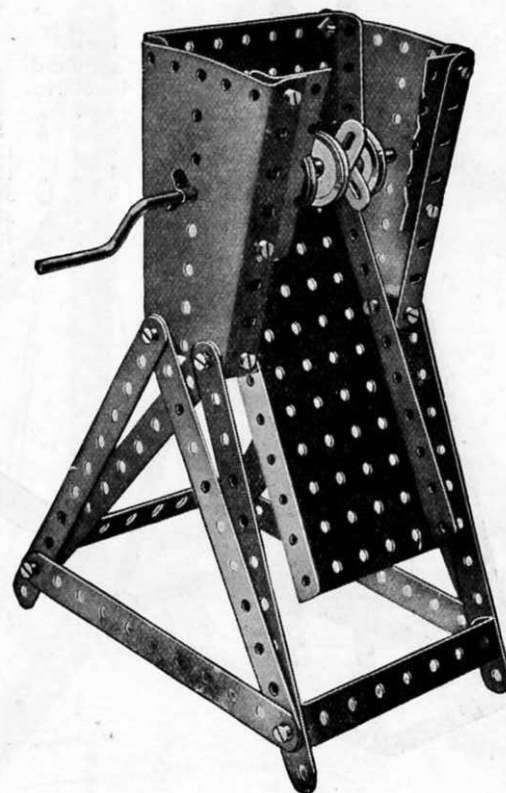

Parts required:		
10 of No. 2	2 of No. 35	
4 " " 10	20 " " 37	
2 " " 12	2 " " 48B	
1 " " 19	1 " " 52	
4 " " 22	2 " " 53	
2 of No. 54		

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

Model No. 330 Swinging Cot

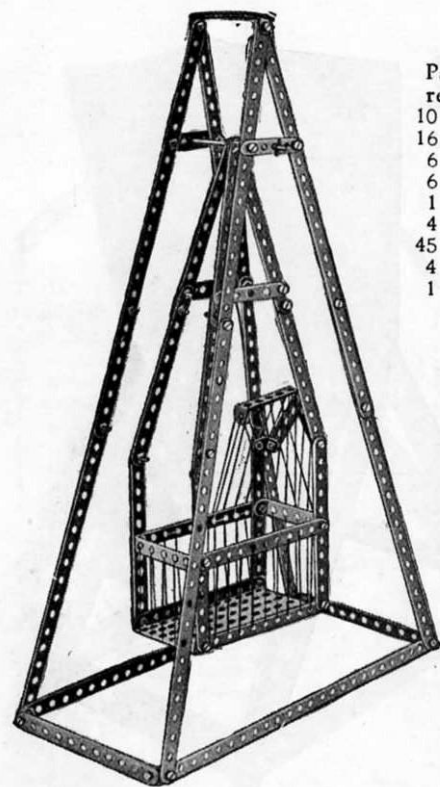


Parts required:		
10	of No.	1
16	" "	2
6	" "	5
6	" "	12
1	" "	15A
4	" "	35
45	" "	37
4	" "	48A
1	" "	52


Model No. 331 Drafting Machine



Parts required:		
4	of No.	1
3	" "	2
1	" "	4
2	" "	5
1	of No.	24
15	" "	37
1	" "	52

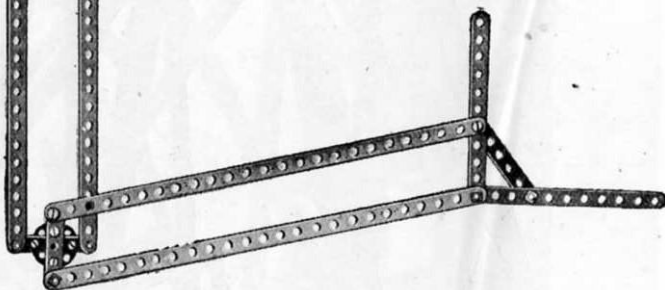


Model No. 332 Lawn Marker

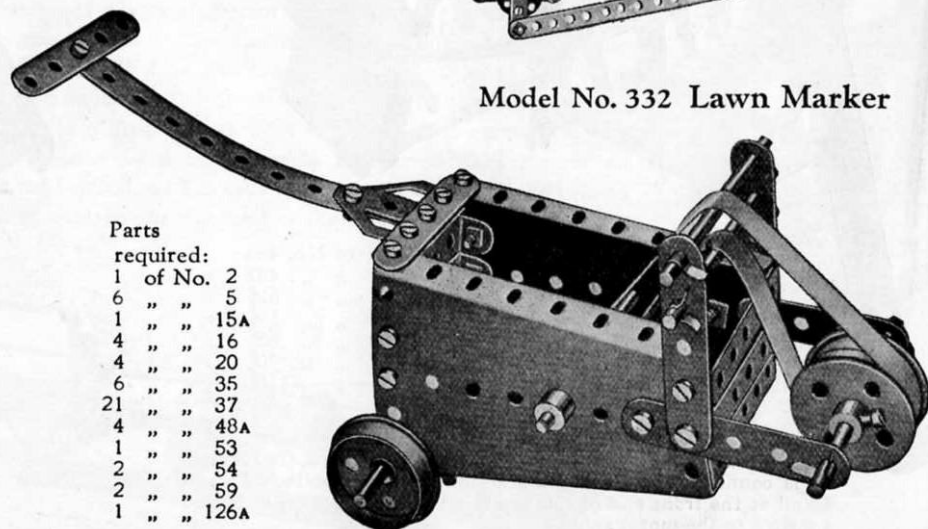

Parts required:		
1	of No.	2
6	" "	5
1	" "	15A
4	" "	16
4	" "	20
6	" "	35
21	" "	37
4	" "	48A
1	" "	53
2	" "	54
2	" "	59
1	" "	126A


Model No. 333 Lace Jennier

Parts required:		
8	of No.	2
4	" "	11
1	" "	15
1	" "	19
1	" "	24
14	" "	37
1	" "	52
1	" "	59
1	" "	62
1	" "	63

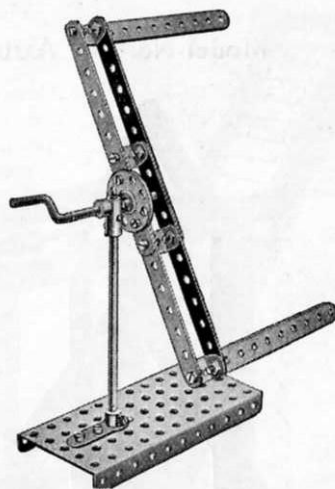


Model No. 334 Flax Cleaner

Parts required:			
6	of No.	2	4 of No. 22
6	" "	3	1 " " 24
8	" "	5	1 " " 26
2	" "	8	1 " " 27A
1	" "	12	4 " " 35
1	" "	15A	26 " " 37
2	" "	16	2 " " 52
1	" "	21	1 " " 53

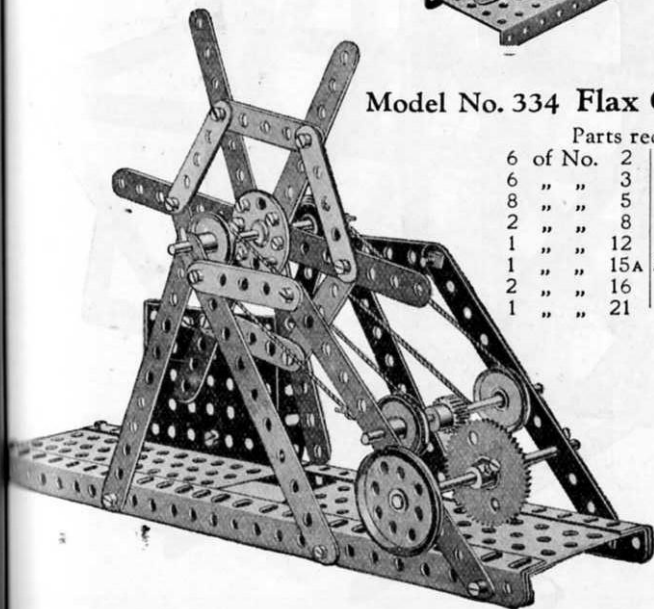

Model No. 335 Ice Boat

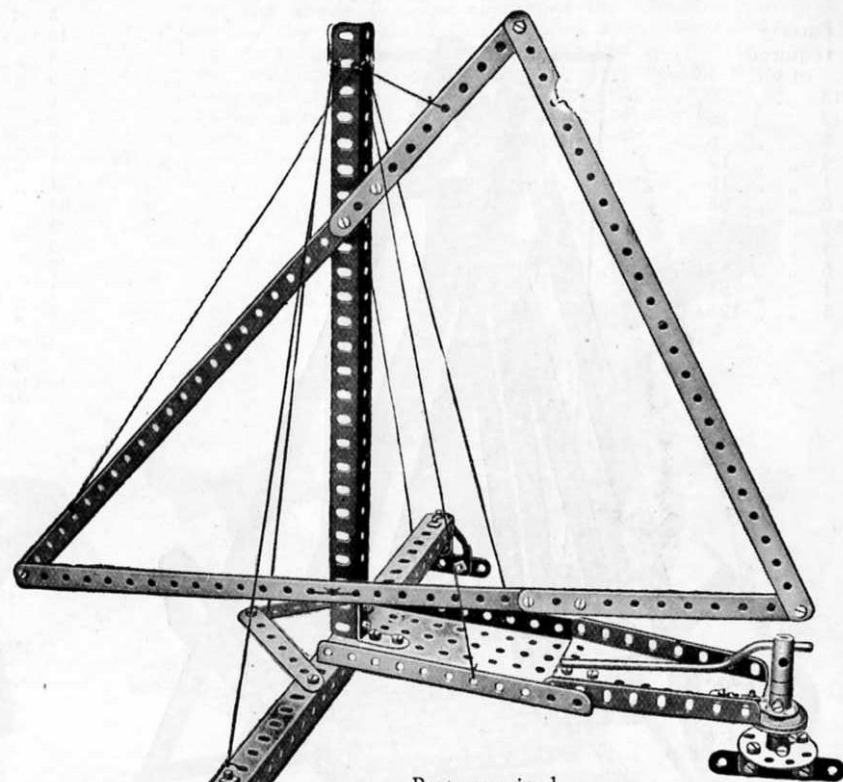


Parts required:			
3	of No.	1	1 of No. 22
2	" "	2	1 " " 24
2	" "	3	36 " " 37
3	" "	5	1 " " 52
2	" "	8	1 " " 54
2	" "	12	1 " " 59
3	" "	12A	1 " " 62
1	" "	17	1 " " 63
1	" "	19	2 " " 126A

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

Model No. 336 Swing


Parts required:		
7 of No.		
13	"	2
12	"	5
8	"	8
4	"	12
1	"	15
6	"	35
69	"	37
4	"	38
6	"	48A
1	"	52
1	"	126A

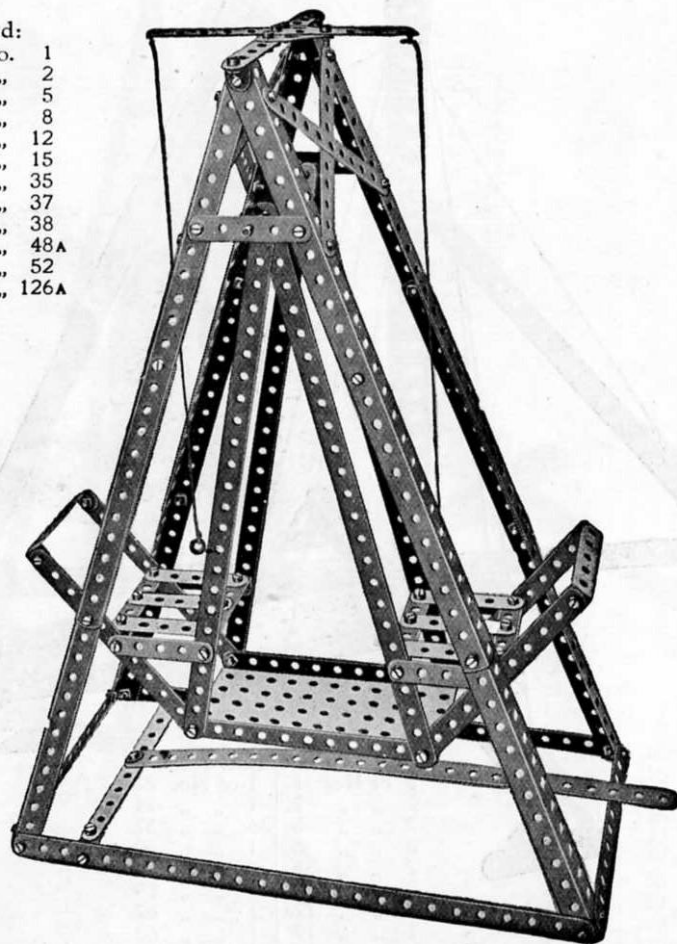

Parts required:		
5 of No.		
18	"	2
4	"	3
9	"	5
8	"	8
8	"	12
2	"	15
1	"	21
1	"	24
84	"	37
3	"	38
2	"	59
2	"	62
1	"	63
2	"	126A

Clockwork
Motor
(not included in
Outfit)


Model No. 337 Automatic Swing Boat

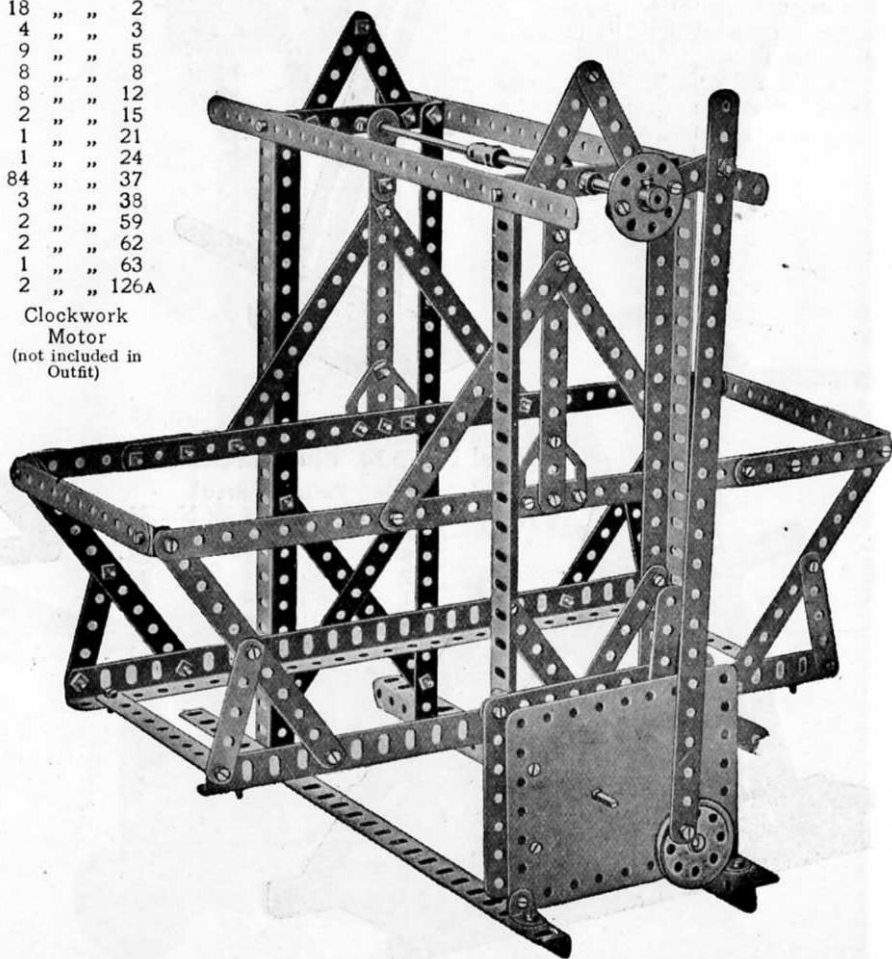

The
to the
Ordin
truck
ported
frame
4 win
end o
runni
or low
7 is t
tion,
the p
necte

Model No. 338 Fire Escape

The main frame 1 is pivotally connected to the running truck 2 about the rod 3. Ordinarily the frame 1 rests on the running truck 2 when the escape is being transported. In order to raise the main frame about the pivot rod 3 the handle 4 winds up the cord 5 the outer end of which is connected to the running truck axle. To raise or lower the ladder 6 the handle 7 is turned in one or other direction, the cord 8 passing over the pulleys 9 and being connected to the sliding ladder.

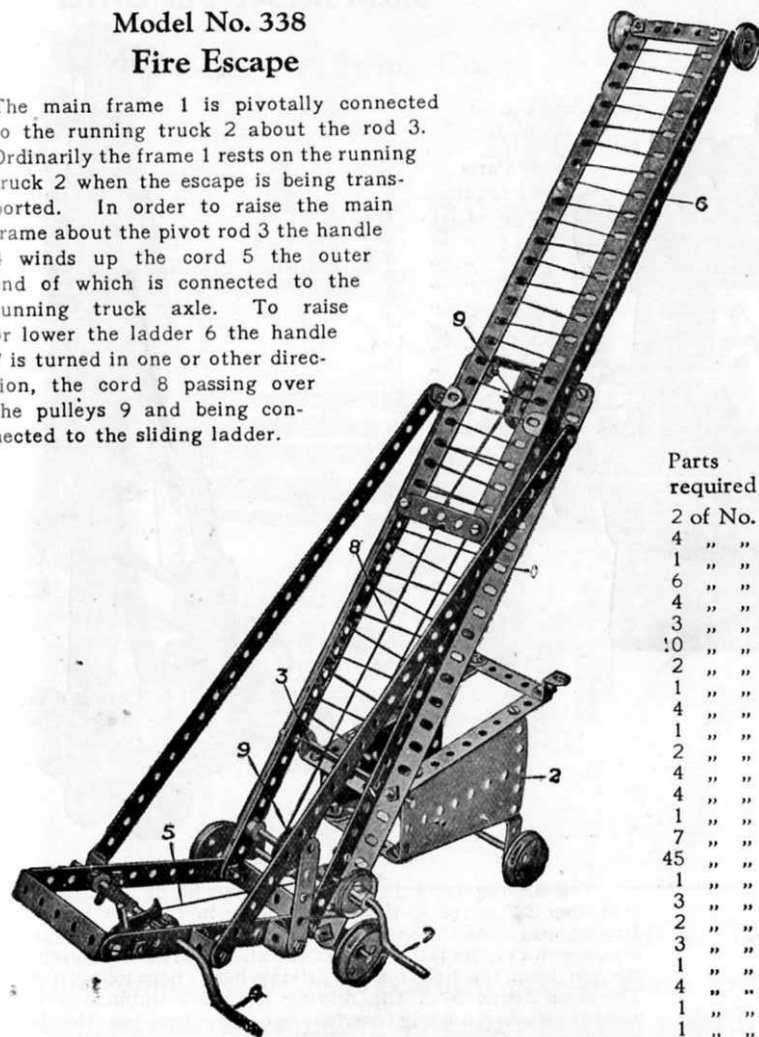


Parts required:

2 of No.	1
4 " "	2
1 " "	3
6 " "	5
4 " "	8
3 " "	11
10 " "	12
2 " "	12A
1 " "	15A
4 " "	16
1 " "	18A
2 " "	19
4 " "	20
4 " "	22
1 " "	22A
7 " "	35
45 " "	37
1 " "	44
3 " "	48A
2 " "	54
3 " "	59
1 " "	115
4 " "	125
1 " "	147A
1 " "	147B
1 " "	148

Model No. 339 Actuated See-Saw

The see-sawing is actuated by the travelling action of the wheels 1. The spindle of the wheels is connected by the cord 2 to the pulley 3 on the spindle of the pinion 4 which drives a gear wheel on the spindle of the bush wheel 5. A threaded pin 6 on this wheel engages the strip 7 coupled to a lever strip 8 pivoted at 9 which rocks the pivot rod 10 of the see-saw 11.

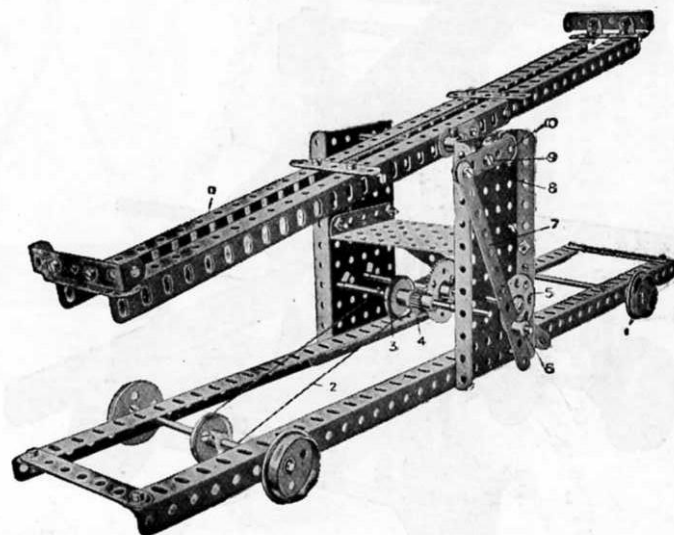


Parts required:

3 of No.	2	4 of No.	20	2 of No.	48A
2 " "	3	2 " "	22	2 " "	52
5 " "	5	1 " "	24	1 " "	53
8 " "	8	1 " "	26	3 " "	59
4 " "	12	1 " "	27A	2 " "	62
2 " "	15	4 " "	35	1 " "	115
3 " "	15A	36 " "	37		


Model No. 340 Hand Trolley

The trolley is caused to travel by working the rocking lever 1 which is connected by a strip 2 to a crank shaft 3 a gear wheel 4 which meshes a pinion 5 on a rod coupled by a cord 6 to an axle rod 7 of the travelling wheels 8.

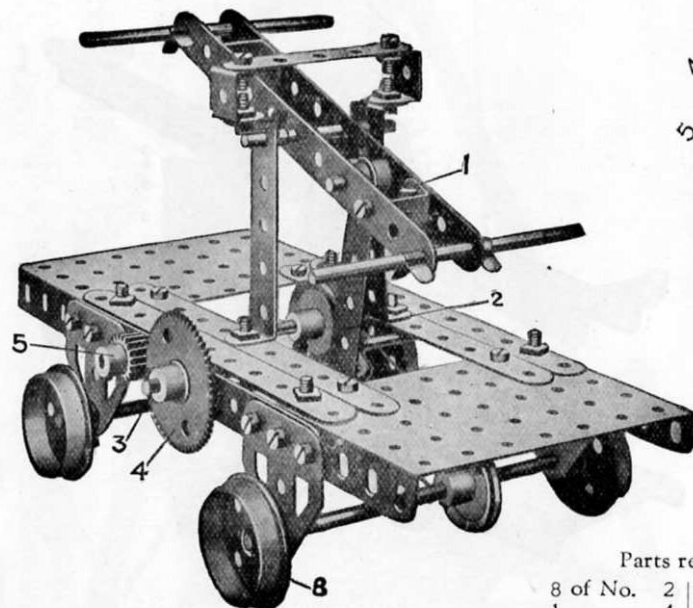


Parts required:

8 of No.	2	2 of No.	22
1 " "	4	1 " "	26
1 " "	5	1 " "	27A
4 " "	11	6 " "	35
3 " "	15A	30 " "	37
2 " "	16	2 " "	48A
1 " "	17	2 " "	53
1 " "	18A	4 " "	59
4 " "	20	4 " "	126A
1 of No. 134			

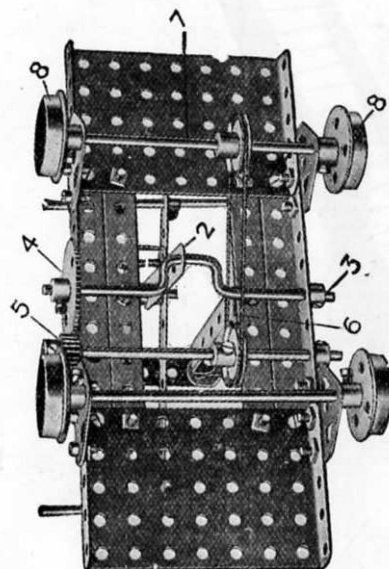

Parts required:

2 of No.	1
2 " "	2
10 " "	5
2 " "	8
2 " "	10
2 " "	12
2 " "	15A
3 " "	16
1 " "	19
4 " "	20
3 " "	22
1 " "	26
1 " "	27A
2 " "	35
26 " "	37
4 " "	38
1 " "	45
3 " "	48A
1 " "	52
4 " "	59
1 " "	115
3 " "	126A

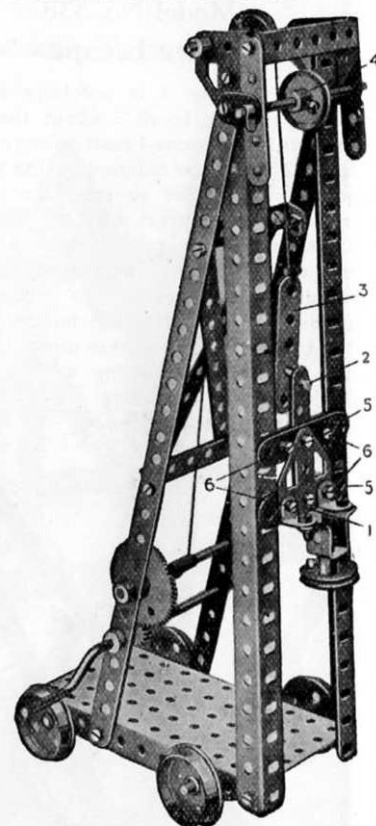

The driving head 1 is raised by means of a threaded pin 2 on two 2½" strips 3, the pin engaging in the first hole of the driving head. As the head is raised, the strip 3 makes contact with a pulley 4 and the latter pushes the strip rearwardly, disengaging the pin from the hole on the driving head, permitting it to fall. The cross strips 5 of the driving head are duplicated behind, spacing washers being inserted between them on the bolts 6 to allow free movement up and down the guide girders.

These Models can be made with MECCANO Outfit No. 3, or No. 2 and No. 2A.

57



Model No. 342 Swing Cot

Parts required:

4 of No.	1	1 of No.	27
10 " "	2	42 " "	37
4 " "	5	2 " "	38
6 " "	8	2 " "	48B
4 " "	12	4 " "	59
2 " "	17	4 " "	90
1 " "	24		

Model No. 343 Scales

Parts required:	
2 of No.	2
1 " "	3
2 " "	4
1 " "	5
2 " "	8
1 " "	11
1 " "	15
1 " "	17
4 " "	20
1 " "	22
1 " "	24
15 " "	37
1 " "	48A
2 " "	52
1 " "	54
2 " "	62
1 " "	63
1 " "	90

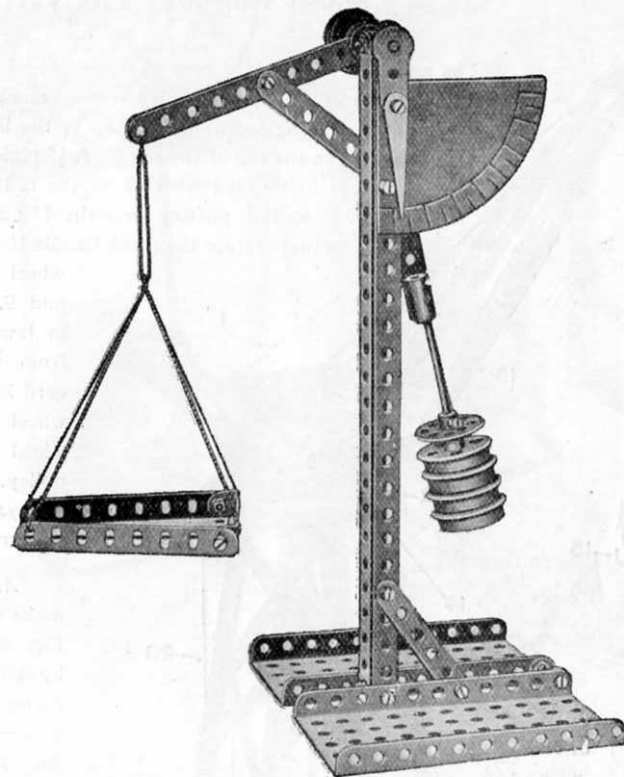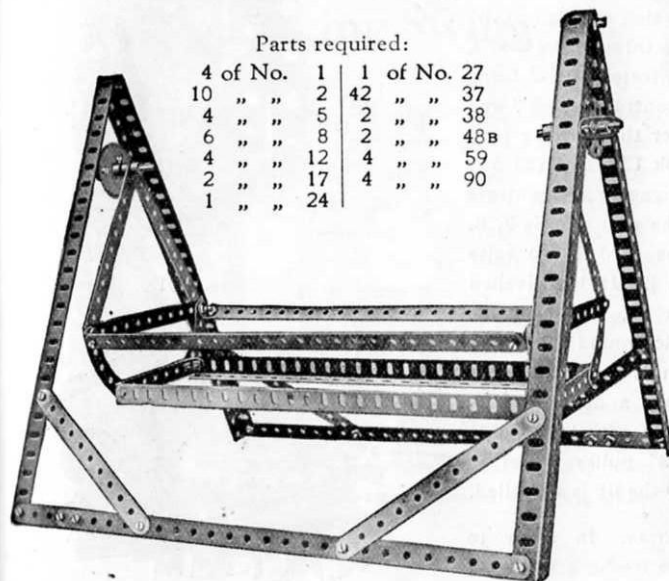


HOW TO CONTINUE

This completes the Models which may be made with MECCANO Outfit No. 3. The next Models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 3A Accessory Outfit, the price of which will be found in the List at the end of the Manual.

This Model can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

Model No. 401 Elevated Jib Crane

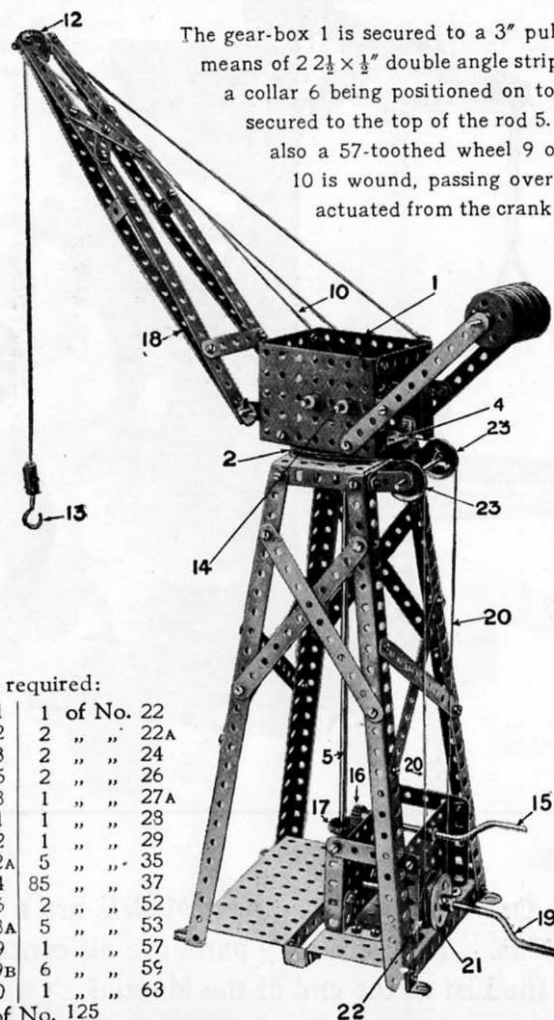

The gear-box 1 is secured to a 3" pulley wheel 2 (the boss 3 of which stands up), by means of 2 $2\frac{1}{2} \times \frac{1}{2}$ " double angle strips 4. The $1\frac{1}{2}$ " rod 5 passes up through the boss 3, a collar 6 being positioned on top of the boss within, the contrate wheel 7 being secured to the top of the rod 5. A $\frac{1}{2}$ " pinion 8 engages the contrate wheel 7 and also a 57-toothed wheel 9 on the rod 14 on which latter the hoisting cord 10 is wound, passing over the 1" pulley 12 to the hook 13. The rod 5 is actuated from the crank handle 15 by the pinion 16 engaging a $\frac{3}{4}$ " contrate wheel 17 and through the gear wheels 7, 8, and 9, and operates the cord 10 to raise or lower the load. The jib 18 is swivelled from the crank handle 19, a continuous cord 20 being wound twice round the flange wheel 21, against which is butted a bush wheel 22 to make it into a double flange pulley. A cord 20 passes round 1" guide pulleys 23 round the 3" pulley wheel 2. By turning the handle 19 the jib is swivelled.

Alternative Construction. In order to make the jib swivel more freely, a ball-race, Fig. 401b, may be fitted. This is made by bolting to the top of the frame a 3" pulley wheel 24 by bolts 25 which also secure in the pulley wheel 24 a wheel flange 26. This provides a circular groove for the reception of the ball bearings 27. The pulley wheel 2 which is bolted to the gear-box 1 is then placed over the rod 5 and rests on the ball bearings 27 to form a race.

(N.B.—The wheel flange and the balls for the bearing are not provided in this Outfit but can be bought separately. See parts list page).

Parts required:			
4	of No. 1	1	of No. 22
10	" "	2	" " 22A
1	" "	3	" " 24
7	" "	5	" " 26
4	" "	8	" " 27A
4	" "	11	" " 28
12	" "	12	" " 29
3	" "	12A	" " 35
2	" "	14	" " 37
5	" "	16	" " 52
1	" "	18A	" " 53
2	" "	19	" " 57
1	" "	19B	" " 59
6	" "	20	" " 63
4 of No. 125			




FIG. 401A




FIG. 401B

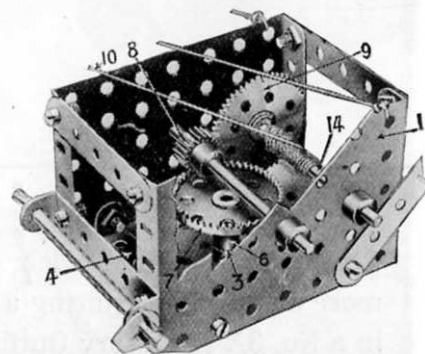


FIG. 401C

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

59

Model No. 402

Alternating Swing


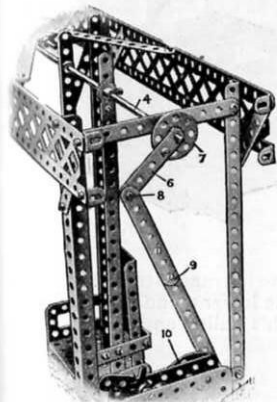


FIG. 402A

The chairs 1, 2, are pivoted on $11\frac{1}{2}$ " rods 3, 4, these rods being geared together by pinions 5, so that they turn in opposite directions. The rod 4 is turned to and fro by means of a $2\frac{1}{2}$ " strip connected to a bush wheel 7. The strip 6 is pivotally connected at 8 to a $7\frac{1}{2}$ " strip 9 loosely bolted to a face plate 10 on the driven spindle 11 of the motor. As the spindle 11 rotates continuously in one direction, the swings are rocked in opposite directions.

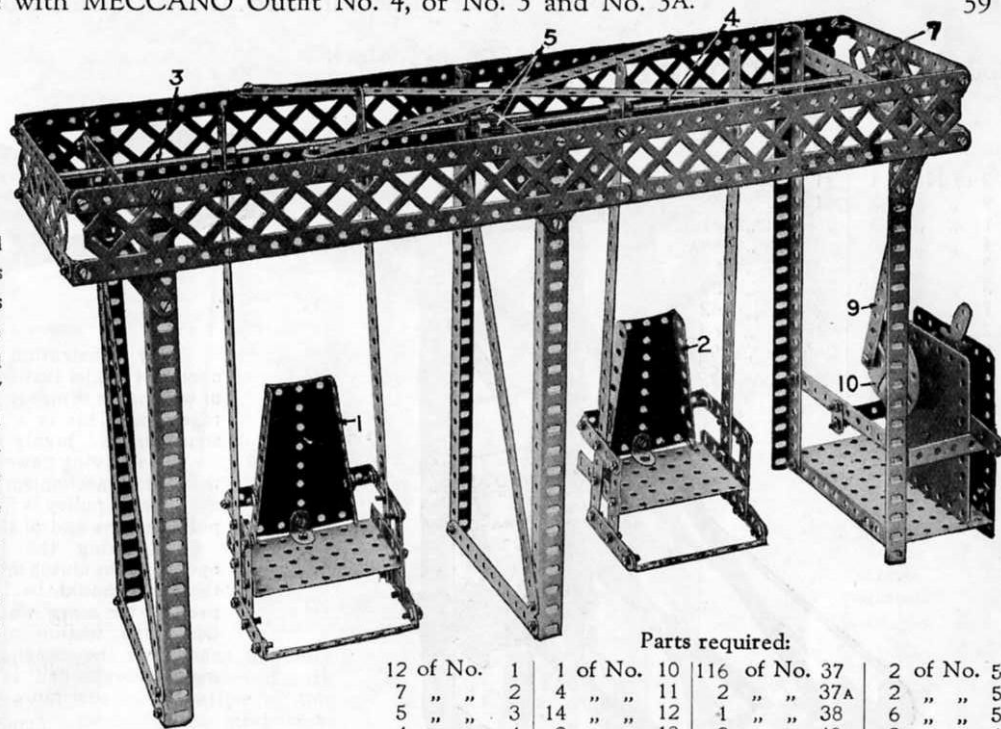


Parts required:

12 of No. 7	1 of No. 1	1 of No. 10	116 of No. 37	2 of No. 53
7 " " 2	4 " " 11	2 " " 37A	2 " " 54	
5 " " 3	14 " " 12	1 " " 38	6 " " 59	
4 " " 4	2 " " 13	2 " " 48A	2 " " 62	
15 " " 5	1 " " 24	2 " " 48B	4 " " 99	
6 " " 8	2 " " 26	1 " " 52	2 " " 100	
1 of No. 109				

Clockwork Motor (not included in Outfit)

Model No. 403 Diplodocus

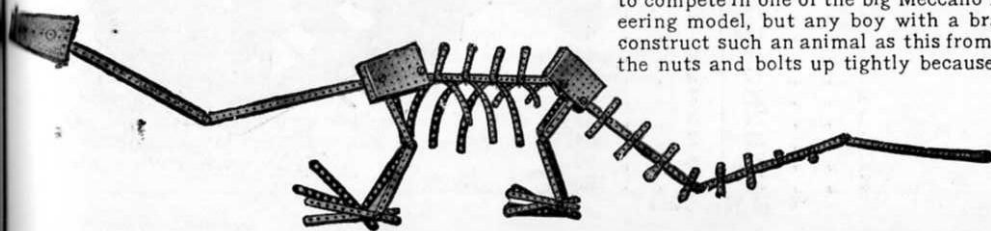

This representation of a prehistoric animal is a most extraordinary effort sent in by a young French boy to compete in one of the big Meccano Model Building Competitions. We could scarcely class it as an engineering model, but any boy with a brain clever enough and an imagination lively enough to conceive and construct such an animal as this from Meccano parts deserved a good prize, so we awarded him one. Screw the nuts and bolts up tightly because the Diplodocus looks most dejected when he droops.

Parts required:


1 of No. 1	1 of No. 1	1 of No. 8	40 of No. 37
7 " " 2	4 " " 10	4 " " 53	
4 " " 3	1 " " 16	2 " " 54	
8 " " 5	4 " " 17	8 " " 59	
	2 " " 22		

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

Model No. 404 Swinging Hot Saw


Parts required:

2 of No.	1	1 of No.	32
9 "	2	1 "	35
1 "	3	36 "	37
4 "	8	3 "	48A
2 "	15	3 "	53
3 "	16	7 "	59
1 "	21	2 "	62
2 "	22	1 "	63
2 "	26	26 "	94
1 "	27A	2 "	96
1 "	28		

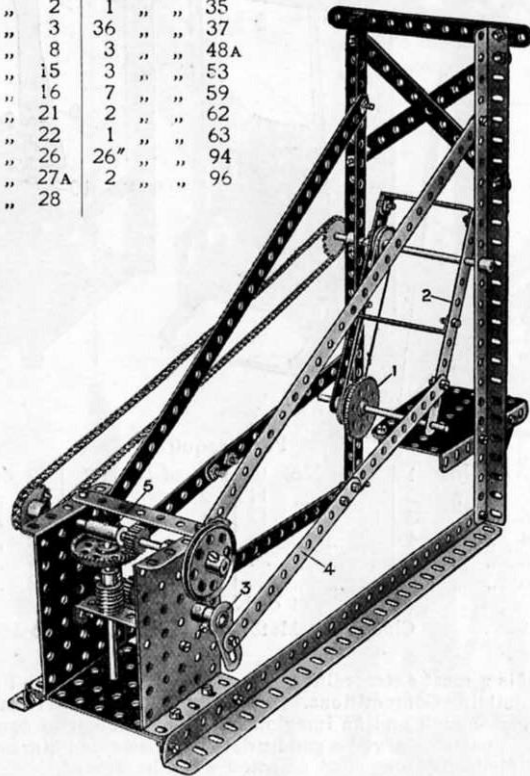

The rotary driving motion in this model is caused to impart a to and fro movement to the swinging frame 2 carrying the circular saw 1 by means of the crank 3 and connecting strips 4. The coupling 5 is loose on the sprocket wheel spindle and forms a bearing for the spindle of the worm.

Model No. 405 Cable Railway

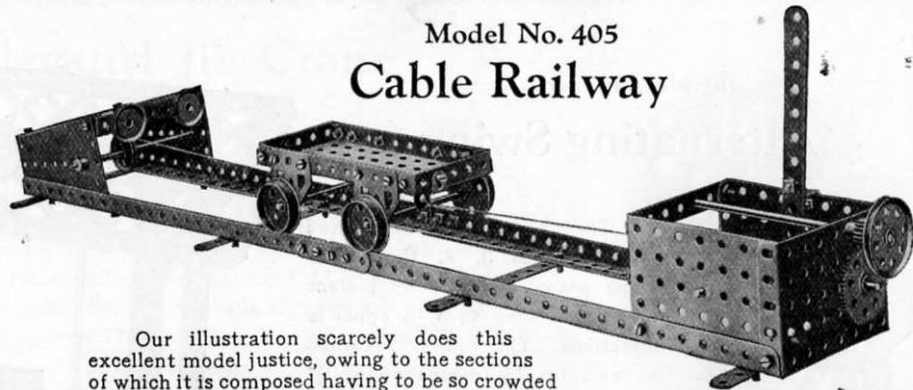

Our illustration scarcely does this excellent model justice, owing to the sections of which it is composed having to be so crowded together. This is a very fine model, both instructive and highly interesting.

The driving power is received at the outer $1\frac{1}{2}$ " pulley, and is transmitted through the clutch mechanism and the pinion and gear wheels to the lower spindle on which the driving pulley is fixed, the driving rope passing round this pulley and the second pulley at the end of the rails, all as shown in the drawing.

In fixing the lever for operating the clutch mechanism, the nuts should be locked to prevent the screw working out. Only one section of rails is shown in the design but they may be extended as desired.

Parts required:

5 of No.	2	1 of No.	27A
3 "	3	2 "	29
2 "	5	2 "	35
4 "	8	51 "	37
1 "	15	3 "	38
2 "	15A	1 "	46
2 "	16	2 "	48A
1 "	17	2 "	48C
4 "	20	1 "	52
1 "	21	3 "	53
3 "	22	2 "	54
1 "	22A	6 "	59
2 "	26	3 "	125
	4 of No.		126A

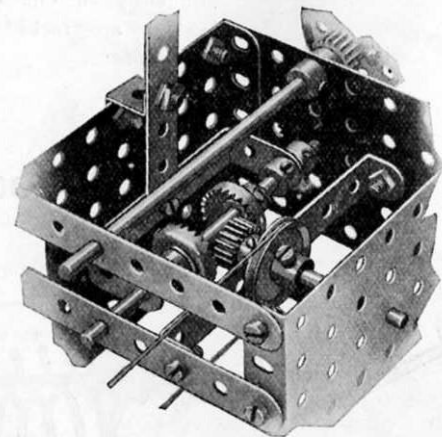


FIG. 405A

The
from th
the hois
at the t
The con
from th

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.


Model No. 406 Warehouse

Parts required:

4	of No.	1	126	of No.	37
18	" "	2	2	" "	48A
2	" "	4	1	" "	48B
6	" "	8	2	" "	48D
4	" "	11	2	" "	52
14	" "	12	1	" "	53
1	" "	12A	2	" "	59
3	" "	14	2	" "	99
1	" "	15	6	" "	100
1	" "	16	2	" "	125
1	" "	17	2	" "	126A
2	" "	22A			
1	" "	23			
1	" "	26			
1	" "	27A			
10	" "	35			


	Clockwork
	Motor
	(not included
	in Outfit)

Clockwork
Motor
(not included
in Outfit)

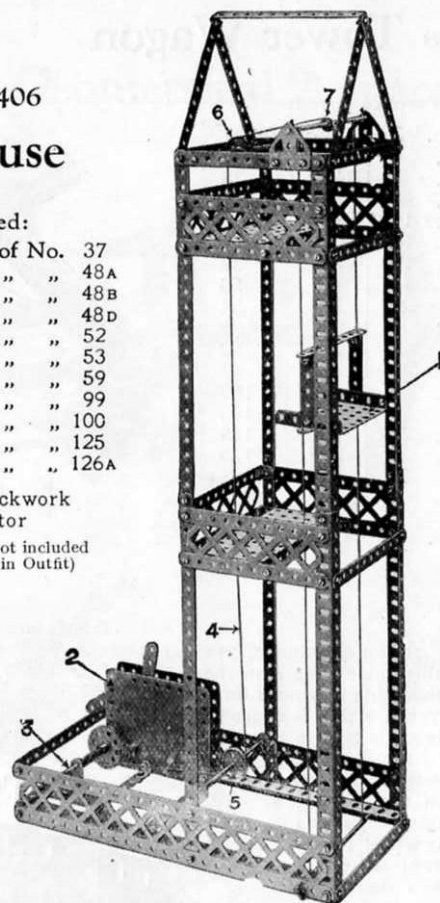

The cage 1 is raised or lowered to the several floors from the motor 2 driving a rod 3 from which passes the hoisting cord 4 round a 1" pulley 5 and another 6 at the top, and thence over a $\frac{1}{2}$ " pulley 7 to the cage 1. The construction of the floors and frame should be clear from the illustration.

Model No. 407 Girder Crane

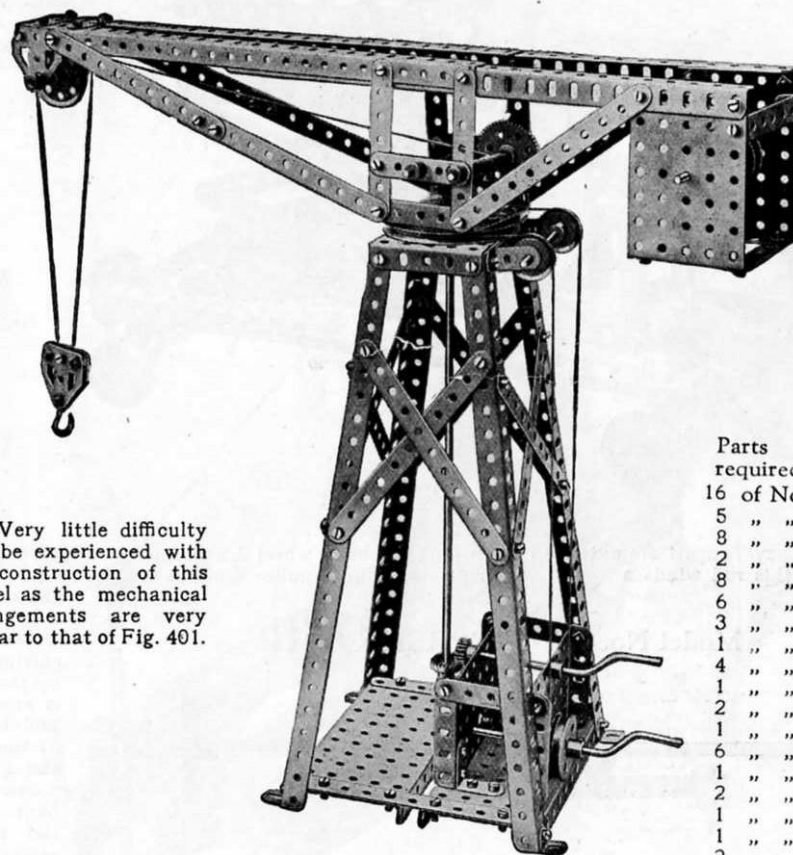

Very little difficulty will be experienced with the construction of this model as the mechanical arrangements are very similar to that of Fig. 401.


Parts required:

16	of No.	2
5	" "	3
8	" "	5
2	" "	6A
8	" "	8
6	" "	12
3	" "	12A
1	" "	13
4	" "	16
1	" "	17
2	" "	19
1	" "	19B
6	" "	20
1	" "	21
2	" "	22
1	" "	23
1	" "	24
2	" "	26
1	" "	27A

1 of No. 28	10 of No. 38	2 of No. 52	9 of No. 59
1 " " 29	1 " " 46	5 " " 53	1 " " 115
92 " " 37	3 " " 48A	1 " " 57	4 " " 126A

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

Model No. 408 Tower Wagon

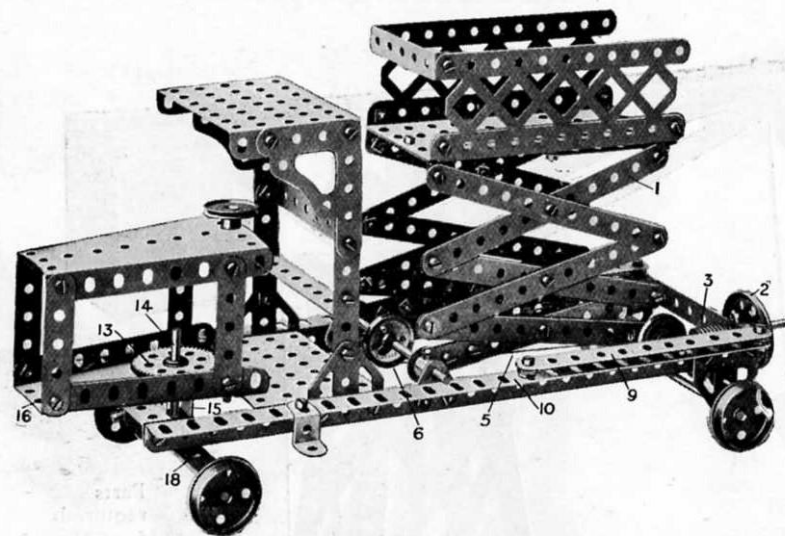

Parts required:

16 of No. 2	78 of No. 37
2 " " 4	22 " " 37A
2 " " 5	24 " " 38
2 " " 8	1 " " 45
2 " " 15	4 " " 48A
5 " " 15A	6 " " 48B
1 " " 16	1 " " 52
2 " " 17	2 " " 53
4 " " 20	2 " " 54
1 " " 21	3 " " 59
3 " " 22	2 " " 62
1 " " 22A	2 " " 77
1 " " 24	2 " " 100
2 " " 26	2 " " 108
1 " " 27A	1 " " 115
1 " " 32	2 " " 125
2 " " 35	4 " " 126A


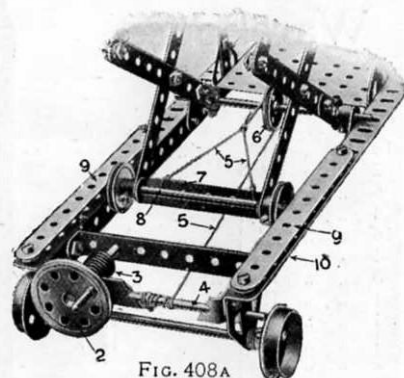


FIG. 408A

The Lazy Tongs 1 are extended by turning the hand wheel 2, a worm 3 on which engages a $\frac{1}{2}$ " pinion not shown, on the rod 4. On this rod winds a cord 5 which passes round a pulley 6 and is secured to a $2\frac{1}{2}$ " \times $\frac{1}{2}$ " double angle strip 7 on the rod 8,

the ends of which slide in guides on either side formed by the strips 9 spaced by washers and the angle girders 10 of the carriage. The Lazy Tongs collapse by their own weight. The steering is effected from the rod 11, a pinion 12 on which engages a 57-toothed gear wheel 13, the 2" rod 14 of which passes through a double bent strip 15 bolted to the under-side of the sector plate 16. The rod 14 is secured to the bush wheel 17 which carries the double angle strip $3\frac{1}{2}$ " \times $\frac{1}{2}$ " 18.

Model No. 409 Breast Drill

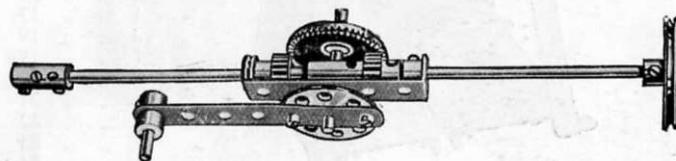

Parts required:

1 of No. 3	1 of No. 21	2 of No. 37
2 " " 15	1 " " 23	1 " " 48A
2 " " 17	1 " " 24	3 " " 59
1 " " 18A	2 " " 26	2 " " 63
	1 " " 28	


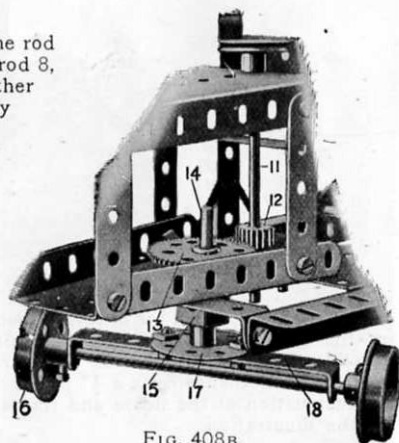


FIG. 408B

This forming linear n Th. Duf to the h his degr He requ form a rigorous publishe " with permit mechan The distance FD being trajector found th angles to point E. Ever and expe

Model No. 410 Geometrical Apparatus

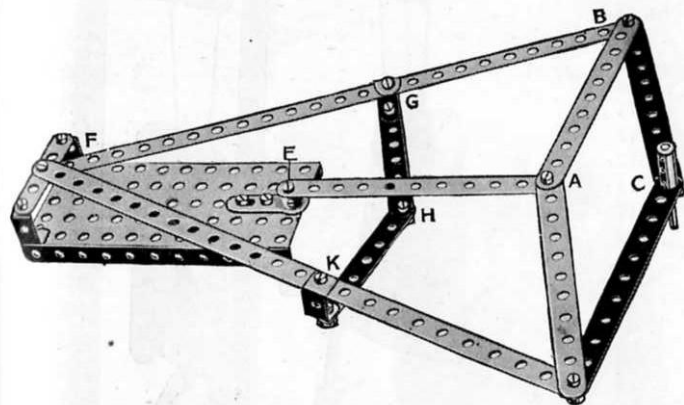


This most ingenious model for transforming a circular movement into a rectilinear movement was designed by M. Pierre-Th. Dufour, who used it in his Thesis (presented to the Faculty of Science in Paris) to obtain his degree of Doctor of the University of Paris. He required an instrument which would transform a circular movement into a movement rigorously rectilinear and he states in his published work that he was able to do this "with the aid of Meccano parts, which permit of making experiments so easily in mechanisms of the most varied types."

The point F is fixed, and is situated at a distance from the fixed point E, equal to AE, the two arms FB and FD being together equal to the four sides of the lozenge ABCD. The trajectory of the point C is then at right angles to EF. It will be found that whilst the point C is moving in a straight line at right angles to EF, the point A is describing a circle round the fixed point E.

Every Meccano Boy should make up this very interesting model and experiment with it.

Parts required:		
2	of No.	1
5	" "	2
2	" "	3
1	" "	5
4	" "	11
1	" "	17
16	" "	37
1	" "	52
7	" "	59
1	" "	62
1	" "	63


Model No. 411 Submarine

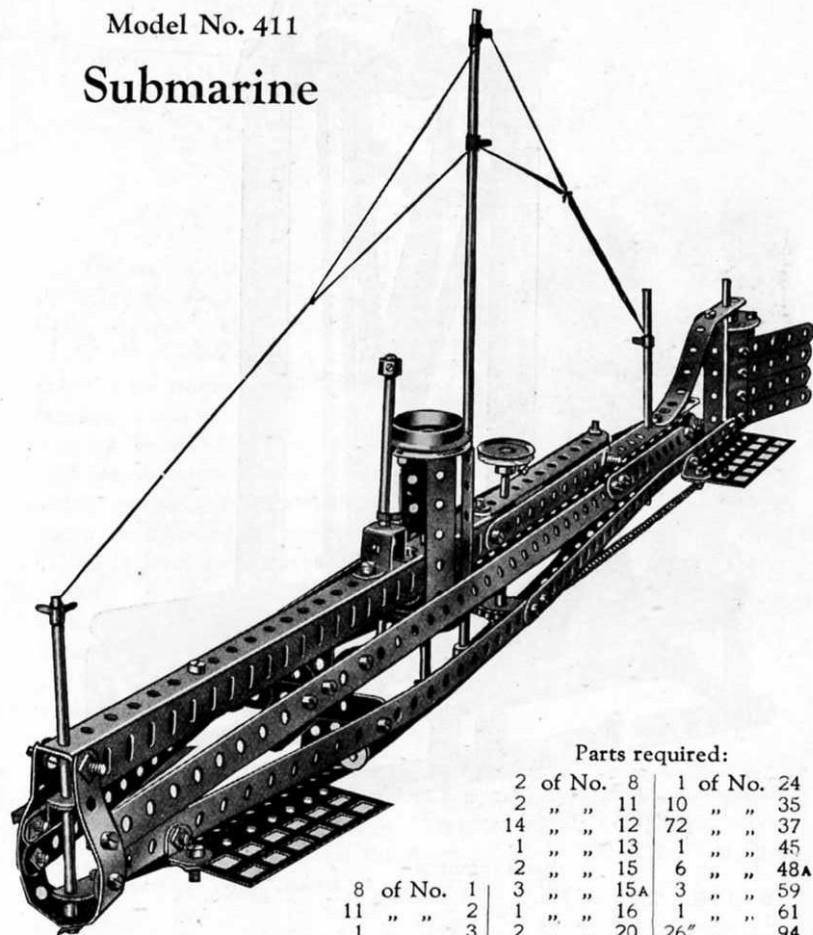

Parts required:		
2	of No.	8
2	" "	11
14	" "	12
1	" "	13
2	" "	15
3	" "	15A
1	" "	16
2	" "	20
1	" "	22
1	" "	26
2	" "	26"
1	" "	27
1	" "	28
1	" "	29
1	" "	30
1	" "	31
1	" "	32
1	" "	33
1	" "	34
1	" "	35
1	" "	36
1	" "	37
1	" "	38
1	" "	39
1	" "	40
1	" "	41
1	" "	42
1	" "	43
1	" "	44
1	" "	45
1	" "	46
1	" "	47
1	" "	48
1	" "	49
1	" "	50
1	" "	51
1	" "	52
1	" "	53
1	" "	54
1	" "	55
1	" "	56
1	" "	57
1	" "	58
1	" "	59
1	" "	60
1	" "	61
1	" "	62
1	" "	63
1	" "	64
1	" "	65
1	" "	66
1	" "	67
1	" "	68
1	" "	69
1	" "	70
1	" "	71
1	" "	72
1	" "	73
1	" "	74
1	" "	75
1	" "	76
1	" "	77
1	" "	78
1	" "	79
1	" "	80
1	" "	81
1	" "	82
1	" "	83
1	" "	84
1	" "	85
1	" "	86
1	" "	87
1	" "	88
1	" "	89
1	" "	90
1	" "	91
1	" "	92
1	" "	93
1	" "	94
1	" "	95
1	" "	96

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

Model No. 412 Swing Saw

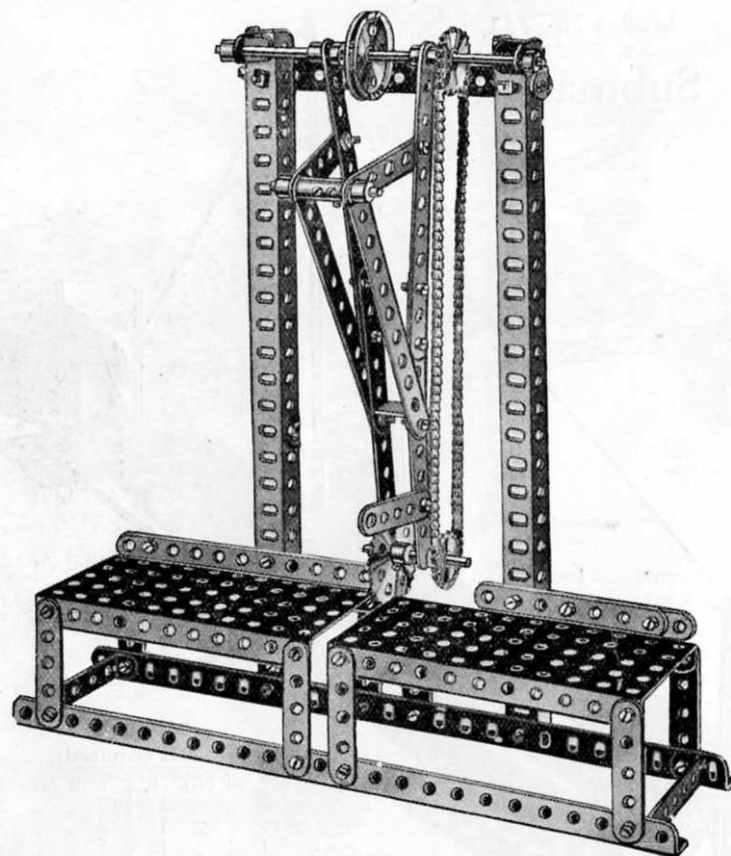

Parts required:

8 of No. 2	1 of No. 11	45 of No. 37	22" of No. 94
1 " " 3	4 " " 12	2 " " 48A	1 " " 95
12 " " 5	1 " " 14	2 " " 52	2 " " 96
6 " " 8	2 " " 17	8 " " 59	
1 " " 10	1 " " 21	1 " " 63	

Model No. 413 Automatic Gong


Parts required:

2 of No. 2	
2 " " 2A	
2 " " 3	
2 " " 8	
5 " " 11	
9 " " 12	
1 " " 12A	
1 " " 14	
5 " " 17	
1 " " 24	
1 " " 26	
1 " " 27A	
43 " " 37	
2 " " 37A	
2 " " 38	
1 " " 45	
1 " " 46	
2 " " 48B	
2 " " 52	
1 " " 53	
2 " " 54	
3 " " 59	
3 " " 63	
1 " " 111	
2 " " 126A	

Clockwork

Motor


(not included
in Outfit)

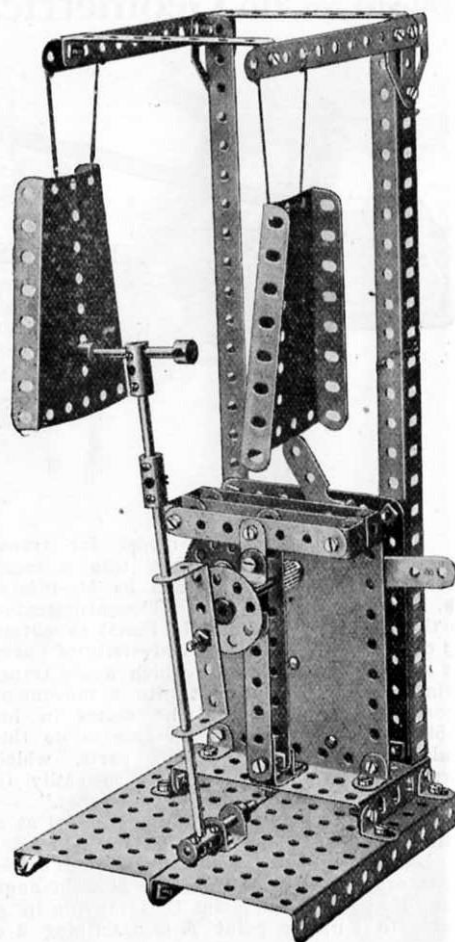

Model No. 414 Wire Rope-making Machine

Parts required:

21 of No. 2	1 of No. 13	4 of No. 17	1 of No. 22	104 of No. 37	2 of No. 53	1 of No. 95
4 " " 3	2 " " 14	1 " " 19	2 " " 24	16 " " 38	2 " " 54	1 " " 96
8 " " 5	1 " " 15	1 " " 19B	2 " " 26	1 " " 45	4 " " 59	1 " " 109
6 " " 8	1 " " 15A	8 " " 20	1 " " 27A	4 " " 48A	2 " " 63	4 " " 126A
8 " " 12	1 " " 16	1 " " 21	1 " " 28	2 " " 52	16 " " 94	

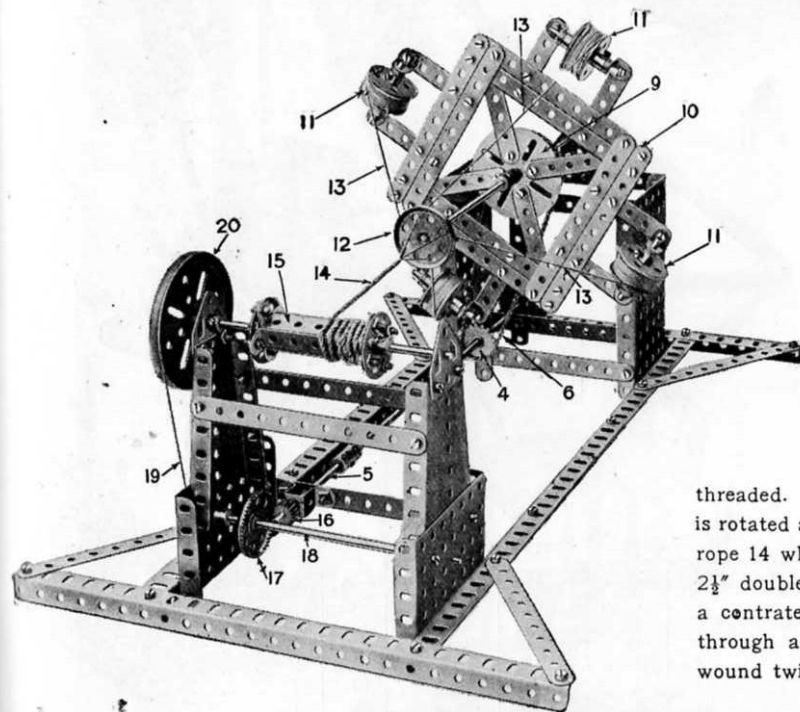

The machine is operated from the crank handle 1, a pinion 2 on which engages a 57-toothed wheel 3. A 1" sprocket wheel 4 on the rod 5 of the toothed wheel 3 drives through a chain 6 a 2" sprocket wheel 7, bolted on the rod 8. To this rod is bolted a face plate 9 which carries a framework 10 in which are mounted the wire spools 11, made from two flanged pulley wheels. At the front of the rod is bolted a 1½" pulley wheel 12, through alternate holes in which the wires 13 from the spools 11 are threaded.

By operating the handle 1 the frame 10 is rotated and the wires stranded to form a twisted rope 14 which is taken up on a drum formed of 4 2½" double angle strips 15. This drum is rotated from the rod 5 by a pinion 16 engaging a contrate wheel 17 on the rod 18 of which a 1" pulley wheel, not shown, drives through a cord 19 a 3" pulley wheel 20, on the drum spindle. The cord 19 may be wound twice round the smaller pulley wheel to get a better grip.

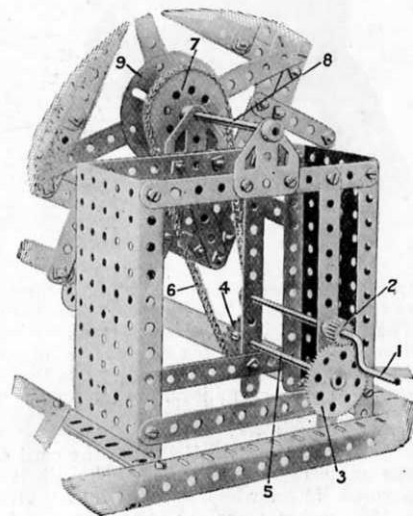


FIG. 414A

Model No. 415

Swivelling and Luffing Jib Crane

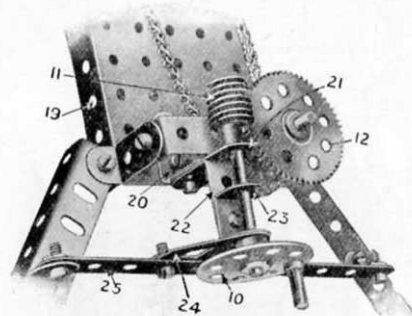


FIG. 415A

In this model three separate actions are provided, for raising the load, raising the jib, and swivelling the jib. The load is raised by means of a crank handle 1 on which the cord 2 is wound and passes over the 1" pulley 3, thence round the $\frac{1}{2}$ " pulley in the block 4 (spacing washers being used

to give clearance to the $\frac{1}{2}$ " pulley), the end of the cord 2 being made fast to the top of the jib. By turning the handle 1 the load is raised or lowered. The jib itself is raised or lowered by the operation of the crank handle 5 on the rod of which a cord is wound, and passes over one of two pulleys 7 to and round another 1" pulley 8 in the jib, whence it returns to and passes round the other pulley 7, being finally made fast to the double bracket 9 bolted to the jib.

As the handle 5 is turned the cord 6 is wound round the pulleys and the angle of the jib varied. The jib is swivelled by the hand-wheel 10, a worm 11 on which engages a 57-toothed wheel 12 on the rod of which a 1" sprocket wheel 13 is mounted. A sprocket chain 14 passes round this wheel 13 and round a 2" sprocket wheel 15 secured to the standard 16 of the crane. The bearing for the rod of the worm 11 is made by bolting a 1" angle bracket 20 to the rectangular plate 19, and to the angle bracket 20 is secured a $1\frac{1}{2}$ " strip 21 and a 1" bracket 22. To the bracket 22 is bolted a double bracket 23. A flat trunnion 24 is bolted to the $5\frac{1}{2}$ " strip 25 which forms with the bracket 23 the front bearing for the rod. The standard is built up of 2 $12\frac{1}{2}$ " girders 16 which are connected at the base by a $1\frac{1}{2}$ " double angle strip 17 which is bolted to the 2" sprocket wheel 15. The 1" rod 18 is secured in the bush of the sprocket wheel 15 and fitted with a collar below the rectangular plate 19, Fig. 415B.


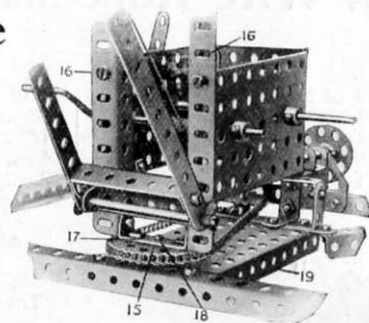



FIG. 415B

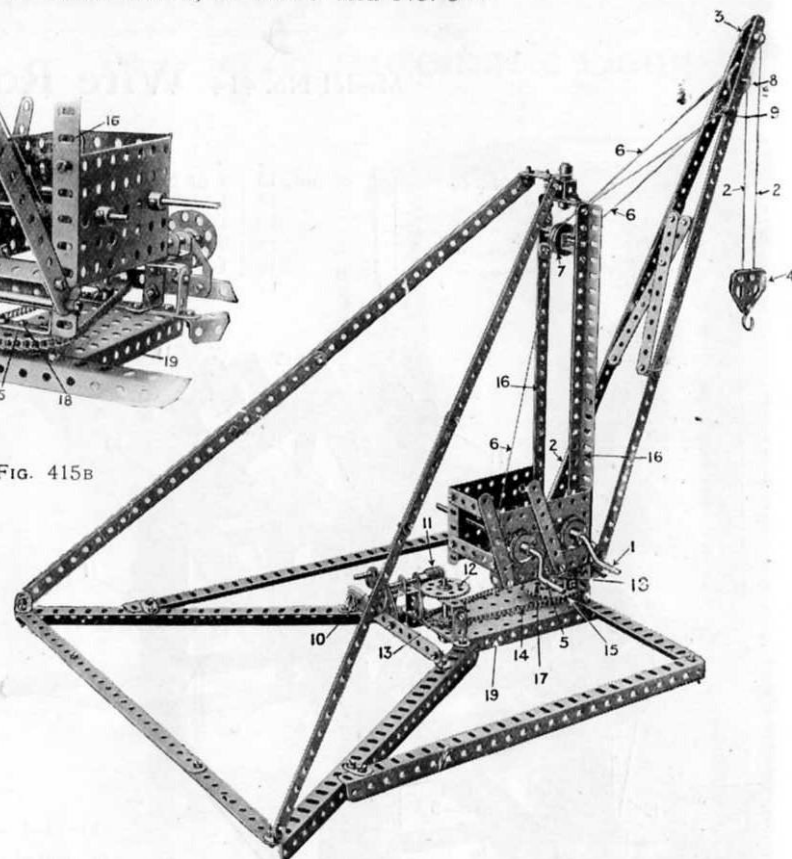

Parts required:


10 of No. 1	2 of No. 12A	1 of No. 27A	3 of No. 48A
3 " " 2	1 " " 16	1 " " 32	2 " " 52
3 " " 3	3 " " 17	2 " " 35	2 " " 53
2 " " 5	4 " " 18A	80 " " 37	1 " " 57
1 " " 6A	2 " " 19	2 " " 37A	8 " " 59
7 " " 8	3 " " 22	13 " " 38	1 " " 95
2 " " 10	3 " " 22A	3 " " 45	1 " " 96
2 " " 11	1 " " 23	1 " " 46	1 " " 115
10 " " 12	1 " " 24	2 " " 48	4 " " 126A

Model No. 416 Distance Indicator

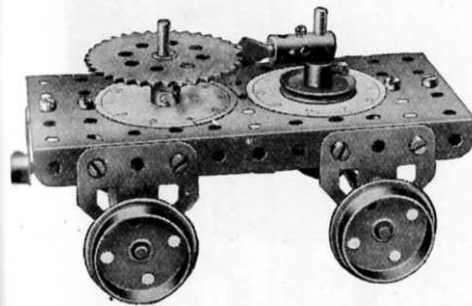


Parts required:

1 of No. 4	1 of No. 37A
4 " " 10	3 " " 38
2 " " 12	1 " " 52
1 " " 15	3 " " 59
2 " " 16	2 " " 62
2 " " 17	1 " " 63
4 " " 19A	1 " " 65
2 " " 26	1 " " 95
1 " " 28	1 " " 96
1 " " 32	4 " " 126A
16 " " 37	

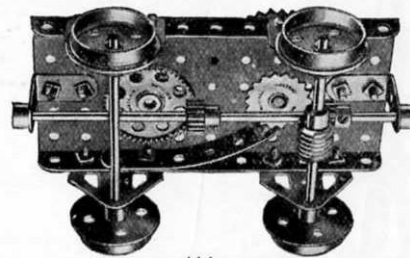


416A

Model No. 417 Band Saw

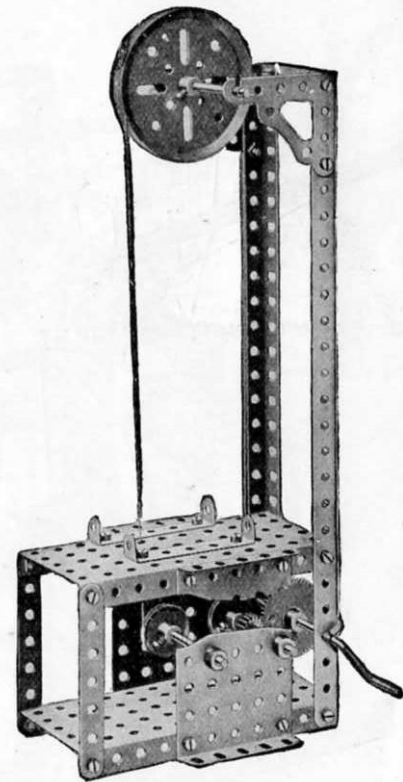

Model No. 418

Clay Modelling Machine

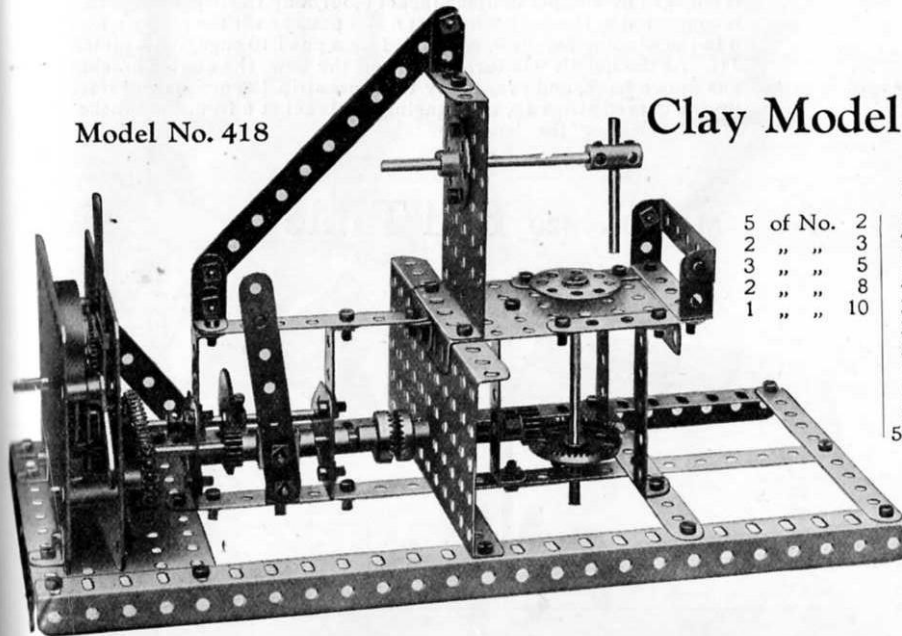

Parts required:

5 of No. 2	1 of No. 11	2 of No. 37A
2 " " 3	7 " " 12	2 " " 38
3 " " 5	1 " " 12A	1 " " 46
2 " " 8	4 " " 16	6 " " 48A
1 " " 10	2 " " 17	2 " " 52
	2 " " 24	2 " " 53
	2 " " 26	4 " " 59
	1 " " 27A	1 " " 63
	1 " " 28	6 " " 94
	2 " " 29	2 " " 96
	55 " " 37	2 " " 126A


Clockwork Motor
(not included in Outfit)

Parts required:

2 of No. 3	2 of No. 22	2 of No. 52
1 " " 5	1 " " 26	2 " " 53
2 " " 8	1 " " 27A	4 " " 59
3 " " 16	4 " " 35	2 " " 108
1 " " 19	26 " " 37	
1 " " 19B	2 " " 48A	

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

Model No. 419 Mechanical Cross Bow

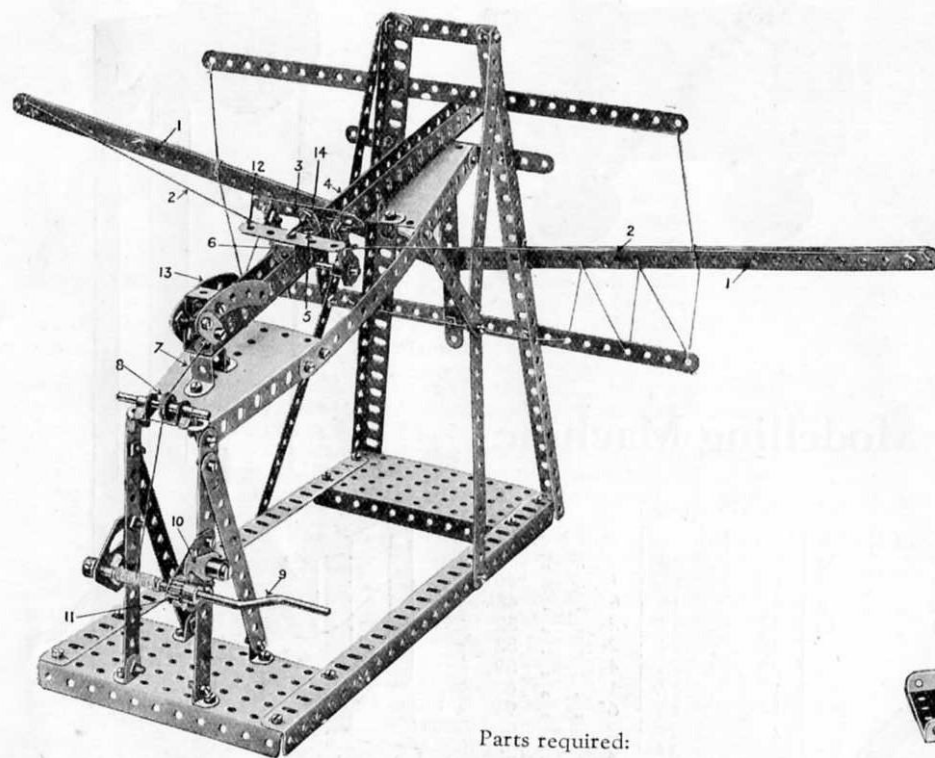

Parts required:

10 of No. 1	12 of No. 12	2 of No. 54
8 " " 2	2 " " 17	1 " " 59
2 " " 3	1 " " 19	2 " " 62
3 " " 5	1 " " 23	2 " " 90
4 " " 8	3 " " 35	1 " " 111
3 " " 10	73 " " 37	2 " " 126A
3 " " 11	1 " " 37A	1 " " 147A
	1 " " 45	1 " " 147B
	2 " " 52	1 " " 148

The only part of this model that requires description is the release of the bow.

This is obtained by the following mechanism: the bow is made of three 12½" strips, 1, on each side, from the outer ends of which the cords 2 of the bow are connected to a frame 3, sliding on the angle girders 4. To this frame is bolted a double bracket 5 and a flat bracket 14, and this

is engaged by another double bracket 6, forming the trigger. A cord 7 is connected to the double bracket 6 and passes over the pulley wheel 8 to the winding handle 9, controlled by a pawl 10 engaging a pinion 11. As the handle 9 is turned to bend the bow, the double bracket 6 is drawn back, and eventually the cross strip 12 engages and rides up the curved strips 13, disengaging the bracket 6 from the bracket 5 and releasing the bow.


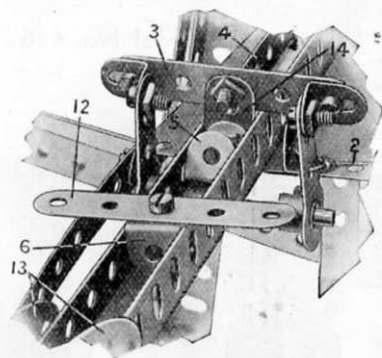


FIG. 419A

Model No. 420 Bed Table

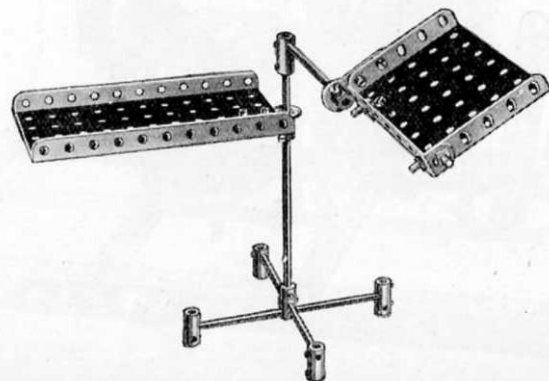

Parts required:

1 of No. 3
1 " " 12
1 " " 14
2 " " 15A
1 " " 16
8 " " 37
1 " " 52
1 " " 53
2 " " 62
6 " " 63


2 of N
4 "
3 "
1 "
2 "
1 "

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

69

Model No. 421

Treadle Hammer

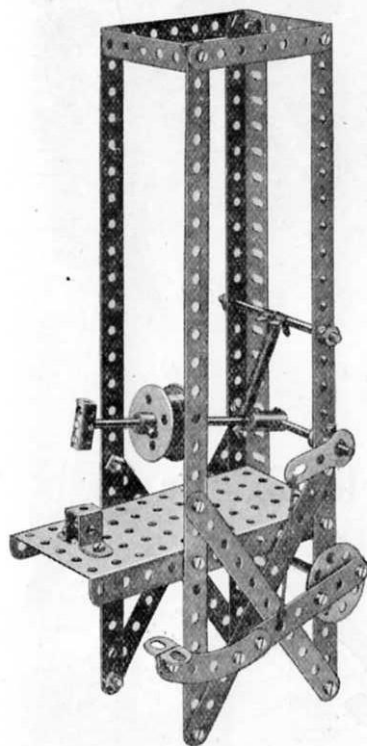


The arms 1 carrying the boats 2 are secured to the 3" pulley 3. This is connected to the rod 4 which carries a gear wheel 5 driven by a pinion 6 on a rod 7. At the foot of this rod is a contrate wheel 8 driven by a pinion on the end of another rod 9. The latter carries a sprocket wheel 10 which is operated through a chain gear from the motor. As the arms 1 rotate about the rod 4 the boats 2 fly out centrifugally.

Parts required:


10 of No. 1	2 of No. 22
9 " " 2	2 " " 26
2 " " 3	1 " " 27A
2 " " 5	1 " " 28
4 " " 8	66 " " 37
4 " " 11	1 " " 45
22 " " 12	2 " " 52
2 " " 13	3 " " 53
1 " " 16	2 " " 59
1 " " 19B	1 " " 95

Parts required:

2 of No. 1	3 of No. 16	1 of No. 45
4 " " 2	2 " " 20	1 " " 48A
3 " " 3	1 " " 24	1 " " 52
1 " " 5	2 " " 35	5 " " 59
2 " " 8	23 " " 37	1 " " 62
2 " " 12	2 " " 39	2 " " 63
1 " " 15A	1 " " 43	1 " " 90

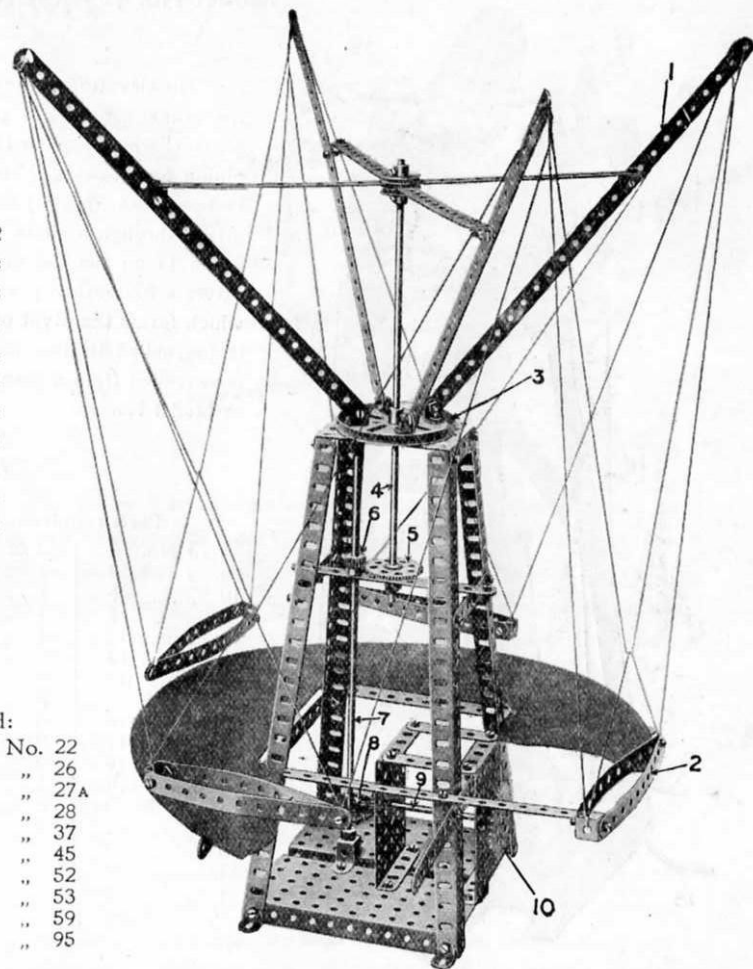

Model No. 423 Searchlight Tower

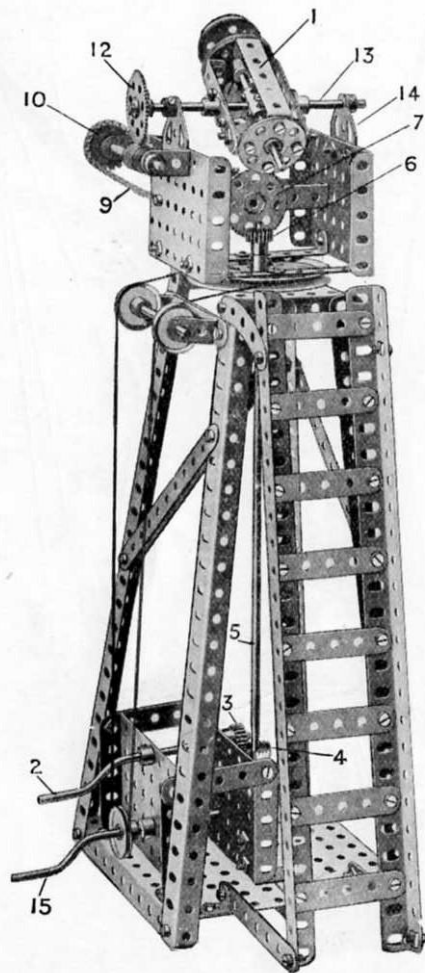

The elevation of the search-light 1 is obtained through the crank handle 2 a pinion 3 on which engages a $\frac{3}{4}$ " contrate wheel 4 on an $11\frac{1}{2}$ " rod 5 at the top of which a $\frac{1}{2}$ " pinion 6 engages a $1\frac{1}{2}$ " contrate wheel 7. On the rod of this contrate wheel at the rear end a 1" sprocket wheel 8 drives through a chain 9 another sprocket wheel 10. A worm 11 on the rod of the latter sprocket engages and drives a 57-toothed gear wheel 12, bolted to a 5" rod 13 which forms the pivot of the search-light 1. The rod 13 is journaled in two flat brackets 14. The search-light is swivelled from a crank handle 15 in the same manner as Model No. 401.


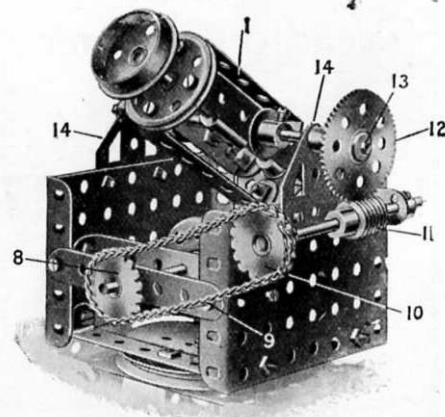


FIG. 423A

Parts required:

3 of No. 2	2 of No. 26
4 " " 3	1 " " 27A
10 " " 5	1 " " 28
6 " " 8	1 " " 29
4 " " 12	1 " " 32
3 " " 12A	88 " " 37
1 " " 13	4 " " 38
1 " " 15	2 " " 46
2 " " 16	4 " " 48A
3 " " 17	3 " " 48B
2 " " 19	2 " " 52
1 " " 19B	5 " " 53
1 " " 20	6 " " 59
1 " " 21	2 " " 62
3 " " 22	1 " " 63
1 " " 22A	2 " " 90
1 " " 24	2 " " 126A

Model No. 424 Field Roller

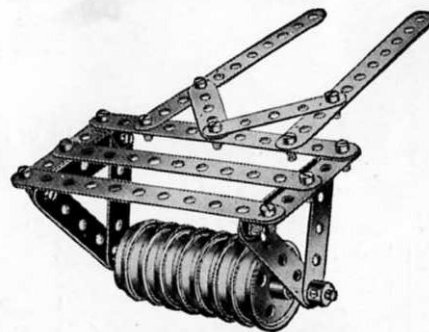


Parts required:

5 of No. 2
10 " " 5
4 " " 12
1 " " 15
8 " " 20
15 " " 37
4 " " 59

This Model can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

71

Model No. 425 Gantry

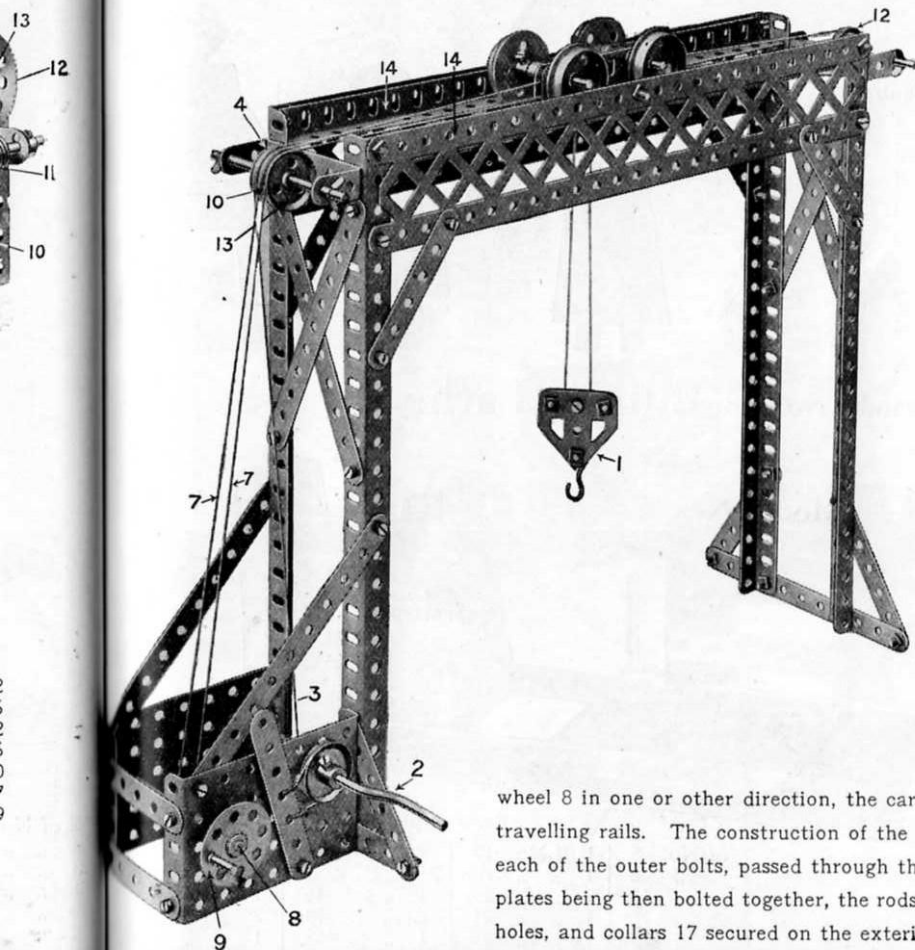

Parts required:

2 of No.	1	1 of No.	24
8 "	2	6 "	35
3 "	3	59 "	37
6 "	4	1 "	37A
2 "	5	12 "	38
6 "	8	2 "	46
3 "	16	2 "	53
2 "	17	1 "	57
1 "	19	4 "	59
4 "	20	2 "	103F
3 "	22	1 "	115
2 "	22A	2 "	126A
3 "	23		


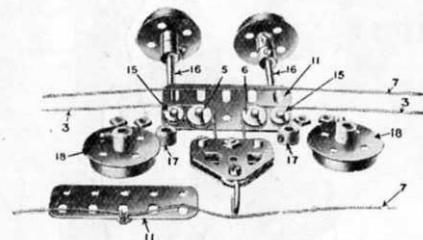


FIG. 425A

The pulley 1 is capable of being hoisted to raise the load, or traversed. In order to raise the load the crank handle 2 is operated, which winds the cord 3 passing over the rear pulley wheel 4 round the $\frac{1}{2}$ " pulley 5 and a corresponding pulley in the block, thence round another $\frac{1}{2}$ " pulley 6 and is made fast at the end of the gantry. For traversing, a continuous cord 7 is wound several turns on the $3\frac{1}{2}$ " rod 8 to which is secured a hand wheel 9. The cord passes over the pulley wheel 10 and is secured to one of the side plates 11, and continues round the pulley 12 returning to and passing over the nearest pulley wheel 13 back to the rod 8. Consequently by turning the hand wheel 8 in one or other direction, the carriage is traversed to and fro along the top angle girders 14, which form the travelling rails. The construction of the travelling carriage is shown in Fig. 425A, three washers 15 being placed on each of the outer bolts, passed through the two plates 11; and $\frac{1}{2}$ " pulley wheels 5, 6, on the inner bolts. The outer plates being then bolted together, the rods 16 of the flange wheels are passed through both plates in the end elongated holes, and collars 17 secured on the exterior. After which the remaining flange wheels 18 are secured on the ends of the rods 16.

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

Model No. 426 Windmill Scare

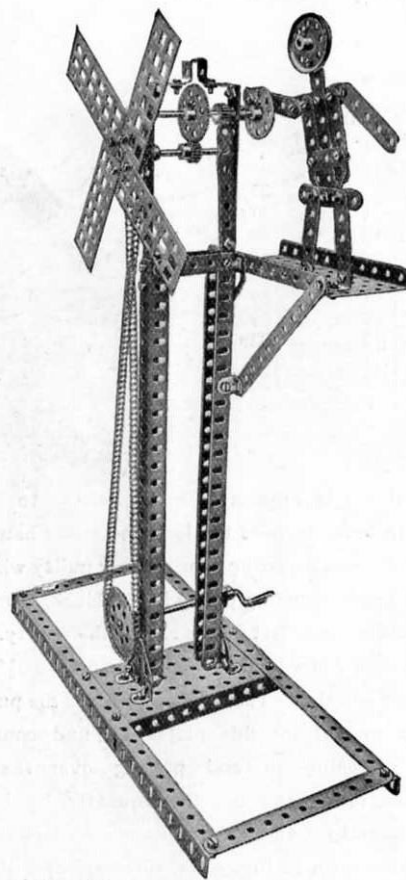


Parts required:

5 of No. 2		
1 " " 3		
11 " " 5		
6 " " 8		
8 " " 12		
2 " " 12A		
2 " " 16		
1 " " 19		
1 " " 21	2 of No. 37A	1 of No. 95
2 " " 24	1 " " 38	1 " " 96
2 " " 26	1 " " 45	1 " " 115
1 " " 27A	2 " " 52	2 " " 125
61 " " 37	4 " " 59	3 " " 126A
	20 " " 94	


Model No. 427 The Meccano Family

Parts required:

1 of No. 2	1 of No. 19B
2 " " 3	1 " " 21
2 " " 4	1 " " 24
12 " " 5	1 " " 27A
7 " " 10	3 " " 35
9 " " 12	36 " " 37
1 " " 15	3 " " 54
1 " " 15A	1 " " 63
1 " " 18A	

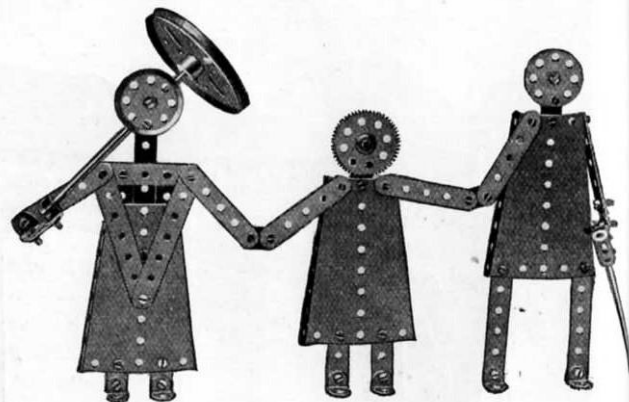

Model No. 428 Elliptic Lathe

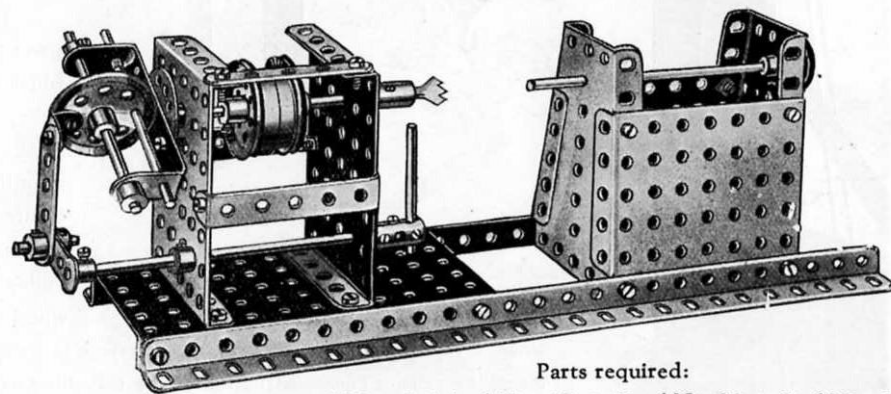


Parts required:

2 of No. 5	1 of No. 17	2 of No. 35	2 of No. 54
2 " " 8	1 " " 18A	26 " " 37	8 " " 59
1 " " 12	2 " " 20	1 " " 46	1 " " 62
2 " " 15	1 " " 21	2 " " 48A	2 " " 63
1 " " 15A	1 " " 22	1 " " 52	1 " " 65
2 " " 16	1 " " 24	4 " " 53	

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

73


Model No. 429 Motor 'Bus

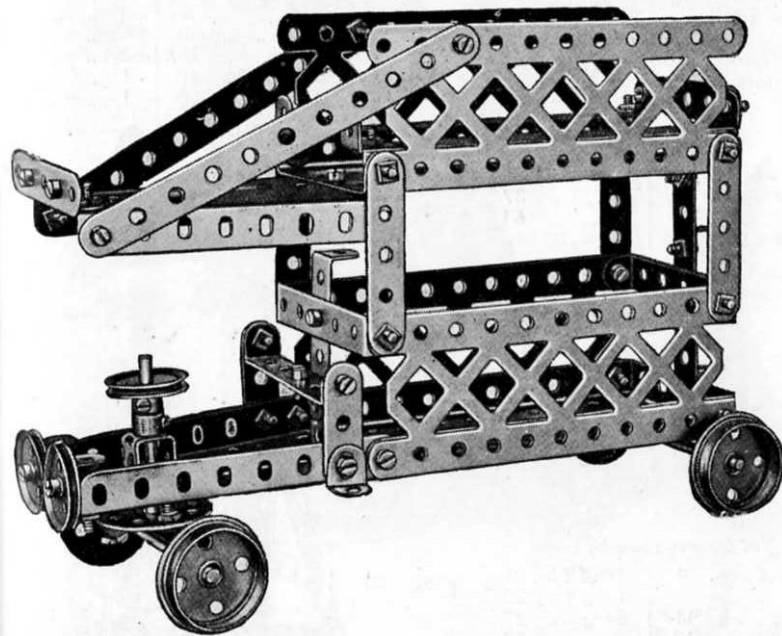

Parts required:

2 of No. 2	12 of No. 12	2 of No. 22A	2 of No. 52
1 " " 3	2 " " 16	1 " " 24	1 " " 54
6 " " 5	1 " " 17	48 " " 37	1 " " 59
2 " " 6A	4 " " 20	1 " " 45	4 " " 100
3 " " 11	1 " " 22	7 " " 48A	

Model No. 430 Bale Press

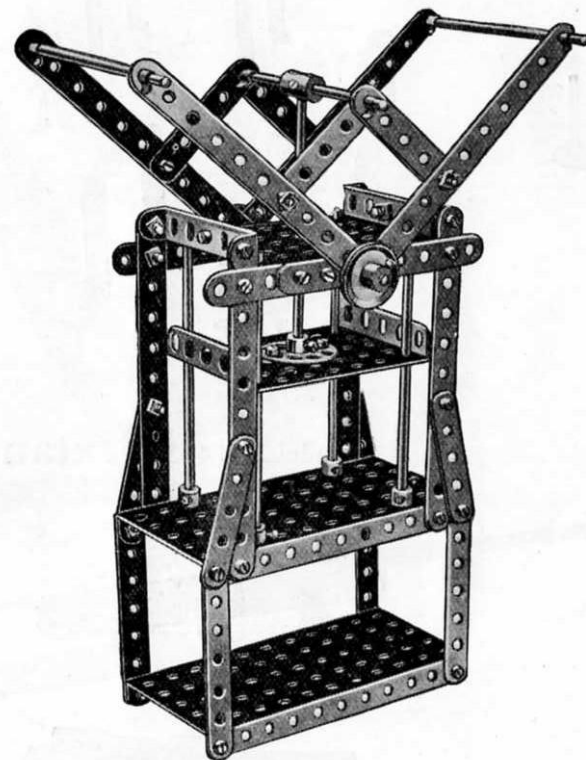


Parts required:

10 of No. 2	1 of No. 15A	44 of No. 37	2 of No. 52
4 " " 3	2 " " 17	14 " " 37A	2 " " 53
8 " " 5	1 " " 24	2 " " 38	4 " " 59
4 " " 15	8 " " 35	2 " " 48A	1 " " 63
2 of No. 111			

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

Model No. 431 Table Croquet

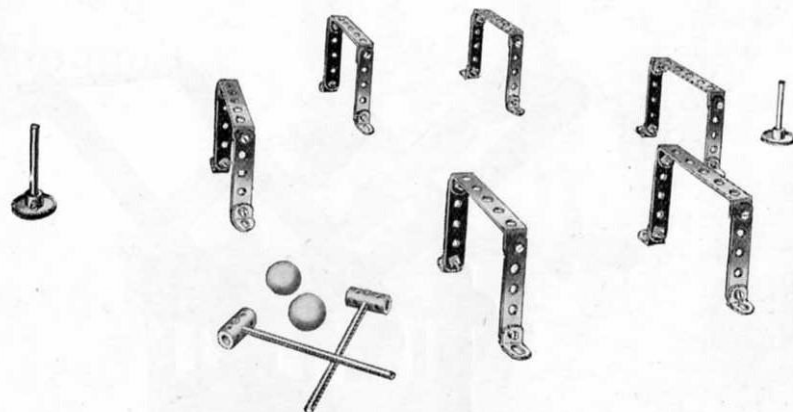

A most diverting game. Coloured marbles may be used for the balls. Full instructions for playing croquet may be obtained from any sports or games dealer.


Parts required:

12 of No.	5	2 of No.	22
12 "	12	24 "	37
2 "	16	2 "	63
2 "	17		


Model No. 432 Potato Chopper

Parts required:

8 of No.	2	1 of No.	24
2 "	8	5 "	35
4 "	12	38 "	37
2 "	13	6 "	48A
1 "	15A	2 "	52
2 "	16	1 "	53
4 "	20	1 "	63

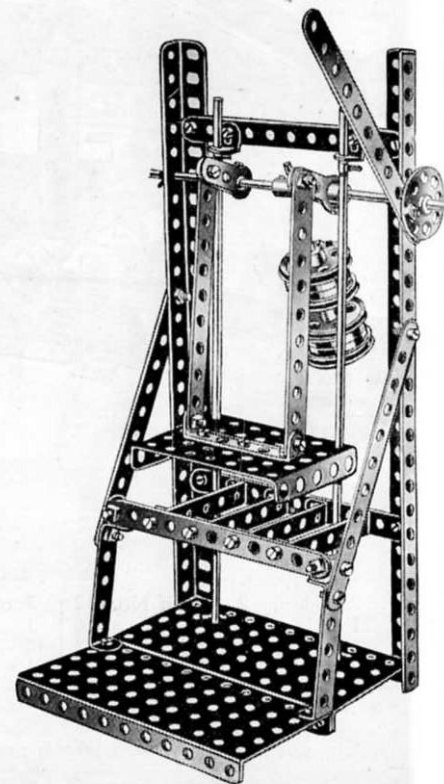


Model No. 433 Sextant and Theodolite

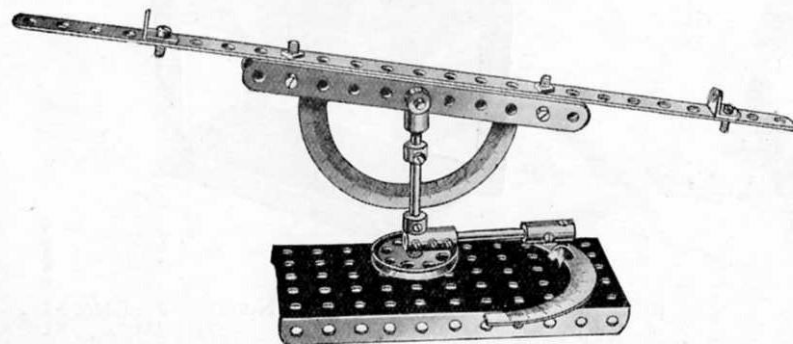

Parts required:

1 of No.	1	1 of No.	21
2 "	2	1 "	22
2 "	11	8 "	37
2 "	12	1 "	52
1 "	16	4 "	59
1 "	17	3 "	63
2 "	18A	1 "	65

Model No. 434 Cake Walk

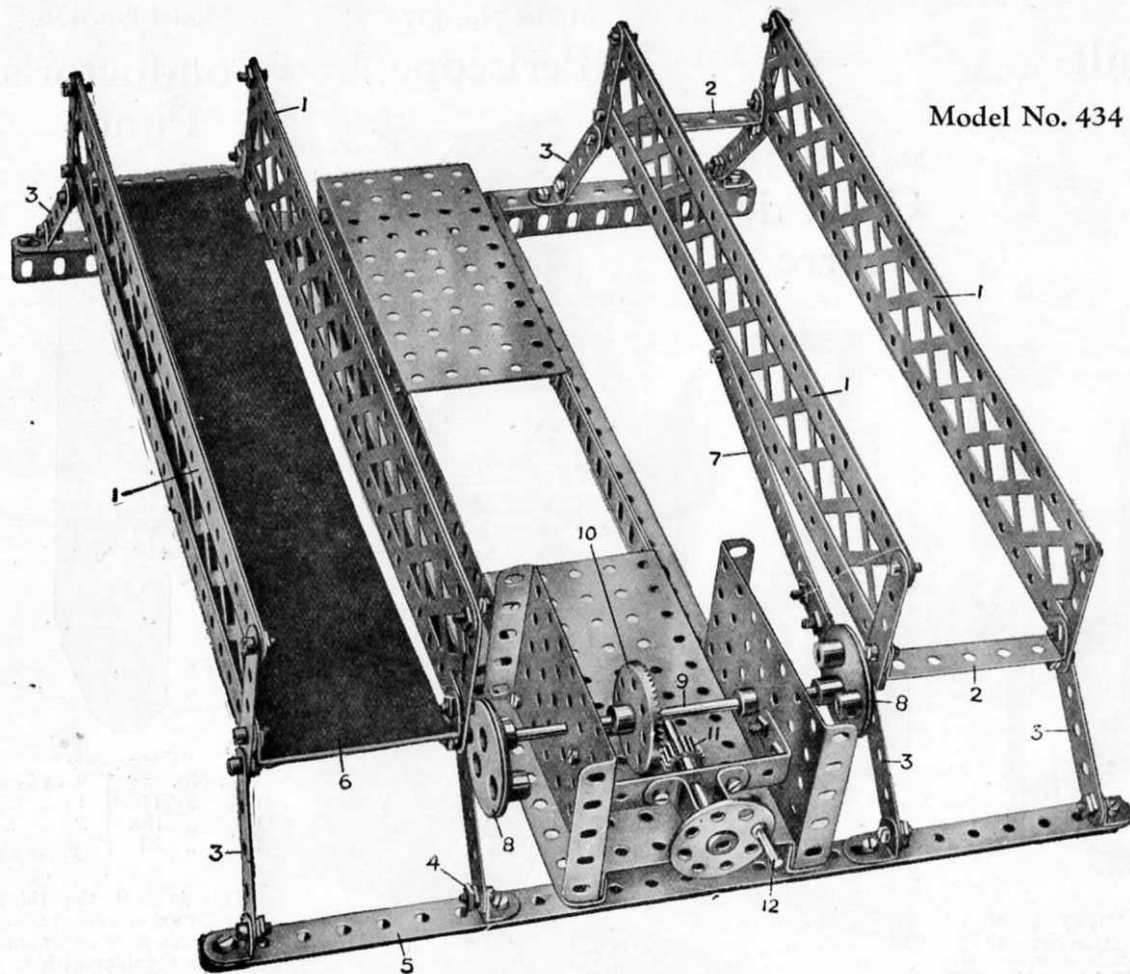
Parts
required:

8 of No.	1
2 "	2
16 "	5
6 "	8
1 "	10
8 "	12
1 "	15
1 "	24
1 "	26
1 "	28
66 "	37
1 "	38
1 "	45
1 "	46
4 "	48A
2 "	52
2 "	53
2 "	59
1 "	77
4 "	99
1 "	115
2 "	130

The rocking platforms are built up of braced girders 1 connected by the end strips 2 and pivotally bolted and lock-nutted to the strips 3 forming rocking links. These latter are bolted and lock-nutted at 4 to the angle girders 5. Strips 6 of cardboard are secured to the end strips 2. The platforms are rocked by means of strips 7 one of which is connected to each rocking platform and to eccentrics 8 fixed on the rod 9 on which is secured a contrate wheel 10 driven by a pinion 11 from the handle 12. As the handle 12 is turned the platforms are rocked to and fro on the strips 3. The eccentrics 8 should be so arranged that the platforms rock in opposite directions.


These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

Model No. 435 Catapult

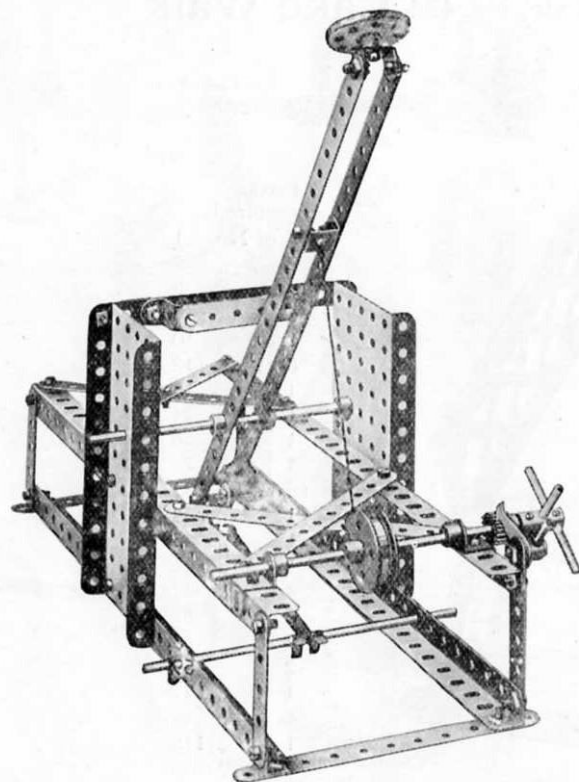


Parts required:			
2 of No. 1	3 of No. 14	44 of No. 37	1 of No. 115
7 " " 2	2 " " 17	1 " " 43	4 " " 125
1 " " 4	1 " " 20	2 " " 52	1 " " 147A
6 " " 5	1 " " 24	1 " " 57	1 " " 147B
4 " " 8	1 " " 28	6 " " 59	1 " " 148
3 " " 11	4 " " 35	1 " " 62	

Model No. 436 Croix de Guerre

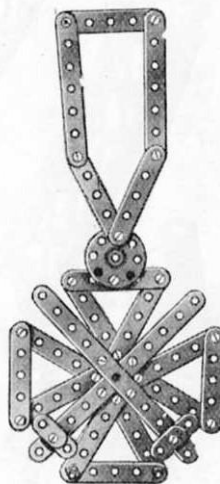

Parts required:	
2 of No. 2	2
2 " " 3	3
15 " " 5	5
4 " " 10	10
2 " " 24	24
24 " " 37	37


Model No. 437 Periscope

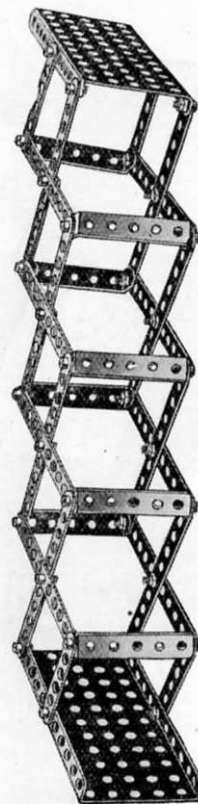

Parts required:	
16 of No. 2	2
4 " " 4	4
32 " " 37	37
8 " " 48A	48A
2 " " 52	52

Small pieces of looking glass should be inserted in the top and bottom plates.

Model No. 438 Conductor's Punch

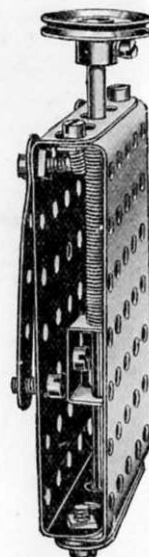

Parts required:

3 of No. 5	9 of No. 37
1 " " 11	1 " " 43
1 " " 15A	2 " " 53
1 " " 22	

This is just the thing for your younger brother, and he only needs a strap to hang it over his shoulder with to make him into a tram conductor. Note the 2½" strip at the bottom, spaced a little away from the body of the punch to allow the ticket to pass in to be punched.

Parts required:	
2 of	2
2 " "	2
4 " "	4
2 " "	2
4 " "	4
1 " "	1
3 " "	3
2 " "	2
5 " "	5
1 " "	1
2 " "	2
1 " "	1
1 " "	1

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

77

Model No. 439 Speed Indicator





FIG. 439A

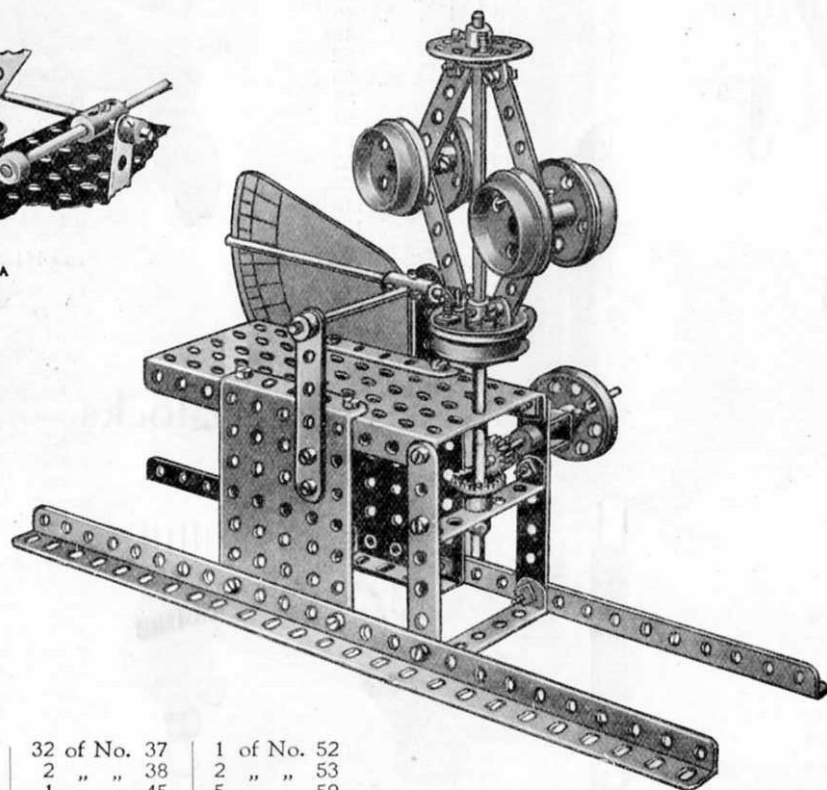


Parts
required:

2	of No.	3
2	" "	4
4	" "	5
2	" "	8
4	" "	12
1	" "	13A
3	" "	16
2	" "	18A
5	" "	20
1	" "	21
2	" "	24
1	" "	26
1	" "	29

32	of No.	37	1	of No.	52
2	" "	38	2	" "	53
1	" "	45	5	" "	59
3	" "	48A	1	" "	63

Model No. 440 Weather Vane

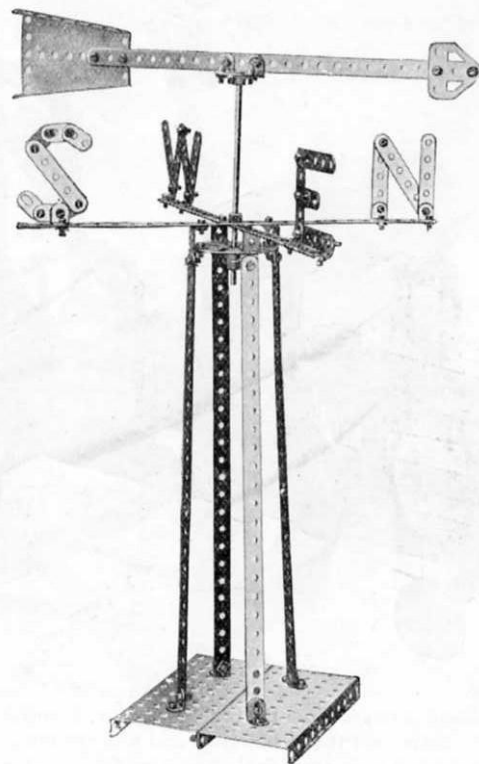

Parts required:

7	of No.	1	1	of No.	14	1	of No.	54
11	" "	5	1	" "	24	2	" "	59
8	" "	10	54	" "	37	1	" "	109
4	" "	11	2	" "	38	1	" "	126A
17	" "	12	2	" "	52			

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

Model No. 441 Travelling Swivel Crane


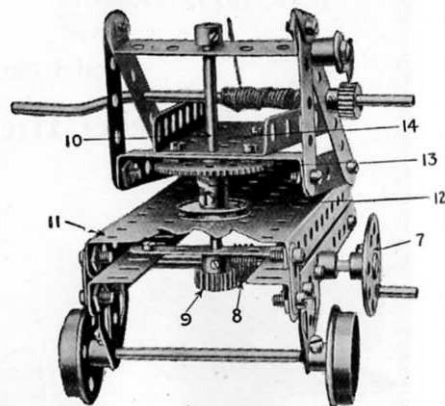


FIG. 441A

Parts required:			
8 of No. 2	6 of No. 35		
2 " " 3	69 " " 37		
2 " " 5	3 " " 37A		
2 " " 8	1 " " 45		
4 " " 10	5 " " 48A		
1 " " 11	1 " " 52		
8 " " 12	2 " " 53		
2 " " 15	2 " " 54		
4 " " 16	1 " " 57		
1 " " 17	3 " " 59		
1 " " 19	1 " " 63		
4 " " 20	2 " " 108		
1 " " 21	1 " " 115		
4 " " 22	1 " " 125		
1 " " 24	4 " " 126A		
1 " " 26	1 " " 147A		
1 " " 27A	1 " " 147B		
1 " " 32	1 " " 148		

Model No. 442 Pulley Blocks

The load is raised from the crank handle 1, a cord 2 winding on which passes over the 1" pulleys 3 and 4 to the block 5. The jib 6 is swivelled from the hand-wheel 7 on the rod of which is a worm 8 engaging a pinion 9 bolted to a vertical rod 10, to which is secured beneath the platform 11 a 1" pulley wheel 12 and a 57-toothed wheel 13 which carries the swivel platform 14. The steering of the crane is effected from the 1" pulley wheel 15 in the same way as Model No. 230.

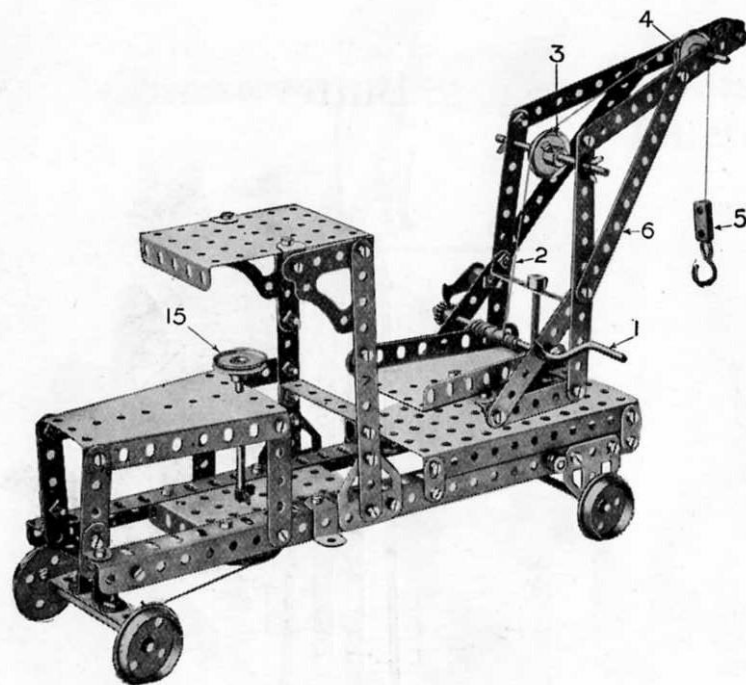

2 of N
5 "
2 "
1 "
4 "
3 "
2 "
1 "
2 "
2 "
1 "

The
consistin
angular
operating
a pinion
rages a
on a ro
wound a
over a pu
of the fra
" pulley
double bo
the pla
another p
fast to t
rectangul
connected
by 1"
and the
thus slide
vertical fr
by 12 1/2"
doubled.

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.


79

Model No. 443 Bale-lifter


Parts required:

2 of No. 1	1 of No. 19	2 of No. 48A
5 " " 2	4 " " 20	3 " " 48B
2 " " 3	2 " " 22	1 " " 52
1 " " 5	1 " " 23	3 " " 53
4 " " 8	1 " " 26	7 " " 59
3 " " 10	1 " " 27A	2 " " 126A
2 " " 12A	2 " " 35	1 " " 147A
1 " " 15	46 " " 37	1 " " 147B
2 " " 15A	1 " " 37A	1 " " 148
2 " " 17	19 " " 38	
1 " " 18A	1 " " 45	

The bale platform 1, consisting of a large rectangular plate, is raised by operating a crank handle 2, a pinion 3 on which engages a 57-toothed wheel 4 on a rod 5, upon which is wound a cord 6, passing over a pulley 7, in the head of the framework, round a pulley 8, pivoted in a double bent strip bolted to the plate 9, up over another pulley 10, and made fast to the plate 9. The rectangular plate 1 is connected to the plate 9 by 1" angle brackets, and the plates 1 and 9 thus slide together in the vertical framework formed by 12½" angle girders doubled.

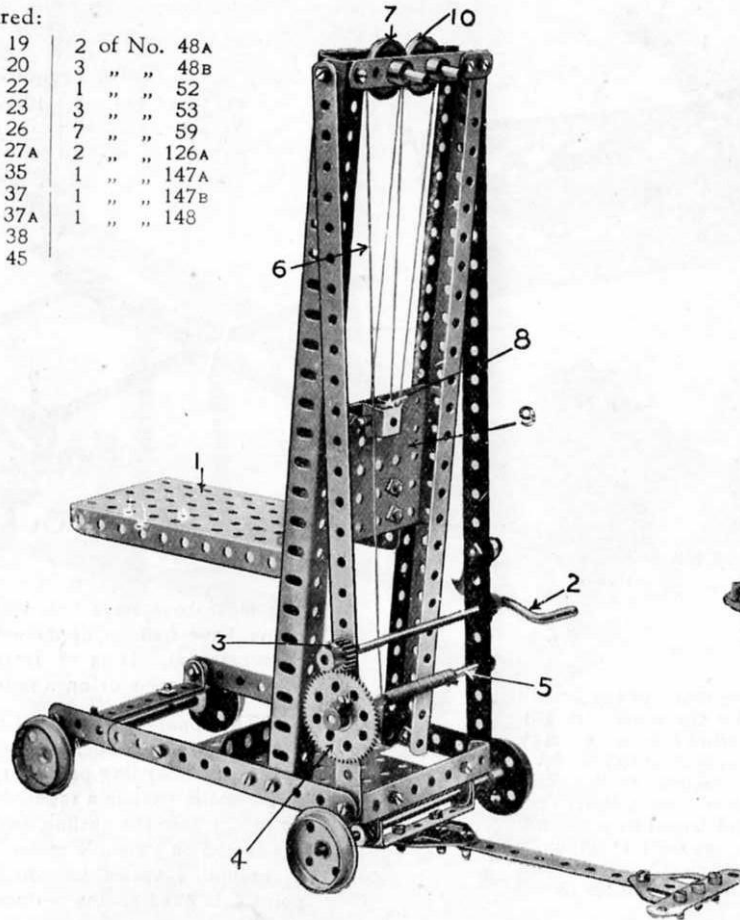

Model No. 444 Butter Churn

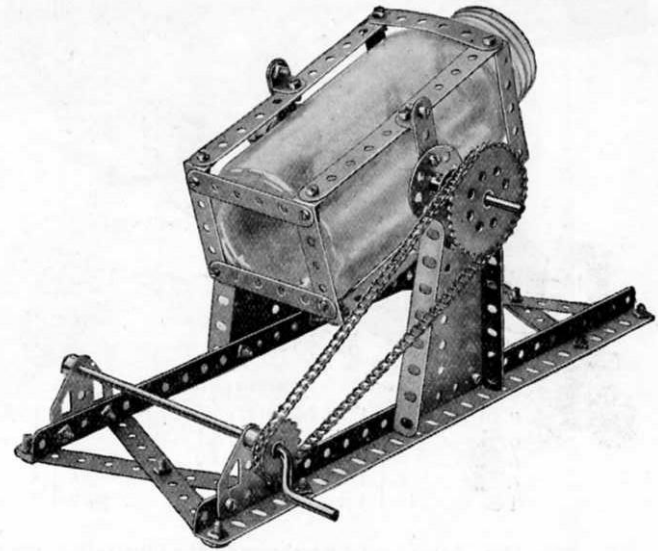


Parts required:

8 of No. 2	1 of No. 19	2 of No. 62
2 " " 3	2 " " 24	16 " " 94
4 " " 4	42 " " 37	1 " " 95
2 " " 8	4 " " 48A	1 " " 96
4 " " 12	2 " " 54	2 " " 126A
2 " " 17	3 " " 59	

These Models can be made with MECCANO Outfit No. 4, or No. 3 and No. 3A.

Model No. 445 Swing Bridge

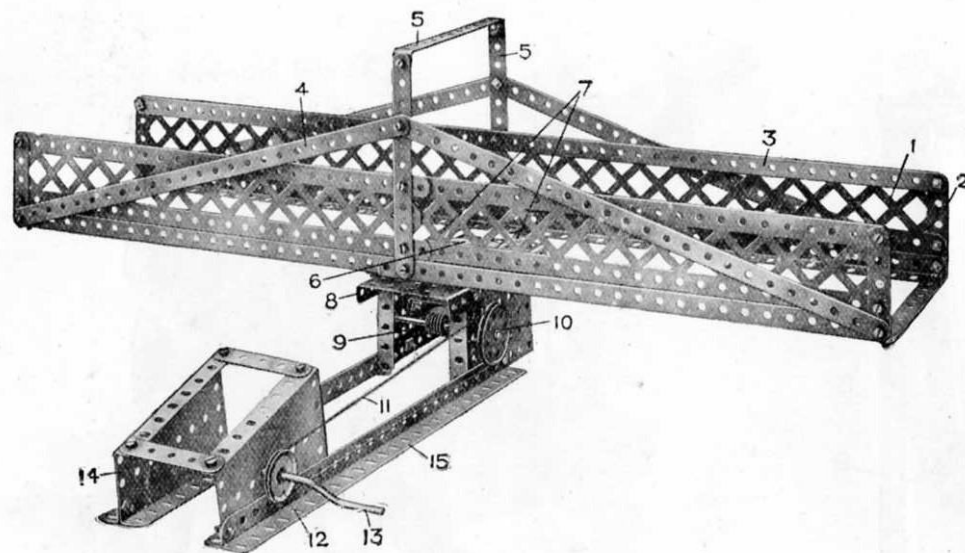

Parts required:


8 of No. 1	1 of No. 17	1 of No. 27A	1 of No. 52
6 " " 2	1 " " 19	1 " " 32	2 " " 53
6 " " 5	1 " " 19B	50 " " 37	2 " " 54
6 " " 8	1 " " 21	1 " " 48A	2 " " 59
1 " " 16	1 " " 22	1 " " 48B	4 " " 99

The sides of this model, as shown in the illustration, are made of the braced girders 1 secured to the upright strips 2 and reinforced by the inner strips 3. Other diagonal strips 4 brace the side girders to the top structure 5 forming a stay for the sides 1. The swing base of the bridge is composed of a 3" pulley wheel 6 which is bolted to two cross 5½" strips 7 which in turn are secured to the main base side girders. The bridge swings on the perforated plate 8 on a short rod, on the lower end of which is secured a gear wheel engaged and driven by a worm 9 on the spindle of which is the grooved pulley 10 driven by the cord 11 which is operated from the smaller grooved pulley 12 on the crank handle 13. The crank handle is journaled in two sector plates 14 secured to the base angle girder 15.

Model No. 446 Pantograph

Parts required:

4 of No. 1	10 of No. 37
2 " " 17	3 " " 45
1 " " 22	2 " " 62

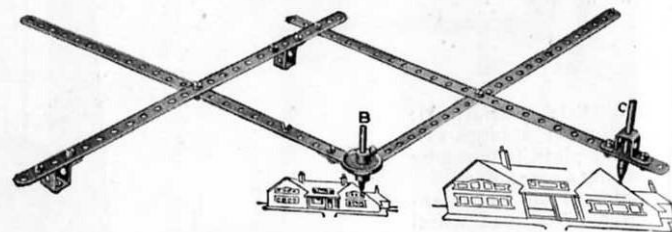


Most boys have heard of the Pantograph but not many have had an opportunity of seeing its principles demonstrated. It is an instrument for copying plans, etc., on the same or on a reduced or enlarged scale.

The apparatus is fixed at the point A. If an enlarged sketch is to be made, the point B is traced round the outlines, the writing point C reproducing the sketch on a larger scale. When a reduced drawing is to be made, the point C traces the outline, whilst the point B reproduces the sketch on a smaller scale. The degree of enlargement or reduction varies according to the position in which point C is fixed on the perforated arm.

Model No. 447

Inclined Delivery Chute

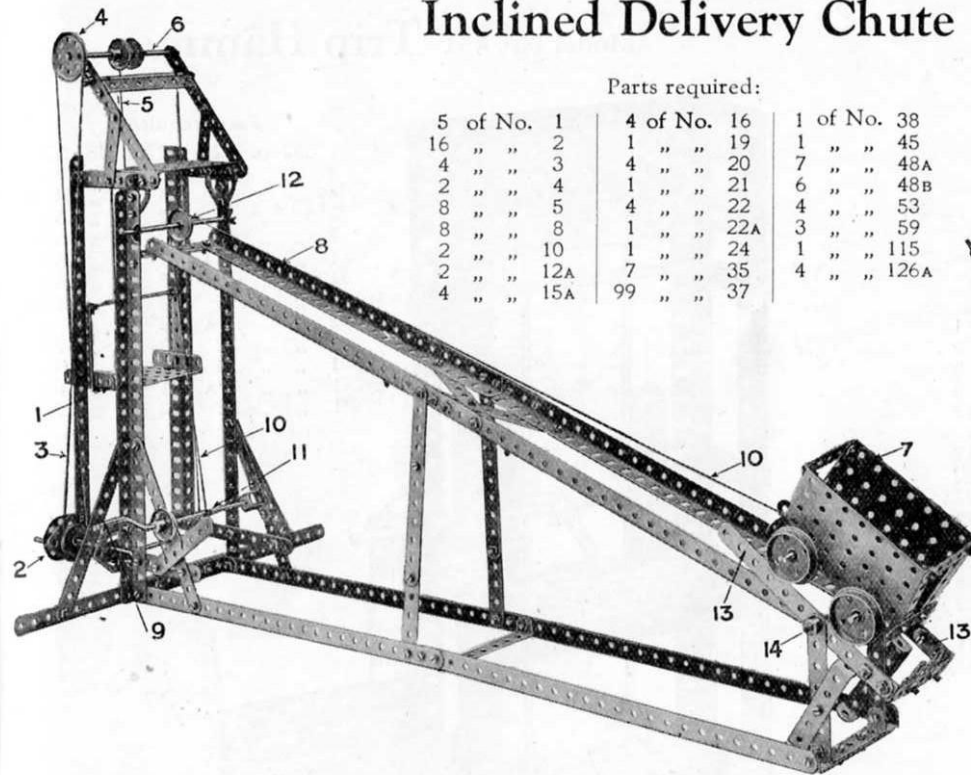


Parts required:

5 of No. 1	4 of No. 16	1 of No. 38
16 " " 2	1 " " 19	1 " " 45
4 " " 3	4 " " 20	7 " " 48A
2 " " 4	1 " " 21	6 " " 48B
8 " " 5	4 " " 22	4 " " 53
8 " " 8	1 " " 22A	3 " " 59
2 " " 10	1 " " 24	1 " " 115
2 " " 12A	7 " " 35	4 " " 126A
4 " " 15A	99 " " 37	

Model No. 448

Yacht

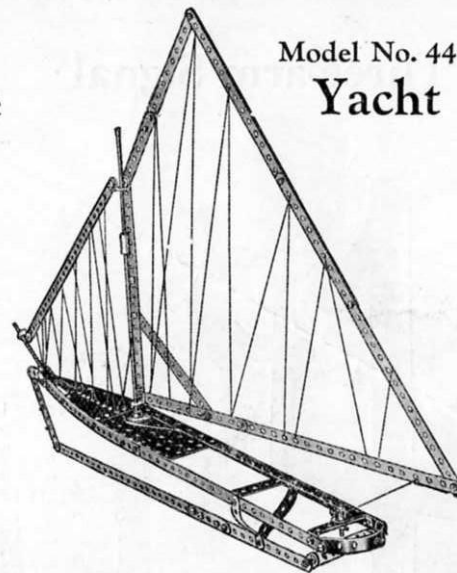

Parts required:


9 of No. 1	2 of No. 18A
7 " " 2	1 " " 22
4 " " 3	51 " " 37
2 " " 4	1 " " 44
2 " " 5	2 " " 48A
1 " " 10	1 " " 52
5 " " 12	1 " " 54
1 " " 13A	1 " " 63
2 " " 15	

Model No. 449

Street Lamp


Parts required:

4 of No. 5	1 of No. 20
2 " " 11	1 " " 24
4 " " 12	12 " " 37
1 " " 13	1 " " 59
2 " " 16	1 " " 63

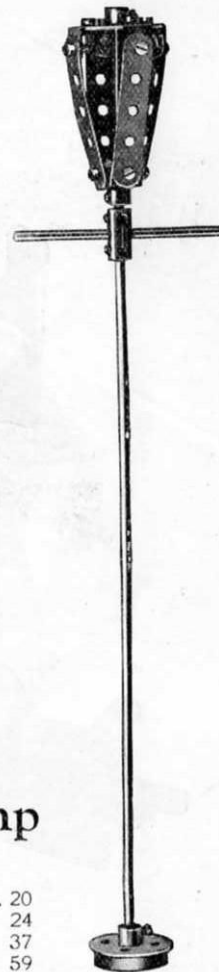

The cage 1 is raised from the hand-wheel 2 by means of an endless cord 3 which passes over the upper $1\frac{1}{2}$ " pulley 4. A cord 5 winding on rod 6 between two $1\frac{1}{2}$ " fast pulleys raises or lowers the cage. The truck 7 is raised or lowered along the inclined rails 8 by a crank handle 9, a cord 10 being wound on the rod 11, passing over a pulley 12, and connected to the truck 7. When the truck reaches the end of the inclined rails 10 it rests upon two $5\frac{1}{2}$ " strips 13 pivoted at 14, the weight of the truck depressing these pivoted strips and tipping the load.


Model No. 450 Three-arm Signal

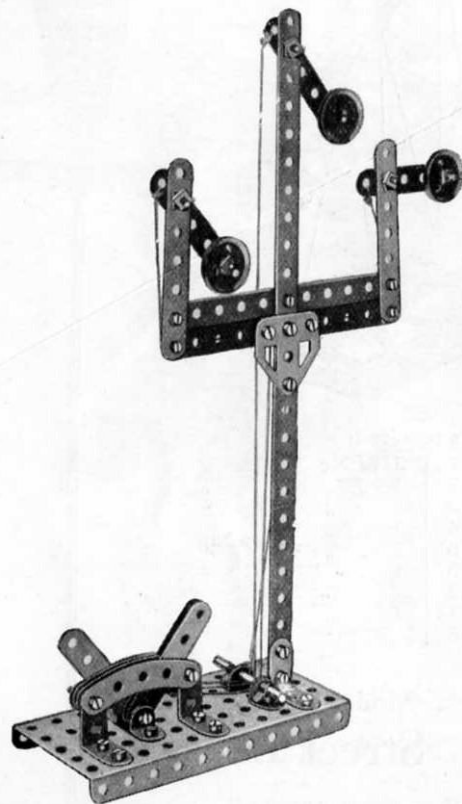

Parts
required:

1 of No.	1
3 " "	2
2 " "	3
6 " "	5
4 " "	12
3 " "	12A
1 " "	17
1 " "	22
2 " "	22A
2 " "	35
27 " "	37
5 " "	37A
11 " "	38
1 " "	52
4 " "	90
3 " "	111
1 " "	126A

Model No. 451 Trip Hammer

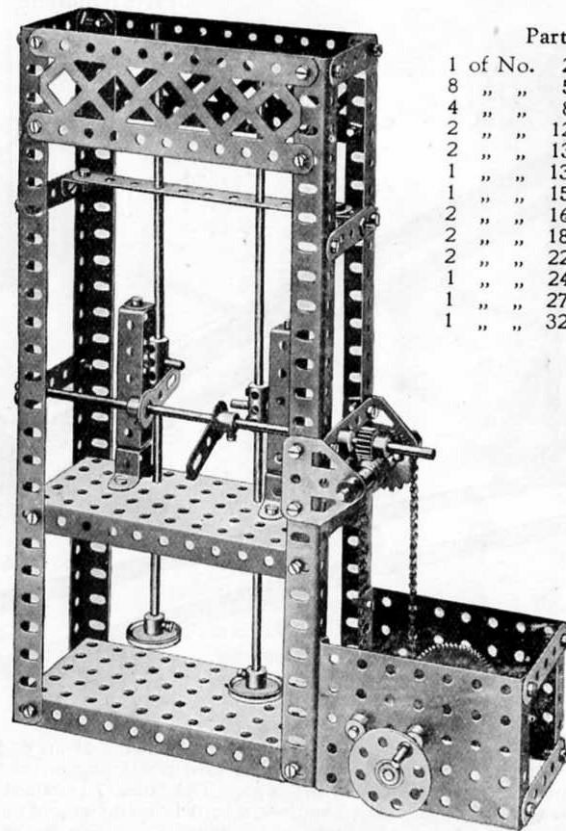

Parts required:

1 of No.	2	52 of No.	37
8 " "	5	2 " "	45
4 " "	8	4 " "	48A
2 " "	12	2 " "	52
2 " "	13	2 " "	53
1 " "	13A	10 " "	59
1 " "	15A	2 " "	62
2 " "	16	2 " "	63
2 " "	18A	12 " "	94
2 " "	22	2 " "	96
1 " "	24	2 " "	100
1 " "	27A	1 " "	115
1 " "	32	2 " "	126A


Model No. 452


Anti-Aircraft Gun

Parts required:

6 of No. 2	1 of No. 21	4 of No. 48A
11 " " 5	2 " " 22	2 " " 48B
1 " " 10	2 " " 24	1 " " 52
2 " " 11	1 " " 26	4 " " 53
4 " " 12	1 " " 27A	8 " " 59
2 " " 12A	1 " " 29	1 " " 62
1 " " 15	1 " " 32	2 " " 63
1 " " 15A	64 " " 37	2 " " 115
4 " " 16	12 " " 38	4 " " 125
1 " " 17	2 " " 45	2 " " 126A
1 " " 19B		

The gun represented by the rod 1 is pivoted upon a transverse rod 2 which passes through a coupling on the rod 1. A 57-toothed wheel 3 on the pivot rod 2 is engaged by a worm 4 operated from the hand-wheel 5. By turning this wheel 5 the gun is lifted or lowered. The two vertical strips forming the framework for the pivot rod 2 are bolted to a $1\frac{1}{2}$ " pulley 7 which is secured on a vertical rod 8. A 3" pulley wheel 9 is also bolted to a rod 8 and from the pulley wheel is carried by reversed angle brackets 10 a framework 11. The rod 8 with the framework is rotated from the hand-wheel 12, a pinion 13 on the spindle of which engages a $\frac{3}{4}$ " contrate wheel 14 on the rod 8. By turning the wheel 12 the gun is swivelled round.

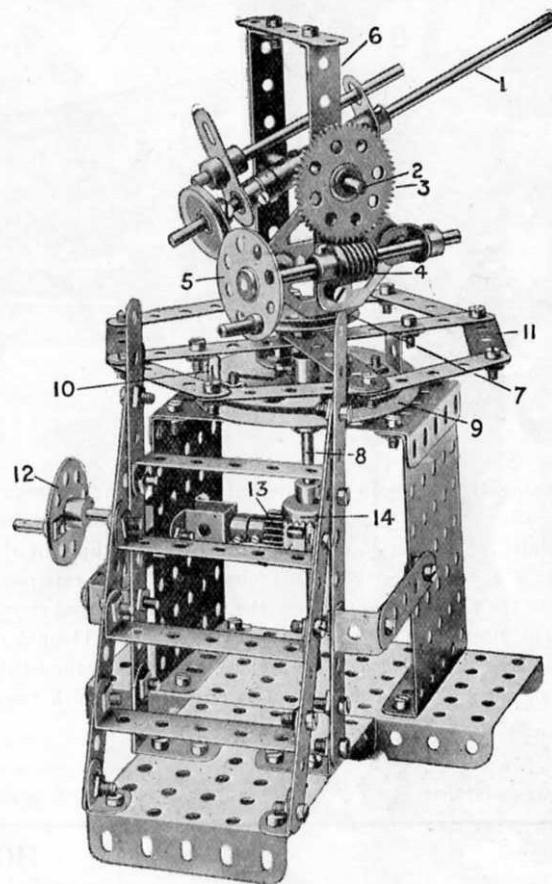

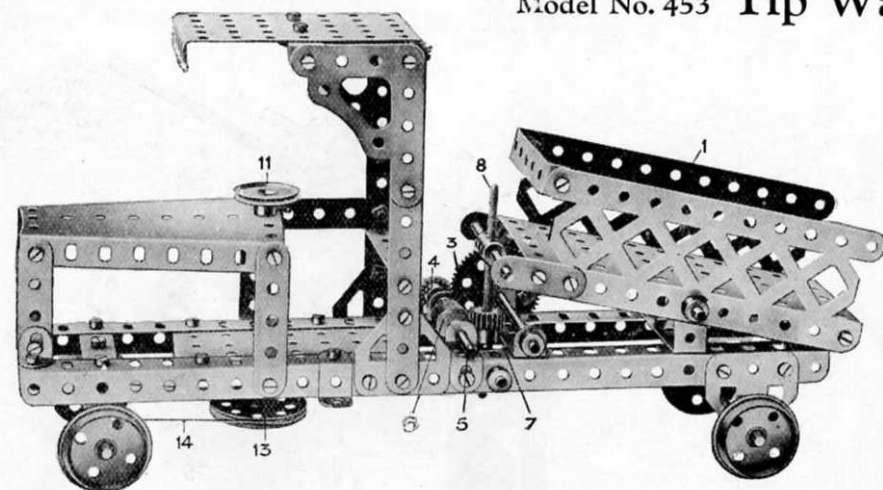Model No. 453 **Tip Wagon**

The tipping of the wagon 1 is effected by the handle 2 secured on a 57-toothed wheel 3 which engages a $\frac{1}{2}$ " pinion 4 mounted on the rod 5. On the same rod is secured a worm 6 which engages a $\frac{1}{2}$ " pinion 7 secured to the upright threaded rod 8. The threaded rod 8 revolves freely in the coupling 9, being retained in position by the collar 10. As the handle 2 is operated, the wagon 1 is tipped or restored to its original position. The steering is effected by a $\frac{1}{2}$ " pulley wheel 11 on a rod 12, at the lower end of which is secured a $1\frac{1}{2}$ " pulley wheel 13, a cord 14, wound twice round this pulley wheel, being connected to a double angle strip 15 in which the steering axle 16 is journaled.

Parts
required:

2 of No.	2
1 "	3
9 "	5
2 "	6A
2 "	8
10 "	12
5 "	16
1 "	19
4 "	20
1 "	21
1 "	22
1 "	24
1 "	26
1 "	27A
2 "	35
59 "	37
2 "	37A
1 "	38
4 "	48A
1 "	52
2 "	53
1 "	54
3 "	59
2 "	62
1 "	63
1 "	80A
2 "	100
2 "	108
1 "	125
4 "	126A

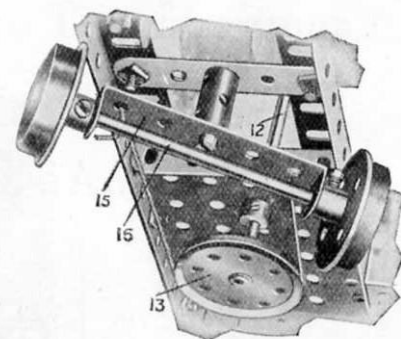


FIG. 453A

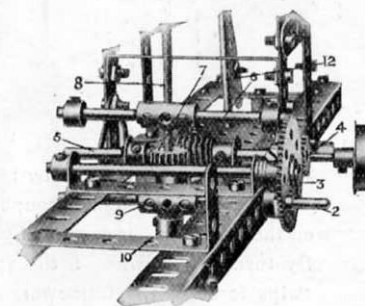


FIG. 453B

HOW TO CONTINUE

This completes the Models which may be made with MECCANO Outfit No. 4. The next Models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 4A Accessory Outfit, the price of which will be found in the List at the end of the Manual.

Model No. 501 Beam Scales

Parts required:

7 of No. 1	2 of No. 22
8 " " 2	88 " " 37
8 " " 3	2 " " 44
2 " " 4	1 " " 46
10 " " 5	5 " " 48A
8 " " 8	1 " " 50
2 " " 10	2 " " 52
9 " " 12	2 " " 53
2 " " 15	2 " " 54
4 " " 15A	2 " " 57
2 " " 16	8 " " 59
7 " " 20	


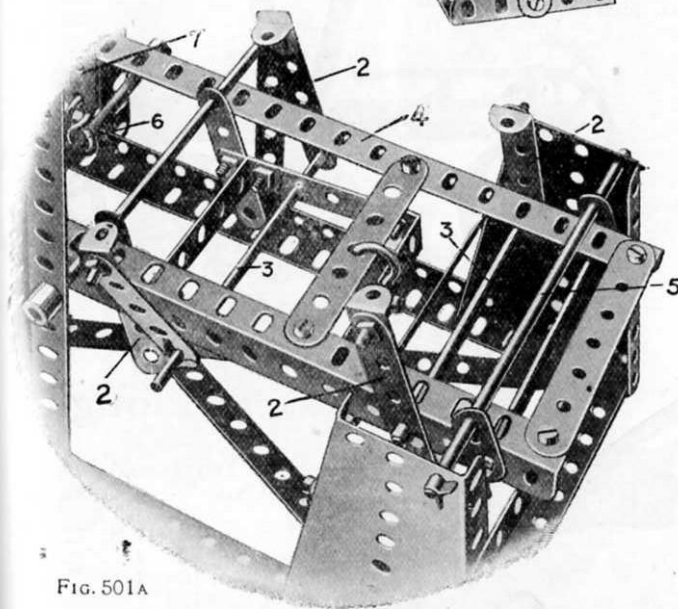


FIG. 501A

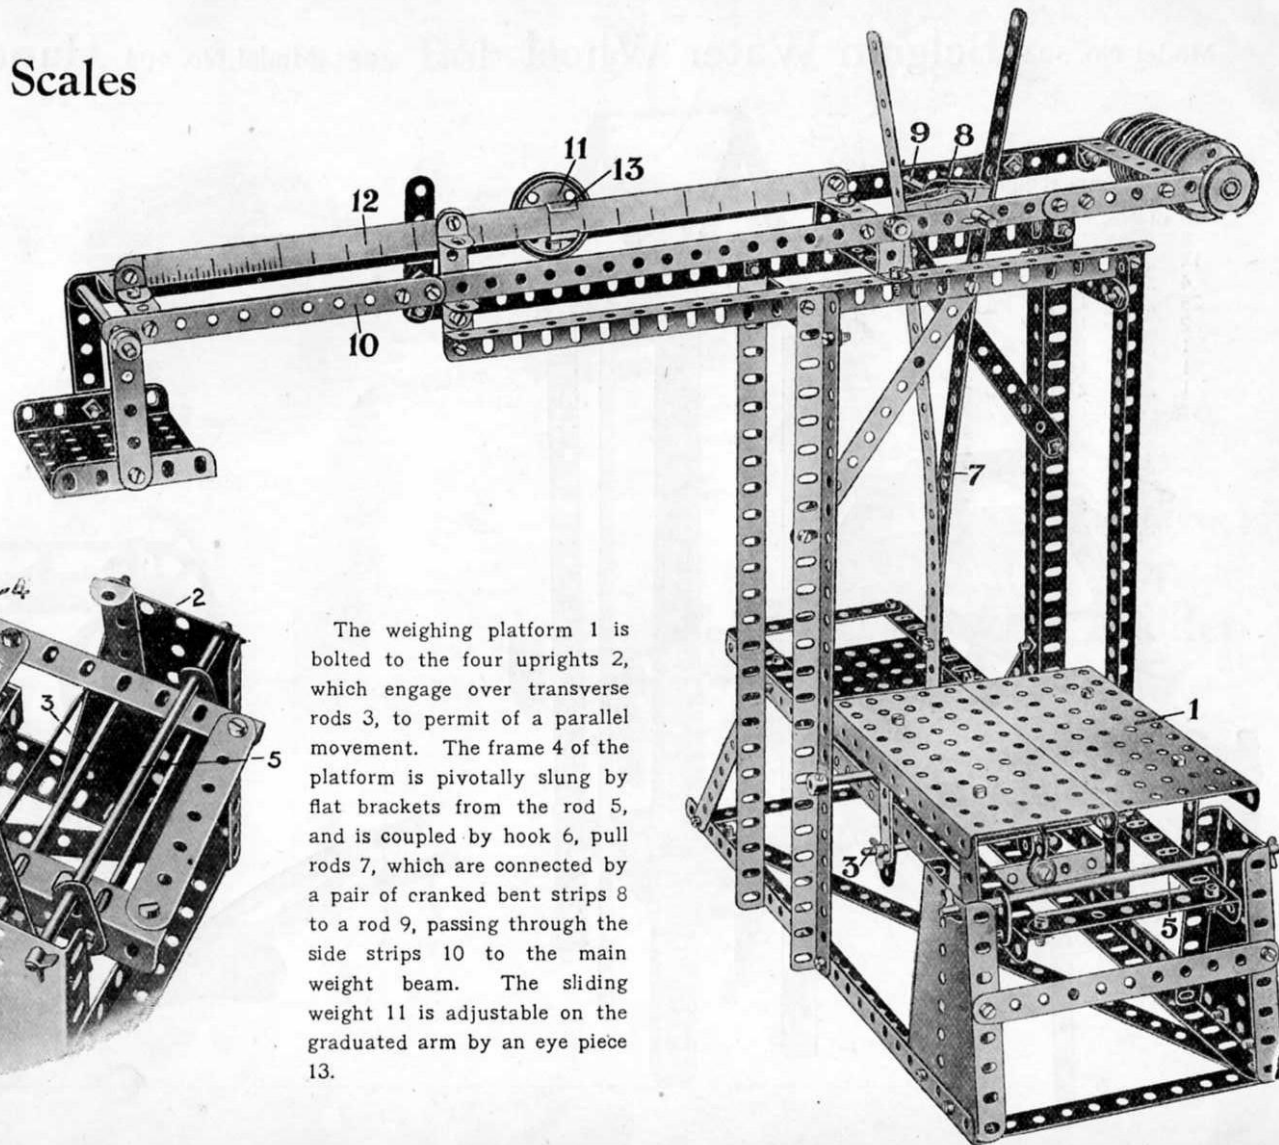


The weighing platform 1 is bolted to the four uprights 2, which engage over transverse rods 3, to permit of a parallel movement. The frame 4 of the platform is pivotally slung by flat brackets from the rod 5, and is coupled by hook 6, pull rods 7, which are connected by a pair of cranked bent strips 8 to a rod 9, passing through the side strips 10 to the main weight beam. The sliding weight 11 is adjustable on the graduated arm by an eye piece 13.

Model No. 502 **Belgian Water Wheel**

Parts required:

10 of No.	1	1 of No.	24
8 "	2	3 "	26
12 "	5	1 "	27A
4 "	8	82 "	37
28 "	12	5 "	48A
2 "	15	2 "	52
1 "	15A	2 "	53
1 "	16	4 "	59
1 "	21	1 "	63

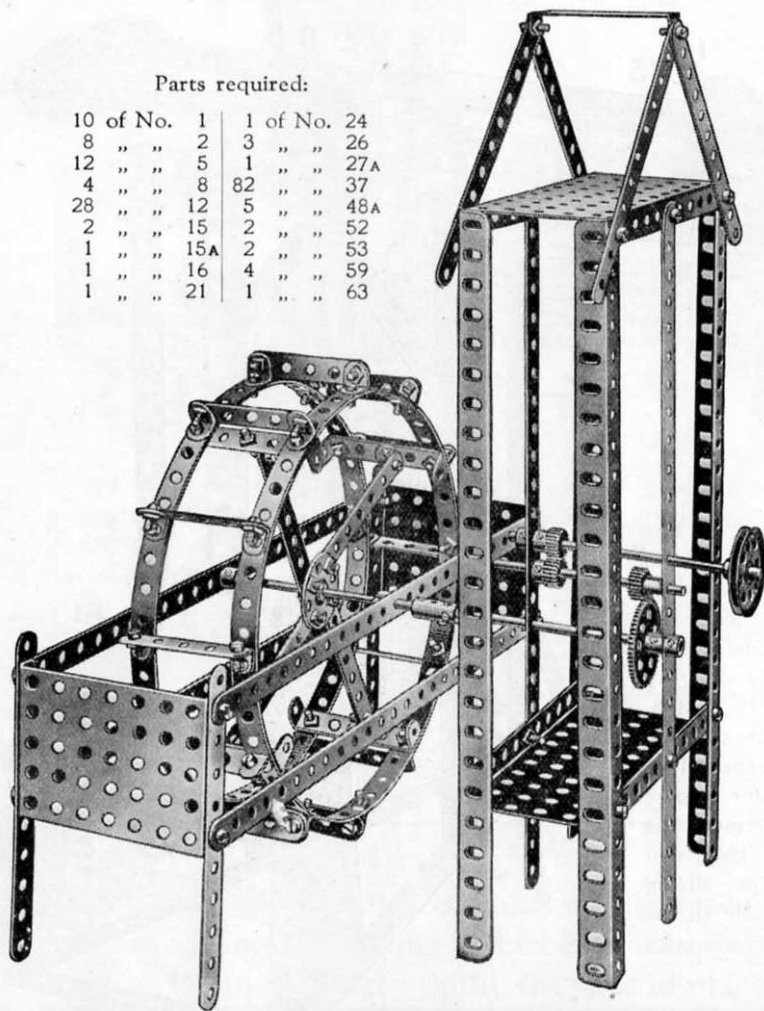Model No. 503 **Hand Car**

Parts required:

4 of No.	2	1 of No.	26
2 "	6A	1 "	27A
2 "	8	32 "	37
1 "	9D	4 "	37A
4 "	11	2 "	45
2 "	14	1 "	46
1 "	15A	7 "	59
1 "	16	2 "	63
1 "	17	1 "	70
4 "	19A	2 "	126A
2 "	24		






Fig. 503A

Model No. 504 **Plough**


Parts required:

2 of No.	2	1 of No.	22
4 "	3	1 "	24
1 "	4	19 "	37
3 "	6	1 "	41
1 "	10	1 "	47
8 "	12		

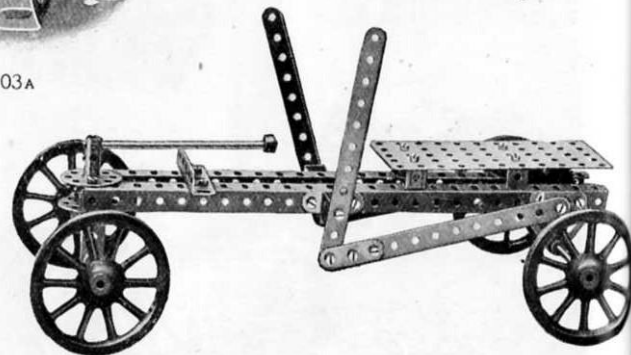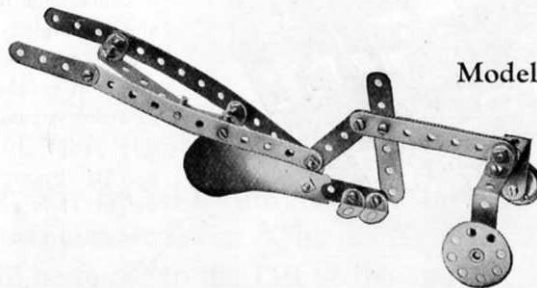

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.


Model No. 505 Bob Sleigh

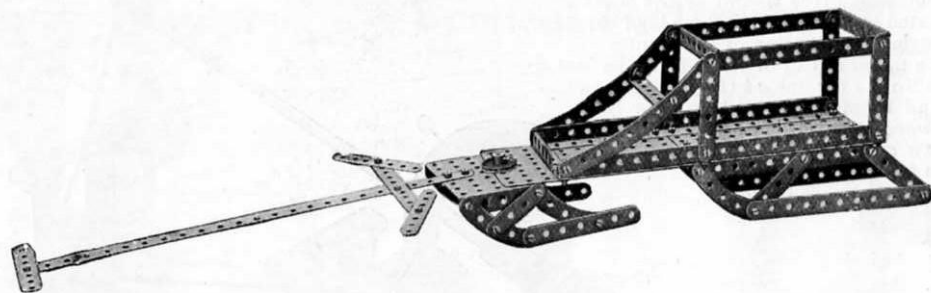

Parts required:

1 of No. 1	2 of No. 22
5 " " 2	50 " " 37
5 " " 3	3 " " 48B
4 " " 4	1 " " 52
4 " " 5	2 " " 52A
2 " " 6	1 " " 53
2 " " 8A	2 " " 89
1 " " 9D	6 " " 90
1 " " 18A	

Model No. 506 Farm Tractor

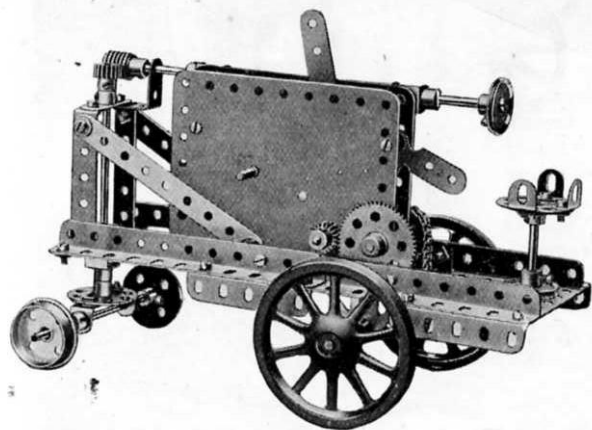


Parts required:

2 of No. 2A	1 of No. 27A
1 " " 3	1 " " 32
1 " " 6A	38 " " 37
4 " " 9	6 " " 38
2 " " 11	1 " " 45
7 " " 12	1 " " 48
1 " " 12A	2 " " 48A
1 " " 13A	2 " " 53
1 " " 15	9 " " 59
1 " " 15A	6 " " 94
2 " " 17	2 " " 96
2 " " 19A	2 " " 126A
2 " " 20	
2 " " 22	
2 " " 24	
2 " " 26	

Clockwork
Motor
(not included
in Outfit)

Model No. 507 Step Ladder

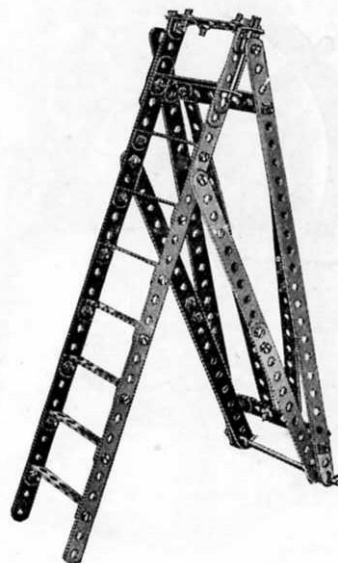

Parts
required:

4 of No. 1	1
8 " " 2	2
2 " " 3	3
3 " " 5	5
2 " " 10	10
8 " " 12	12
1 " " 16	16
2 " " 17	17
10 " " 35	35
44 " " 37	37
9 " " 48A	48A
2 " " 59	59

Model No. 508 Sighting Apparatus

This model is for determining the heights of buildings, towers, etc. The pointer 11½" rod 1 is pivoted on the 2" rod 2 and controlled by a spring 3, the pointer 1 being adjusted by the cord 4 which passes round a guide pulley 5 and on to the axle 6 upon which it is wound by the crank handle 7 which operates the gear wheel and pinion 8. A graduated scale of degrees 9 made of cardboard, or a protractor, is mounted in order to read off the angle of inclination of the pointer.

In finding the height of a building, measure out a number of feet or yards from the foot of the building, and set this out to some scale corresponding to the line *ab* (Fig. B). Then standing at the point *a* furthest from the building, and keeping the angle girders 10 horizontal, move the pointer 1 until it is directed towards the top of the building. Then read off the angle on the scale 9, and draw a line *ac*, making the angle *bac* equal to the angle read off. Then draw a vertical line *bc* from the point *b*, and with the same scale used for setting off the distance *ab* measure the height *bc*, which will be the height of the building.


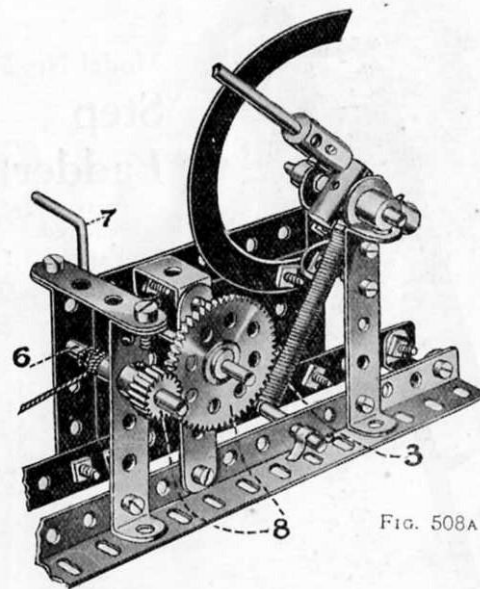


FIG. 508A

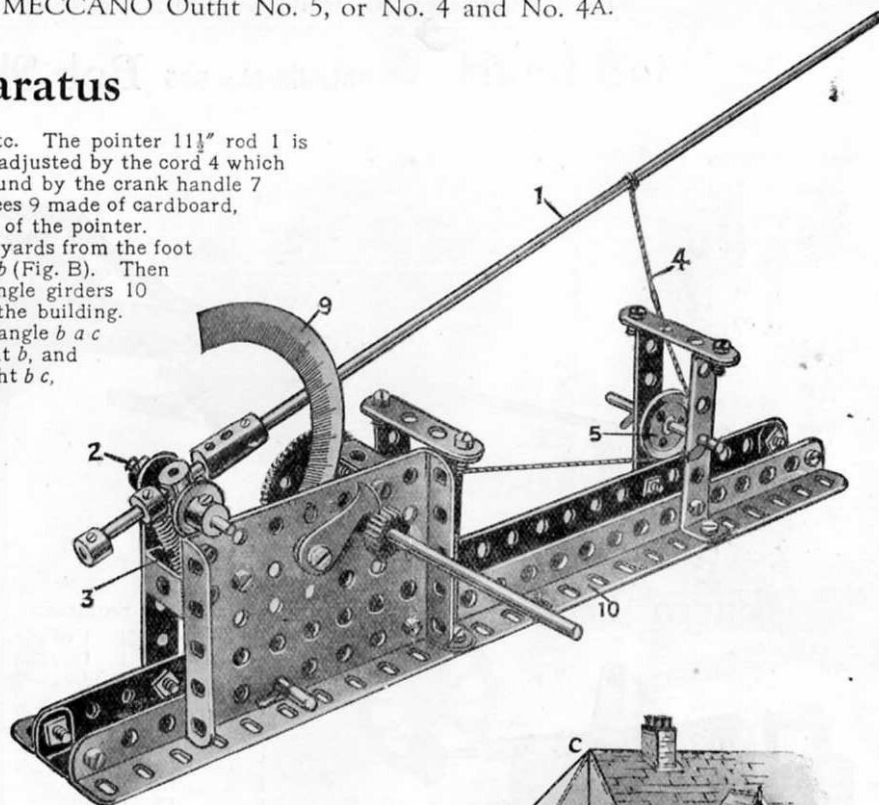

Parts required:

1 of No. 5	24 of No. 37
2 " " 6	1 " " 43
2 " " 8	5 " " 48A
4 " " 11	1 " " 53
1 " " 13	3 " " 59
4 " " 17	2 " " 62
1 " " 19	2 " " 63
1 " " 22	1 " " 147A
1 " " 26	1 " " 147B
1 " " 27A	1 " " 148
2 " " 35	


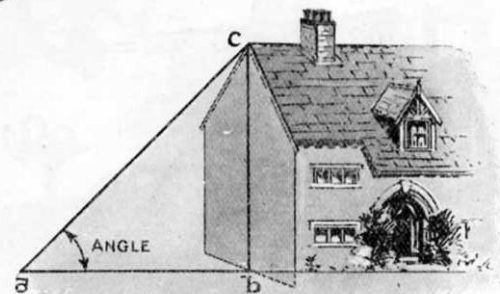


FIG. 508B

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.

Model No. 510 Fret Saw

Model No. 509 Vertical Drill

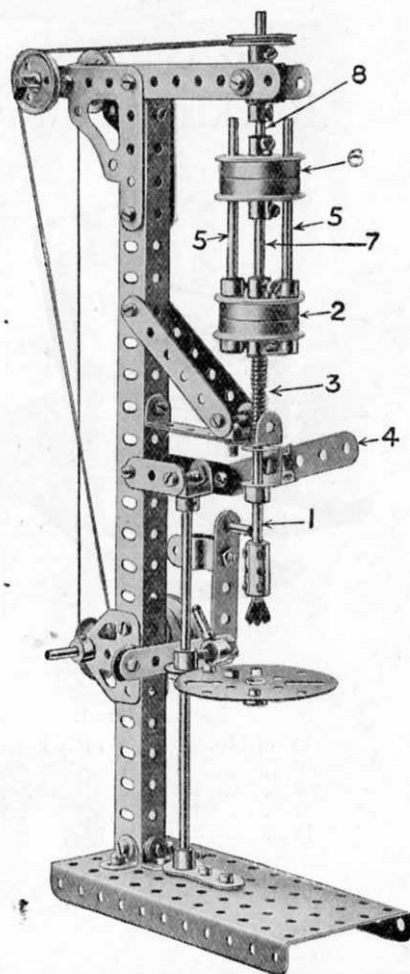


Parts required:

2 of No. 2	4 of No. 16	1 of No. 48A
3 " " 4	1 " " 17	1 " " 50
2 " " 5	6 " " 20	10 " " 59
1 " " 6	2 " " 21	2 " " 62
1 " " 6A	2 " " 22A	1 " " 65
2 " " 8	4 " " 35	2 " " 108
5 " " 11	39 " " 37	1 " " 109
6 " " 12	6 " " 38	1 " " 111
1 " " 14	1 " " 43	2 " " 115
1 " " 15A	1 " " 44	2 " " 126A

The drill rod 1 is connected to the boss of the lower pair of flanged wheels 2 which are reversed, a spring 3 round the rod raising the drill after it has been depressed by the handle strip 4. Bolted in the wheels 2 are two outer rods 5 which slide in the upper flanged wheels 6. The central rod 7 is bolted in the upper wheels and slides in the centre bosses of the lower wheels 2. The upper wheels 6 are bolted to the driving spindle 8 and consequently the drill is driven by the rods 5 when the drill is depressed by the handle 4 against the spring.

See also "Meccano Standard Mechanisms," under Locking Device (S.M. 137) and Variable Drive (Section XIII.)

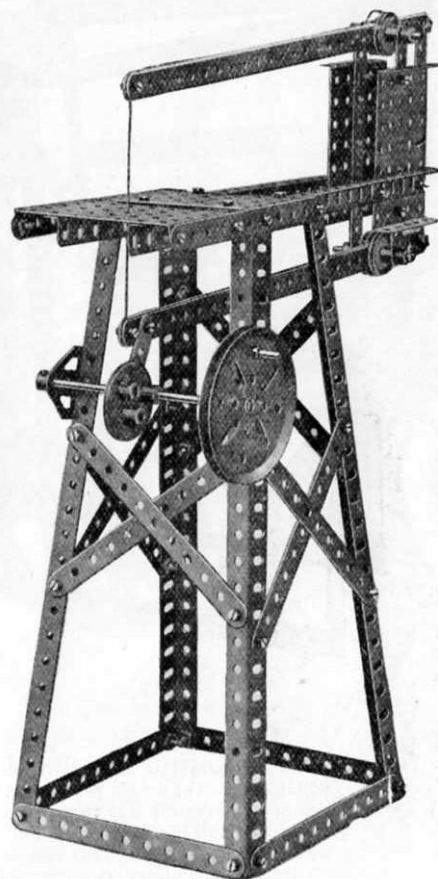


Parts required:

4 of No. 1	1
17 " " 2	2
6 " " 8	8
1 " " 15	15
2 " " 17	17
1 " " 19B	19B
4 " " 22	22
53 " " 37	37
4 " " 53	53
5 " " 59	59
1 " " 115	115
2 " " 126A	126A
1 " " 130	130

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.

Model No. 511 Giant Auto Swing

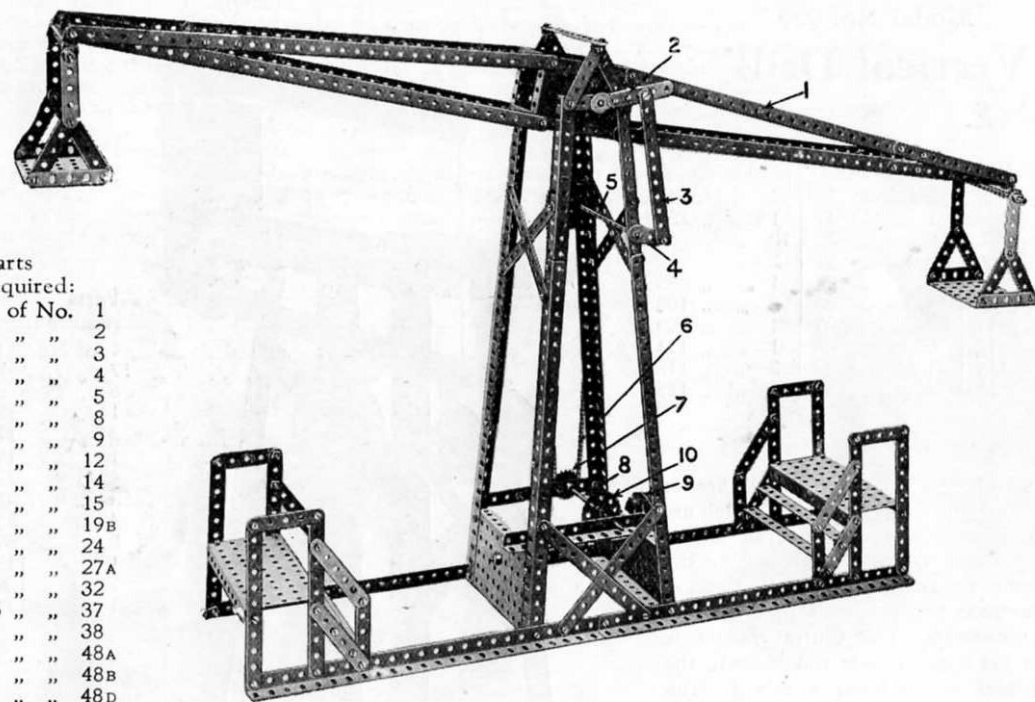


Parts
required:

8	of No.	1
26	" "	2
2	" "	3
8	" "	4
31	" "	5
12	" "	8
1	" "	9
18	" "	12
2	" "	14
4	" "	15
1	" "	19B
1	" "	24
1	" "	27A
1	" "	32
165	" "	37
2	" "	38
2	" "	48A
2	" "	48B
4	" "	48D
4	" "	52
4	" "	53
9	" "	59
2	" "	62
28	" "	94
1	" "	95
1	" "	96
1	" "	147B

The beam 1 is rocked by means of a crank 2 secured on the end of a rod which forms the beam pivot and which is bolted in a bush wheel secured to the beam. This crank 2 is connected by a strip 3 to another crank 4 on a rod 5. On the end of this is a large sprocket wheel driven by a chain 6 from a small sprocket wheel 7 on a rod 8. This rod is driven by means of a worm on the rod of the 3" pulley 9 which worm engages and drives the gear wheel 10 on the rod 8. As the crank 4 continuously rotates the link 3 causes the upper crank 2 to oscillate and also the beam 1.

Model No. 512 Rocking Chair

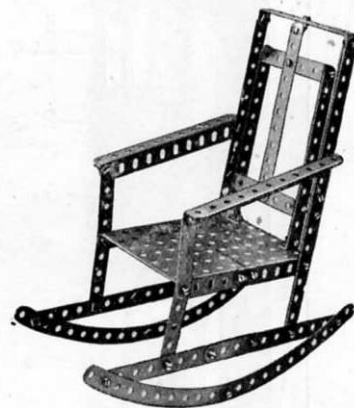


Parts required:

9	of No.	2	2	of No.	48A
8	" "	5	1	" "	48B
2	" "	10	2	" "	53
3	" "	12	4	" "	89
44	" "	37			

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.

91

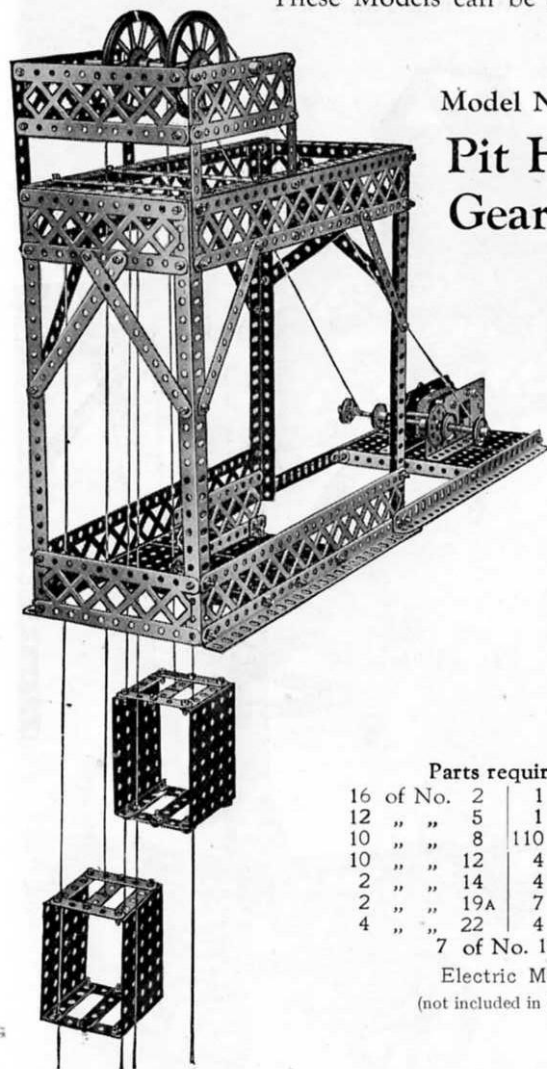

Model No. 513

Pit Head Gear


Parts required:

16 of No.	2	1 of No.	26
12 "	5	1 "	27
10 "	8	110 "	37
10 "	12	4 "	52
2 "	14	4 "	53
2 "	19A	7 "	59
4 "	22	4 "	99
7 of No. 100			

Electric Motor
(not included in Outfit)

Model No. 514

Manure Distributing Cart

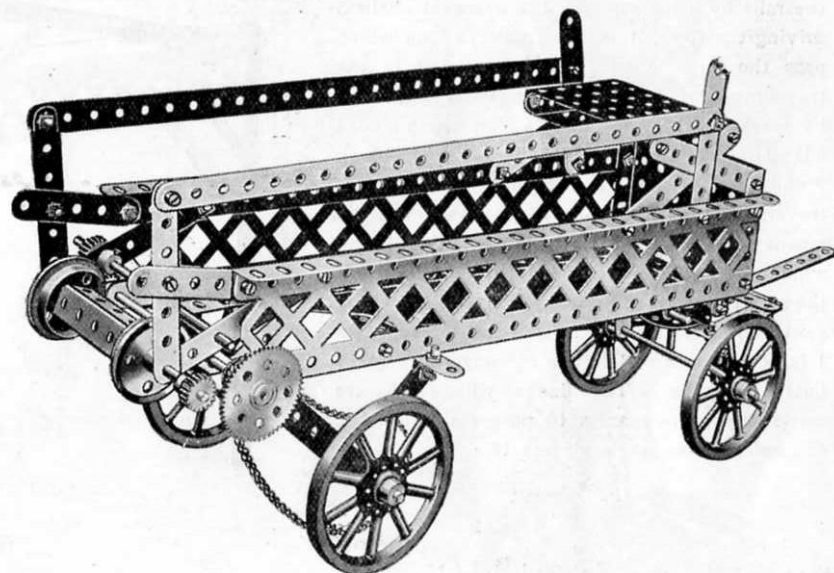

Parts required:

2 of No.	1	3 of No.	15	3 of No.	26	2 of No.	53
3 "	2	2 "	15A	1 "	27A	8 "	59
10 "	3	2 "	17	4 "	35	1' "	94
9 "	5	4 "	19A	57 "	37	1 "	95
4 "	8	2 "	20	1 "	46	1 "	96
6 "	12	1 "	24	4 "	48A	2 "	99
1 "	14						

Model No. 515 Travelling Gantry Crane

The travelling gantry 1 is traversed along the rails by a hand wheel 2, a sprocket chain 3 driving the rod 4 round the pulleys 5 on which pass the cords 6 which are connected to the travelling gantry. The load is raised or lowered by operating the crank handle 7 on which a cord 8 is wound, passing round a $\frac{1}{2}$ " pulley in the block 9 and being secured to a rod 10. The winch is traversed along the rails of the gantry 1 by means of the crank handle 11, a pinion 12 on which engages a 57-toothed gear wheel 13, on the axle of the travelling wheels. The travelling gantry is built up of the rails of the angle girders 1 bolted at each end to two $5\frac{1}{2}$ " angle girders 14 buttled together. The flange wheels 15 are carried upon their axles 16 passed through the end holes of the angle girders 14.


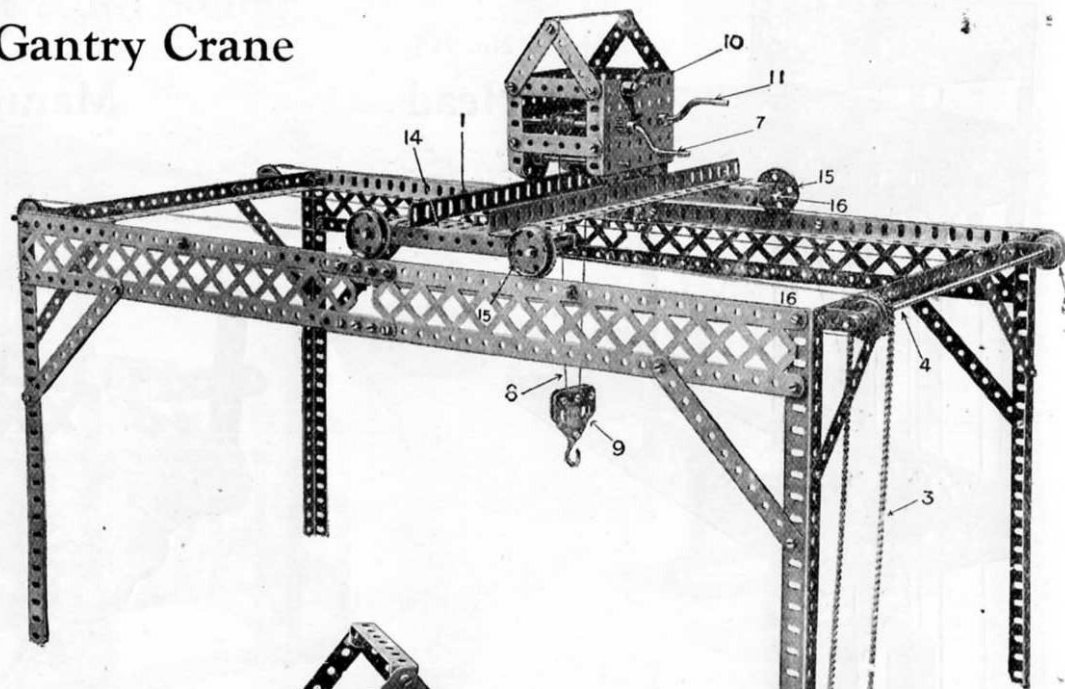



FIG. 515A

Parts required:

4 of No	1	8 of No.	20	1 of No.	57
8 "	2	4 "	22	8 "	59
4 "	4	1 "	23	24 "	94
10 "	5	1 "	24	2 "	96
12 "	8	1 "	26	4 "	99
4 "	9	1 "	27A	4 "	100
2 "	11	2 "	35	2 "	115
4 "	12A	26 "	37	3 "	126A
2 "	13	6 "	38	1 "	147A
3 "	16	1 "	48	1 "	147B
5 "	17	1 "	48B	1 "	148
2 "	19	2 "	53		

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.

Model No. 516 Field Gun and Carriage

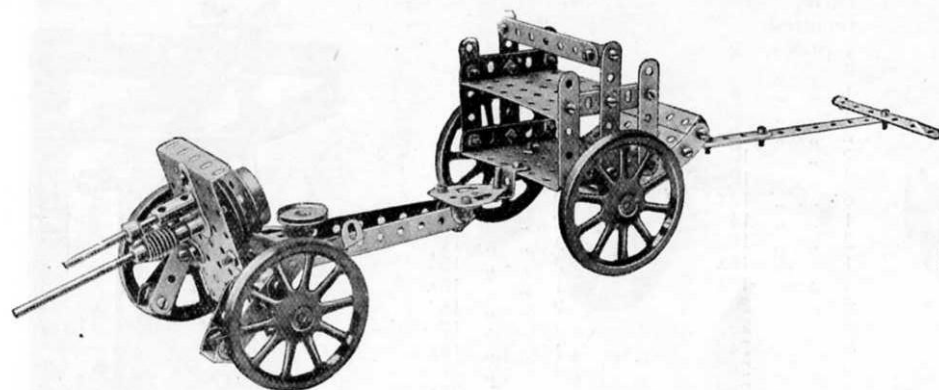

Parts required:

4	of No.	2	1	of No.	22
2	"	3	1	"	24
2	"	4	1	"	32
6	"	5	62	"	37
2	"	6A	2	"	38
3	"	10	3	"	48A
3	"	11	2	"	48B
14	"	12	2	"	53
2	"	15	3	"	59
1	"	15A	1	"	62
1	"	16	1	"	63
1	"	18A	2	"	90
4	"	19A	1	"	115
1	"	20	2	"	125
1	"	21	2	"	126A





FIG. 516A


Model No. 517 Perambulator

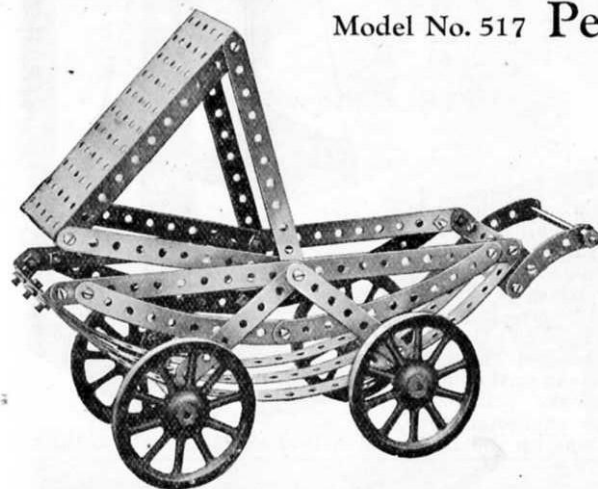

Parts required:

3	of No.	1	37	of No.	37
8	"	2	5	"	48A
4	"	3	1	"	52
6	"	12	2	"	59
3	"	16	4	"	89
4	"	19A	2	"	90

Model No. 518 Station Cart

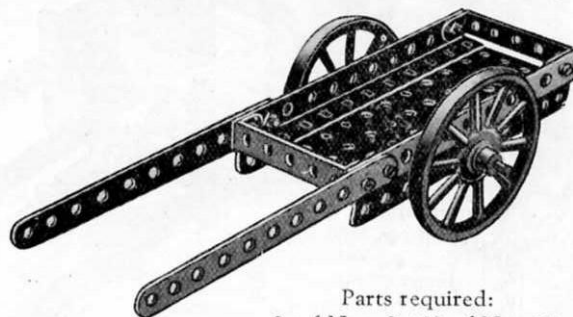


Parts required:

2	of No.	2	10	of No.	37
2	"	9	2	"	48A
1	"	15A	1	"	52
2	"	19A			

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.


Model No. 519 Motor Car

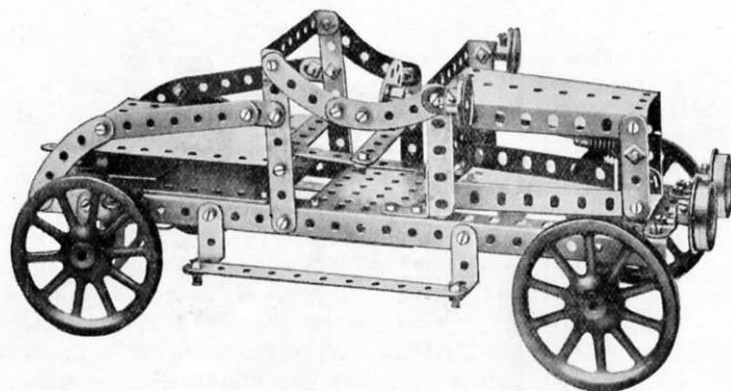

Parts required:		
2 of No.	2	
8 "	3	
1 "	5	
4 "	6	
2 "	8	
2 "	10	
8 "	12	
6 "	12A	
1 "	14	
2 "	15	
1 "	16A	
4 "	19A	
2 "	20	
2 "	22	
2 "	24	
2 "	26	
1 "	28	
1 "	32	
75 "	37	
4 "	38	
3 "	48B	
2 "	53	
2 "	54	
7 "	59	
2 "	89	
2 "	126A	

Clockwork Motor
(not included in Outfit)

Model No. 520 Spooling Machine

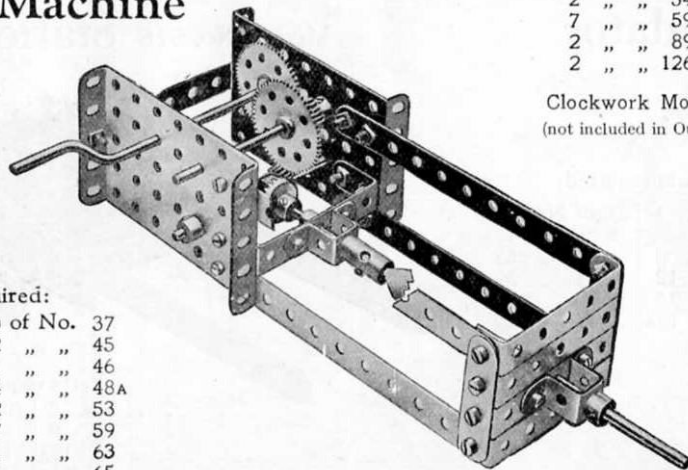


Parts required:		
4 of No.	2	20 of No. 37
1 "	3	2 " 45
3 "	16	1 " 46
1 "	17	4 " 48A
1 "	19	2 " 53
2 "	26	7 " 59
2 "	27A	1 " 63
1 "	29	1 " 65

Model No. 521 Spring Scales

Parts required:

6 of No.	2
2 "	4
2 "	8
2 "	10
3 "	11
2 "	15
1 "	15A
2 "	16
2 "	17
1 "	18A
2 "	26
2 "	27A
23 "	37
1 "	43
2 "	48A
1 "	52
1 "	54
1 "	57
2 "	59
2 "	62
2 "	63

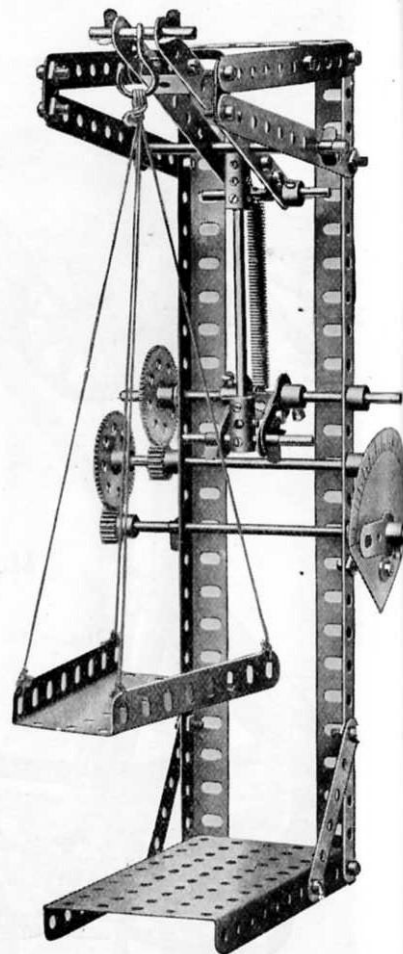


The Scale beam 1 is made of two 5½" strips distanced by double bent strips. The vertical rod 2 is connected to the beam which is pivoted on the rod 3. The cranks 4 are gripped on an axle 5 on which is secured the gear wheel 6 actuating through a gear train the pointer 7. A spring 8 connected to a rod 5 and another rod in the end hole of the beam acts as the spring balance.

Parts required:
2 of No. 1
2 " 2
14 " 4
1 " 1
2 " 2
2 "

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.

Model No. 522 Timber Carriage

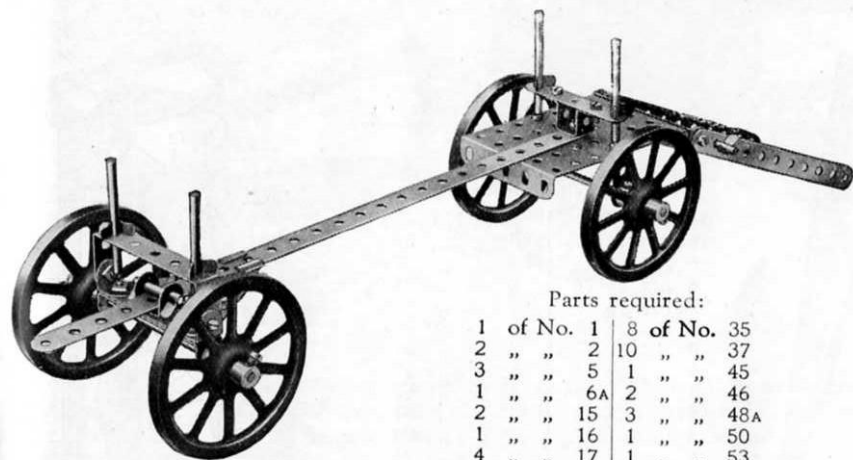

Parts required:


1	of No. 1	8	of No. 35
2	" "	2	10 " "
3	" "	5	1 " "
1	" "	6A	2 " "
2	" "	15	3 " "
1	" "	16	1 " "
4	" "	17	1 " "
1	" "	18B	4 " "
4	" "	19A	1 " "
			111

Model No. 524 Cart


Parts

required:

2	of No. 2
1	" " 16
2	" " 19A
14	" " 37
4	" " 48A
1	" " 52
2	" " 100
2	" " 126A

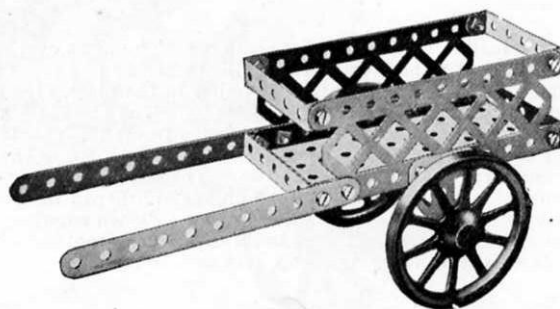


Model No. 523 Coster's Barrow

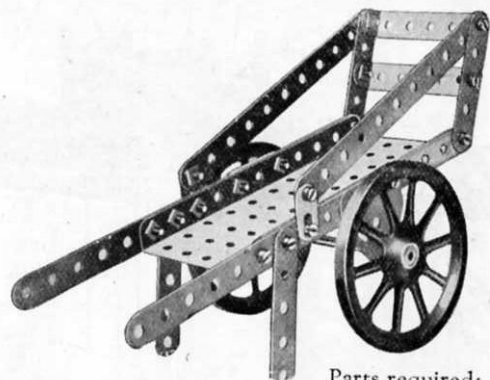

Parts required:

4	of No. 2	18	of No. 37
4	" "	5	2 " "
2	" "	10	1 " "
1	" "	16	2 " "
2	" "	19A	
			48A
			52
			126A

Model No. 525 Bullock Cart

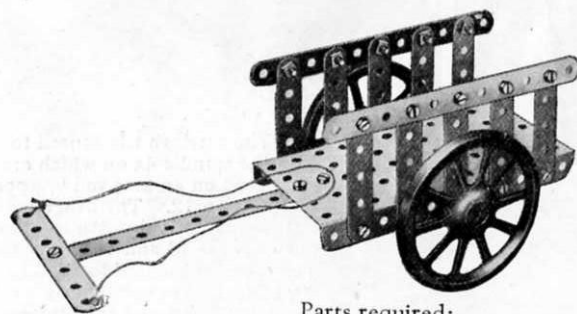


Parts required:

3	of No. 2	2	of No. 19A
1	" "	3	21 " "
10	" "	5	1 " "
1	" "	16	
			37
			52

This Model can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.

Model No. 526 Travelling Crane

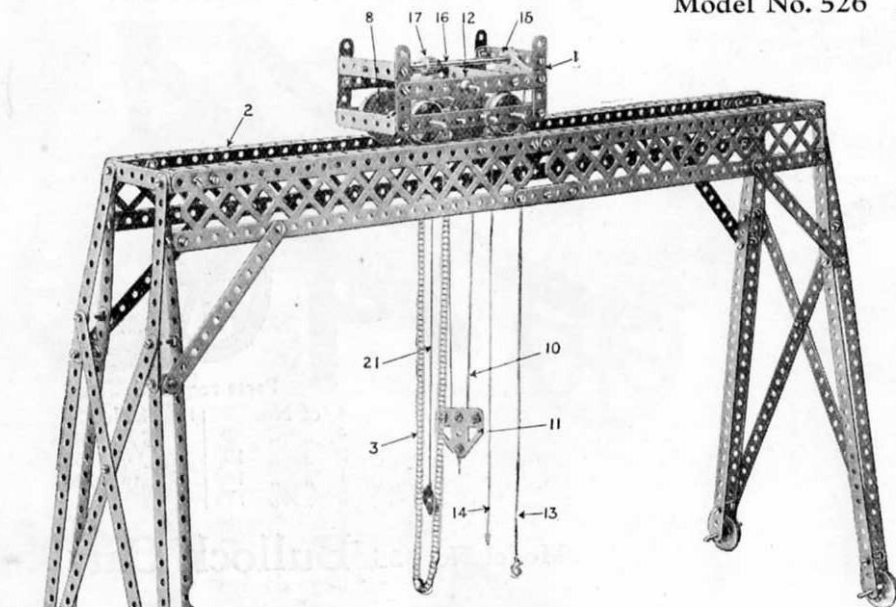

Parts required:

16	of No. 1	2	of No. 27A
16	" "	2	1 " "
6	" "	5	86 " "
4	" "	8	8 " "
2	" "	9	2 " "
8	" "	11	5 " "
4	" "	12	1 " "
1	" "	14	6 " "
1	" "	15A	1 " "
4	" "	16	1 " "
4	" "	17	30" " "
8	" "	20	1 " "
1	" "	22	4 " "
1	" "	23	2 " "
3	" "	26	1 " "
			128


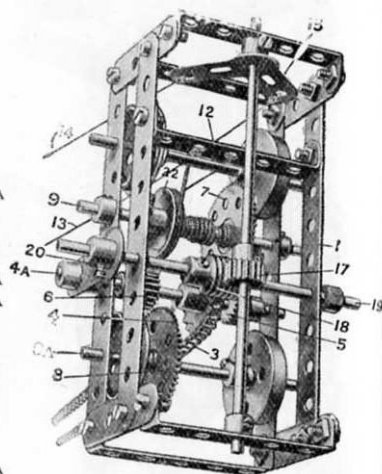


FIG. 526A

The carriage 1 is caused to travel on the rails 2 in either direction by the sprocket chain 3, which passes over a 1" sprocket wheel 4 on the spindle 4A on which are two pinions 5 and 6 for engagement respectively with toothed wheels 7 and 8. The toothed wheel 7 is secured on an axle rod 9, upon which is coiled the winding cord 10 passing round a $\frac{1}{2}$ " pulley in the block 11, and being made fast to the strip 12. The other toothed wheel 8 is secured on the axle of the travelling wheels 9A. The pinions 5 and 6 are caused to engage respectively with the toothed wheels 7 and 8 by sliding the pinion axle 4A in the carriage frame 1. This is effected by means of two cords 13 and 14 connected to a boss bell crank 15 on a rod 16, a pinion 17 which engages a worm 18 in the manner of a rack. This worm is secured to a rod 19, which is connected by a crank piece 20 to the pinion rod 4A. The latter revolving freely in the crank 20, being held in position by a collar on each side of the crank. Consequently, by pulling on one or other of the cords 13, 14, the bell crank is racked and the pinions caused to engage with one or other of the toothed wheels 7 or 8. When engaging the toothed wheel 7 the load may be raised or lowered by pulling the sprocket chain 3, but when the pinion 6 engages the toothed wheel 8, the carriage travels on the rails. The cord 21 passes round a pulley 22 on the winding axle and acts as a brake.

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.

Model No. 527 Motor Plough

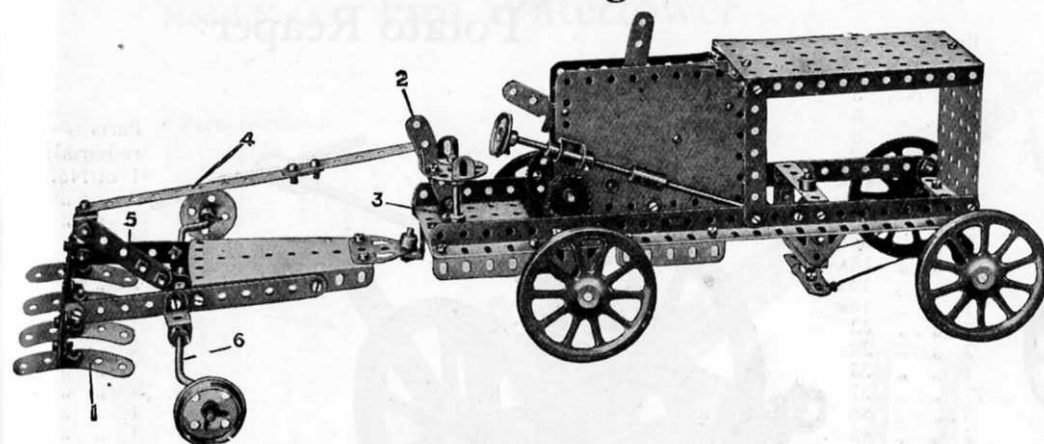

The ploughshares 1 are raised or lowered by the handle 2 pivoted to an angle bracket on the far side of the seat pillar, and connected by strips 4 to a crank 5 secured on the bent axle 6 of the wheels formed by crank handles. The plough is driven by a Meccano Clockwork Motor.

Parts required:

5 of No. 2	2 of No. 26	1 of No. 54
3 " " 3	1 " " 27A	9 " " 59
3 " " 5	1 " " 29	1 " " 62
2 " " 8	4 " " 35	2 " " 63
2 " " 10	24 " " 37	4 " " 90
1 " " 11	6 " " 38	6 " " 94
19 " " 12	1 " " 45	2 " " 96
3 " " 15A	1 " " 46	1 " " 115
1 " " 16	4 " " 48A	3 " " 125
3 " " 17	1 " " 52	5 " " 126A
2 " " 19	3 " " 53	Clockwork Motor (not included in Outfit)
4 " " 19A		
2 " " 20		
3 " " 22		
1 " " 24		

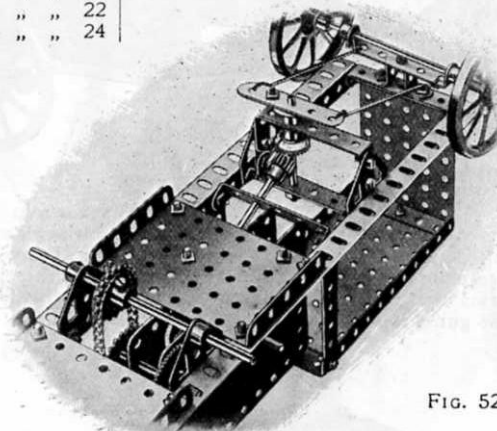

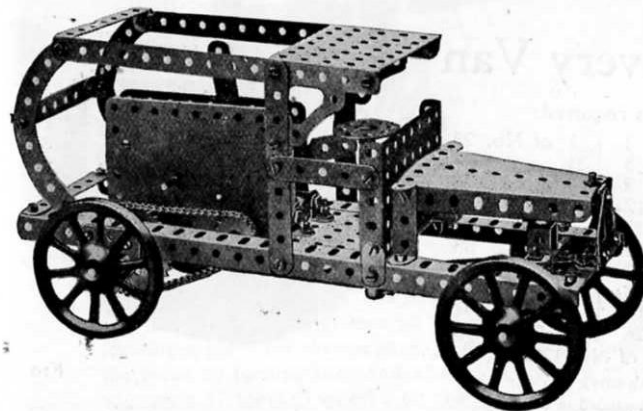


FIG. 527A

Model No. 528 Automobile




Parts required:

3 of No. 2	2 of No. 45
4 " " 3	2 " " 48
5 " " 5	2 " " 48B
2 " " 8	3 " " 53
2 " " 10	1 " " 54
11 " " 12	3 " " 59
2 " " 15A	1 " " 62
1 " " 16	4 " " 90
1 " " 17	12 " " 94
4 " " 19A	1 " " 95
2 " " 24	1 " " 96
63 " " 37	2 " " 108
2 " " 38	1 " " 125
3 of No. 126A	


Clockwork Motor
(not included in outfit)

FIG. 528A



These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.

Model No. 529 Armoured Motor Car

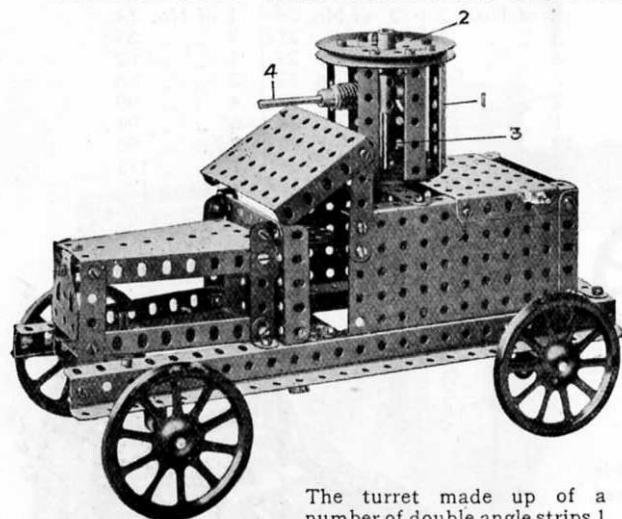


The turret made up of a number of double angle strips 1 bolted at the top to a 3" pulley 2 and below to a face plate is bolted on a rod 3 passing up the centre which forms the pivot of the turret so that it may freely turn. The gun 4 is bolted in a coupling on this pivot rod.

Parts
required:

5	of No.	3
6	"	5
4	"	8
5	"	12
1	"	12A
2	"	14
1	"	15
2	"	16
2	"	18A
4	"	19A
1	"	19B
2	"	22
2	"	24
1	"	32
77	"	37
2	"	38
2	"	45
7	"	48A
1	"	48B
2	"	52
4	"	53
2	"	54
8	"	59
1	"	63
1	"	109
3	"	126A


Model No. 530 Potato Reaper

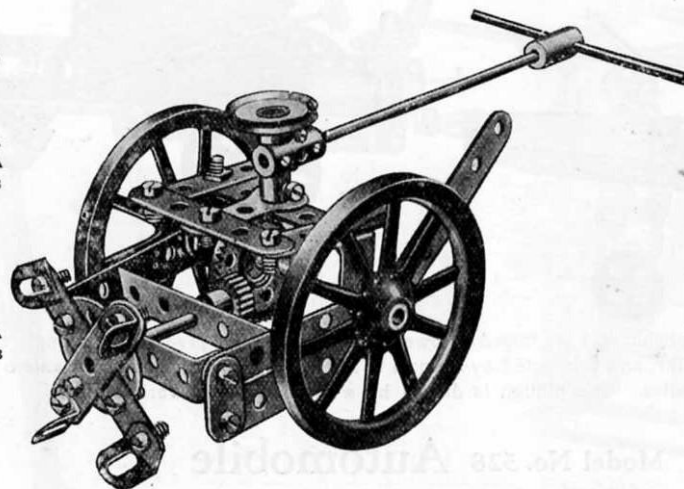

Parts
required:

1	of No.	3
8	"	5
2	"	10
4	"	12
1	"	15
2	"	16
1	"	17
1	"	18A
2	"	19B
1	"	22
1	"	24
1	"	26
1	"	28
19	"	37
1	"	46
2	"	48A
1	"	59
1	"	62
2	"	63

Model No. 531 Delivery Van

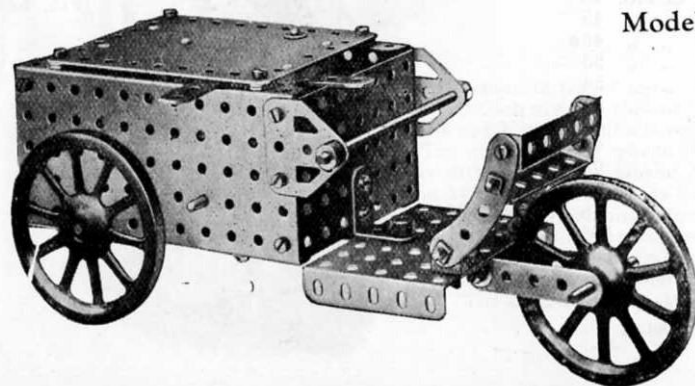

Parts required:

1	of No.	3	1	of No.	28
3	"	5	31	"	37
4	"	12	9	"	38
1	"	12A	2	"	48A
1	"	15	2	"	52
2	"	15A	3	"	53
1	"	17	7	"	59
1	"	18A	2	"	90
3	"	19A	9	"	94
1	"	26	2	"	95
2 of No. 126A					

Clockwork Motor
(not included in Outfit)


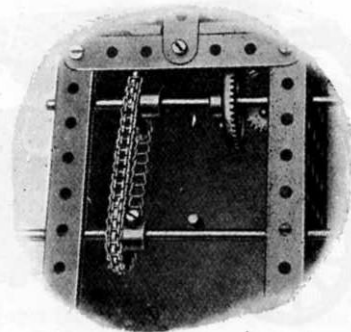


FIG 531A

Model No. 532 Fire Watertower


Parts required:

2 of No. 2	1 of No. 22	2 of No. 53
2 " " 4	2 " " 24	9 " " 59
11 " " 5	1 " " 27A	2 " " 62
4 " " 8	1 " " 32	3 " " 63
3 " " 10	3 " " 35	1 " " 115
2 " " 11	65 " " 37	4 " " 126A
2 " " 12	2 " " 45	
3 " " 15A	1 " " 46	
4 " " 16	5 " " 48A	
2 " " 17	1 " " 52	
2 " " 19A		
4 " " 20		

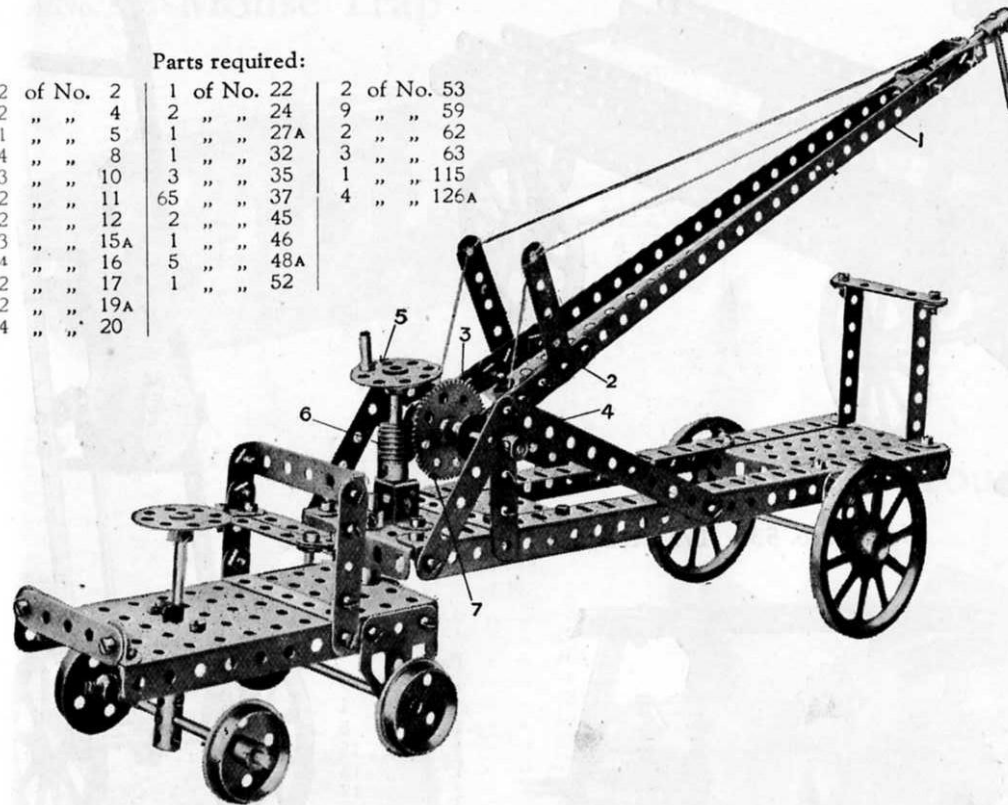

This is an apparatus for raising a water-hose and directing the nozzle towards high buildings. The hose is led along the support 1, formed of two 12 1/2" angle girders, secured by strips 2 and cranks 3 to the rod 4, forming a pivot for the support. The support is raised or lowered about the pivot by turning the hand-wheel 5, a worm 6 on the spindle of which engages a 57-toothed wheel 7 on the rod 4.

Model No. 533 Skein Winder

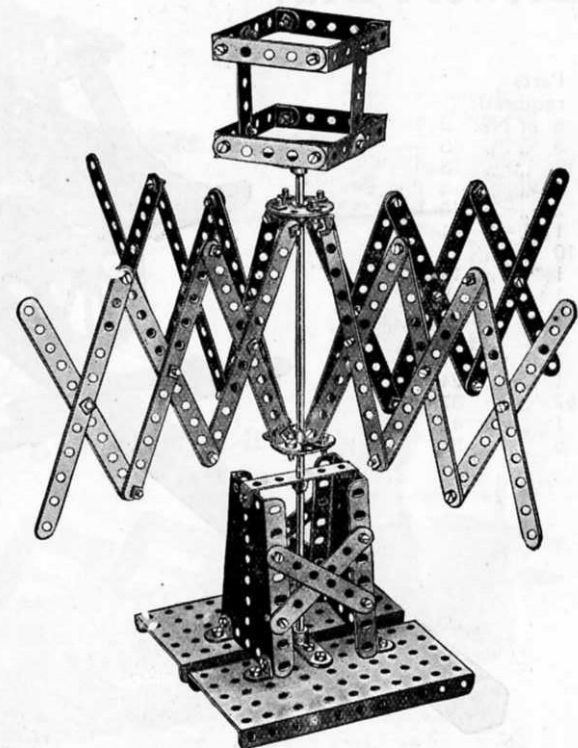

Parts required:

24 of No. 2	2 of No. 24
4 " " 4	86 " " 37
7 " " 5	5 " " 48A
8 " " 12	2 " " 52
1 " " 13	2 " " 54
1 " " 21	2 " " 59

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.


Model No. 534

Brewer's Dray

Parts

required:

6	of No.	2
3	" "	3
19	" "	5
8	" "	8
2	" "	10
1	" "	11
10	" "	12
1	" "	14
1	" "	15
1	" "	18A
4	" "	19A
1	" "	21
1	" "	24
62	" "	37
1	" "	47
6	" "	59

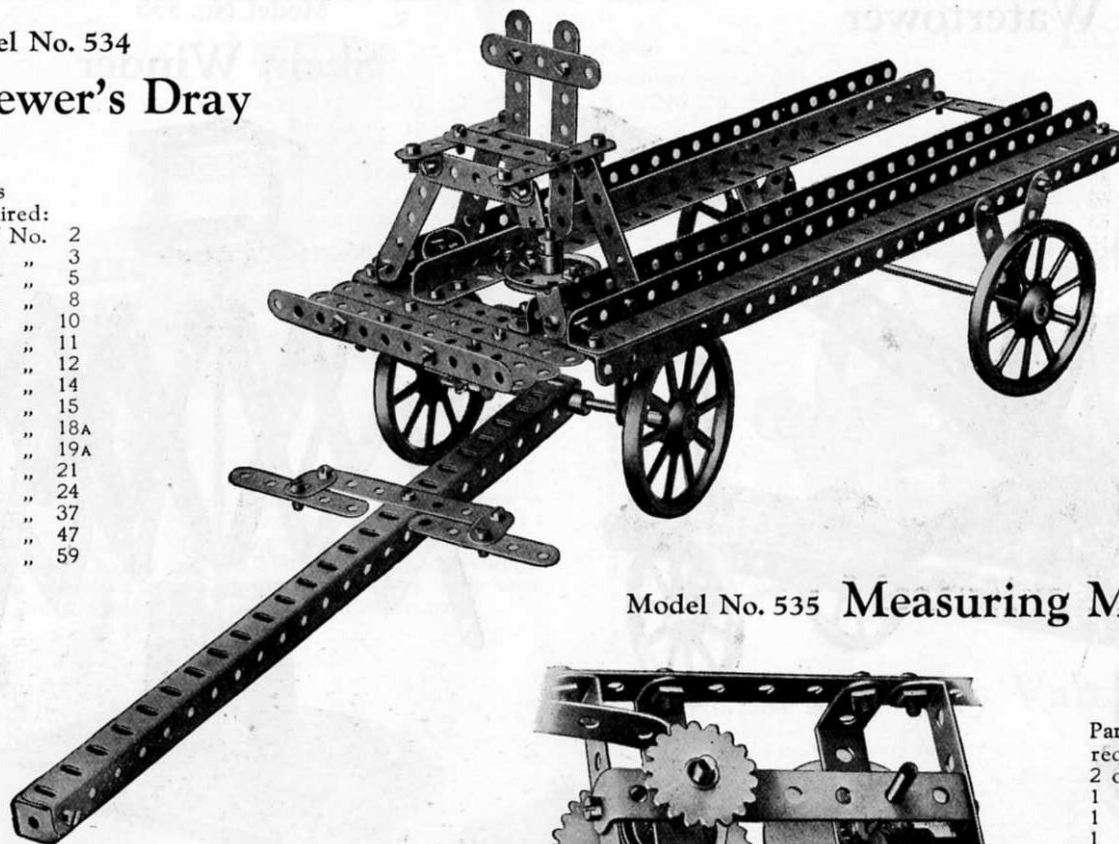

Model No. 535 Measuring Machine


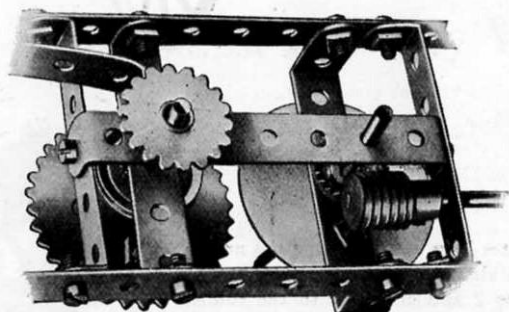


FIG. 535A

Parts

required:

2	of No.	1
1	" "	5
1	" "	15
1	" "	16
2	" "	17
2	" "	19A
1	" "	22
1	" "	26
2	" "	29
1	" "	32
22	" "	37
1	" "	46
5	" "	48A

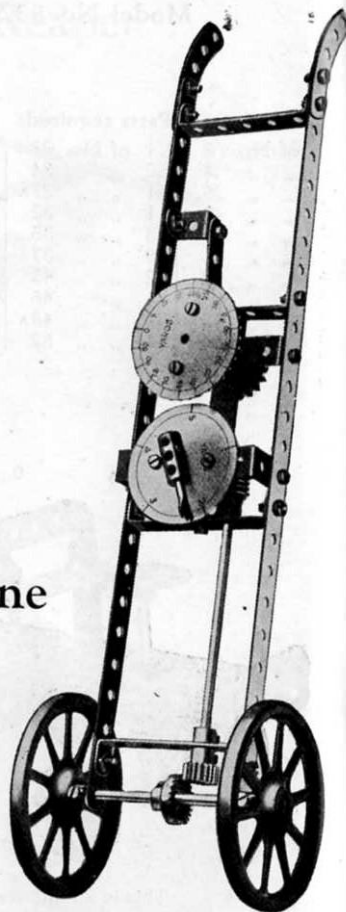


1	of No.	48B	2	of No.	90
1	" "	59	1	" "	95
1	" "	63	1	" "	96
1	" "	65	1	" "	125

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.


101

Model No. 536 Mouse Trap

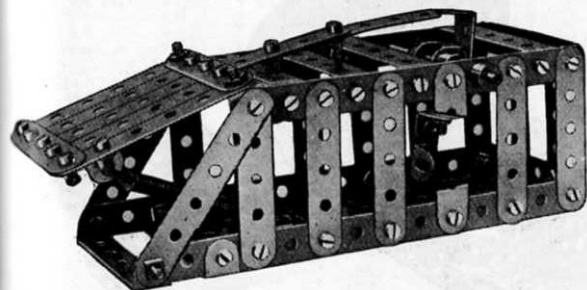


Parts required:			
3	of No.	2	
8	"	"	4
18	"	"	5
1	"	"	10
1	"	"	11
4	"	"	12
1	"	"	16
59	"	"	37
5	"	"	38
1	"	"	43
1	"	"	48
9	"	"	48A
1	"	"	52
4	"	"	59

Model No. 537 Ducking Chair

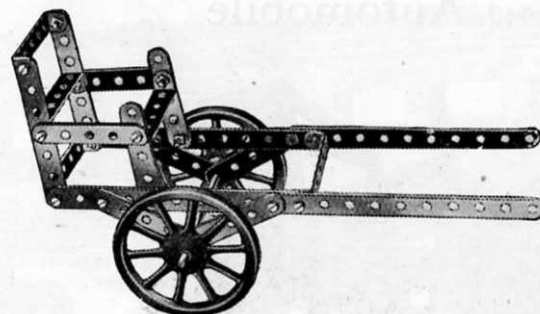


Parts required:			
4	of No.	2	
2	"	"	3
8	"	"	5
1	"	"	15A
2	"	"	19A
4	"	"	35
16	"	"	37
5	"	"	48A

Model No. 538 Invalid Chair

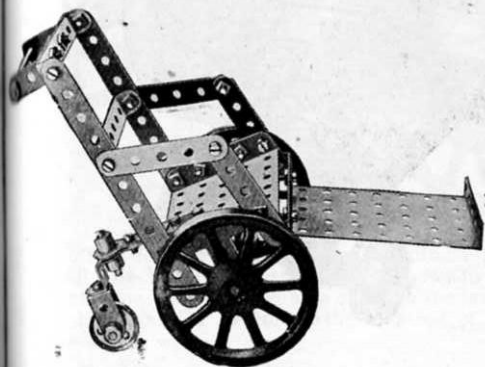

Parts required:			
2	of No.	2	
5	"	"	5
1	"	"	10
1	"	"	15A
1	"	"	16
2	"	"	18A
2	"	"	19A
1	"	"	22A
25	"	"	37
5	"	"	38
1	"	"	46
3	"	"	48B
2	"	"	53
5	"	"	59
1	"	"	62
1	"	"	102
1	"	"	125
2	"	"	126A

Model No. 539 Touring Tram Car

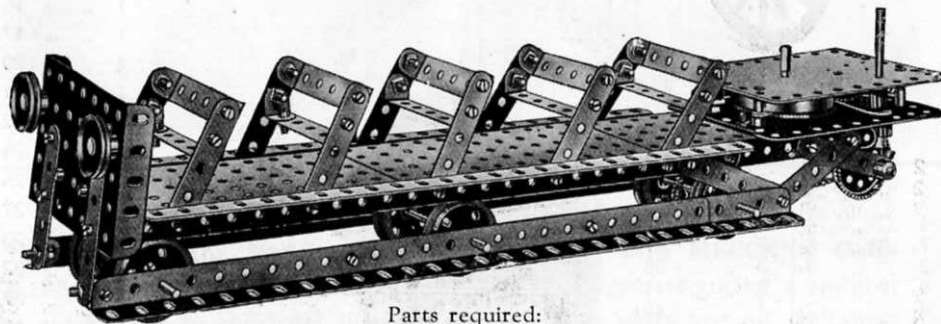


Parts required:			
20	of No.	5	6 of No. 20
6	"	"	8
8	"	"	12
4	"	"	16
6	"	"	22
1	"	"	26
1	"	"	28
64	"	"	37
8	of No.	48A	
3	"	"	52
1	"	"	53
2	"	"	59

Clockwork Motor
(not included in Outfit)

No. 90
" 95
" 96
" 125

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.

Model No. 540 Automobile

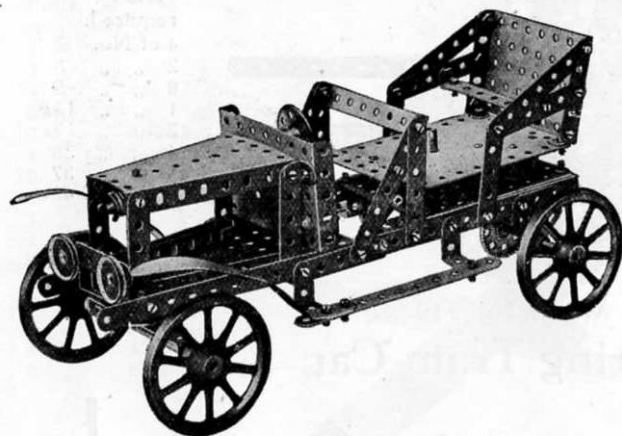

Parts required:

2 of No. 1	2 of No. 24
2 " " 2	2 " " 26
7 " " 3	1 " " 28
4 " " 4	1 " " 32
7 " " 5	67 " " 37
2 " " 9	3 " " 38
9 " " 12	2 " " 41
4 " " 12A	1 " " 48A
1 " " 14	3 " " 48B
2 " " 15	3 " " 53
1 " " 16	2 " " 54
4 " " 19A	7 " " 59
2 " " 22	2 " " 126A

Clockwork Motor
(not included in Outfit)





FIG. 540A

Model No. 541 Distance Indicator

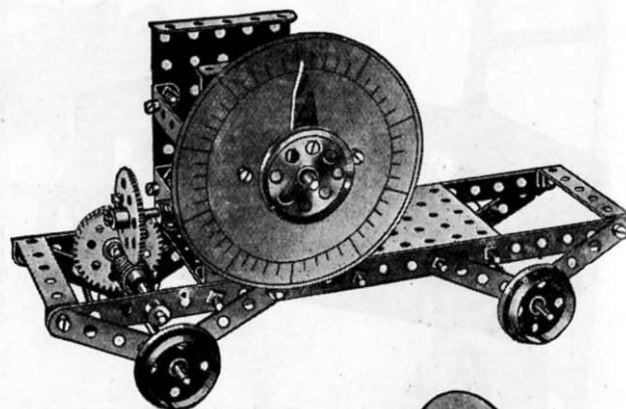

Parts required:

4 of No. 2	2
4 " " 3	3
8 " " 5	5
10 " " 12	12
2 " " 15	15
2 " " 15A	15A
1 " " 16	16
1 " " 17	17
4 " " 20	20
1 " " 21	21
2 " " 22	22
1 " " 24	24
2 " " 26	26
2 " " 27A	27A
1 " " 28	28
1 " " 32	32
38 " " 37	37
2 " " 48A	48A
1 " " 52	52
2 " " 53	53
6 " " 59	59

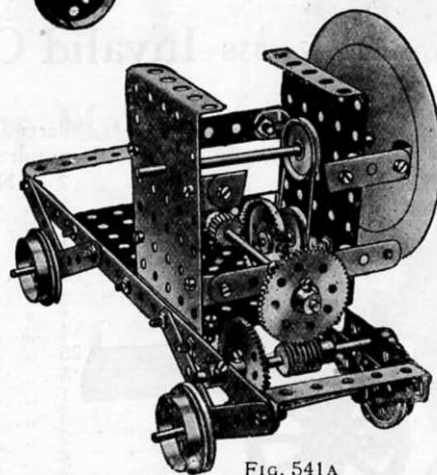


FIG. 541A

Arm

2 of
2 "
1 "
2 "
4 "
2 "
1 "
2 "
2 "



The
small sp
illustrat
sprocke
rear wh

These Models can be made with MECCANO Outfit No. 5, or No. 4 and No. 4A.


Model No. 542

Armoured Motor Tricycle

Parts required:


2 of No. 2	4 of No. 18A	1 of No. 52
2 " " 5	3 " " 19A	1 " " 59
1 " " 9D	1 " " 21	6 " " 63
2 " " 11	3 " " 22	2 " " 90
4 " " 12	2 " " 24	1 " " 95
2 " " 12B	1 " " 32	1 " " 96
1 " " 15A	22 " " 37	1 " " 125
2 " " 16	10 " " 38	1 " " 126A
2 " " 17	1 " " 48A	

Clockwork Motor
(not included in Outfit)

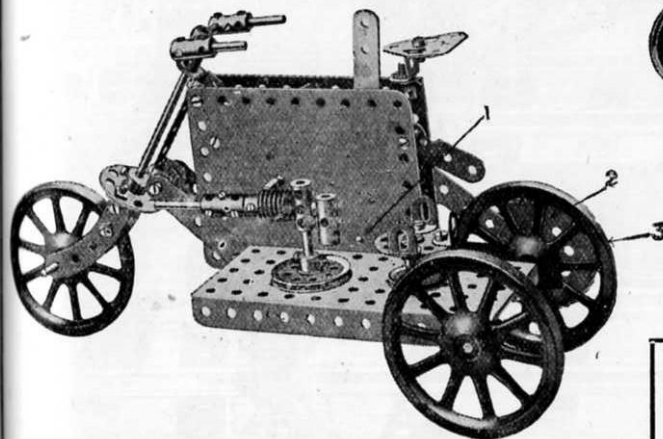

This is driven from the motor spindle 1, a small sprocket wheel at the rear, not shown in the illustration, being geared by a chain to the larger sprocket wheel 2 bolted on the axle rod of the rear wheel 3.

Model No. 543 Pullman Car

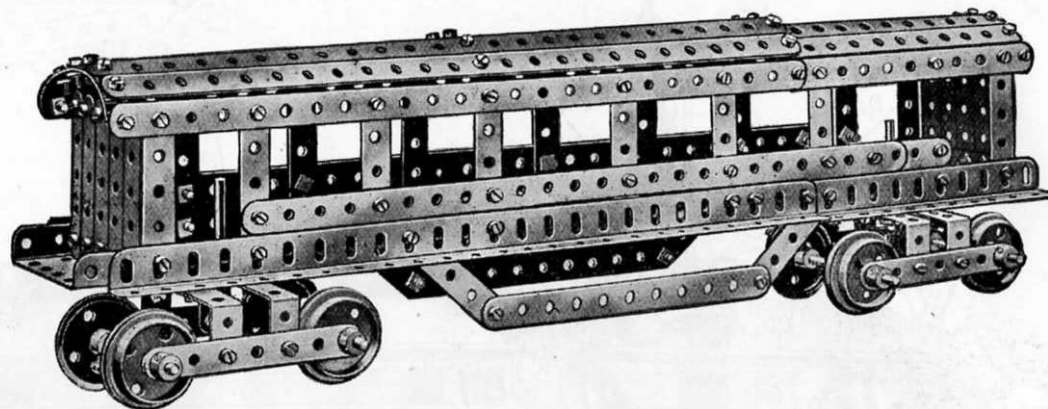

Parts required:

9 of No. 1	4 of No. 8	116 of No. 37
9 " " 2	4 " " 16	4 " " 46
8 " " 3	2 " " 17	3 " " 52
34 " " 5	8 " " 20	10 " " 59
	2 " " 21	


HOW TO CONTINUE

This completes the Models which may be made with MECCANO Outfit No. 5. The next Models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 5A Accessory Outfit, the price of which will be found in the List at the end of the Manual.

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 601

Level Crossing Gates

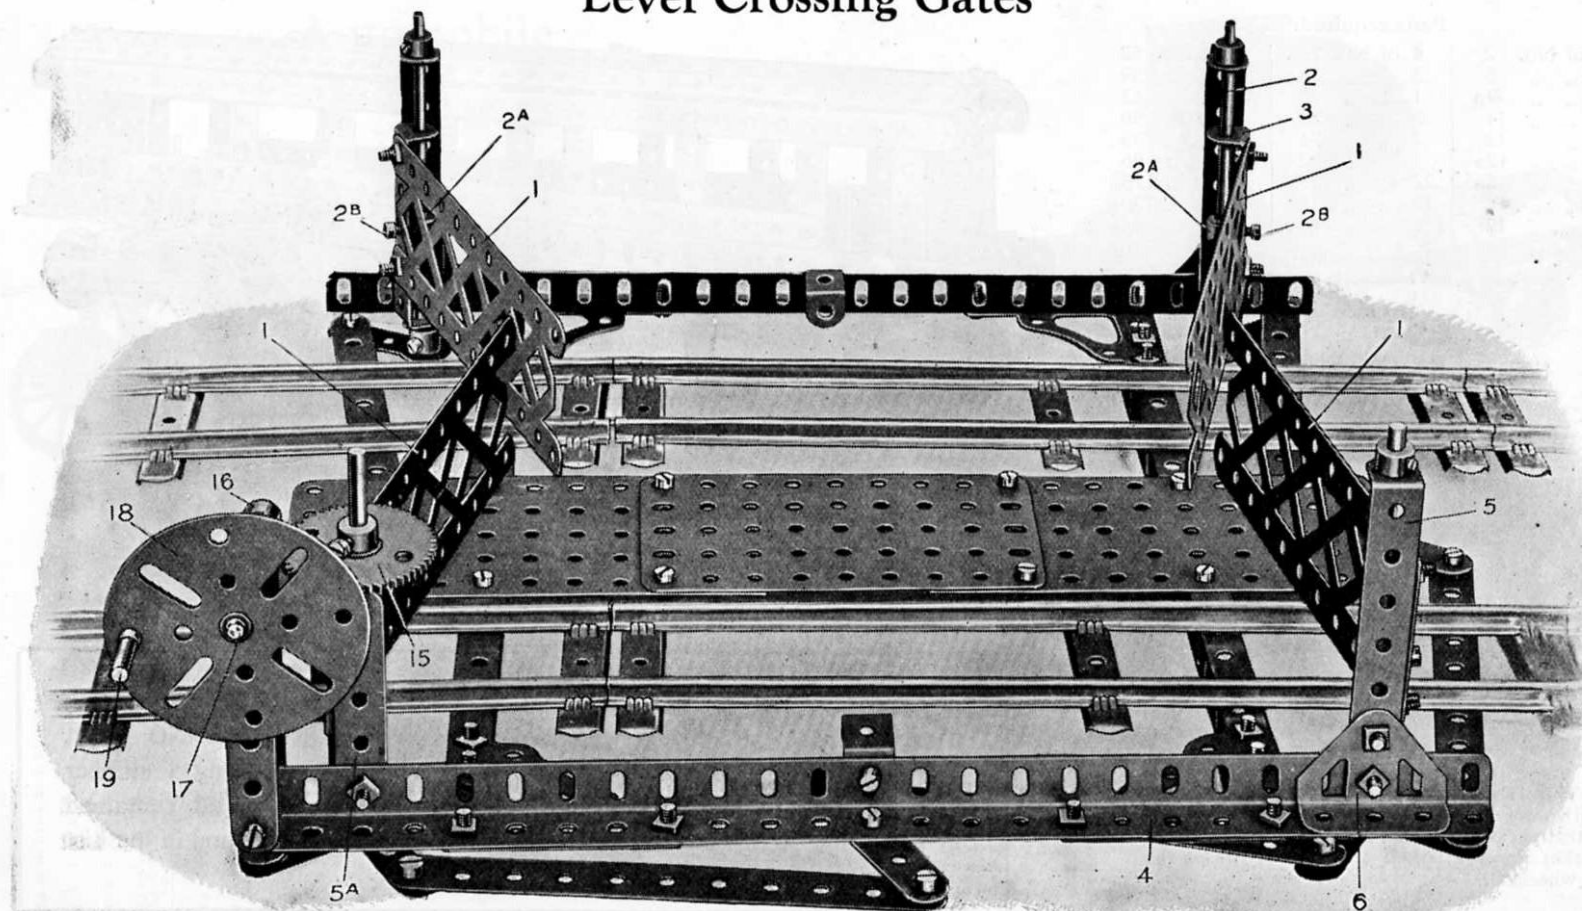

The
a collar
collar to
by $\frac{1}{4}$ " of
rods 2
2 $\frac{1}{2}$ " str
pivoted
secured
By turn

Model No. 601 Level Crossing Gates (continued)

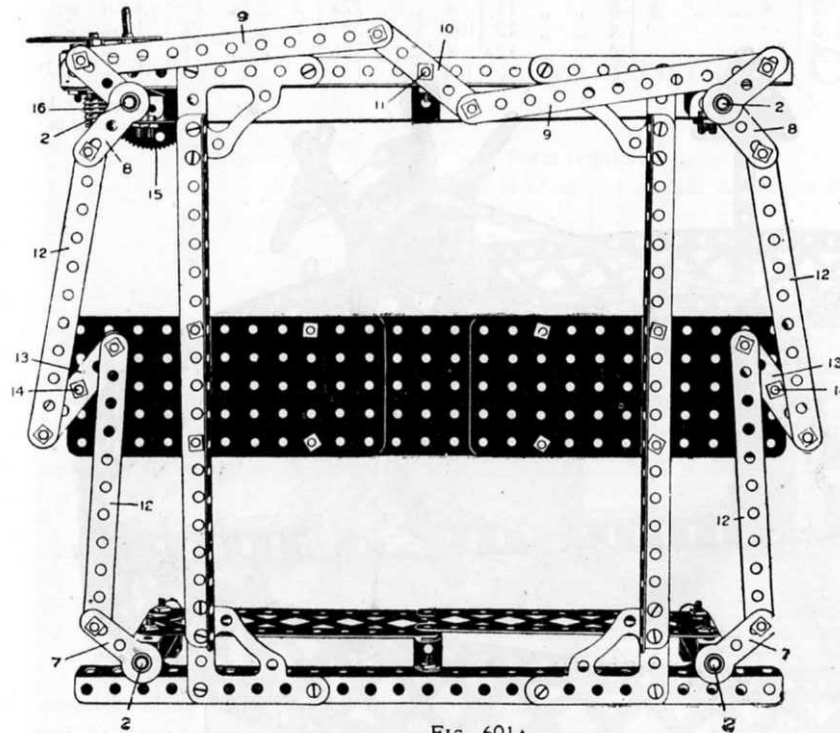


FIG. 601A

Parts required:

6	of No.	2
2	" "	4
3	" "	5
1	" "	6A
2	" "	8
2	" "	8A
4	" "	11
4	" "	15A
1	" "	17
1	" "	27A
1	" "	32
53	" "	37
16	" "	37A
4	" "	48A
3	" "	48B
1	" "	53A
7	" "	59
2	" "	62
3	" "	70
4	" "	100
4	" "	108
1	" "	109
1	" "	115
3	" "	126
2	" "	128

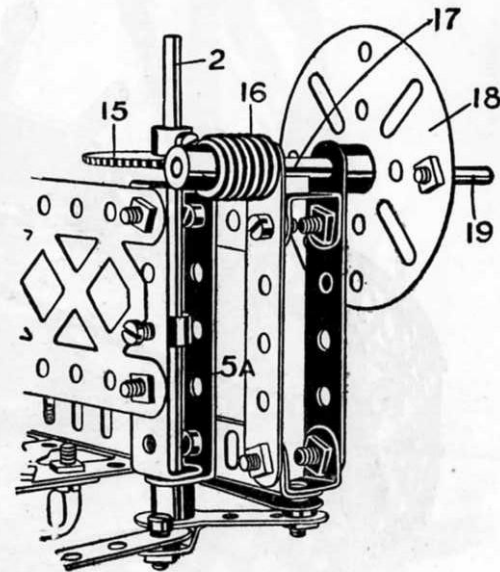


FIG. 601B

The gates consist of $5\frac{1}{2}$ " braced girders 1 and are pivotally carried on the rods 2 being bolted to $2\frac{1}{2}$ " by $\frac{1}{2}$ " double angle strips 3. On each rod 2 is threaded a collar 2A, Fig. 601, and a bolt 2B is passed through the centre hole of the double angle strips 3 and screwed into the thread hole of the collar 2A, nipping the collar to the rod 2, thus ensuring that the braced girders 1 shall turn with the rods 2. Three of the rods 2 are carried from the lower angle girders 4 in $3\frac{1}{2}$ " by $\frac{1}{2}$ " double angle strips 5, and one in a $2\frac{1}{2}$ " by $\frac{1}{2}$ " double angle strip 5A, the feet of the strips 5 being reinforced to the angle girders 4 by the trunnions 6. The rods 2 are coupled together by cranks 7 on the rear rods, and bell cranks 8 on the other rods, the ends of the two bell cranks being connected by strips 9 to $2\frac{1}{2}$ " strip 10 pivoted on the bolt 11, Fig. 601A, while the bell cranks 8 are connected to the cranks 7 by other strips 12, pivotally connected to $2\frac{1}{2}$ " strips 13, pivoted on the bolts 14. Consequently, all the rods 2 are inter-connected. As will be seen from the Figs. 601 and 601B, a 56-toothed gear wheel 15 is secured on one of the rods 2, and is engaged by a worm 16 on a rod 17 to which is secured a face plate 18, fitted with a threaded pin 19, as an operating handle. By turning the face plate 18 the spindles 2 are all rotated, and the gates caused to open or close.


This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 602 Roundabout

Parts required:

12 of No. 1	24 of No. 6	16 of No. 10	1 of No. 15	4 of No. 54	14 of No. 94
1 " " 2	4 " " 8	8 " " 11	4 " " 22A	2 " " 59	1 " " 95
2 " " 3		4 " " 12	135 " " 37	1 " " 72	1 " " 96
27 " " 5		4 " " 12A	4 " " 48A	1 " " 76	7 " " 99
					1 " " 109

Clockwork Motor
(not included in Outfit)

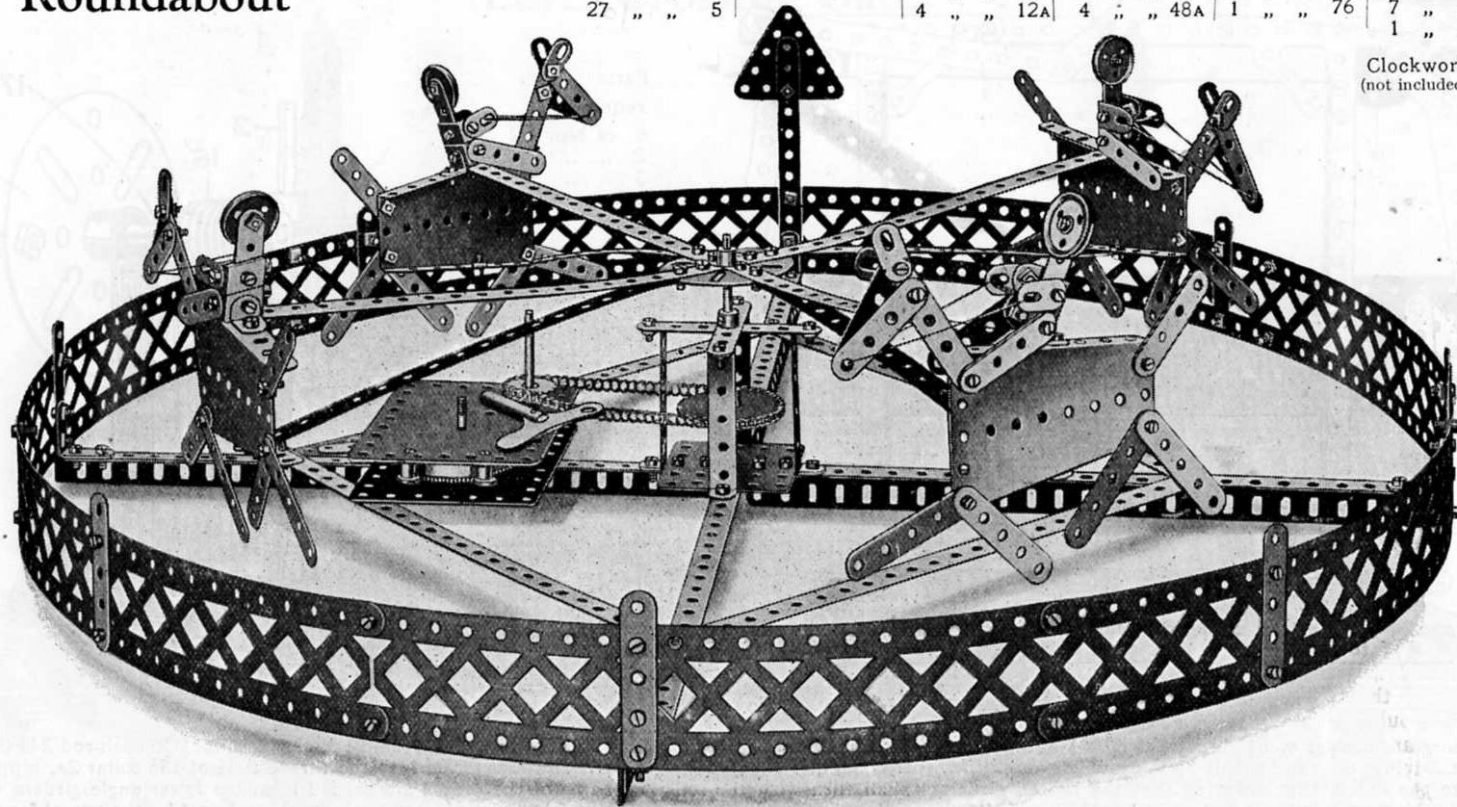

In this model the animals, built up from sector plates and short strips to represent the limbs, are carried from $9\frac{1}{2}$ " strips bolted to a face plate, which is rotated from the centre rod by means of a chain and a 1" sprocket wheel connected to the spring motor.

The centre rod, by means of which the rotating figures are driven, is supported below the face plate by a light framing to give rigidity.

The model is surrounded by braced girder strips bolted together, and strengthened by $12\frac{1}{2}$ " cross angle girders, connected in the centre by a $2\frac{1}{2}$ " by $2\frac{1}{2}$ " flat plate. The centre hole of this plate carries the lower end of the vertical rod upon which the animals are mounted.

TH
is mov
wheels
4 are s
against
then ru
forces
trunnio
The
Mechan

Model No. 603 Portable Crane

Parts required:

12 of No. 2	16 of No. 12	1 of No. 21	1 of No. 40
3 " " 3	1 " " 15	5 " " 22	2 " " 44
6 " " 5	5 " " 16	2 " " 22A	1 " " 45
2 " " 9	4 " " 17	2 " " 23	1 " " 48
	2 " " 18A	1 " " 24	2 " " 48A
	1 " " 19	1 " " 26	1 " " 53
		1 " " 27A	1 " " 57
		74 " " 37	10 " " 59
		16 " " 38	2 " " 62
			2 " " 63
			2 " " 89
			2 " " 90
			4 " " 126A


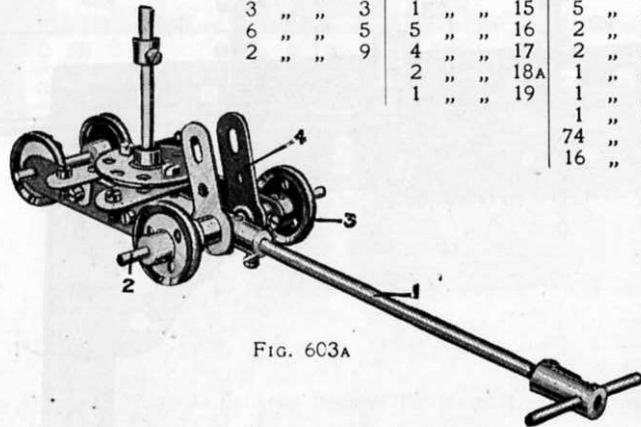


Fig. 603A


The construction of the tower is quite clear from the illustration. The crane is moved about by depressing the handle 1 carrying an axle 2 for the 1" loose pulley wheels 3, which are secured in position by collars and set screws. A pair of cranks 4 are secured to the axle 2 and are arranged when the handle is depressed to bear against the underface of the small rectangular plate 5 and lift the crane so that it then runs on the wheels 3 and 6. When the crane is brought to rest its weight forces down the cranks 4 which raises the handle 1, and the tips 8 of the flat trunnions together with front wheels 6 then support the crane.

The load is controlled by a strap and lever brake (see "Meccano Standard Mechanisms," detail No. 81).

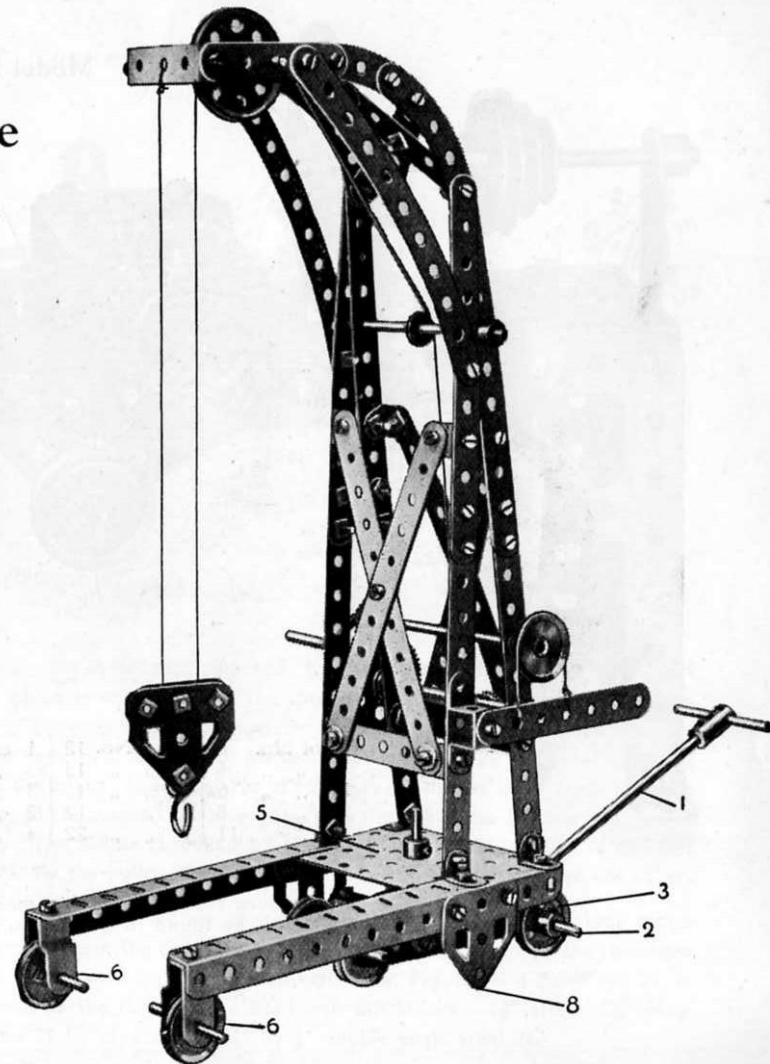

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 604 Lathe

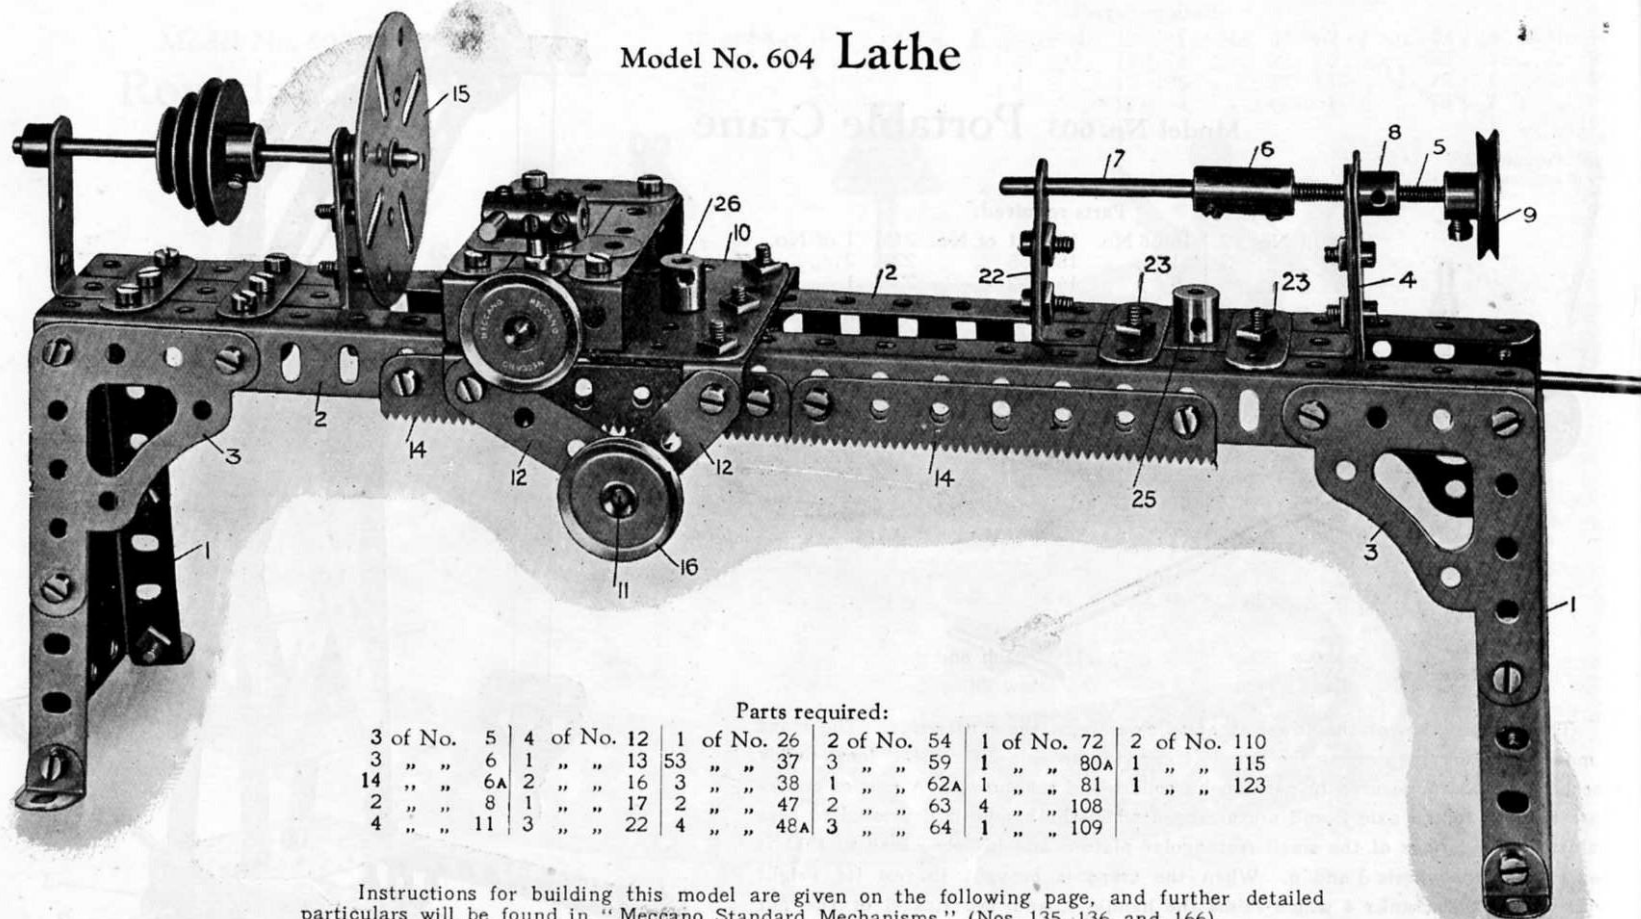

Parts required:

3 of No. 5	4 of No. 12	1 of No. 26	2 of No. 54	1 of No. 72	2 of No. 110
3 " " 6	1 " " 13	53 " " 37	3 " " 59	1 " " 80A	1 " " 115
14 " " 6A	2 " " 16	3 " " 38	1 " " 62A	1 " " 81	1 " " 123
2 " " 8	1 " " 17	2 " " 47	2 " " 63	4 " " 108	
4 " " 11	3 " " 22	4 " " 48A	3 " " 64	1 " " 109	

Instructions for building this model are given on the following page, and further detailed particulars will be found in "Meccano Standard Mechanisms" (Nos. 135, 136, and 166).

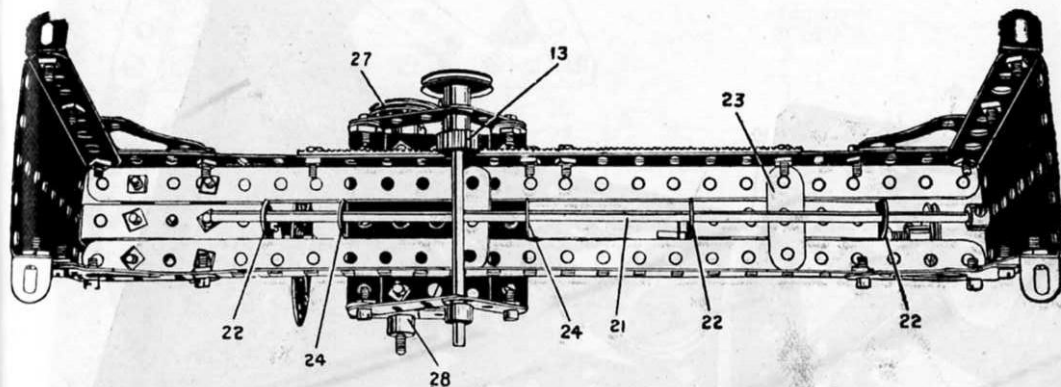
Model No. 604 **Lathe** (continued)

Fig. 604A




Fig. 604B




Fig. 604C

The lathe frame is built up from sector plates 1, at each end bolted to $12\frac{1}{2}$ " angle girders 2, forming the bed, by means of architraves 3. The tail stock 4, slides between the angle girders 1, and has a screw adjustment 5, the screw of which is connected by the threaded coupling 6 to the rod 7; the screw 5 is threaded into a threaded crank 8, and is operated by the 1" pulley wheel 9. The tail stock is locked by turning the threaded boss 25, which engages the bolt holding the underneath cross strip 23, thus gripping it beneath the lathe bed. The saddle 10, consisting of a $2\frac{1}{2}$ " by $2\frac{1}{2}$ " flat plate, carries the rod 11, journaled in the strips 12, and carries a pinion 13, Fig. 604B, which engages the racks 14, so that the saddle may be moved to or from the face plate 15, by turning the pulley wheel 16. The traversing movement is obtained by means of the screw 17, which engages a threaded boss 18, into the end of which is screwed a threaded pin 19, carrying the coupling 20, which forms the tool post. The saddle is locked by the threaded boss 26, similar to the tail stock. The screwed rod 17, is held against end movement in the $2\frac{1}{2}$ " by $\frac{1}{2}$ " bent strip 17A, by the pulley wheel 27 at one side and the collar 28 on the other.

The construction of the saddle is shown in Figs. 604B and 604C, where the $1\frac{1}{2}$ " strips 29, of Fig. 604C are shown removed from Fig. 604B; these strips 29 are bolted at the end of the guide strips 30, Fig. 604B, and form guides for the $2\frac{1}{2}$ " strip 31, carrying the tool post. They are spaced apart by the thickness of the strips 30, and the $1\frac{1}{2}$ " strips 32, bolted to the strip 31, slide on the strips 30. As will be seen from the underneath view, Fig. 604A, a guide rod 21, is fixed beneath the bed plates, and is engaged by the end holes of the $1\frac{1}{2}$ " strips 22, secured to the sides of the head and tail stocks; $1\frac{1}{2}$ " strips 23, being bolted above and below to retain the tail stock in position. The saddle engages the rod 21 by means of a $2\frac{1}{2}$ " by $\frac{1}{2}$ " double angle strip 24.

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 605 Theodolite

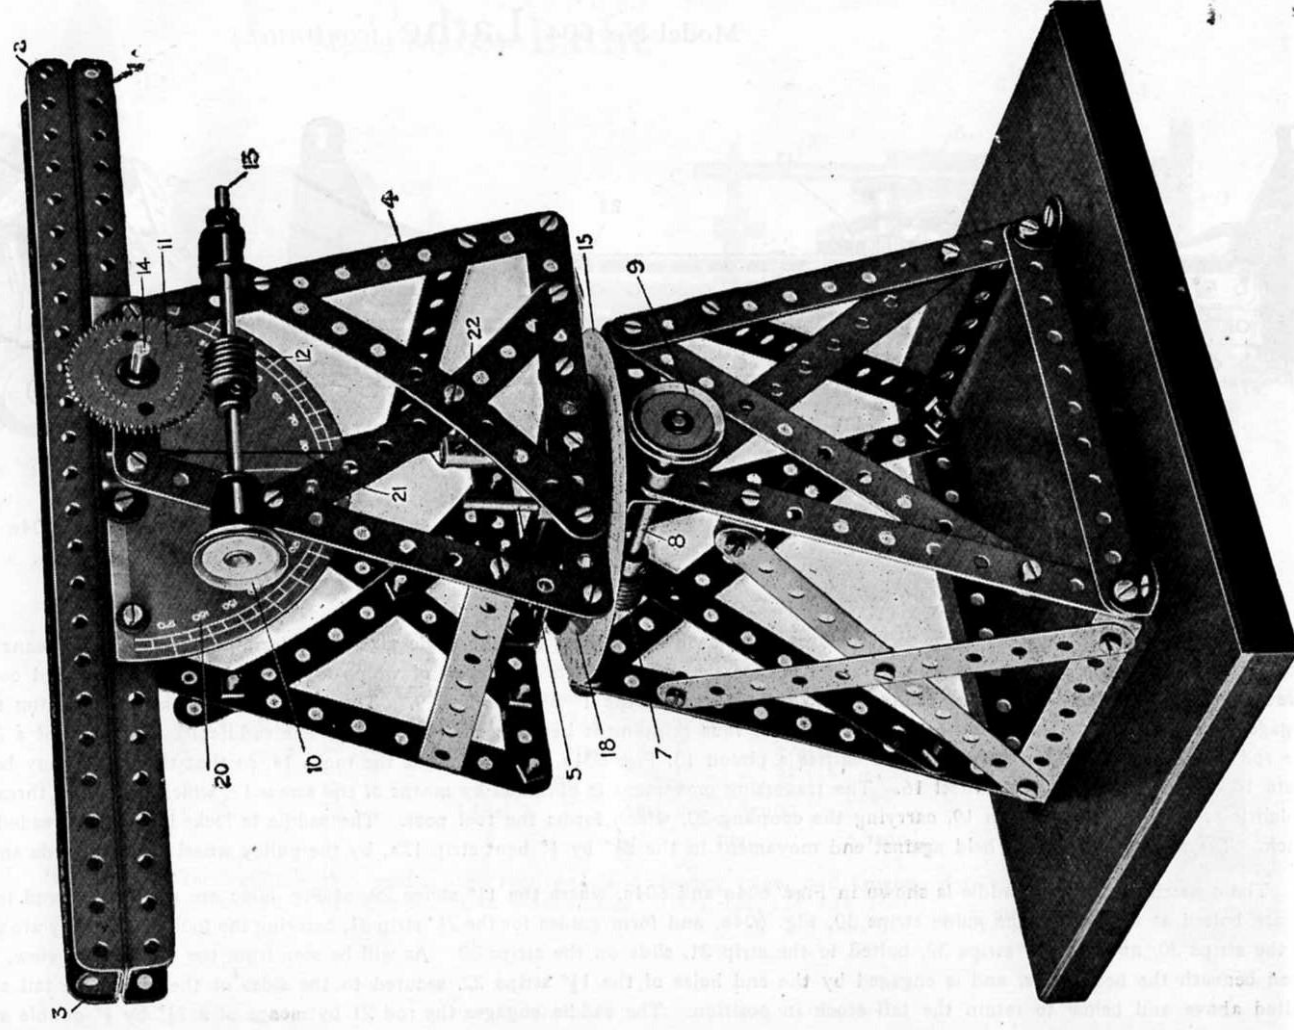

The
to form
of the

The
worm 2
a rod 1
of the s

A
forated
against
ment o

Sir
arm, a
of the s
gives th
are bol

Th

Model No. 605 Theodolite (continued)

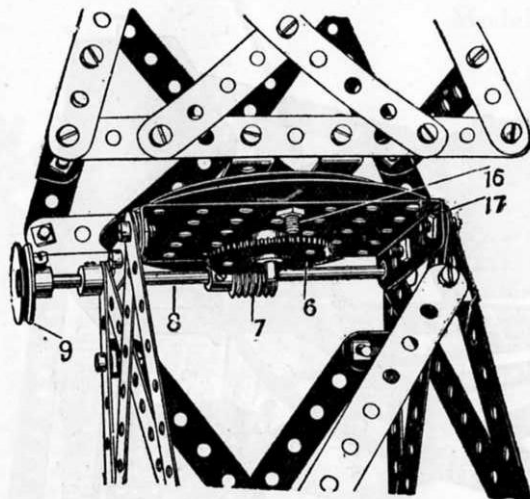


FIG. 605A

Parts required:	
20 of No.	2
2 "	5
6 "	6A
4 "	8
2 "	11
10 "	12
3 "	15
1 "	17
1 "	19B
2 "	22
2 "	27A
2 "	32
60 "	37
1 "	45
6 "	48B
1 "	53
6 "	59
1 "	62
1 "	63
4 "	89
1 "	135

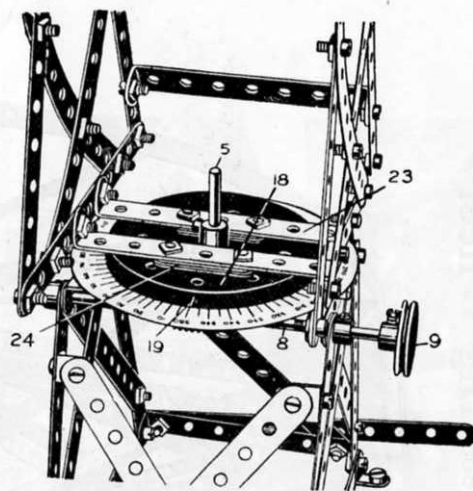


FIG. 605B

The Theodolite is represented by two reverse pairs of angle girders 1 and 2, which form a "sighting arm," an angle bracket 3 being bolted at one end to form an eye piece. A small piece of gummed paper is fastened over the aperture in the angle bracket, and a fine pin-hole made in the paper at the centre of the aperture. Two crossed threads are gummed across the aperture of the angle bracket bolted at the other end of the sighting arm.

The upper framework 4 swivels horizontally with the vertical spindle 5 as a pivot. On the lower end of this rod is a gear wheel 6, Fig. 605A, engaged by a worm 7 on a rod 8, operated by the 1" pulley 9. This gives the horizontal traverse of the upper frame 4, in which the sighting arm is pivotally mounted upon a rod 14, on which is a gear wheel 11 engaged by a worm 12 on a rod 13 operated by a 1" pulley 10. This mechanism gives the vertical traverse or inclination of the sighting arm.


A protractor for the horizontal angular movement of the upper frame 4 consists of a graduated cardboard disc 15, which is bolted by a bolt 16 to a perforated flanged plate $3\frac{1}{2}$ " by $2\frac{1}{2}$ " 17, the head of the bolt 16 being above the cardboard disc, and beneath the 3" pulley wheel 18. The cardboard disc is thus held against movement by the bolt 16, its centre hole engaging round the pivot rod 5. An index mark or pointer 19 is made on the pulley wheel 18. The movement of this pointer round the graduated scale on the disc shows the horizontal angular traverse.

Similarly, the vertical traverse of the sighting arm is indicated by means of a semi-circular protractor 20, bolted to the lower angle girder 1 of the sighting arm, a cord 21 carrying a weight 22, being hung from the rod 14, the position of the thread 21 over the protractor 20 indicating the vertical angular adjustment of the sighting arm. The thread 21 has a loop by which it is hung on the rod 14, so that its direction always points truly radially to the rod 14, and this gives the correct angular reading. In order to bring the double angle strips 23 flush with the outer rim of the pulley wheel 18, three $1\frac{1}{2}$ " packing strips 24 are bolted beneath the double angle strips, as shown in Fig. 605B.

The sighting arm is secured to the rod 14 by a crank bolted to the arm on the opposite side to the protractor and nipped by the set screw to the rod 14.

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 606 Big Wheel

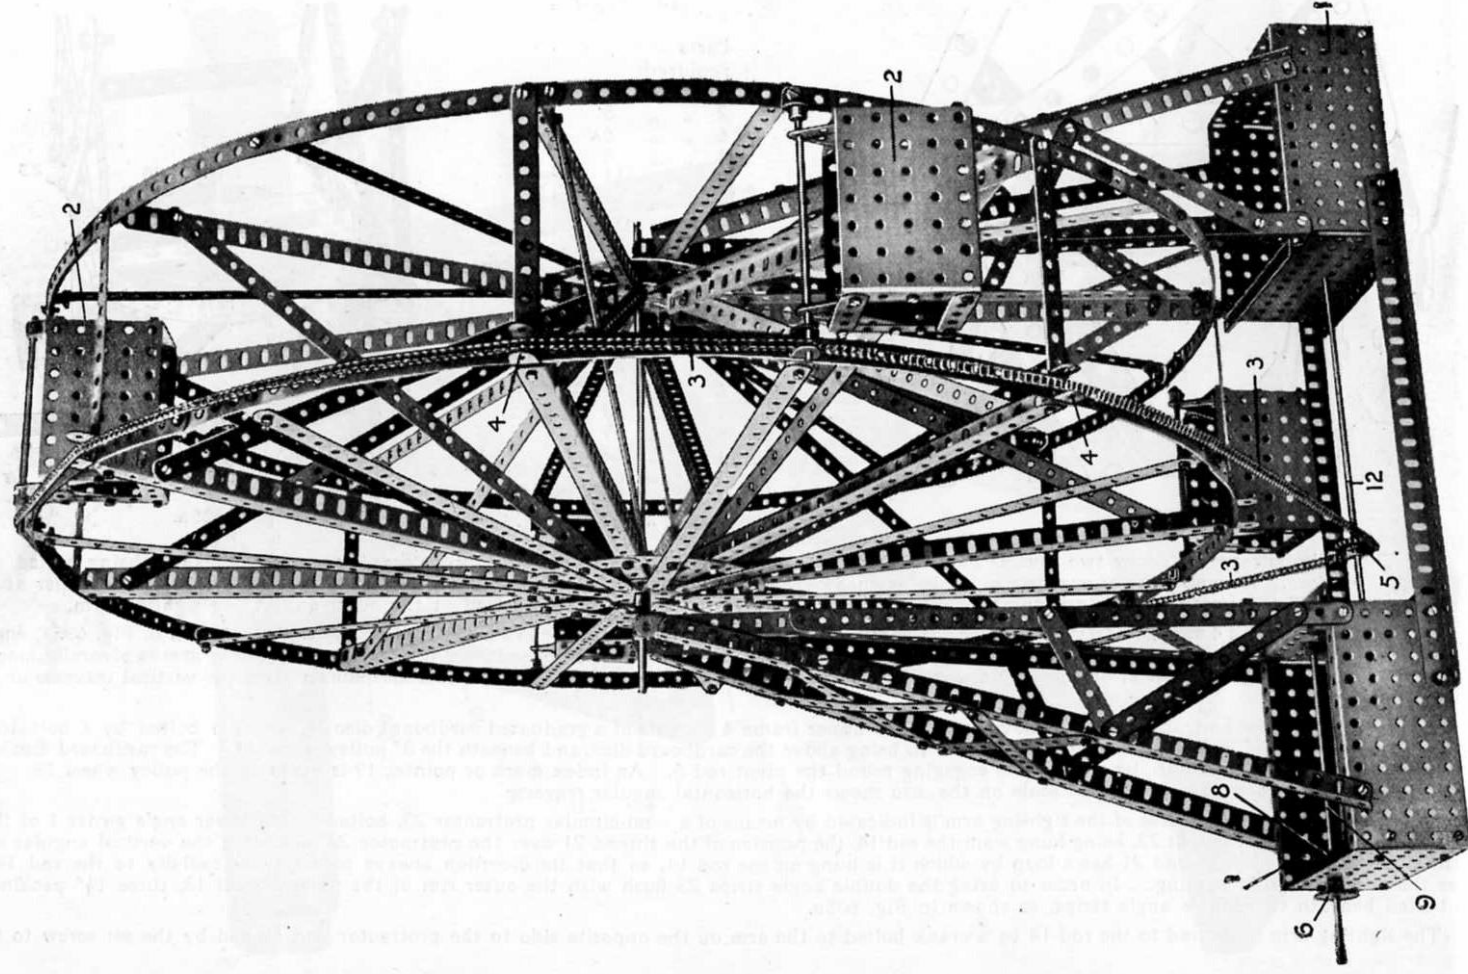

I
form
eleme
F
drivin
the sp
F

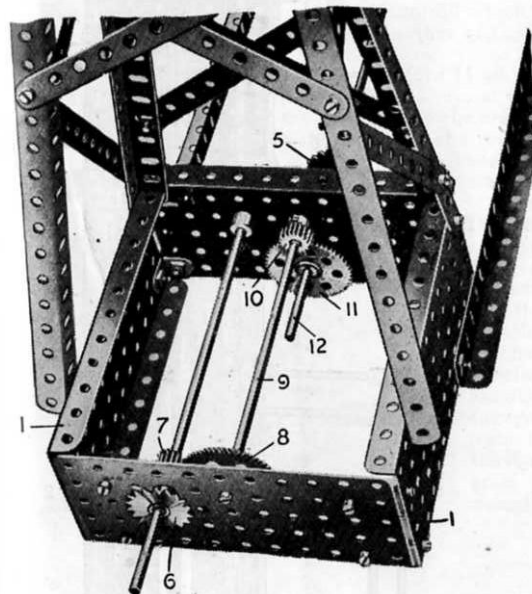
Model No. 606 **Big Wheel** (*continued*)

FIG. 606A

Parts required:		
46 of No.	1	
24 "	"	2
4 "	"	3
32 "	"	5
26 "	"	8
4 "	"	9
8 "	"	11
44 "	"	12
2 "	"	13
1 "	"	13A
1 "	"	14
4 "	"	15
2 "	"	24
2 "	"	26
2 "	"	27A
308 "	"	37
6 "	"	38
4 "	"	48D
6 "	"	52
8 "	"	53
2 "	"	54
13 "	"	59
2 "	"	70
16 "	"	90
8 "	"	94
2 "	"	96
2 "	"	109

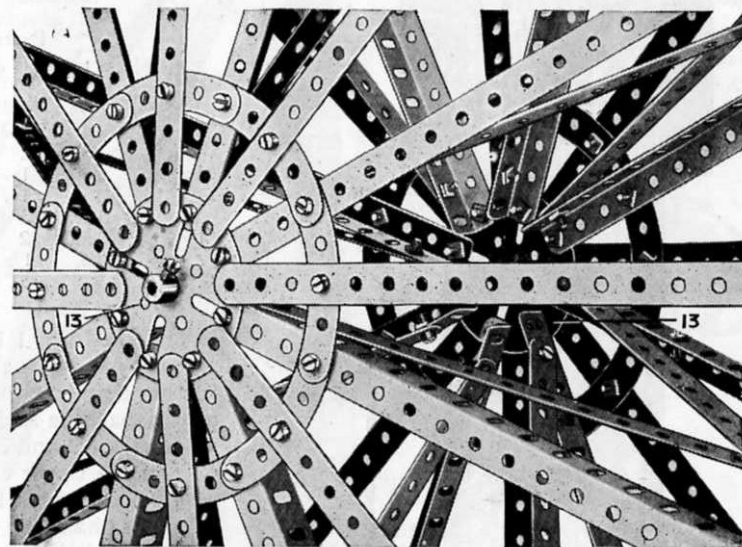


FIG. 606B

In constructing this model, flanged plates 1 are used to form the sides and inner part of the base of the side pedestals, and also to form the suspended cages 2 on the wheel. The driving chain 3 is conveniently kept in position round the periphery of one of the side elements of the wheel by a series of double angle brackets 4, bolted on the ends of the spokes.

Fig. 606A shows how the driving chain 3 is actuated from the sprocket wheel 5. On the axle of the driving sprocket 6 is a $\frac{1}{2}$ " pinion 7 driving a $1\frac{1}{2}$ " gear wheel 8 on an axle 9. On the other end of this axle 9 is a $\frac{1}{2}$ " pinion 10 engaging a $1\frac{1}{2}$ " gear wheel 11 on the rod 12 of the sprocket wheel 5.

Fig. 606B shows how the wheel is built up from the centre face plates 13.

Model No. 607

Automatic Weighing Machine

Parts required:

2 of No. 1	1 of No. 24	12 of No. 59
6 " " 2	2 " " 26	2 " " 62
2 " " 3	2 " " 27A	6 " " 63
6 " " 4	64 " " 37	10 " " 94
4 " " 5	2 " " 37B	1 " " 96
4 " " 8	1 " " 43	2 " " 99
1 " " 13	1 " " 48A	6 " " 100
2 " " 13A	3 " " 48B	2 " " 108
1 " " 15A	2 " " 52	
7 " " 16	1 " " 53	

The platform 1 is connected by cross rod and couplings 2a to a rod 2 (by means of a further coupling) passing through the centre of the machine and guided in the $3\frac{1}{2}$ " double angle strips 3 and 3a connected to side strips 4. At the upper end of this rod 2 is a bush wheel 5, to which is connected a cord 6 and sprocket chain 7. This chain passes round a sprocket wheel 8 on the same spindle as the 57-toothed gear wheel 9 engaging a $\frac{1}{2}$ " pinion 10. The pinion 10 also engages another 57-toothed gear wheel 10a, and this in turn a $\frac{1}{2}$ " pinion 11 on the spindle 12 carrying the pointer 13. The other end of the chain is coupled by a spring 14 to the cross piece 3a, and the pointer is thus always returned to zero immediately the load is removed from the platform.

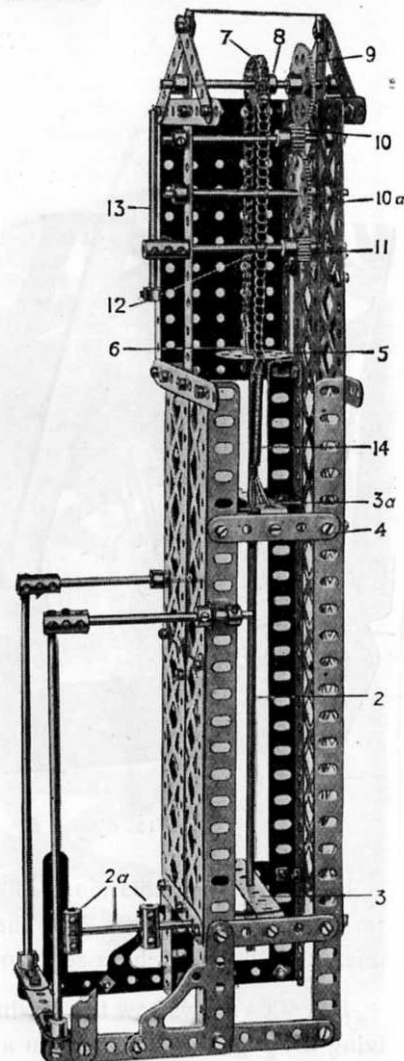
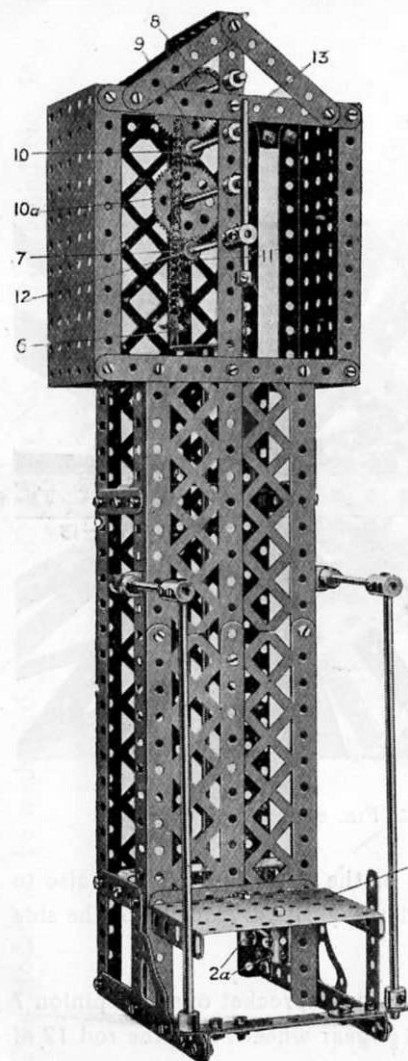


Fig. 607A

The
a set of
a set of
by a sp
cord on
The
the end
crank h
The
passed a
the four
effected

Fig. 607

10 of N
6 " "
4 " "
20 " "
4 " "
18 " "
2 " "
6 " "
6 " "
10 " "
1 " "
2 " "
3 " "
2 " "

Model No. 608 Derricking Grab

The grab 1 is suspended by the cords 2 which pass over the pulleys 3 and round the outer pulleys of a set of four 4 at the head of the standard 5. The cords continue down and under the outer pulleys of a set of smaller pulleys 6 and are wound on a crank handle 7 at the centre of which they are connected by a spring clip. (Care should be taken to see that, when winding up, the double lapping of each cord on the rod occurs simultaneously, as otherwise the grab will cant over).

The grab is opened or closed by the cord 11 which is secured to the standard 5, and having passed around the other of the two inner pulleys at the jib-end is passed back and around one of the four pulleys 4 and one of the pulleys 6 to the crank handle 10.

The jib 9 is raised or lowered by the cord 11 which is secured to the standard 5, and having passed around the other of the two inner pulleys at the jib-end is passed back and around one of the four pulleys 4 and one of the pulleys 6 to the crank handle 12. The swinging of the jib is effected from the crank handle 13 on the end of a rod, on which is a $\frac{1}{2}$ " pinion 14 engaging a contrate wheel 15 at the foot of the standard 5.

Gear wheels 16 and 17 are bolted on the crank handles 10 and 7 and are connected by the pinion 18. The crank handle 7 is fixed against longitudinal movement, but the crank handle 10 may be slid clear of the pinion 18, and the handle 7 turning the grab is raised or lowered. If the handle 10 is slid to disengage its gear wheel from the pinion 18 and the handle turned, the grab is opened or closed.


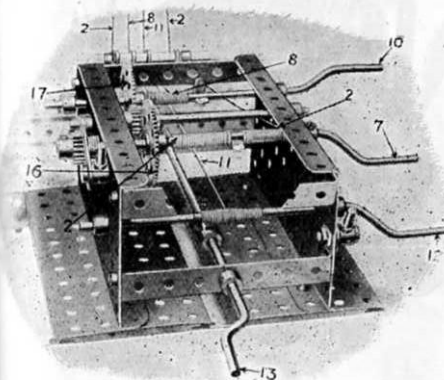


FIG. 608A


Parts required:

10	of No. 1	1 of No. 18A	9 of No. 48A
6	" " 3	4 " " 19	5 " " 48B
4	" " 4	2 " " 21	6 " " 52
20	" " 5	2 " " 22	2 " " 53
4	" " 6	3 " " 22A	1 " " 57
18	" " 8	4 " " 23	16 " " 59
2	" " 9	2 " " 24	1 " " 63
6	" " 10	2 " " 26	2 " " 108
6	" " 11	2 " " 27A	2 " " 115
10	" " 12	1 " " 28	1 " " 126
1	" " 13	6 " " 35	2 " " 147A
2	" " 15A	169 " " 37	2 " " 147B
3	" " 16	2 " " 44	2 " " 148
2	" " 17	4 " " 48	

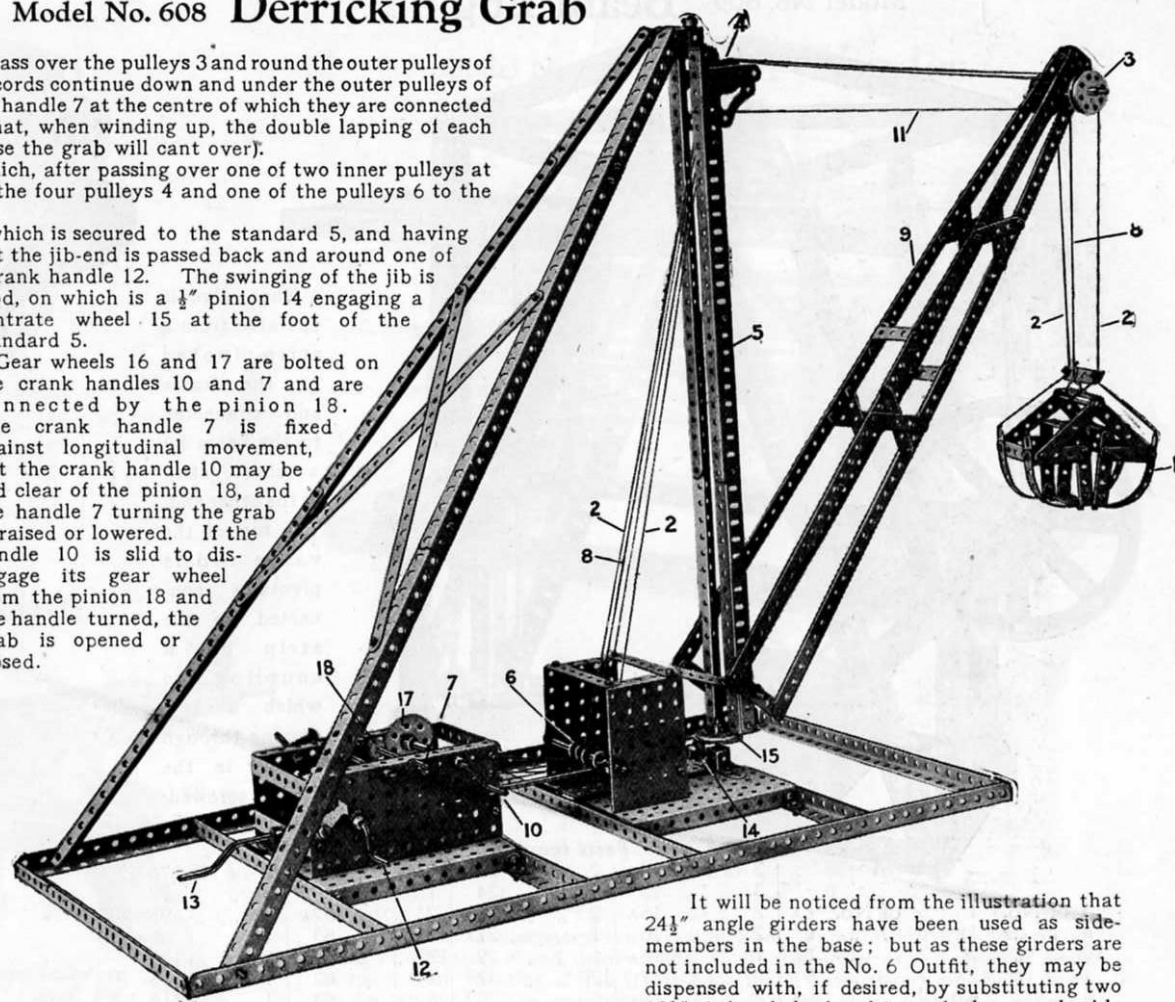

It will be noticed from the illustration that $24\frac{1}{2}$ " angle girders have been used as side-members in the base; but as these girders are not included in the No. 6 Outfit, they may be dispensed with, if desired, by substituting two $12\frac{1}{2}$ " girders bolted end to end along each side of the base frame.

Model No. 609 Beam Engine

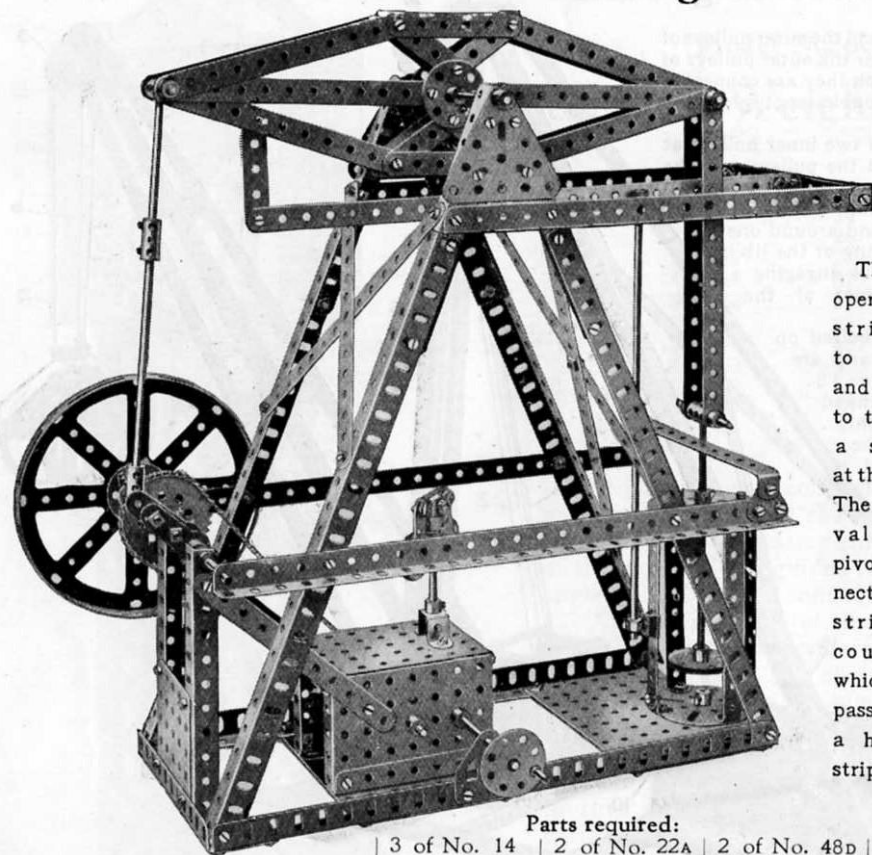


The valve is operated from a strip pivoted to the frame and connected to the beam by a short strip at the other end. The top of the valve rod is pivotally connected to the strip by a coupling into which a bolt passing through a hole in the strip is screwed.

Parts required:

5 of No. 1	5 of No. 6A	3 of No. 14	2 of No. 22A	2 of No. 48D	2 of No. 76
4 " " 1B	8 " " 8	3 " " 15	4 " " 24	1 " " 50	2 " " 77
10 " " 2	2 " " 8A	2 " " 15A	2 " " 26	2 " " 52A	1 " " 95
1 " " 2A	7 " " 9	2 " " 16	1 " " 27A	3 " " 53	1 " " 96A
4 " " 4	2 " " 9B	1 " " 16A	1 " " 29	17 " " 59	2 " " 109
1 " " 5	4 " " 11	2 " " 17	120 " " 37	2 " " 62	1 " " 115
8 " " 6	3 " " 12	2 " " 18A	6 " " 38	6 " " 63	1 " " 118
		1 " " 18B	1 " " 45	1 " " 63B	1 " " 126A
		1 " " 21	3 " " 48c	1 " " 72	2 " " 133

Model No. 610 Aerocar

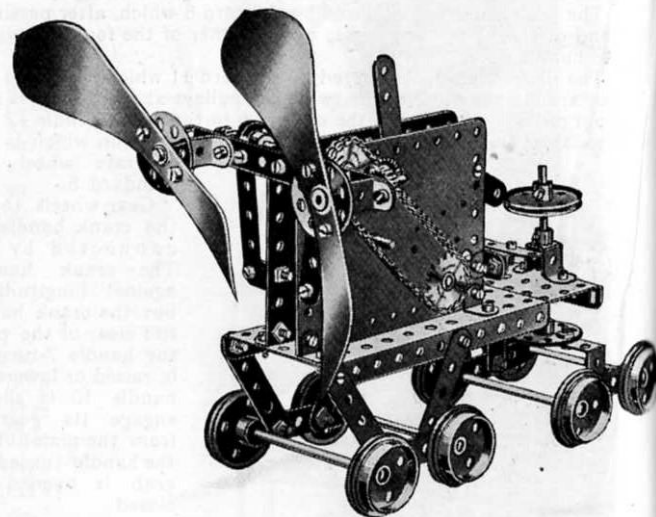

Parts required:


1 of No. 2	2 of No. 29
1 " " 4	47 " " 37
10 " " 5	4 " " 41
10 " " 12	3 " " 45
2 " " 15A	1 " " 46
4 " " 16	1 " " 52
2 " " 17	1 " " 53
8 " " 20	2 " " 59
3 " " 24	2 " " 96
2 " " 26	

Clockwork Motor
(not included in Outfit)

These Models can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 611

Jaunting-Car

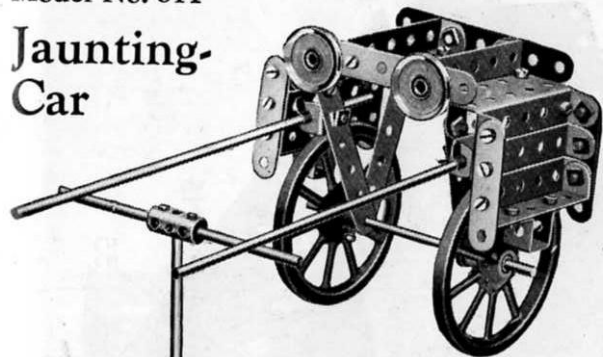


Parts required:

2 of No. 3	2 of No. 15A	39 of No. 37
4 " " 4	1 " " 16B	2 " " 45
4 " " 6	2 " " 19A	10 " " 48A
2 " " 11	1 " " 20	1 " " 53
8 " " 12	2 " " 22	1 " " 63
2 " " 13A	4 " " 35	

Model No. 612 Machine Gun


Parts required:

1 of No. 2A	1 of No. 26
2 " " 3	17 " " 37
2 " " 5	8 " " 38
2 " " 11	1 " " 48B
5 " " 12	1 " " 50
2 " " 12A	7 " " 59
2 " " 12B	1 " " 62A
1 " " 17	1 " " 63
1 " " 18A	1 " " 81
1 " " 18B	2 " " 109

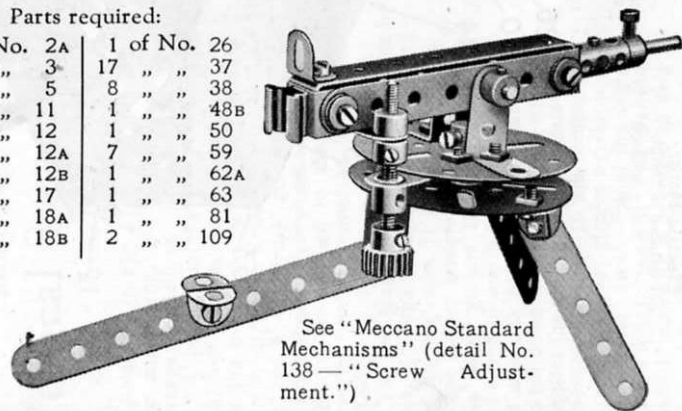

See "Meccano Standard Mechanisms" (detail No. 138—"Screw Adjustment.")

Model No. 613 Linen Winder

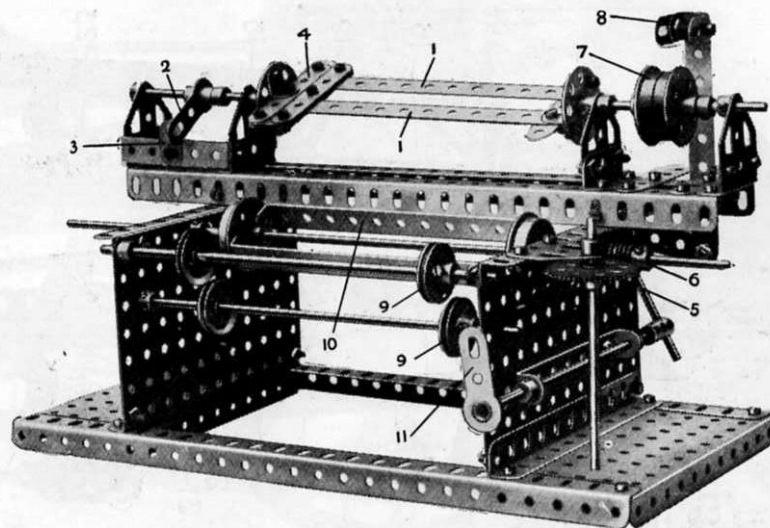

Parts required:

2 of No. 2	1 of No. 13	1 of No. 27A	2 of No. 48b
1 " " 2A	2 " " 13A	1 " " 32	2 " " 52
8 " " 5	1 " " 14	66 " " 37	2 " " 52A
4 " " 8	1 " " 15A	2 " " 37A	16 " " 59
4 " " 9	2 " " 16	1 " " 37B	2 " " 62
4 " " 9F	1 " " 16A	6 " " 38	2 " " 63
6 " " 10	4 " " 20	1 " " 44	5 " " 126A
1 " " 11	4 " " 22	1 " " 48A	
7 " " 12	2 " " 24	1 " " 48B	

In order to disengage the winding frame bars 1 the crank 2 is lifted clear of the stop 3 and drawn back, this action disengaging the end cross strips 4 from the tips of the frame bars 1 and permitting the wound linen to be removed. The gear wheel 5 engaging the worm 6 forms a counter. 7 are the belt pulleys, and 8 the belt striker operated by crank 11; 9 are the guide pulleys for the main linen drums 10.

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A

Model No. 614

Vertical Steam Engine


Parts required:

1 of No.	1a	1 of No.	29
4	2	155	37
2	18	2	38
3	4	2	45
8	6A	1	48
6	8	13	48A
2	9	7	48B
7	9	2	50
5	9D	3	52
1	9F	1	52A
4	10	9	59
3	11	4	62
3	12	4	63
1	12B	2	63B
1	13A	1	70
1	14	2	76
2	15	14	94
2	15A	1	95
2	16	3	96
4	16A	1	96A
4	17	6	100
1	18A	1	109
1	18B	2	111
1	19B	1	118
2	22	4	124
2	22A	4	125
5	24	2	126
4	26	5	126A
3	27A	1	130

2 of No. 133

Electric Motor

(not included in Outfit)

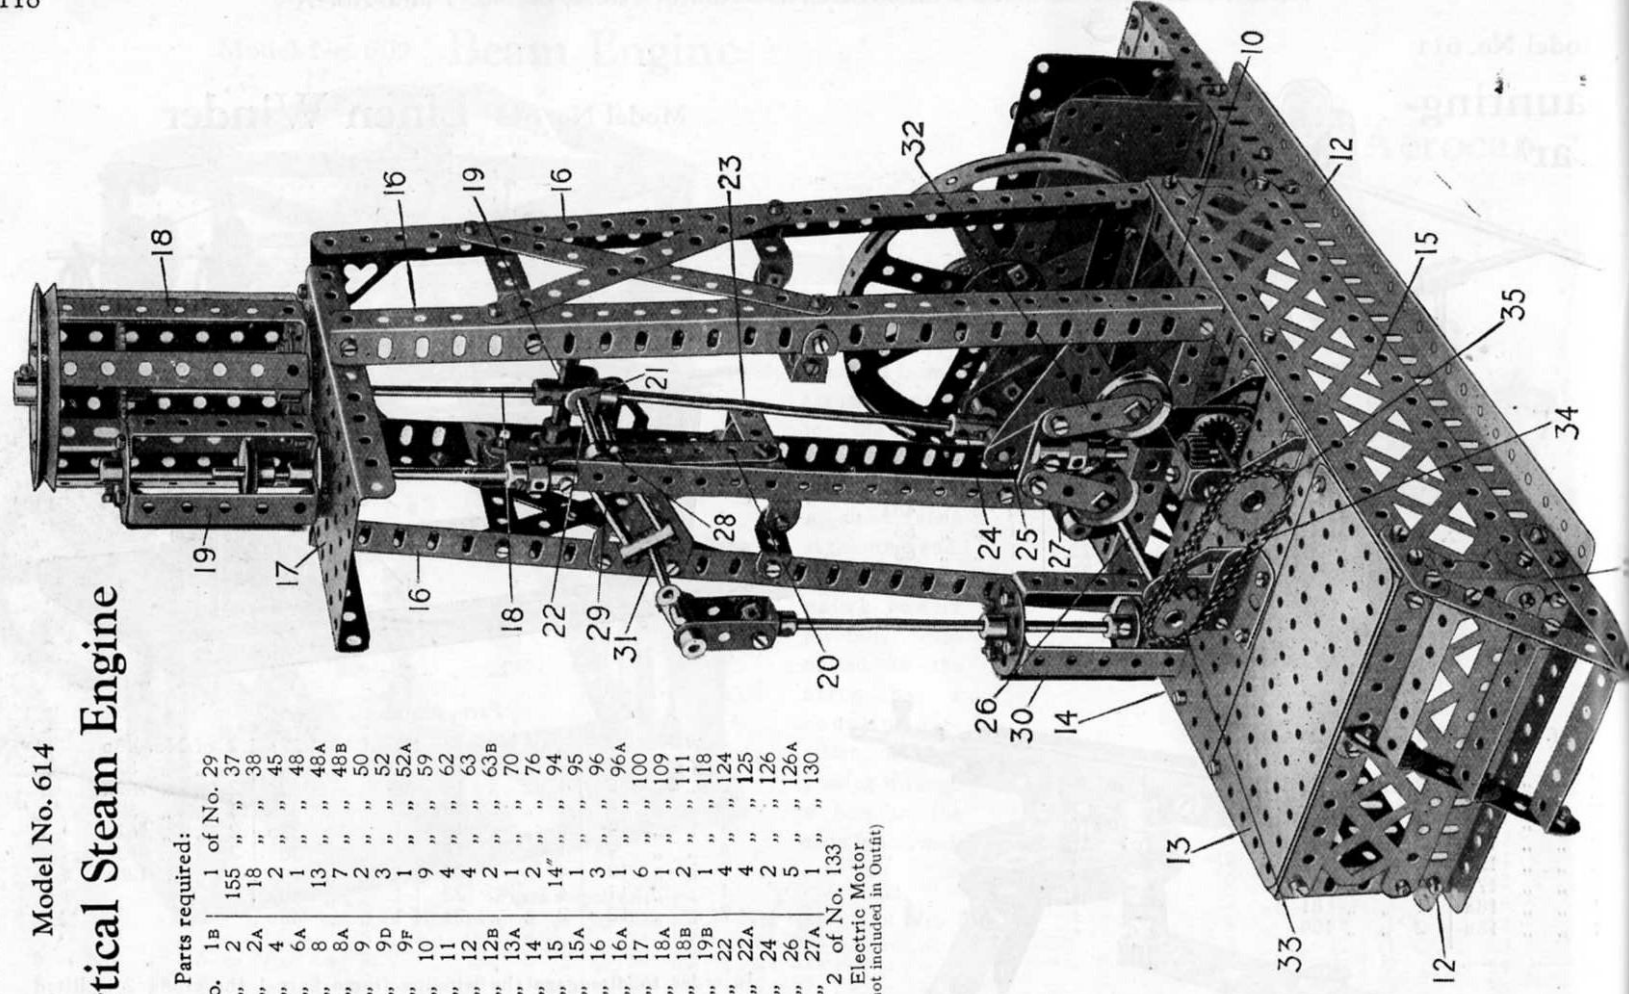

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 614

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 614

Vertical Steam Engine

(continued)

FIG. 614A


As shown in Fig. 614A, the motor drives the engine through a reduction gearing arranged as follows:

A $\frac{1}{2}$ " pinion 1 on the motor spindle drives a 57-toothed gear wheel 2 on the $2\frac{1}{2}$ " rod 3, on the other end of which a further $\frac{1}{2}$ " pinion engages a similar gear wheel on the $2\frac{1}{2}$ " rod 4; a third $\frac{1}{2}$ " pinion 5 on this rod engages another gear wheel 6 on a $3\frac{1}{2}$ " rod 7. This rod is coupled to the engine by a sprocket chain 8 connected to 1" sprocket wheels 9.

The bed plate is built up at the sides by two $9\frac{1}{2}$ " angle girders 10 bolted to $2\frac{1}{2}$ " angle girders 11 at the corners. These corner girders are bolted to $12\frac{1}{2}$ " angle girders 12, and the top is formed of one $5\frac{1}{2}$ " \times $2\frac{3}{4}$ " flat plate 13 and one $5\frac{1}{2}$ " \times $3\frac{1}{4}$ " flat plate 14 bolted down to the girders 10, which support the vertical angle girders 16. The side members 15 are composed of two $5\frac{1}{2}$ " brace girders overlapped three holes. In the top of the angle girders 16 is bolted a $5\frac{1}{2}$ " \times $2\frac{1}{4}$ " flanged plate 17 carrying a cylinder 18 and valve chest 19.


At the lower end of the piston rod 18 is the crosshead formed of a 2" rod 19 passing through the centre hole of a coupling into the end hole of which the piston rod 18 is secured. The ends of the rod 19 engage eye pieces which slide on the $4\frac{1}{2}$ " strips 20. The fork piece 21 is pivotally connected to the coupling by a $2\frac{1}{2}$ " rod 22, and the $6\frac{1}{2}$ " connecting rod 23 is secured to a coupling 24 through which is passed a $1\frac{1}{2}$ " rod 25; the ends of the latter engage the bosses of two cranks bolted to triangular plates forming the balance weights of the crankshaft.

The $4\frac{1}{2}$ " rod 26 carries an eccentric tie 27 which operates the valve in the valve chest 19, and the two collars 28 on the rod 22 engage two 2" rods 29 which actuate the pump 30 from the rocking rod 31. The governor 32 is driven from a $\frac{3}{4}$ " sprocket wheel 33 coupled by a chain 34 to a 1" sprocket wheel 35. The construction of the governor gear can be clearly seen in the illustration.

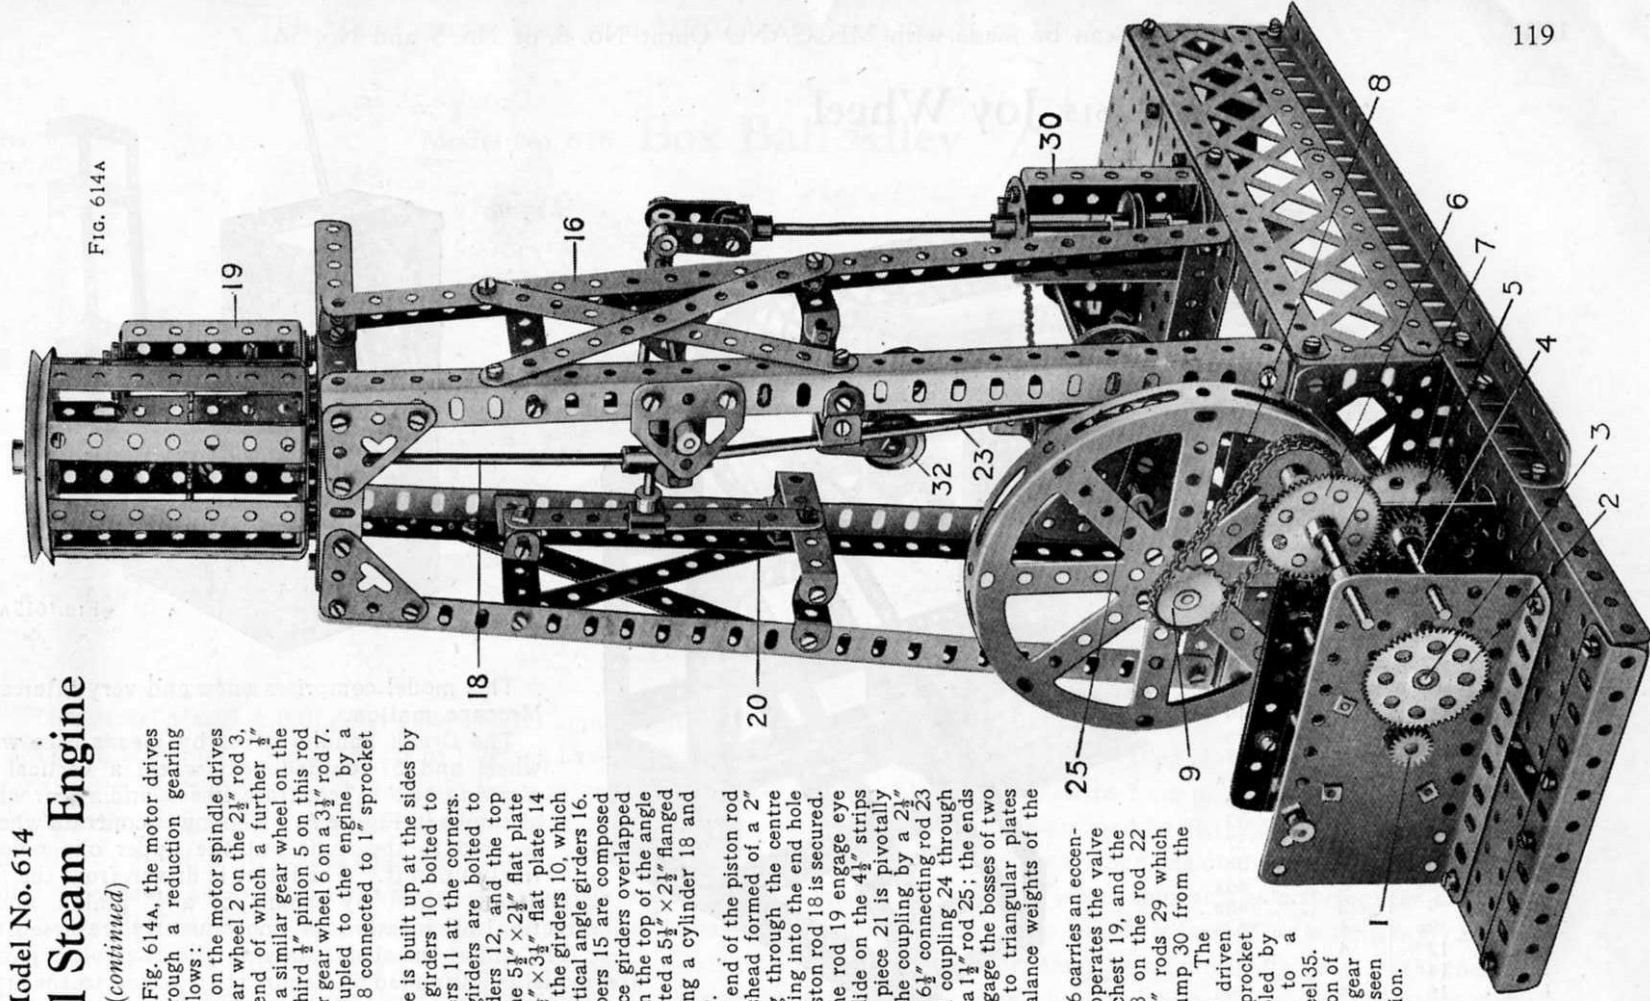

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 615 Joy Wheel

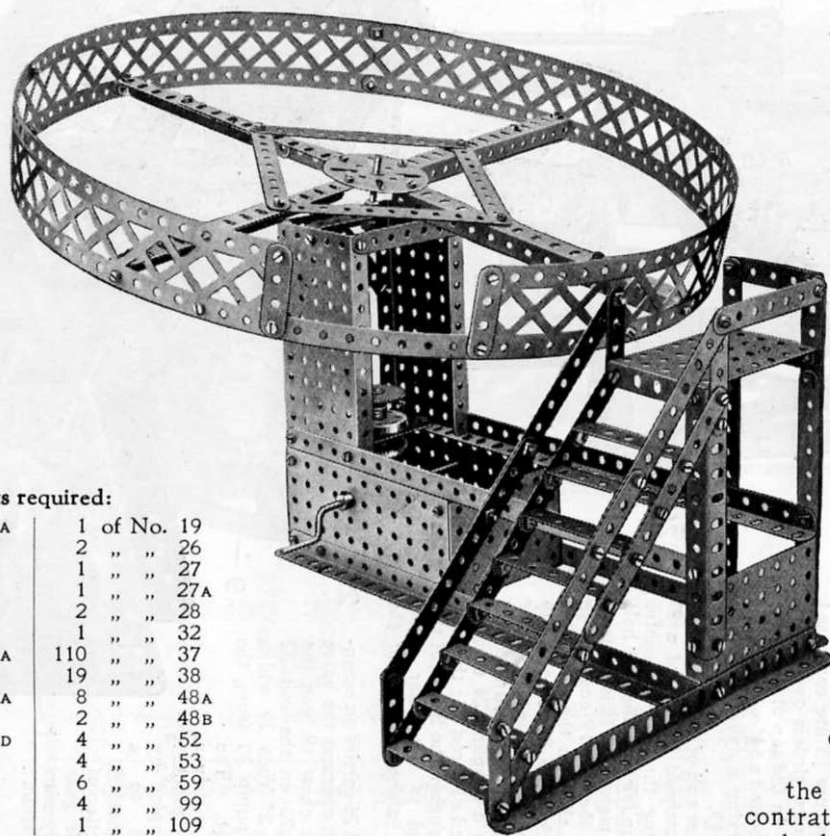

Parts required:

1 of No.	1A	1 of No.	19
16 "	2	2 "	26
4 "	3	1 "	27
2 "	4	1 "	27A
2 "	5	2 "	28
5 "	6	1 "	32
2 "	6A	110 "	37
4 "	8	19 "	38
1 "	8A	8 "	48A
9 "	9	2 "	48B
1 "	9D	4 "	52
5 "	12	4 "	53
1 "	14	6 "	59
1 "	16	4 "	99
1 "	17	1 "	109
1 of No. 126			

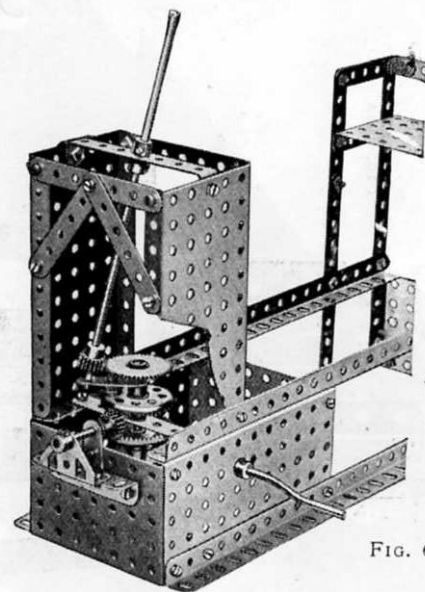


FIG. 615A

This model comprises a new and very interesting Meccano motion.


The Crank handle drives by means of a worm wheel and 57-toothed gear wheel a vertical rod carrying two $1\frac{1}{2}$ " contrate wheels and a gear wheel, as shown in Figure A. The lower contrate wheel is secured to the shaft but the upper one revolves freely upon it. The latter is driven from the fixed contrate wheel by means of a $\frac{1}{2}$ " pinion, and its direction of rotation is consequently reversed.

The end of the shaft carrying the revolving part of the model is journaled on a short strip bolted to the upper contrate wheel and carries a $\frac{1}{2}$ " pinion which engages with the gear wheel secured on the vertical shaft. Thus, on operation of the crank handle, the model revolves upon its axis, at the same time twisting slowly round with an amusing "wobble." A circular piece of cardboard is cut and placed in position to represent the floor found in real "Joywheels."

Model No. 616 Box Ball Alley

Parts
required:

6	of No.	1
19	" "	2
5	" "	3
2	" "	4
15	" "	5
6	" "	8
5	" "	11
27	" "	12
1	" "	14
1	" "	15
2	" "	16
1	" "	24
8	" "	35
132	" "	37
1	" "	43
2	" "	52
2	" "	53
2	" "	54
2	" "	59
2	" "	62
1	" "	63

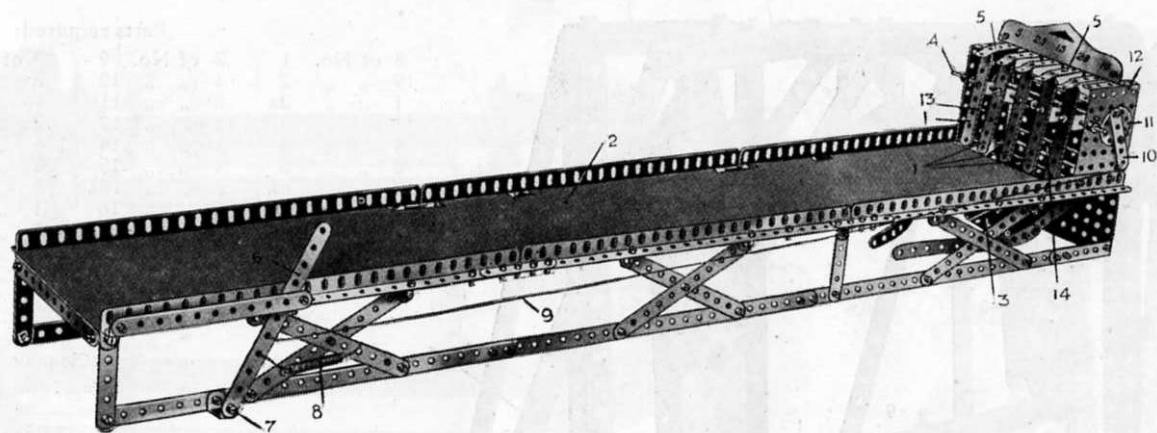


This model of a Box Ball Alley gives endless amusement, apart from the actual construction.

The object is to hit one of the strips 1, which have various number values, by means of a ball rolled along the platform 2, the ball after striking and tipping one of the strips being returned by the tray 3 to the player. The strips 1 are pivoted by double bent strips on to a rod 4, so that each strip may swing independently. The upper end of each strip is engaged by strips 5, the ends of which are bent slightly down, as shown, so that while the strips 1 are normally held in the position shown, when one of the strips is struck by the ball it is deflected backward and its upper end snaps outward past the bent end of its strip 5, which thus acts as a spring, the deflected strip being then retained in that position until it is reset. To reset any or all of the strips 1 a handle is formed by a strip 6 pivoted at 7 and controlled by a tension spring 8. A cord 9 connects the strip 6 to a short strip 10 forming a crank and bolted to a bush wheel 11 on an axle journaled in the side plates 12. This axle on its interior carries two further bush wheels to which are secured two short strips 13 forming cranks, a long double bent strip 14 being in turn bolted to the strips 13. When therefore the handle 6 is pulled out against the spring 8 the cord 9 rotates the bush wheel 11 and forces out the long double bent strip 14 which pushes out the strips 1 and resets them in their normal positions. During this resetting operation the upper ends of the strips 1 snap back beneath the bent ends of the spring strips 5.

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 617 Stone-Sawing Machine

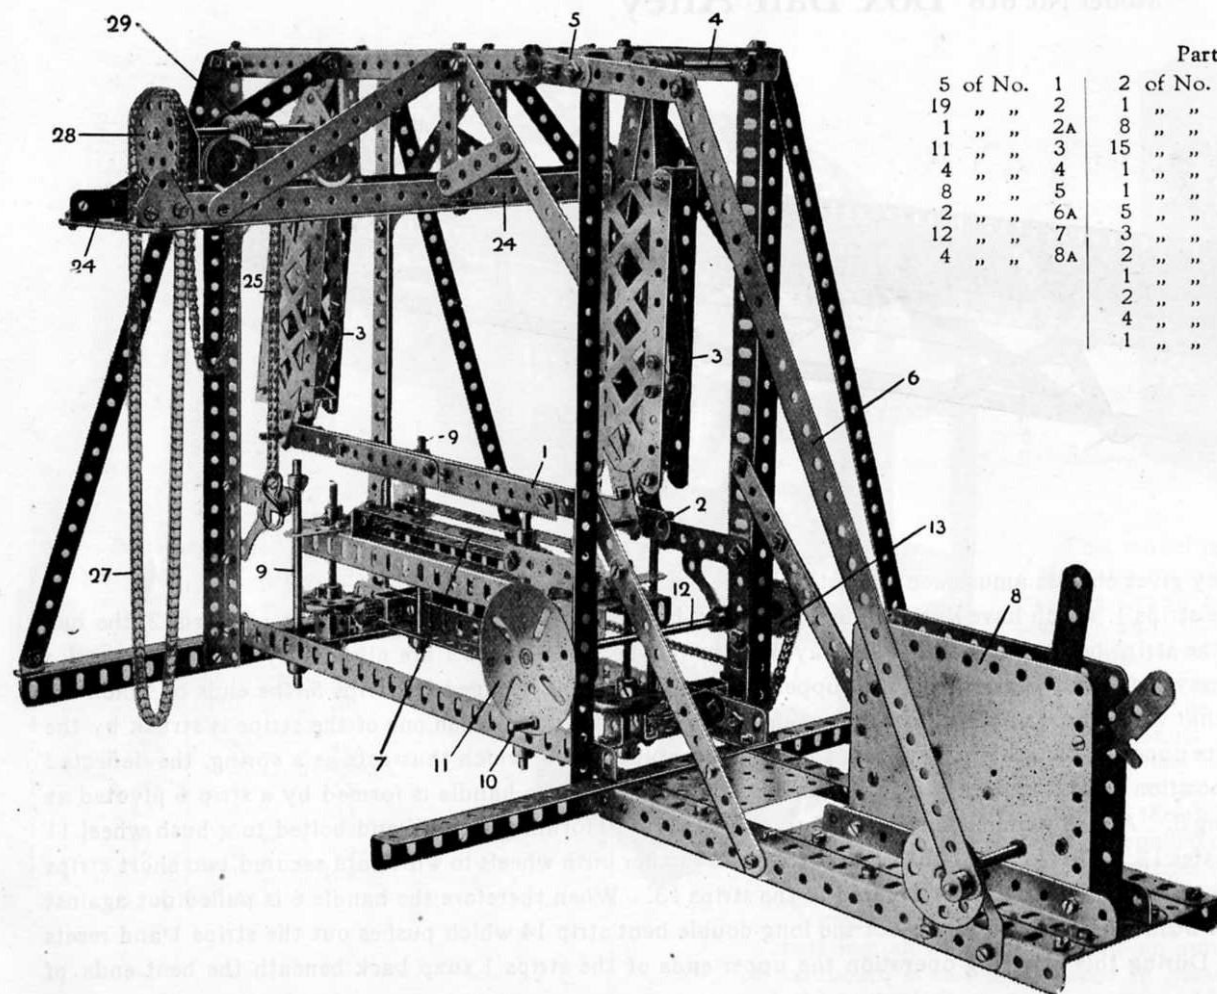

Parts required:

5 of No. 1	2 of No. 9	3 of No. 26	2 of No. 62A
19 " " 2	1 " " 10	2 " " 28	2 " " 77
1 " " 2A	8 " " 11	1 " " 32	2 " " 80A
11 " " 3	15 " " 12	12 " " 35	40" " " 94
4 " " 4	1 " " 14	185 " " 37	1 " " 95A
8 " " 5	1 " " 15	32 " " 38	1 " " 96A
2 " " 6A	5 " " 15A	6 " " 45	4 " " 100
12 " " 7	3 " " 16	1 " " 47	4 " " 108
4 " " 8A	2 " " 16A	5 " " 48A	1 " " 109
	1 " " 17	3 " " 53	2 " " 110
	2 " " 18A	2 " " 57	2 " " 115
	4 " " 22	15 " " 59	4 " " 125
	1 " " 24	2 " " 62	3 " " 126A

Clockwork Motor
(not included in Outfit)

The sawing strip 1 consists of two rack strips bolted to a 12½" strip 2 connected by 1" rods to the ends of the swinging frames 3, one loosely pivoted on one of the rods carried in the frame and the other secured by a crank to the rod 4. The swinging frames 3 are oscillated from the crank 5 and connecting rod 6 driven by the clockwork motor 8.

Model No. 617 Stone-Sawing Machine (continued)

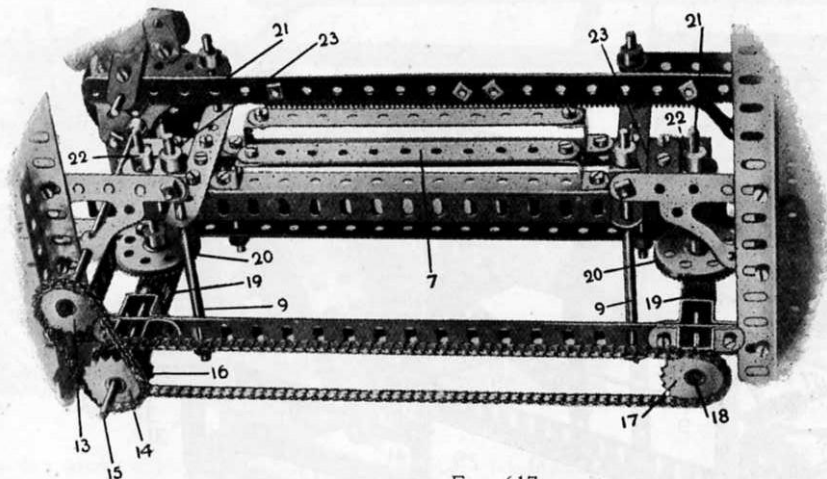


FIG. 617A

The support frame 7 (Fig. A) for the stone to be sawn is raised and lowered as follows: The frame 7 is guided on the vertical rods 9 and raised and lowered by the operation of the threaded pin 10 forming a handle on the face plate 11. This face plate is mounted on a rod 12 carrying a 1" sprocket wheel 13 connected by a chain to another 1" sprocket wheel 14 on a rod 15. A third 1" sprocket 16 on the same rod is coupled to another 1" sprocket wheel 17 at the other end of the machine.

The rods 15 and 18 carry $\frac{1}{2}$ " pinions 19 driving contrate wheels 20 secured on screwed rods 21 and engaging threaded cranks 22 secured to the frame 7 by $1\frac{1}{2}$ " strips 23.

The trolley (Fig. B) runs on gantry rails 24 and the load chain 25 passes over a $\frac{3}{4}$ " sprocket wheel on the rod 26, to be secured at one end to the trolley frame.

The chain 25 is raised or lowered by the operation of a sprocket chain 27 passing over a $1\frac{1}{2}$ " sprocket wheel 28, the rod of which carries a worm 29. This engages a $\frac{1}{2}$ " pinion on the rod 26 carrying a sprocket wheel 30 over which the load chain 25 passes.

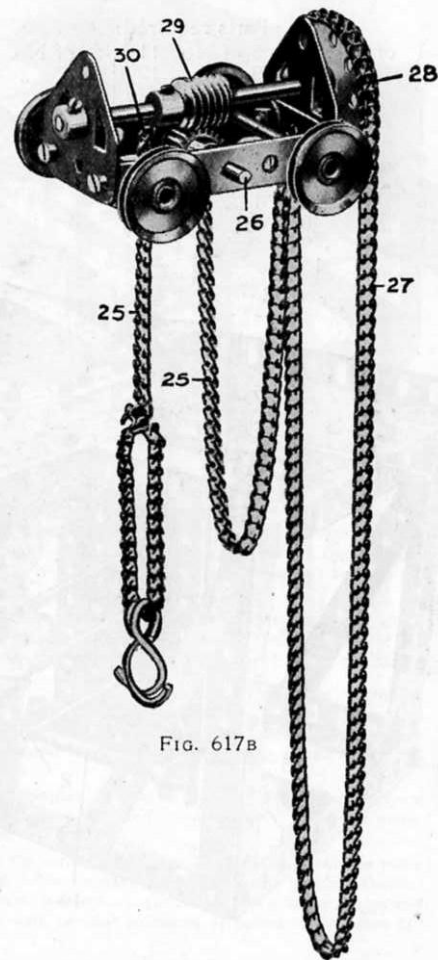


FIG. 617B

Model No. 618 Bagatelle Table

Parts required:

1	of No.	1	5 of No.	11	3 of No.	17
10	"	2	9	"	12	2
2	"	2A	1	"	12B	1
1	"	3	4	"	13A	1
1	"	4	2	"	14	2
6	"	5	1	"	15	134
4	"	6	2	"	15A	6
6	"	6A	1	"	16	
10	"	8				
11	"	9				
6	"	10				

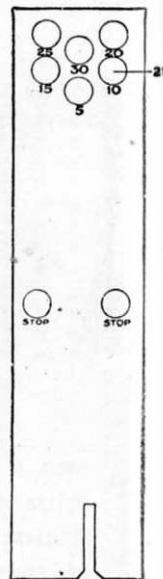
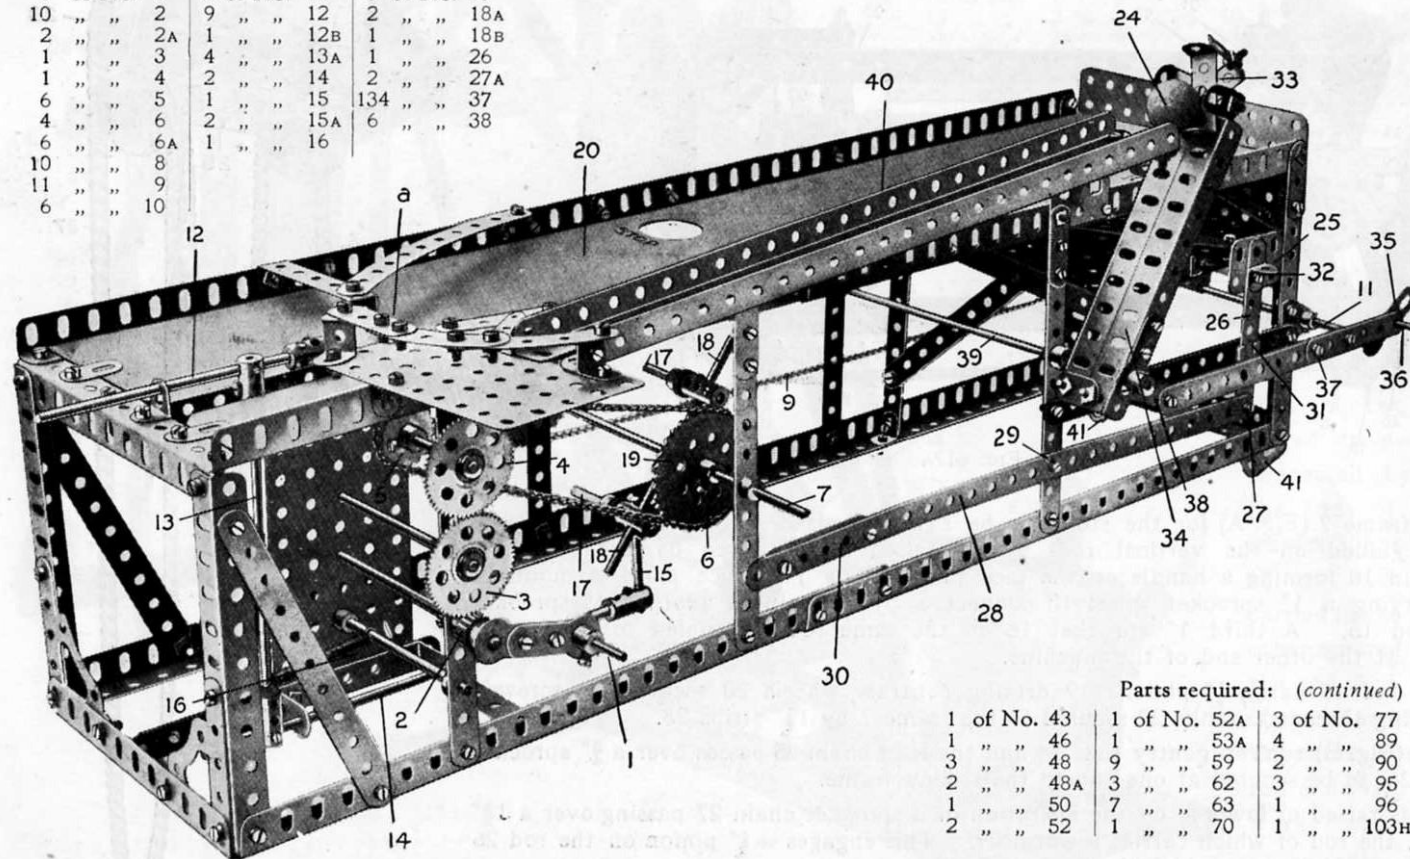


FIG. A

Parts required: (continued)

1	of No.	43	1	of No.	52A	3	of No.	77	2	of No.	108
1	"	46	1	"	53A	4	"	89	1	"	111A
3	"	48	9	"	59	2	"	90	1	"	115
2	"	48A	3	"	62	3	"	95	1	"	125
1	"	50	7	"	63	1	"	96	3	"	126A
2	"	52	1	"	70	1	"	103H	1	"	128

The o
another 1
is a 2" spr
wheel 8 co

The p
from a 5 1/2"
is a 2" rod
the marble
upon which
rods 18 wh
coupling 1

As the
rearwardly
marble from
falls into a
flanged pla
of 5 1/2" curv
24 (Fig. 61
on a 3 1/2" str
29 and we

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

125

Model No. 618 Bagatelle Table (continued)

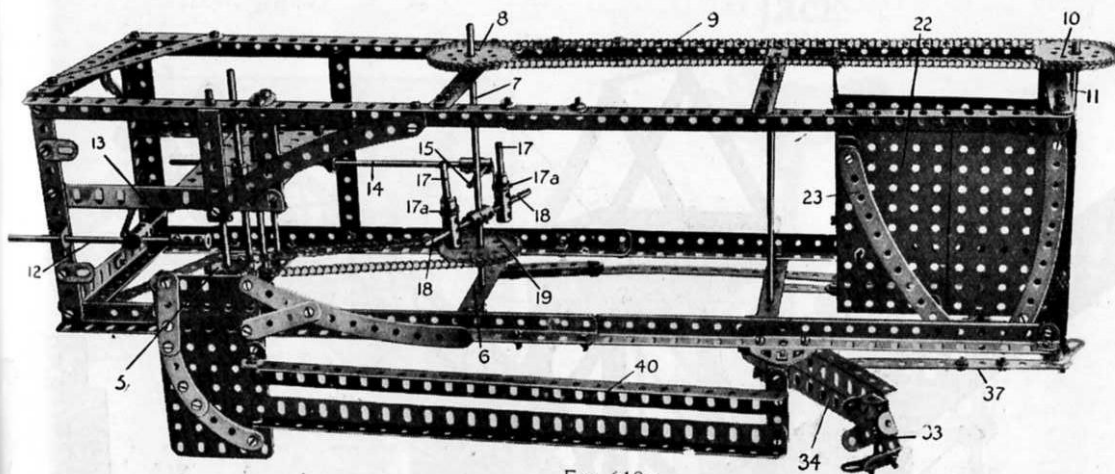


Fig. 618B

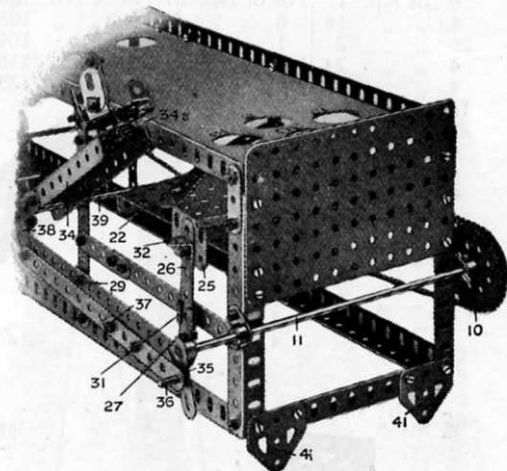


Fig. 618C

The operating handle 1 drives a $\frac{1}{2}$ " pinion 2 engaging a $\frac{1}{4}$ " gear wheel 3. This engages another $\frac{1}{4}$ " gear wheel 4 on the axle rod of which is a 1" sprocket wheel 5 coupled by a chain to a 2" sprocket wheel 6 on the axle rod 7. On the further end of this rod 7 is another 2" gear wheel 8 connected by a chain 9 to a 2" gear wheel 10 on a rear axle rod 11.

The pusher-rod 12 (by means of which the marble is driven from the point a), is carried from a $\frac{5}{16}$ " vertical rod 13 which is connected to an 8" rod 14. At the front end of the latter is a 2" rod 15 arranged vertically and a spring 16 tends to pull the pusher-rod forward to strike the marble. The pusher-rod is depressed against the spring by the action of two 1" rods 17 upon which are mounted $\frac{1}{2}$ " pulley wheels 17a carried from two couplings secured on two 2" rods 18 which enter the central coupling 19. The axle rod 7 passes completely through the coupling 19.

As the rods 17 rotate, the pulleys 17a bear against the rod 15 and depress the pusher-rod rearwardly until released, when the spring pulls the pusher-rod sharply forward to drive the marble from the point a along the table 20 towards the holes 21 (Fig. A). When the marble falls into any one of the holes 21 it drops on to the Plate 22 (Figs. B and C) formed of two $\frac{5}{16}$ " flanged plates bolted together. The plate 22 is inclined one hole down, and guides consisting of $\frac{5}{16}$ " curved strips 23 (Fig. B) connected to the plate by double angle brackets, lead the marble 24 (Fig. 618) to the end of the plate, where it is retained by a $\frac{1}{2}$ " flat girder 25 (Fig. C) carried on a $\frac{3}{16}$ " strip 26 pivotally connected at 27 (Fig. 618) by locked nuts to a $\frac{1}{2}$ " strip pivoted at 29 and weighted at 30 with $\frac{1}{4}$ " strips.

The strip 26 (Fig. C) is guided in an eye piece 31 and an angle bracket 32 is bolted near the top of the strip. The pocket 33 consists of three $\frac{1}{2}$ " x $\frac{1}{2}$ " double angle strips at the end of an arm 34 formed by two $\frac{5}{16}$ " angle girders. The pocket is carried from the arm 34 by a 1" triangular plate 34a the two base holes of which are bolted in the end holes of the angle girders. The pocket is bolted to the apex hole of the triangular plate, with three washers beneath the pocket to set it up.

The arm 34 is rocked from the rod 11 (Fig. 618) by a crank 35, a threaded pin 36 on which engages the end hole of a $\frac{5}{16}$ " and a 3" strip 37 overlapped three holes. The other end of the strip is connected to a boss bell crank 38 bolted to the arm 34 and secured to the rod 39.

As the axle rod 11 rotates, the arm 34 is permitted to fall, and in so doing makes contact with the angle bracket 32 and depresses the stop plate 25, permitting the marble to drop from the plate 22 into the pocket 33. Further rotary movement of the rod 11 again raises the arm 34 with the marble in the pocket, until the marble is deposited into the chute 40 and is returned to the point a.

Meanwhile, on the rising of the arm 34 the plate 25 is again raised to close the outlet from the inclined plate 22. The bearings for the axle rod 11 are formed by two 1" triangular plates secured to the rear vertical angle girders.



Figure A shows the shape and size of the cardboard table. The holes 21 should be made only slightly larger than the marble used. (The marble is not supplied in Meccano Outfits, but may be purchased separately). The table is given a slight incline towards the pusher-rod end by forming at the other end two feet with two flat trunnions 41 bolted to the lower $\frac{5}{16}$ " angle girders.

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 619 Jack Knife Bridge

Parts required:

6	of No.	1	210	of No.	37	4	of No.	100
4	" "	1 ^B	6	" "	38	4	" "	108
26	" "	2	1	" "	40	1	" "	109
4	" "	2 ^A	1	" "	48 ^A	1	" "	115
4	" "	3	2	" "	48 ^B	4	" "	133
16	" "	6	3	" "	48 ^D			
20	" "	8	2	" "	52			
6	" "	9	2	" "	52 ^A			
4	" "	9 ^D	17	" "	59			
6	" "	12	6	" "	70			
1	" "	13 ^A	6	" "	89			
6	" "	14	2	" "	94			
1	" "	16 ^B	1	" "	95 ^A			
2	" "	26	4	" "	96			
2	" "	27 ^A	1	" "	96 ^A			
1	" "	29	4	" "	98			
1	" "	32	4	" "	99			

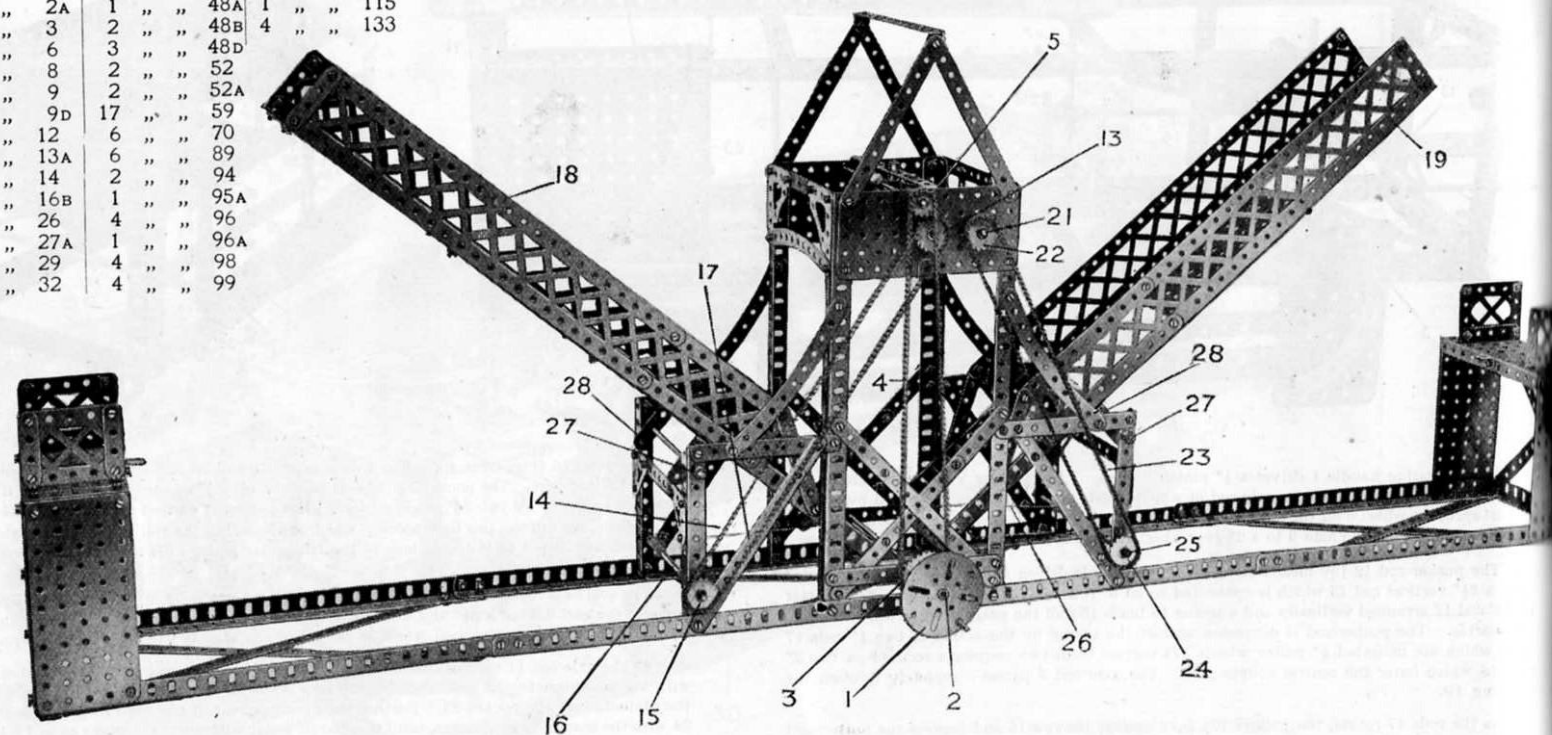

The arms of the bridge are raised or lowered by rotating the hand-wheel 1. On the 8" rod 2 of the hand-wheel is mounted a $1\frac{1}{2}$ " sprocket wheel 3 which is coupled by a chain 4 to a $\frac{3}{4}$ " sprocket wheel 5 on a $6\frac{1}{2}$ " rod 6, Fig. 619A. On this rod a worm wheel 7 drives a $\frac{1}{2}$ " pinion 8 on a $3\frac{1}{2}$ " rod 9, on which is a $\frac{3}{4}$ " contrate wheel 10. This engages a $\frac{3}{4}$ " pinion 11 carried on a 3" rod 12, on the outer end of which is a 1" sprocket wheel 13 connected by a sprocket chain 14 to a 1" sprocket wheel 15 on a $6\frac{1}{2}$ " rod 16; on this rod a cord 17 is wound, connected to the end of one arm 18 of the bridge. The other arm 19 is operated from a 57-toothed gear wheel 20 on the rod 12

Mod



engag
rod
sprock
to an
wind
conn
bridg

The
carrie
 $1\frac{1}{2}$ " d

These Models can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

127

Model No. 619 Jack Knife Bridge (continued)


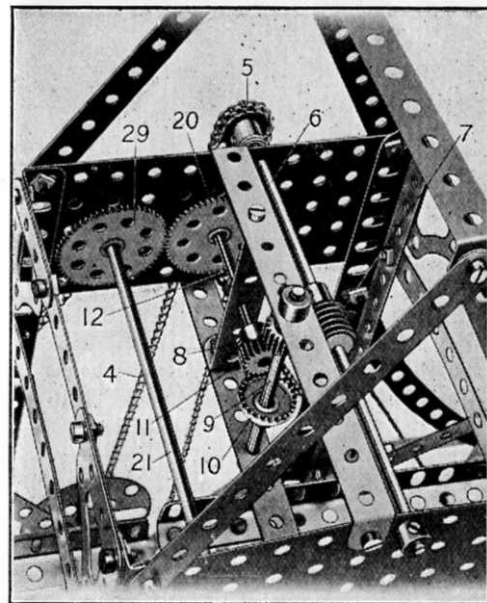


FIG. 619A

engaging a similar wheel 29 on the $6\frac{1}{2}$ " rod 21. On the end of this rod a 1" sprocket wheel 22 is coupled by a chain 23 to another 1" sprocket wheel 24 on the $6\frac{1}{2}$ " winding rod 25, the cord 26 from which is connected to the other arm 19 of the bridge.

The arms 18 and 19 are pivotally carried on $6\frac{1}{2}$ " rods 27 by means of $3\frac{1}{2}$ " x $1\frac{1}{2}$ " double angle strips 28.


Model No. 620 Jack

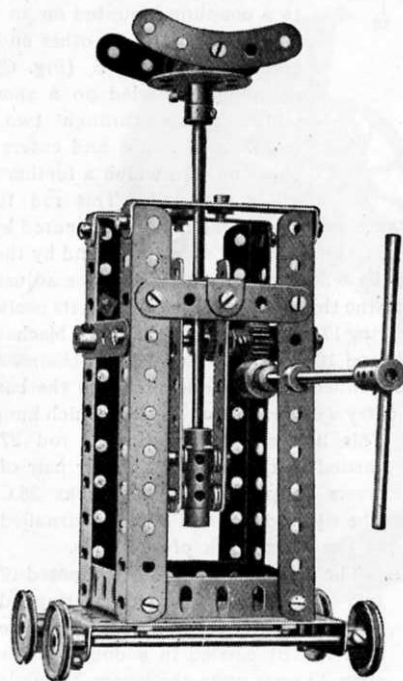

Parts required:

5 of No. 5	3 of No. 26
4 " " 9	1 " " 32
4 " " 9D	32 " " 37
2 " " 12	8 " " 38
2 " " 14	3 " " 48A
2 " " 15A	1 " " 53
1 " " 16	7 " " 59
1 " " 16B	2 " " 63
4 " " 22	2 " " 90
1 " " 24	2 " " 110


Model No. 621 Semaphore

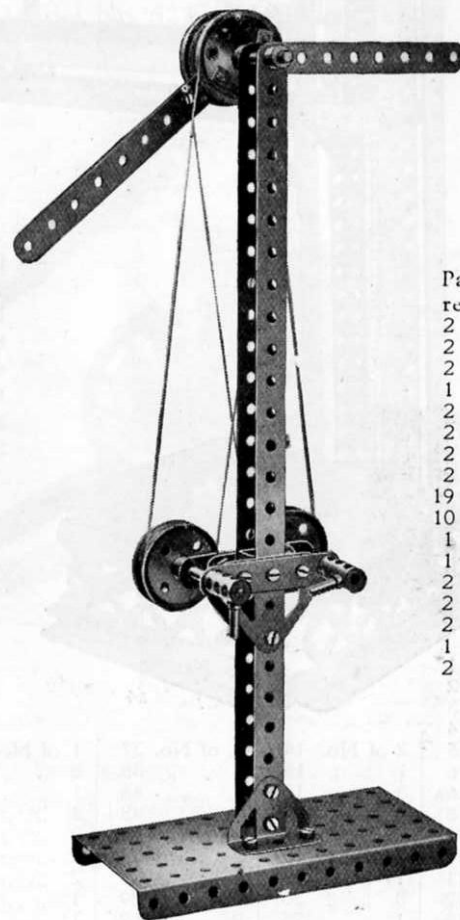

Parts required:		
2 of No. 2	2	
2 " " 5	5	
2 " " 8	8	
1 " " 16A	16A	
2 " " 17	17	
2 " " 20	20	
2 " " 21	21	
2 " " 24	24	
19 " " 37	37	
10 " " 38	38	
1 " " 40	40	
1 " " 52	52	
2 " " 59	59	
2 " " 63	63	
2 " " 115	115	
1 " " 126	126	
2 " " 126A	126A	

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 622 Platform Scales

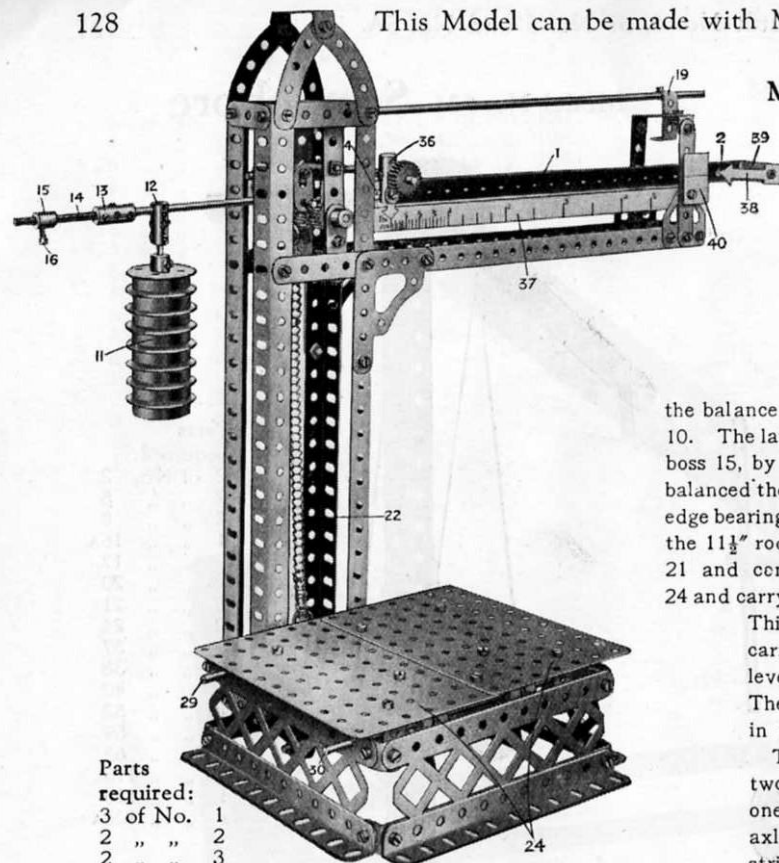

Parts required:

3 of No. 1	2 of No. 14	78 of No. 37	1 of No. 64
2 " " 2	1 " " 15	14 " " 38	2 " " 65
2 " " 3	3 " " 16	1 " " 46	1 " " 81
2 " " 4	2 " " 16B	3 " " 48	4 " " 90
3 " " 5	1 " " 17	4 " " 48D	3 " " 100
2 " " 6	2 " " 18A	2 " " 52A	2 " " 102
4 " " 8A	1 " " 18B	6 " " 57	2 " " 108
2 " " 9	8 " " 20	20 " " 59	1 " " 111
4 " " 10	1 " " 25	2 " " 62	1 " " 111A
1 " " 11	2 " " 26	8 " " 63	2 " " 115
2 " " 12	8 " " 35	1 " " 63B	2 " " 126A
1 " " 12A			
3 " " 12B			
2 " " 13			

The steelyard 1, consisting of a 12½" strip, is bolted at its extreme end at 2 to a coupling mounted on an 11½" rod 3, Fig. C, and at its other end 4 to a second coupling 5, (Fig. C). This coupling is carried on a short rod 6 which passes through two further couplings 7 and 8 and enters another coupling 9 in which a further axle rod 10 is mounted. This rod 10 carries

the balance weights 11 which may be secured by means of the coupling 12 in any position on the rod 10. The latter is also extended at its end by the coupling 13 and threaded rod 14 carrying a threaded boss 15, by which very accurate balance adjustment may be made. When the steelyard is exactly balanced the threaded boss is secured in its position by the bolt 16. The fulcrum 7 rests upon a knife-edge bearing 17 (see "Meccano Standard Mechanisms") and is lifted into weighing position by placing the 11½" rod 18 under the stop 19. A chain 22 is suspended by means of flat brackets 20 and hook 21 and connects with the levers 23 in the base of the model. These levers are pivoted on hooks 24 and carry a central 3" rod 25 from which hangs a link 26 consisting of a double bracket and ¾" bolt.

This link supports a further rod 27 carried in the ends of another pair of levers 28 pivoted to the hooks 28A. The 6½" rods 29 and 30 are journaled in the framework of the base.

The platform, Fig. A, is composed of two 5½" by 3½" flat plates overlapped one hole and secured together; the axle rod 31 carried in a double angle strip 32 rests upon the levers 23, while the threaded pins 33 bolted in 1" by ½" angle brackets 34 rest upon the levers 28. Two washers are placed on the bolts underneath each end of the double angle strip 32 and four washers are placed beneath each of the brackets 34. Single bent strips 35 form guides for the platform and fit over the rod 30 in the base.

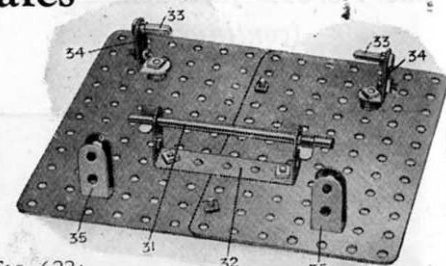


FIG. 622A


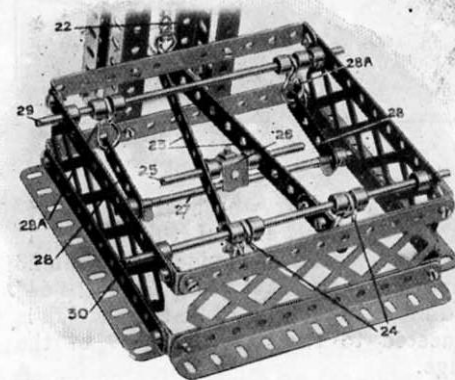


FIG. 622B

A weight and ¾" pin small arm load being A piece of may be h arranged when the Before balancing the line 4 mark in

Model No. 622 Platform Scales (*continued*)

FIG. 622c

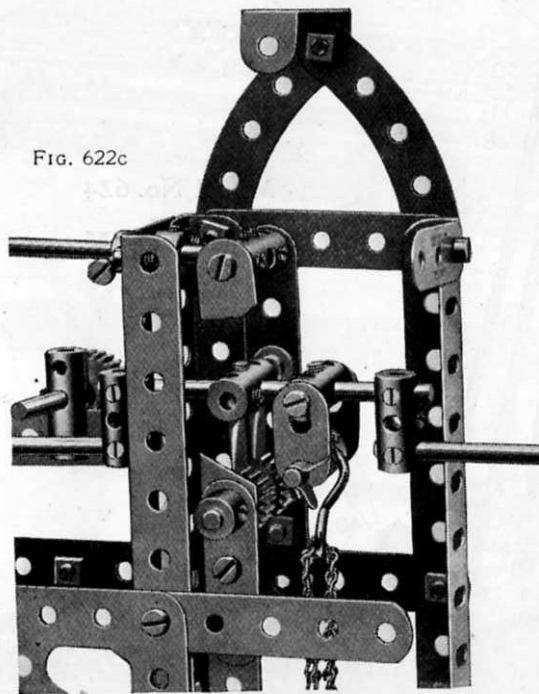


A weight 36 consisting of a strip coupling, short rod, and $\frac{3}{8}$ " pinion slides along the steelyard 1 and carries a small arrow, cut from cardboard, which indicates the load being weighed by means of the graduated rule 37. A piece of cardboard 38 also cut in the form of an arrow may be bolted to a 1" reversed angle bracket 39 and arranged to rest against the cardboard indicator 40 when the scales are exactly balanced.

Before commencing to weigh care should be taken in balancing the steelyard so that the arrow 38 points to the line 40 when the sliding weight 36 is at the "O" mark in the rule 37.

Model No. 623 Field Gun

FIG. 623A

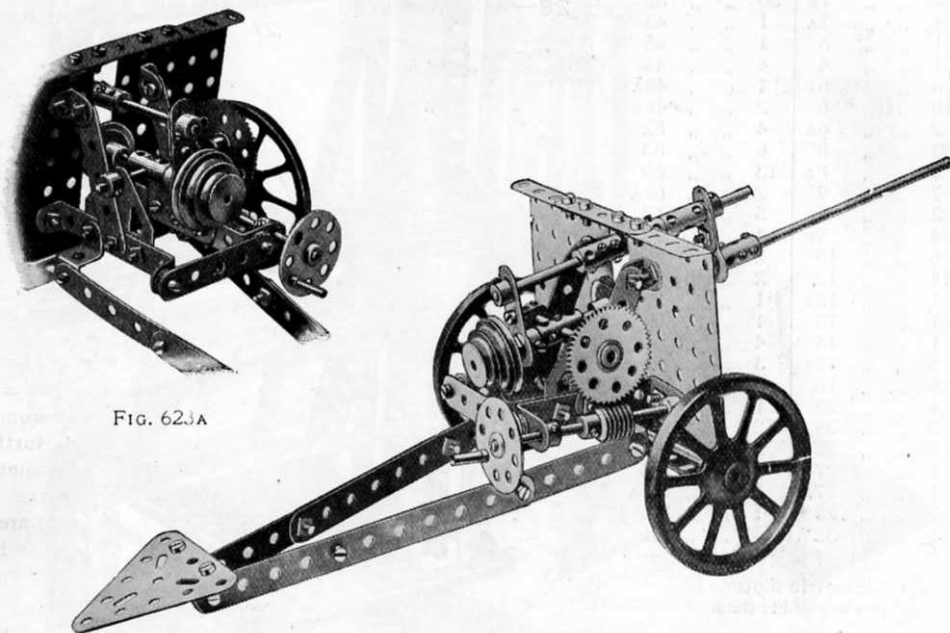

Parts required:

4 of No. 2	1 of No. 13A	1 of No. 18B	1 of No. 27A	1 of No. 47	1 of No. 76
5 " " 5	1 " " 14	2 " " 19B	1 " " 32	2 " " 53	1 " " 115
2 " " 10	1 " " 15	3 " " 22	34 " " 37	5 " " 59	1 " " 123
1 " " 11	1 " " 16	1 " " 24	6 " " 38	2 " " 62	2 " " 124
6 " " 12	1 " " 16A	1 " " 26	1 " " 46	4 " " 63	2 " " 126


This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Parts required:

3 of No.	1	146 of No.	37
2 "	1A	30 "	38
4 "	2A	1 "	43
1 "	3	1 "	45
1 "	4	4 "	48
8 "	5	1 "	48A
10 "	6	2 "	48B
2 "	6A	4 "	52
23 "	8	6 "	53
4 "	8A	13 "	59
7 "	9	2 "	62A
2 "	9D	5 "	63
4 "	9F	4 "	77
6 "	10	2 "	80B
14 "	12	2 "	94
1 "	12B	1 "	95
1 "	13	1 "	95A
1 "	14	4 "	96
6 "	15A	3 "	96A
5 "	16	3 "	108
4 "	22	1 "	109
2 "	25	2 "	110
3 "	26	2 "	115
1 "	27	3 "	126
1 "	27A	2 "	126A
2 "	28	1 "	130
1 "	32	4 "	136

1 of No. 144

Electric Motor
(not included in Outfit)

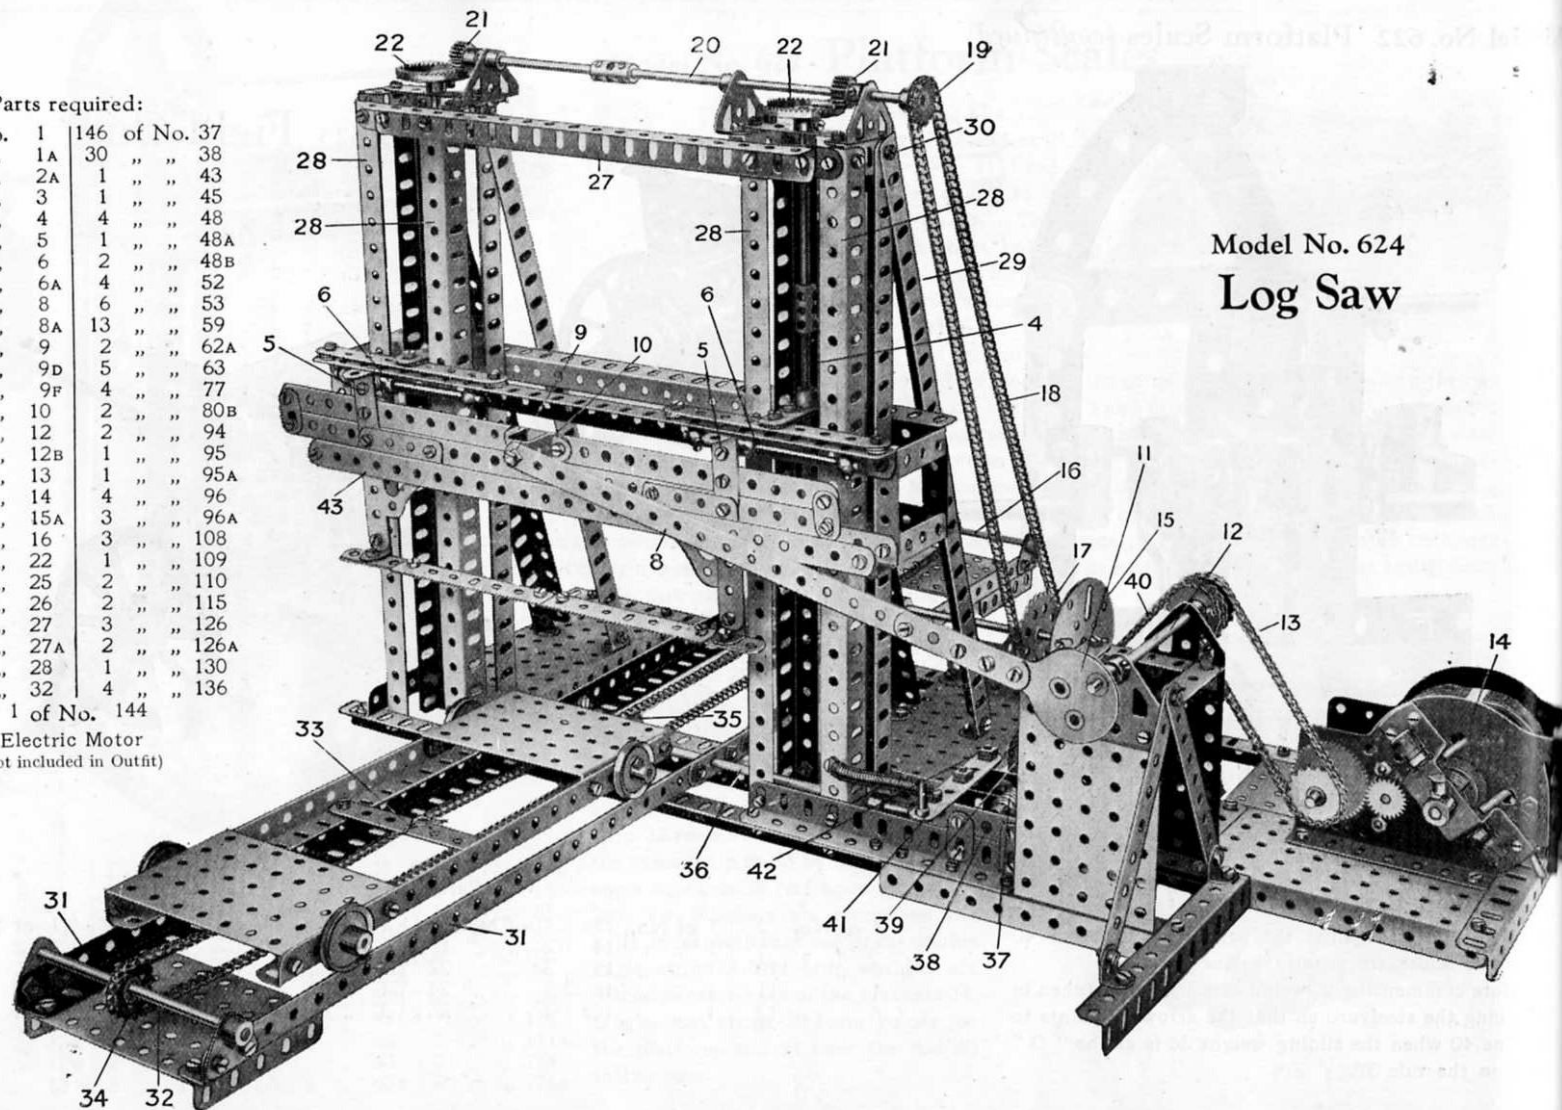

Model No. 624

Log Saw

The illustration shows a complete model of a log saw. The saw is built using Meccano parts, including a large gear mechanism on the right side, which is connected to a motor (not shown). The saw is designed to cut through logs, with a sliding mechanism for the cutting head. The parts are labeled with numbers from 1 to 43, corresponding to the parts list.

The coupling is made by rail lapping. The saw frame is also built using Meccano parts. The chain is made of Meccano links. The rod is made of Meccano wire.

Model No. 624 Log Saw (continued)

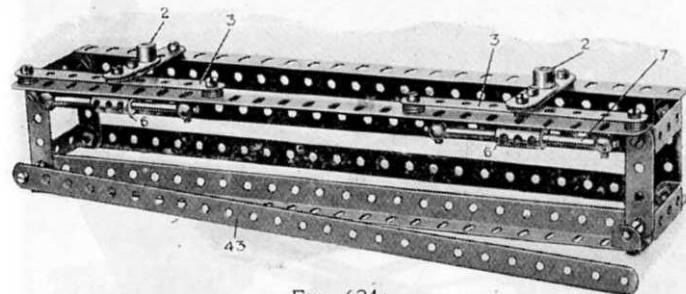


FIG. 624A

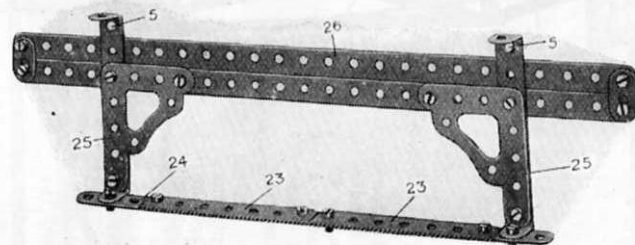


FIG. 624B

The general construction of the main framework of the model is clearly illustrated in Fig. C, while details of the vertically adjustable frame and saw slide are shown in Fig. A and of the saw frame in Fig. B. When completed, the frame (Fig. A) is slipped over the uprights 28. The $9\frac{1}{2}$ " angle girder 27 is then bolted to the $12\frac{1}{2}$ " angle girders 28 as shown and the $12\frac{1}{2}$ " angle girders 29 are joined at 30 to the top of the uprights. The threaded cranks 2 and the strips 3 (Fig. A), are not secured to the saw slide at this stage, but when the slide is in position on the uprights the cranks 2 and strips 3 may be bolted in place. The strips 3 are spaced with washers in order to prevent the bolts, which secure the cranks, from fouling the sliding members 6. The threaded rods 4 are then screwed into the cranks 2 (see book of Meccano Standard Mechanisms, Section IX.)

The saw frame, Fig. B, is bolted and spaced with washers at 5 to the couplings 6 which slide on two $3\frac{1}{2}$ " rods 7 secured to the frame (Fig. A) by rail supports and is reciprocated by means of a $9\frac{1}{2}$ " and $2\frac{1}{2}$ " strip 8 overlapping 3 holes and bolted at 9 to a double bent strip 10 on the frame. The saw frame is further retained on the slide by a $12\frac{1}{2}$ " strip 43. The strip 8 is also bolted to an eccentric 11 on the rod 12, which is driven by a sprocket chain 13 from the motor 14.

The saw slide is adjusted vertically by turning the face plate 15 mounted on a $4\frac{1}{2}$ " rod journaled in a $2\frac{1}{2}$ " x 1" double angle strip (Fig. C.) This rod carries a $1\frac{1}{2}$ " sprocket wheel 17 coupled by a chain 18 to a $\frac{3}{4}$ " sprocket

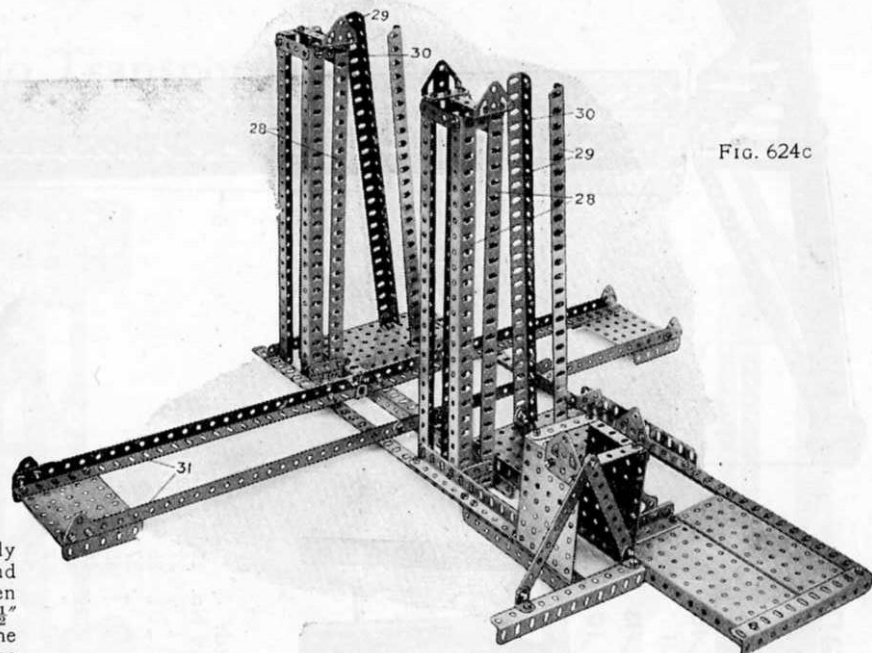


FIG. 624C

wheel 19 on a rod 20 made up of 6" and $3\frac{1}{2}$ " rods coupled together. Two $\frac{1}{2}$ " pinions 21 engage $1\frac{1}{2}$ " contrate wheels 22 each secured to a $3\frac{1}{2}$ " rod and coupled to the $4\frac{1}{2}$ " screwed rods 4 which engage the cranks 2.

The saw is made up of two rack strips 23 bolted to a $9\frac{1}{2}$ " strip 24 carried by architraves 25 from the saw frame. The latter consists of two $12\frac{1}{2}$ " strips 26 bolted together at the ends.

The feed carriage, which slowly moves the logs against the saw whilst they are being cut, runs on rails 31 formed from $12\frac{1}{2}$ " angle girders butted together, and is advanced by a sprocket chain 32 connected at 33 to the carriage. This chain passes over a $\frac{3}{4}$ " sprocket wheel 34 at either end of the rails, while the lower part of the chain passes under and is driven by a $1\frac{1}{2}$ " sprocket wheel 35 on the 8" rod 36. The latter is connected by a dog clutch to a $3\frac{1}{2}$ " rod carrying a $\frac{3}{4}$ " pinion engaged by a worm wheel 37 on a $2\frac{1}{2}$ " rod. at the other end of which is a 2" sprocket wheel 39. This is driven by a chain 40 from the rod 12. The dog clutch is controlled by the hand lever 41 pivoted at 42. (Meccano Standard Mechanisms, Section V.)

Model No. 625 Crane

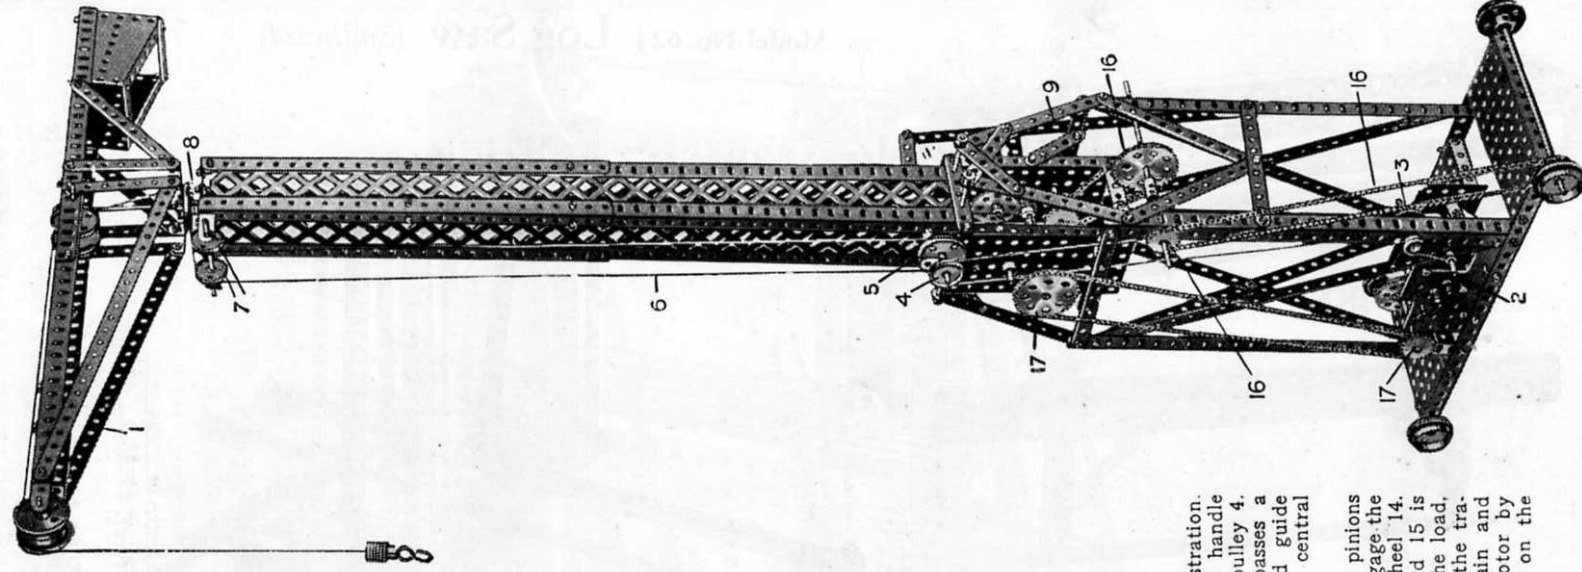
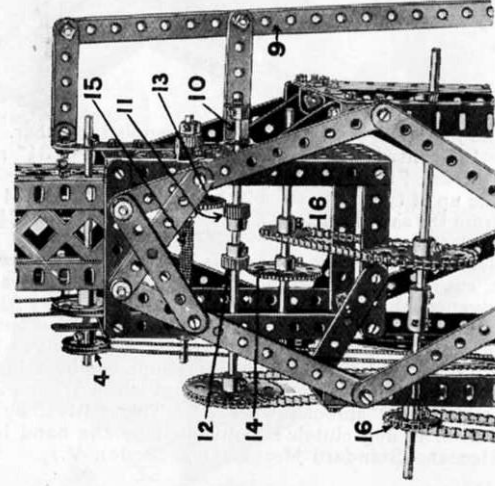


FIG. 625A

Parts required:

10 of No.	1	3 of No.	26
12	"	3	27A
8	"	4	"
4	"	4	35
17	"	139	37
16	"	5	45
1	"	8	46
"	"	11	"
"	"	12	48A
"	"	13A	52
"	"	14	54
"	"	15	57
"	"	16	59
"	"	17	62
"	"	18A	63
"	"	20	94
"	"	21	96
"	"	22	99
"	"	22A	147A
"	"	24	147B
"	"	24	148

Electric Motor

(not included in Outfit)


The frame of the model is well shown in the illustration. The swinging of the jib 1 is effected from the handle 2 by means of a cord coupling a pulley 3 to a pulley 4. Round a larger pulley 5 on the same shaft passes a continuous cord 6 which, after winding round guide pulley 7, passes round a pulley 8, fixed on the central spindle jib.

The handle 9 slides the spindle 10 carrying two pinions 11 and 12 so that either the pinion 11 may engage the gear wheel 13 or the pinion 12 the gear wheel 14. When the pinion engages the wheel 13 the cord 15 is wound on or off the spindle to raise or lower the load, and when the pinion 12 engages the wheel 14 the reversing movement is effected through the chain and sprocket 16. The power is taken from the motor by way of the 1" and 2" sprockets 17, the latter on the spindle carrying the pinions 11 and 12.

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

133

Model No. 626 St. Malo Transporter Bridge

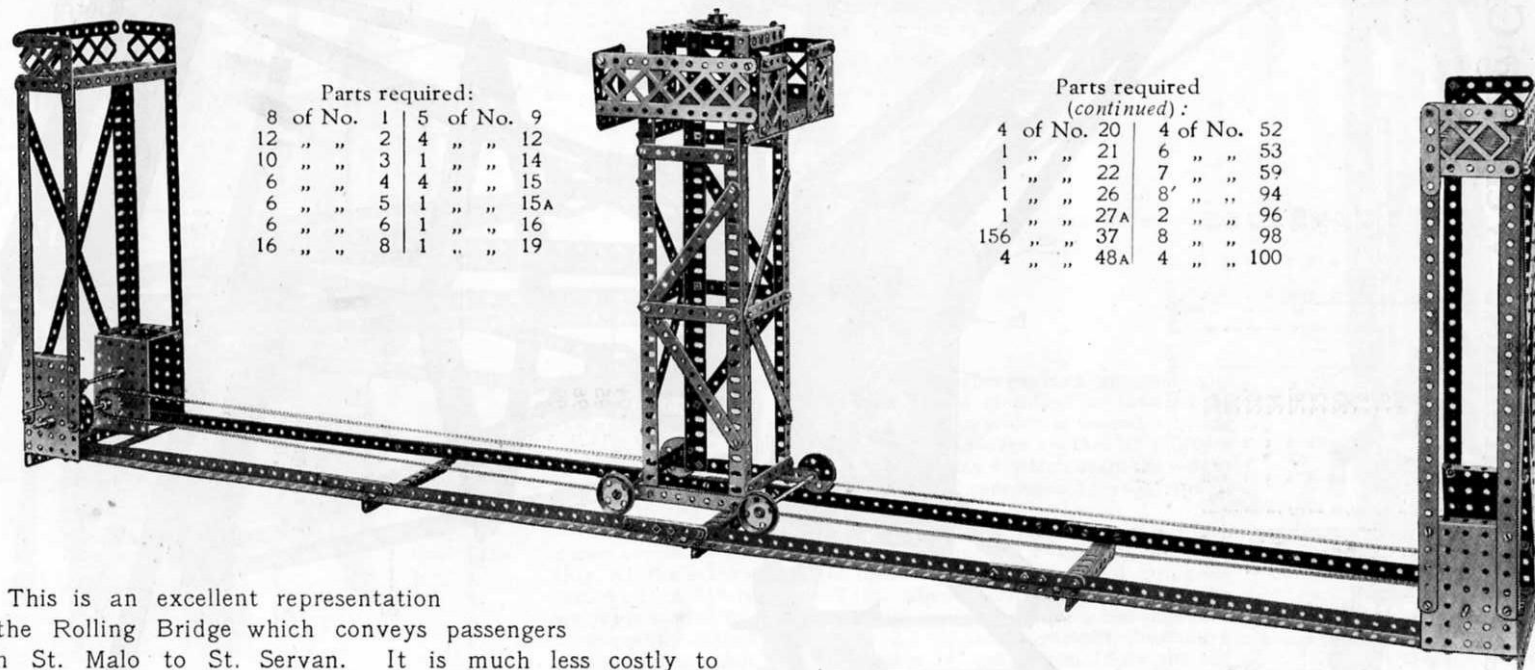

Parts required:

8 of No.	1	5 of No.	9
12	" "	2	4 " " 12
10	" "	3	1 " " 14
6	" "	4	4 " " 15
6	" "	5	1 " " 15A
6	" "	6	1 " " 16
16	" "	8	1 " " 19

Parts required (continued):

4 of No.	20	4 of No.	52
1	" "	6	" " 53
1	" "	7	" " 59
1	" "	8	" " 94
1	" "	2	" " 96
156	" "	8	" " 98
4	" "	4	" " 100

This is an excellent representation of the Rolling Bridge which conveys passengers from St. Malo to St. Servan. It is much less costly to construct than a transporter bridge of the Newport type, but of course it can only be used over marshy land with shallow water over which a solid track can be laid. The clever Meccano boy will know how to add little decorations to the transporter and the landing platforms in the way of flags, etc., and make a first-class toy of this fine model.

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

135

Model No. 627 Automatic Weighing Crane (continued)

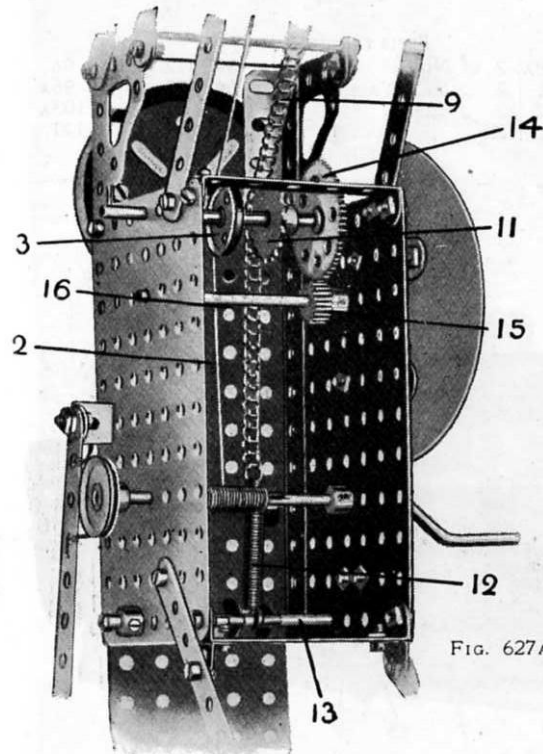


FIG. 627A

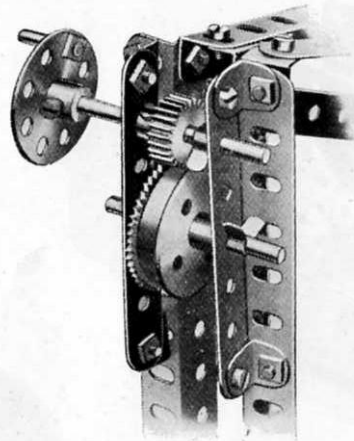


FIG. 627B

This is a model of a crane that, when raising a load, automatically indicates the weight carried. The load is raised or lowered by the operation of the crank handle 1 upon which is wound a lifting cord 2 passing round a 1" pulley 3 and over another 1" pulley 4 (Fig. C) to the loaded hook 5. The 1" pulley 4, which bears the weight of the load, is carried by two cranks 6 connected to a $3\frac{1}{2}$ " rod 7, slidable in two double brackets 8.

To the top of the rod is connected a sprocket chain 9 which passes over a $1\frac{1}{2}$ " sprocket wheel 10 and under a 1" sprocket wheel 11 (Fig. A), the other end of the chain being connected to a spring 12, secured to a $3\frac{1}{2}$ " rod 13. Thus, when a load is being raised the weight is carried by the rod 7 which pulls down in its bearings and consequently extends the spring 12. In this movement, the chain 9 rotates the sprocket wheel 11 and a $1\frac{1}{2}$ " gear wheel 14 on the rod of the sprocket 11 engages a $\frac{1}{2}$ " pinion 15 on a rod 16. On the outer end of this rod 16 is a crank 17 that sweeps round the graduated

dial 18 to indicate the weight of the load that is being lifted.

The construction of the remainder of the model will be clearly seen from the illustration. The bearings 23 carrying the flanged wheels 24 are formed of $2\frac{1}{2}$ " strips connected to the girders 20 by angle brackets.

It will be noted that the crane jib is carried upon ball bearings 19, the balls (Part No. 117) for which are not supplied in the No. 6 Outfit but may be obtained separately. The crane will work well without the ball bearing, but the operation is easier when such a bearing is fitted.


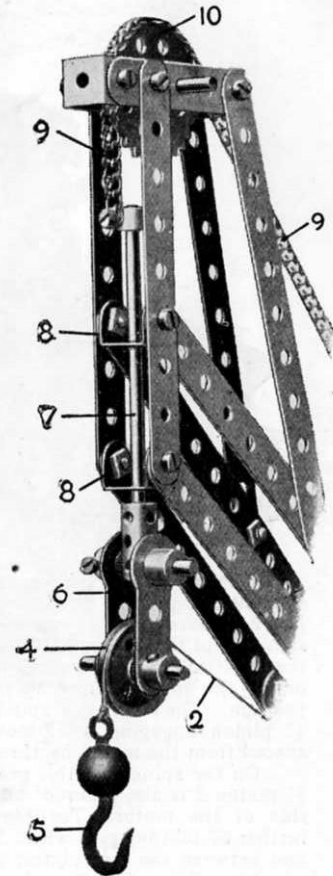


FIG. 627C

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 628 Meccano High-Power Electric Loco Chassis

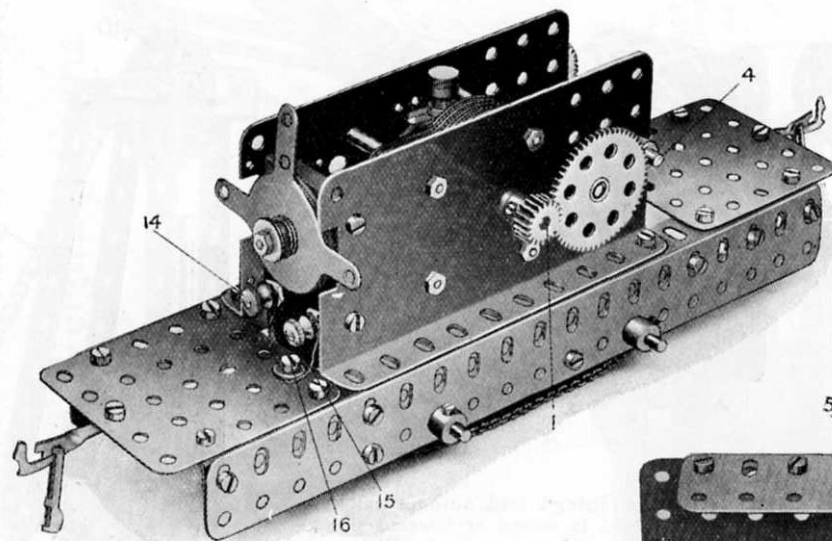


This is a simply constructed and very efficient electric loco, in which either a No. 1 or No. 2 Meccano motor may be used. The construction of the chassis will be clearly seen from the illustrations. The gearing should be built on to the motor before bolting the latter in position. On the motor spindle 1 is secured a $\frac{1}{2}$ " pinion engaging a 57-toothed gear wheel spaced from the motor by three washers.

On the spindle of this gear wheel a second $\frac{1}{2}$ " pinion 2 is also secured, but on the opposite side of the motor. The pinion 2 engages a further 57-toothed gear wheel 3 on the spindle 4, and between the side plates, on the latter spindle, is secured a $\frac{3}{4}$ " sprocket wheel 5. Before inserting the spindle 4 a ring of sprocket chain 6, containing 39 links, should be threaded over the sprockets 5 and 11, after which the motor may be bolted on to the chassis. The flanged travelling wheels 7 may now be placed in position as shown. The sprocket wheel 11 is $\frac{3}{4}$ " in diameter and the sprocket wheels connecting the axles are 1". The ring of sprocket chain for these should contain 52 links.

Parts required:

2 of No. 8A	2 of No. 26	4 of No. 59	2 of No. 96
2 " " 16	2 " " 27A	2 " " 64	2 " " 96A
1 " " 17	2 " " 37	2 " " 72	2 " " 103A
4 " " 20	2 " " 48A	1 " " 94	2 " " 121
1 of No. 149			

Electric Motor
(not included in Outfit)

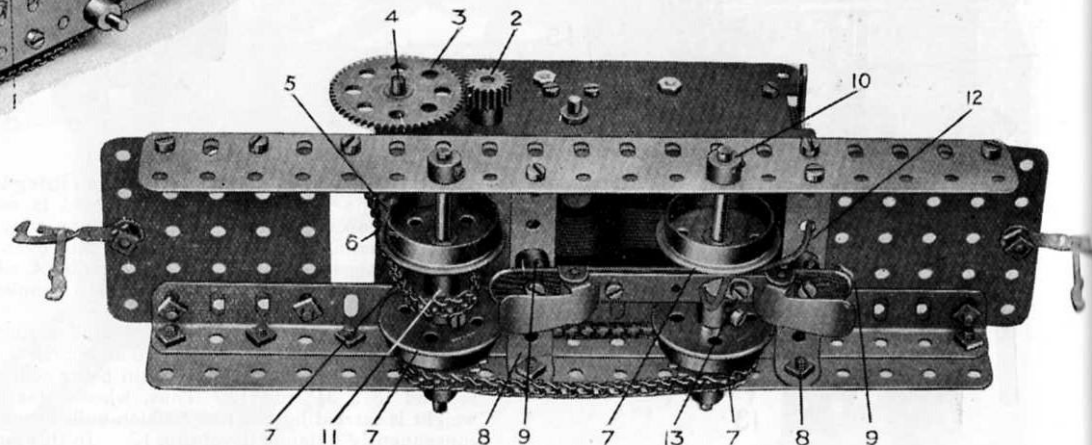


The new Meccano electric shoe is bolted to the $2\frac{1}{2}$ " double angle strips 8, spaced with a threaded boss 9 at each end to give clearance to the axle rod 10. One end of a piece of insulated wire 12 is connected to the bolt head 13, and the other end to the terminal 14, while another piece of wire is connected with the terminal 15 and the bolt head 16.

The loco is designed to run on "0" gauge electric rails, and may be coupled to Hornby train rolling stock. Any suitable superstructure may be built up on the chassis, to represent an electric loco, to suit the builder's taste.

Th
the kn

Model No. 629 Knife Grinder

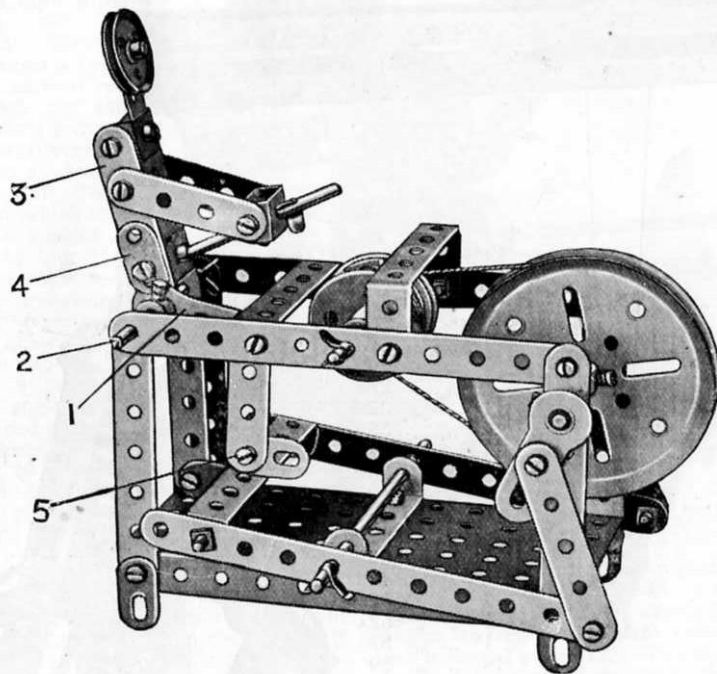Parts
required:

4	of No.	2
4	" "	3
2	" "	4
4	" "	5
3	" "	6
4	" "	10
3	" "	11
2	" "	12
1	" "	15
3	" "	16
1	" "	17
1	" "	19A
2	" "	20
1	" "	22
1	" "	22A
2	" "	35
32	" "	37
6	" "	37A
1	" "	46
2	" "	48A
1	" "	48B
1	" "	52
3	" "	62

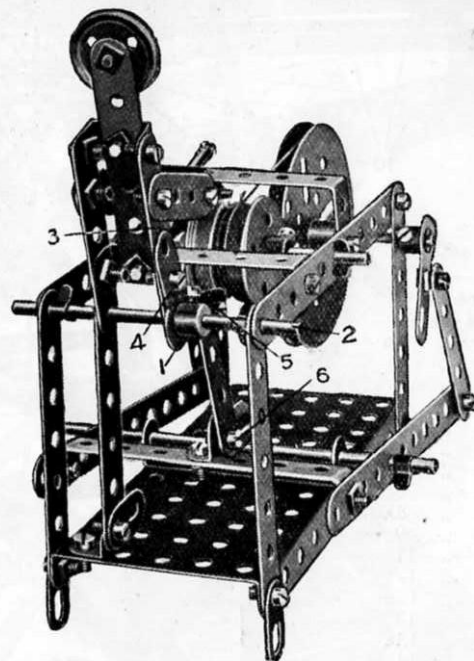


FIG. 629A

* The crank 1 is secured to the rod 2, and the 2½" side-strip 3 is clamped to the crank 1 by the flat bracket 4. The bolt at the end of the crank forming the knee and the bolt 5 are lock-nutted to allow free movement. When the treadle is operated the body works backwards and forwards.

Model No. 630

Radial Travelling Crane


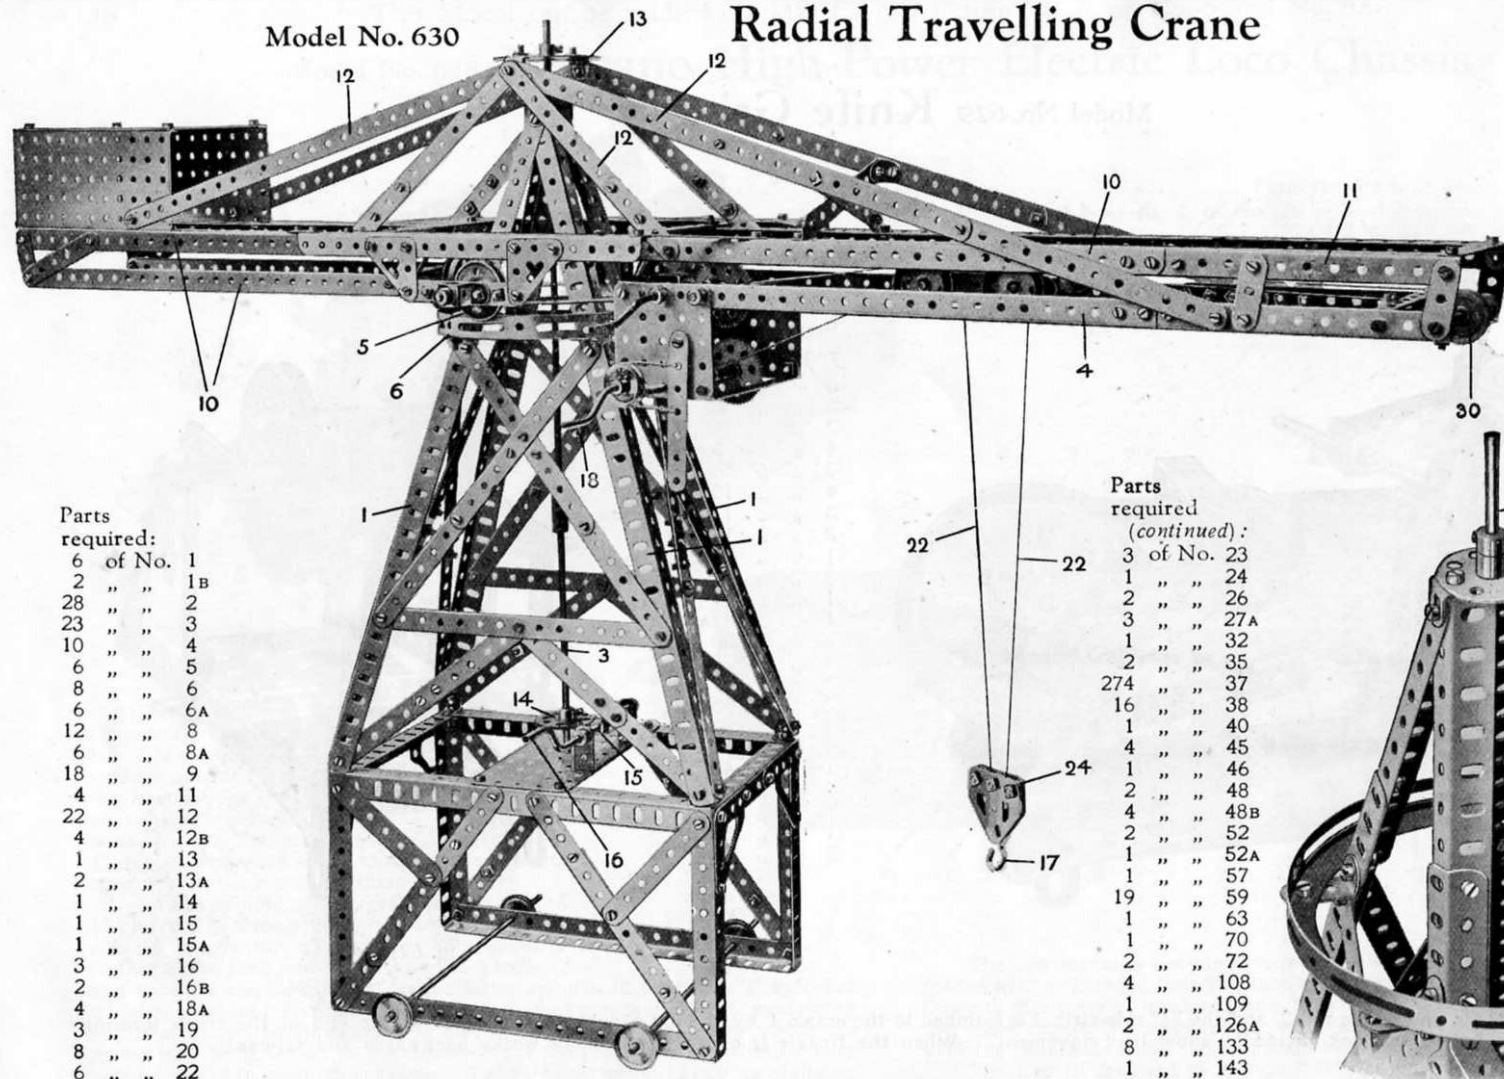


FIG. 630A

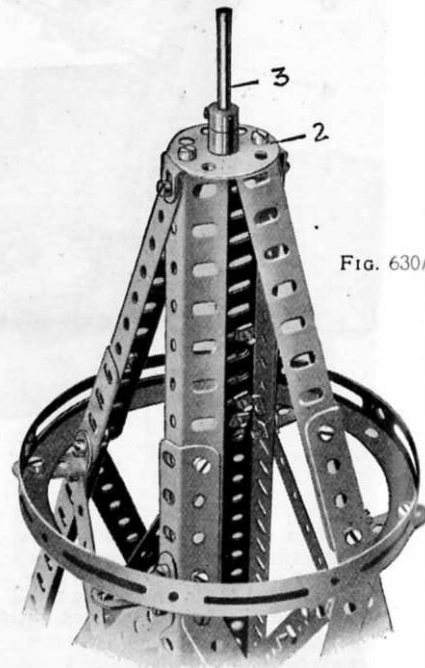

Begin
model
the m
details
clearly
the illu
previ
that
corner
are co
top (a
A) by
secured
bracket
wheel
for the
by wh
lever a
The
turns
formed
wheels
a circu
ported
angle
to the
The ca
up (as
B) from
girders
two 5
overlap
From t
girders
one s
similar
the oth
nected
Th
the ver
crank h
Th
engages
the blo
at the
arm the
Th
this a
which a
of the j
trolley
Th
strips 5

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

139

Model No. 630 Radial Travelling Crane (continued)

Begin to build this model by constructing the main tower, the details of which are clearly brought out in the illustrations on the previous page. Notice that the inclined corner angle girders 1 are connected at the top (as shown in Fig. A) by a bush wheel 2 secured by angle brackets. This bush wheel forms a bearing for the vertical rod 3 by which the cantilever arm 4 is turned.

The cantilever arm 4 turns on a wheel-race formed of flanged wheels 5, which run on a circular girder 6 supported by four $1" \times \frac{1}{2}"$ angle brackets bolted to the corner girders 1. The cantilever is built up (as shown in Fig. B) from two $9\frac{1}{2}"$ angle girders 8 braced by two $5\frac{1}{2}"$ angle girders 9 overlapped nine holes. From these, $12\frac{1}{2}"$ angle girders 10 extend at one side, and to similar girders 10 at the other side are connected $5\frac{1}{2}"$ girders 11.

The inclined strips 12 are connected at the top, by means of angle brackets, to a face plate 13 secured to the vertical rod 3. At the foot of the rod 3 is a $1\frac{1}{2}"$ gear wheel 14 engaged by a worm wheel 15 operated by the crank handle 16 and in this way the cantilever arm is swung round, the wheels 5 riding on the circular girder 6.

The load carried from the hook 17 is raised or lowered by the crank handle 18, a $\frac{1}{2}"$ pinion 19 on which engages a $1\frac{1}{2}"$ gear wheel 20 on a rod 21 on which is wound a cord 22. This cord passes over a $\frac{1}{2}"$ pulley 23 to the block 24 and back over another $\frac{1}{2}"$ pulley on the trolley, and is secured to the $3\frac{1}{2}" \times \frac{1}{2}"$ double angle strip 25 at the outer end of the cantilever arm. Consequently, when the trolley is caused to travel along the cantilever arm the load remains suspended at a constant height—an important point and an interesting detail.

The trolley is caused to move to and fro along the cantilever arm by the action of the crank handle 26. On this a $\frac{1}{2}"$ pinion 27 engages a $1\frac{1}{2}"$ gear wheel 28 on a rod on which is wound the cord 29, the opposite ends of which are connected to the opposite ends of the trolley. The cord 29 passes round a pulley 30 at the outer end of the jib. By turning the crank handle 26, therefore, the cord 29 winds on and off its rod, and moves the trolley to and fro, its wheels 31, as shown in Fig. C, running on the angle girders 10.

The wheels 5 are connected to $1\frac{1}{2}"$ rods 5a which are journaled in double bent strips 5b bolted to $3\frac{1}{2}"$ strips 5c carried from the angle girders 8 by corner brackets 5d.

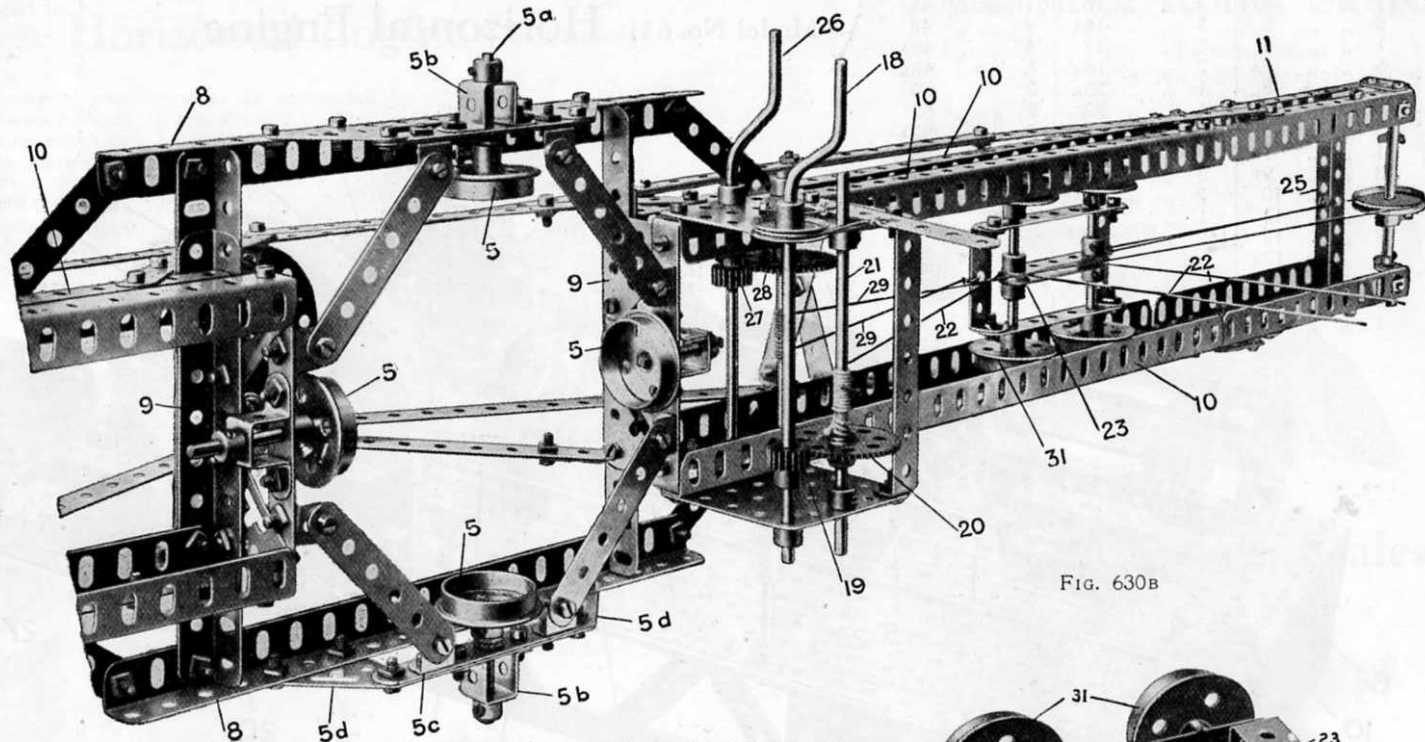


FIG. 630B

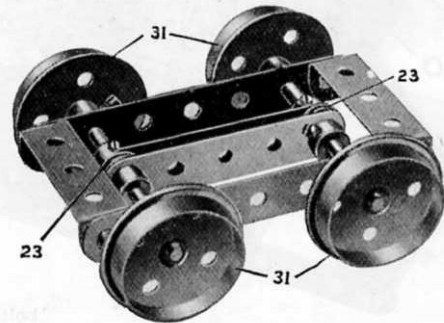


FIG. 630C

Parts required:

2 of No. 3	1 of No. 15A	20 of No. 38
11 " " 4	2 " " 16	1 " " 45
8 " " 5	2 " " 16A	4 " " 48
1 " " 6	5 " " 17	4 " " 48A
5 " " 6A	2 " " 18A	6 " " 48B
7 " " 8	1 " " 20A	2 " " 50
1 " " 8A	1 " " 22	7 " " 52
3 " " 9	2 " " 22A	2 " " 52A
1 " " 9B	3 " " 24	4 " " 53
3 " " 9F	3 " " 26	16 " " 59
4 " " 10	2 " " 27A	
2 " " 11	1 " " 29	
2 " " 12	160 " " 37	
1 " " 12A		
1 " " 13		
2 " " 14		
1 " " 15		

Model No. 631 Horizontal Engine

Parts required

(continued):

4 of No. 62	2 of No. 109
6 " " 63	2 " " 116
2 " " 63B	1 " " 118
3 " " 70	2 " " 126
2 " " 76	3 " " 126A
26 " " 94	4 " " 133
1 " " 95	3 " " 136
3 " " 96	

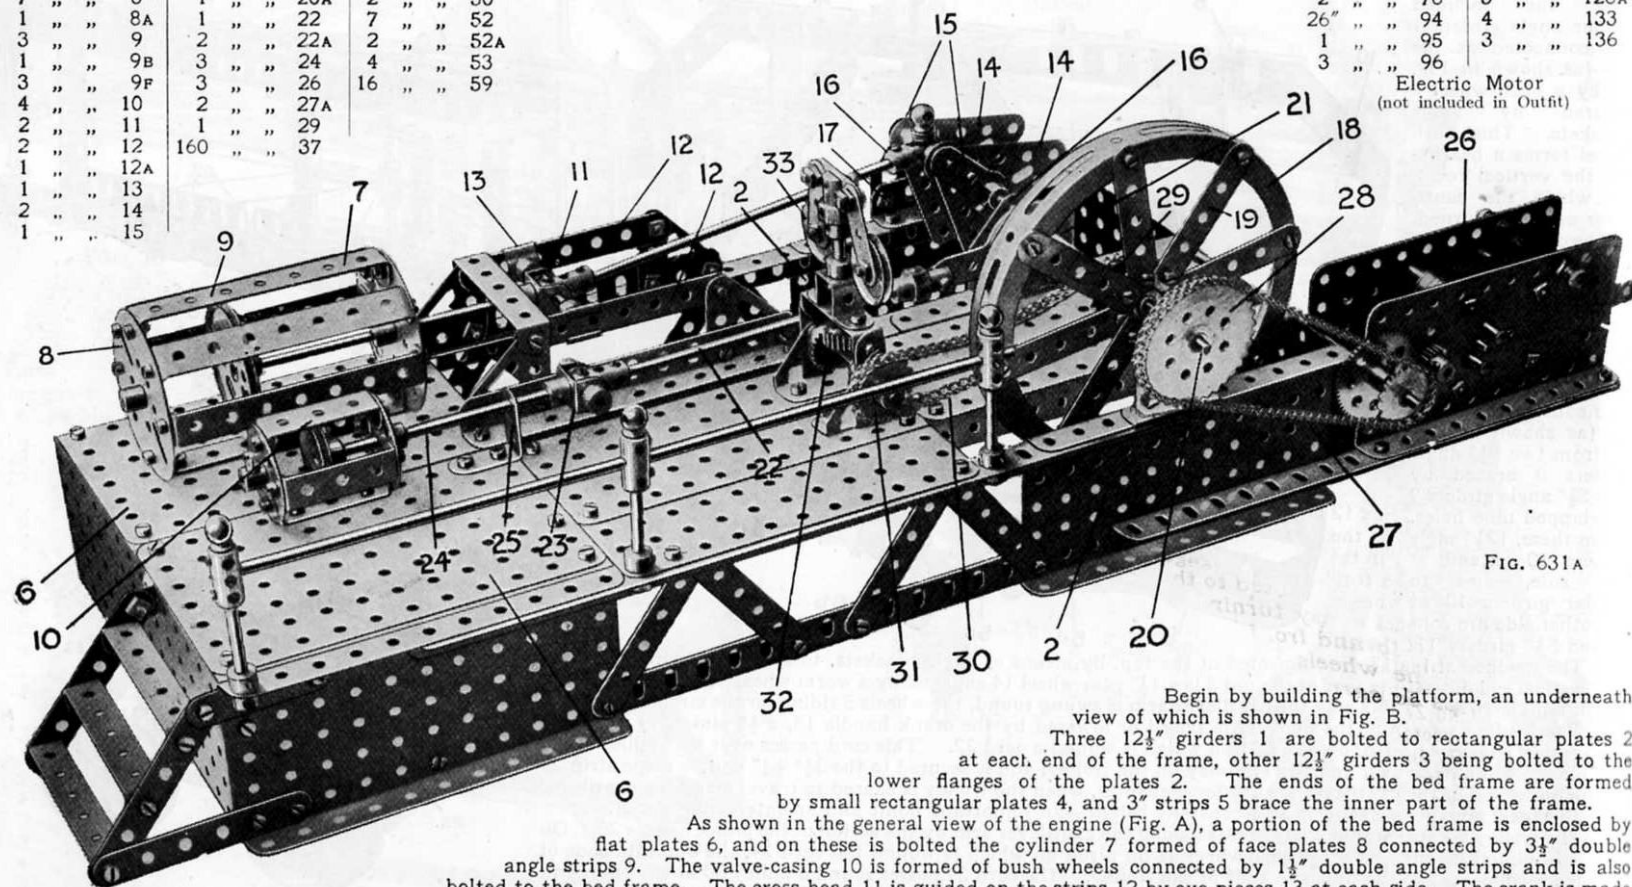
Electric Motor
(not included in Outfit)

Fig. 631A

Begin by building the platform, an underneath view of which is shown in Fig. B.

Three $12\frac{1}{2}$ " girders 1 are bolted to rectangular plates 2 at each end of the frame, other $12\frac{1}{2}$ " girders 3 being bolted to the lower flanges of the plates 2. The ends of the bed frame are formed by small rectangular plates 4, and 3" strips 5 brace the inner part of the frame.

As shown in the general view of the engine (Fig. A), a portion of the bed frame is enclosed by flat plates 6, and on these is bolted the cylinder 7 formed of face plates 8 connected by $3\frac{1}{2}$ " double angle strips 9. The valve-casing 10 is formed of bush wheels connected by $1\frac{1}{2}$ " double angle strips and is also bolted to the bed frame. The cross-head 11 is guided on the strips 12 by eye-pieces 13 at each side. The crank is made up of triangular plates 14 representing the balance weights, secured to cranks 15. The main or crank shaft 20 is journaled in flat trunnions 16 secured to $1\frac{1}{2}$ " girders 17, which are in turn bolted to the flanges of the rectangular plates 2.

The 1
strips
eccen-
the fo
in th
motor
2" ge
A 1"
by s
anoth
wheel
govern



crank sh
speed lin
engine to

Model No. 631 Horizontal Engine (continued)

The fly-wheel is made of a circular girder 18 connected by strips 19 to a bush wheel secured to the shaft 20. The eccentric 21 is pivotally connected by a rod 22 to the fork piece 23 on the valve rod 24, which slides in the 1" angle bracket 25. The electric motor 26 drives by sprocket chain 27 a 2" gear wheel 28 on the shaft 20. A 1" sprocket wheel 29 drives by sprocket chain 30 another 1" sprocket wheel 31 in the governor.

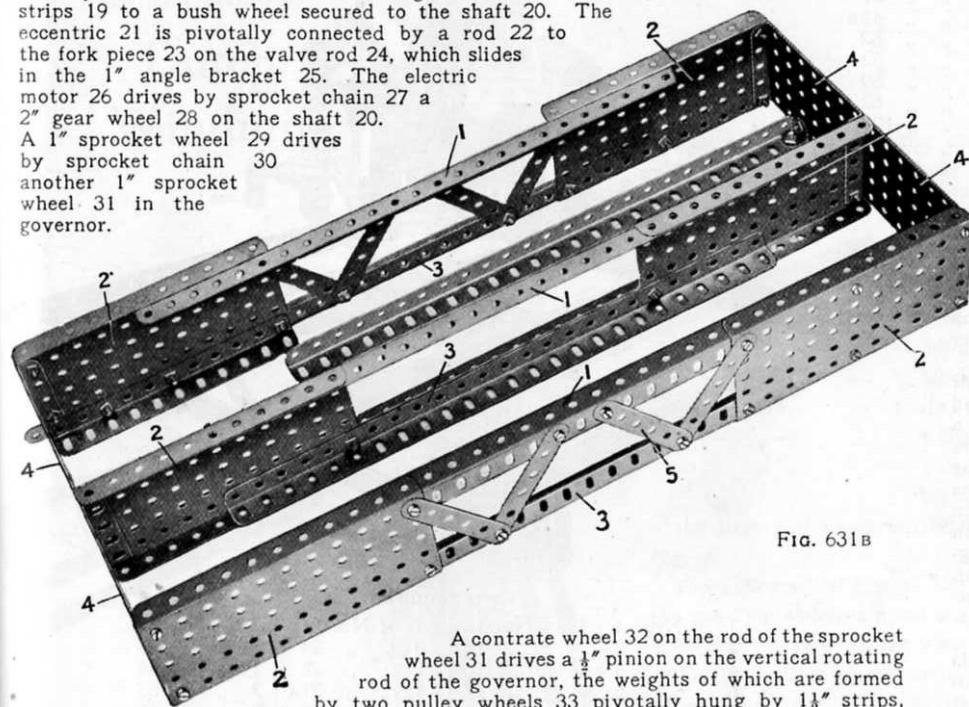


FIG. 631B


A contrate wheel 32 on the rod of the sprocket wheel 31 drives a $\frac{1}{2}$ " pinion on the vertical rotating rod of the governor, the weights of which are formed by two pulley wheels 33 pivotally hung by $1\frac{1}{2}$ " strips, lock-nutted in the outer holes of a horizontal $1\frac{1}{2}$ " strip. This strip is bolted in the slot of an octagonal coupling, secured to the top of the vertical rod of the governor.

In the operation of an engine such as the model represents, the valve 10 controls the admission of steam to each end of the cylinder 7, thus causing the crank shaft 20 to be driven. Should the engine tend to "race," or to exceed a certain speed limit, the weights 33 of the governor fly out and shut off steam, causing the engine to slow down again. The governor thus keeps the engine speed constant.


Model No. 632 Roller Skate

Parts required:

2 of No.	8B	19 of No.	37
4	"	2	"
2	"	1	"
4	"	1	"
		1	"
		1	"
		1	"
		2	"

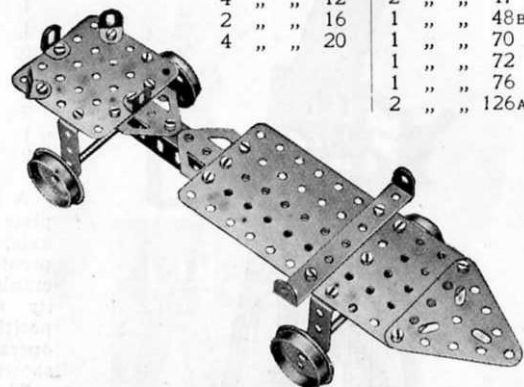


Model No. 633 Scales

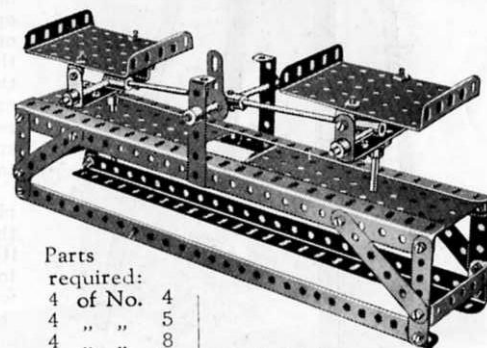

Parts required:

4 of No.	4	2 of No.	52
4	"	2	"
4	"	6	"
4	"	3	"
5	"	3	"
2	"	3	"
30	"	3	"
2	"	3	"
6	"	3	"

Model No. 634 Heliograph

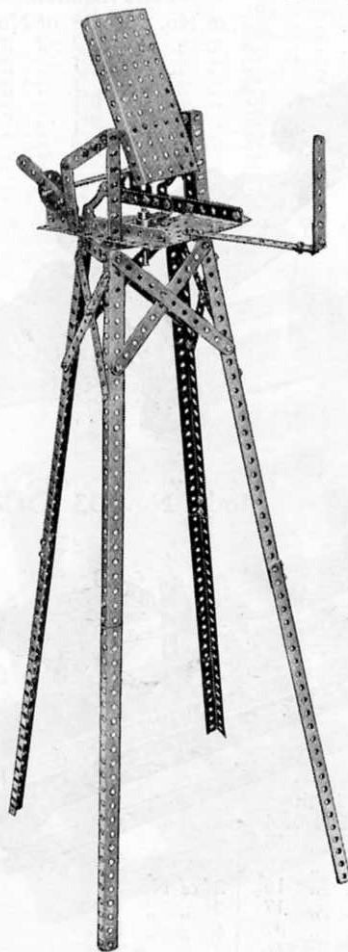

Parts required:


9 of No. 2	1 of No. 17
1 " " 3	1 " " 19B
1 " " 4	1 " " 24
1 " " 5	61 " " 37
1 " " 6	1 " " 48B
6 " " 6A	1 " " 52
8 " " 8	2 " " 53
2 " " 9	5 " " 59
2 " " 9B	2 " " 62
1 " " 12A	2 " " 108
2 " " 15A	2 " " 126A

A large rectangular plate is secured to an axle, about which it pivots, by means of a crank bolted to one of its flanges, and its position is altered on operation of the lever shown.

The rectangular plate should be fitted with a mirror, and a sighting aperture mounted in front, the operator bringing one of the perforations in the plate in line with the aperture while signalling, so that he can see the opposite instrument in the distance.

The platform is pivotally mounted on the standard so that it may be swung round to any position, a bush wheel being bolted to the top of the standard in which the pivot works. The platform is made of two small rectangular plates butted together and connected on each side by strips.

Model No. 635 Searchlight

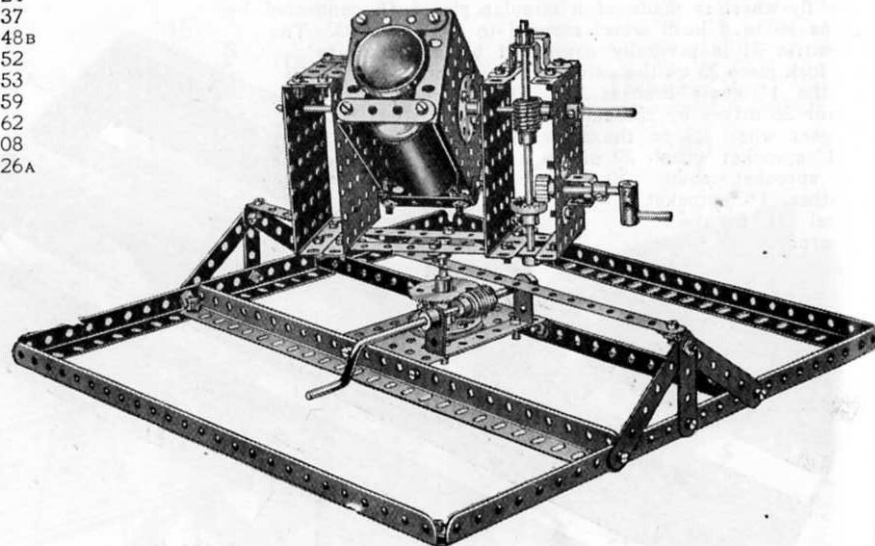

Parts required:


1 of No. 1	6 of No. 12	1 of No. 21	62 of No. 37
2 " " 2	1 " " 15	3 " " 24	3 " " 45
4 " " 4	1 " " 16	2 " " 26	1 " " 46
6 " " 6	2 " " 17	1 " " 27A	7 " " 53
6 " " 8	1 " " 18A	1 " " 29	8 " " 59
2 " " 10	1 " " 19	2 " " 32	1 " " 63

A splendid model with which great fun may be obtained by fitting an electric flash lamp. The light may be quickly manoeuvred in any direction and enemy aircraft "spotted" at once.

Dutch Windmill



The construction of the sails 1 of the mill, will be readily followed from the illustration. They are bolted to an inner strip frame 2 and to a bush wheel 3 fixed on a rod 4, on which is also mounted a pulley wheel 5. The driving cord passes round this pulley wheel to a lower pulley wheel



6, the driving of which will be followed from Fig. A.

The pulley wheel 6 is on the outer end of the rod 7 on which is fitted a $1\frac{1}{2}$ " gear wheel 8 driven by a $\frac{1}{2}$ " pinion 9 on the axle rod 10. This axle rod also carries a $\frac{1}{2}$ " pinion 11 engaged by a worm 12 on the driving shaft 13 which carries a driving pulley 14. The driving gear is enclosed in two small side flanged plates 15 bolted to a base plate 16.

The vertical tower of the mill is made from corner angle girders 17 bolted to side plates 15.

Parts required:

12	of No.	1	24	of No.	12	2	of No.	26	2	of No.	52
18	" "	2	1	" "	14	1	" "	27A	2	" "	52A
4	" "	3	3	" "	16	1	" "	32	2	" "	53
4	" "	4	1	" "	21	124	" "	37	5	" "	59
18	" "	5	2	" "	22	1	" "	40			
4	" "	8	1	" "	24	2	" "	48A			


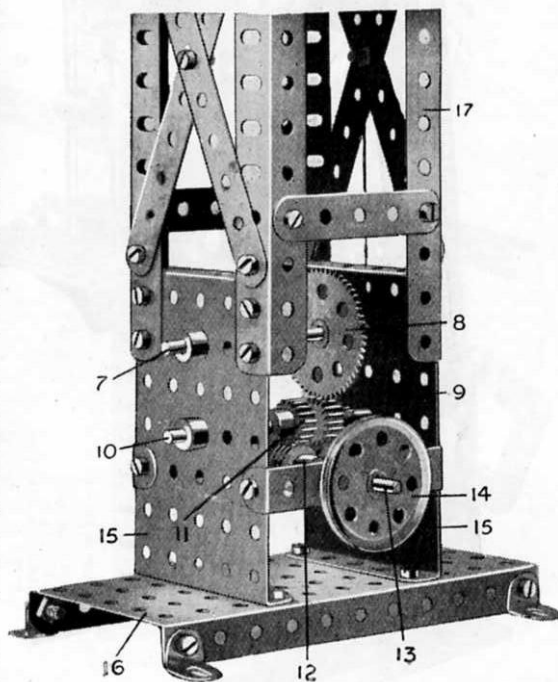


FIG. 636A

These Models can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.


Model No. 637 Punching Machine

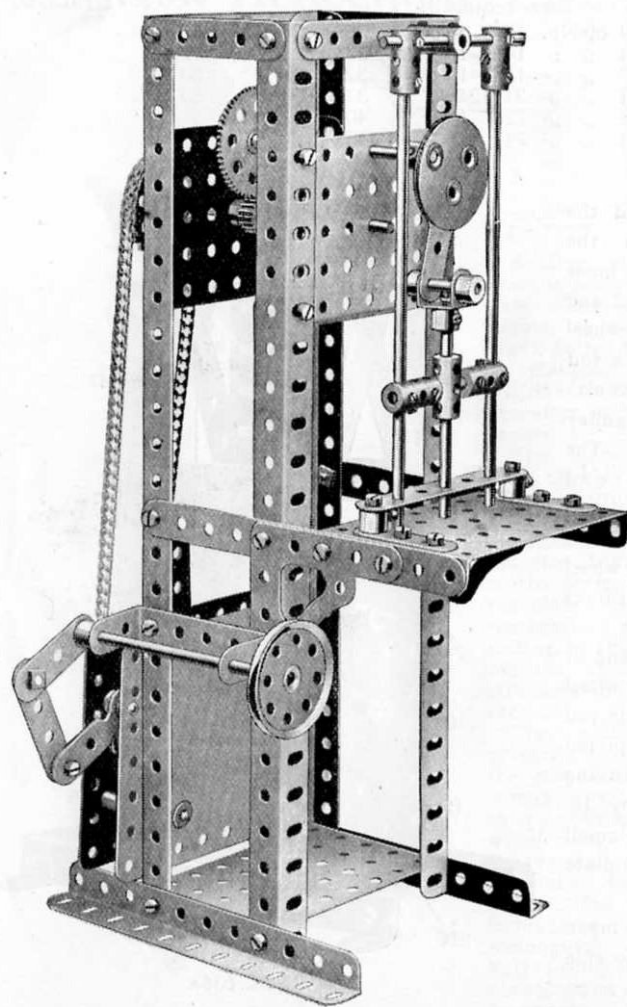

Parts required:	
2 of No.	
2	3
3	5
2	6
1	8
4	9
2	14
2	15A
2	16
1	16B
1	17
1	18A
2	18B
1	21
1	26
1	27A
42	37
1	38
1	46
4	53
6	59
3	62
6	63
1	94
1	95A
1	96
2	108
1	116
1	130

Clockwork
Motor
(not included in
Outfit)

Model No. 638 Fly Boats

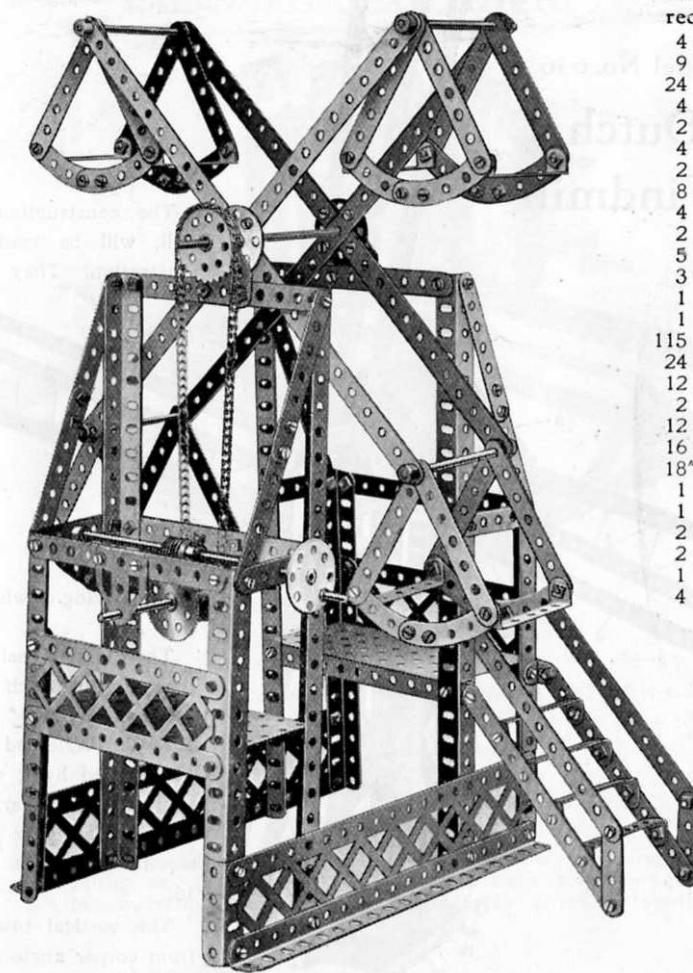


Parts required:	
4 of No.	
4	1
9	2
24	3
4	5
2	6
4	8
2	8A
8	9
4	12
2	14
5	16
3	24
1	27A
1	32
115	37
24	38
12	48A
2	52
12	59
16	90
18	94
1	95A
1	96
2	99A
2	100
1	115
4	126A

TH
brou
arm
three
overl
which
the 2
7
the c
drivin
aerop
the of
There
prop
bolted
This 3
passes
on the

Model No. 639

Revolving Aeroplane

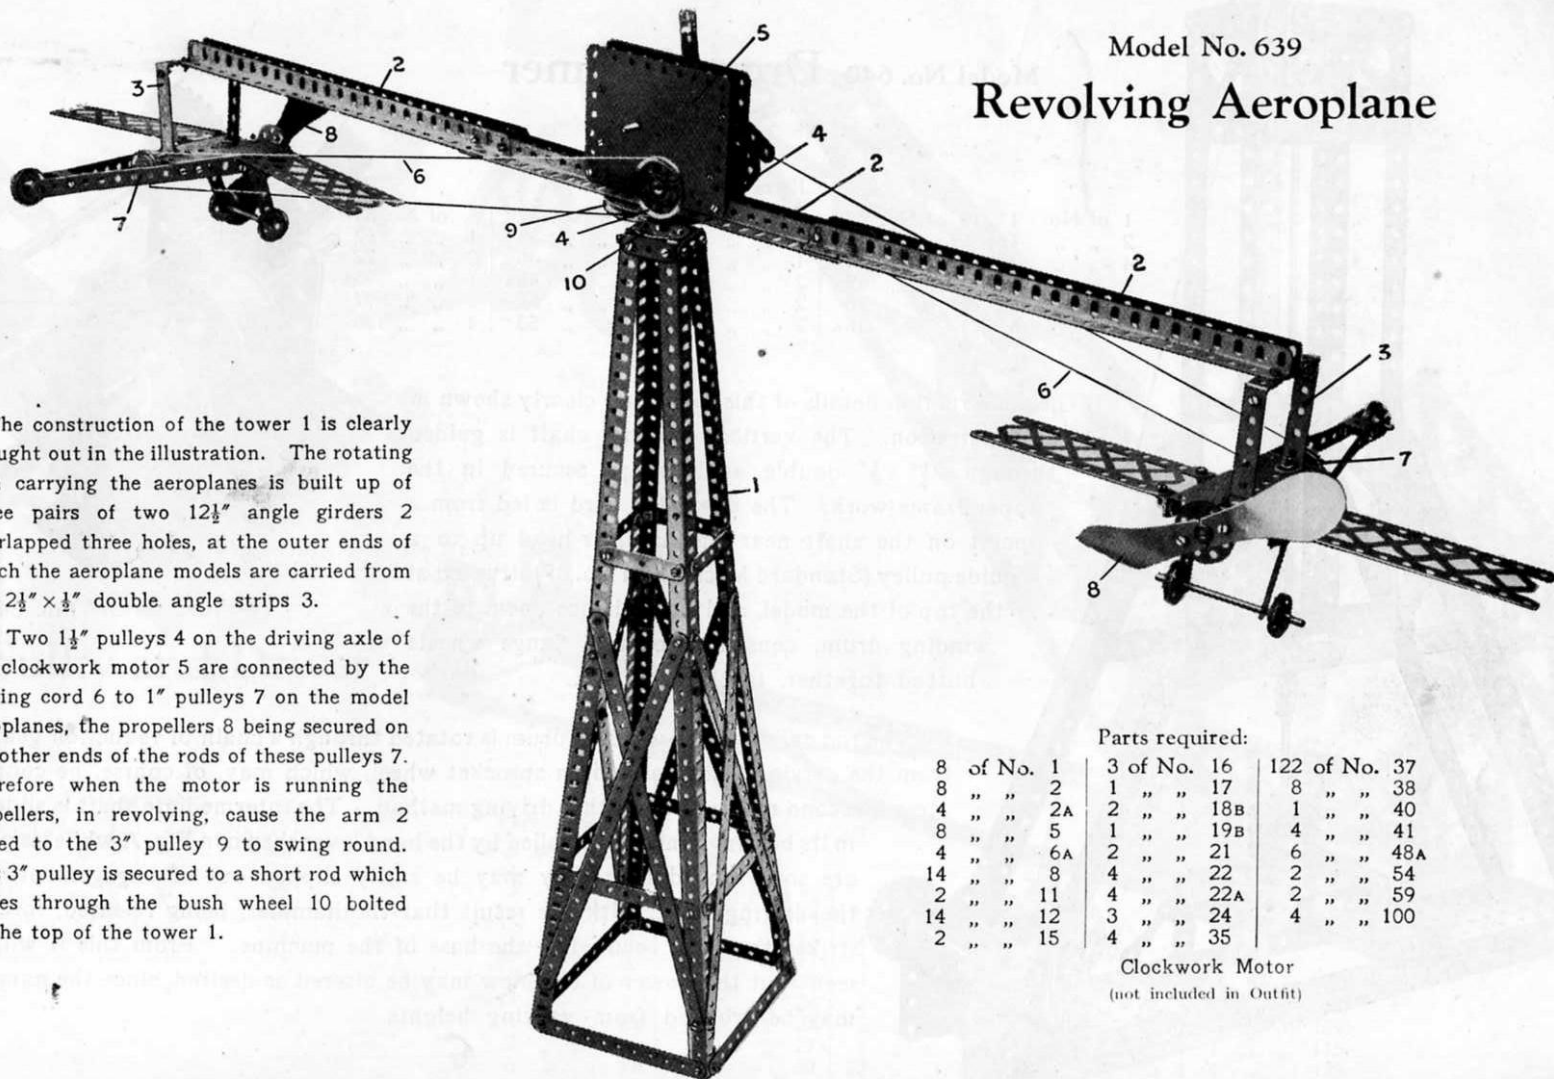

The construction of the tower 1 is clearly brought out in the illustration. The rotating arm carrying the aeroplanes is built up of three pairs of two $12\frac{1}{2}$ " angle girders 2 overlapped three holes, at the outer ends of which the aeroplane models are carried from the $2\frac{1}{2}$ " \times $\frac{1}{2}$ " double angle strips 3.

Two $1\frac{1}{2}$ " pulleys 4 on the driving axle of the clockwork motor 5 are connected by the driving cord 6 to 1" pulleys 7 on the model aeroplanes, the propellers 8 being secured on the other ends of the rods of these pulleys 7. Therefore when the motor is running the propellers, in revolving, cause the arm 2 bolted to the 3" pulley 9 to swing round. This 3" pulley is secured to a short rod which passes through the bush wheel 10 bolted on the top of the tower 1.

Parts required:

8 of No. 1	3 of No. 16	122 of No. 37
8 " " 2	1 " " 17	8 " " 38
4 " " 2A	2 " " 18B	1 " " 40
8 " " 5	1 " " 19B	4 " " 41
4 " " 6A	2 " " 21	6 " " 48A
14 " " 8	4 " " 22	2 " " 54
2 " " 11	4 " " 22A	2 " " 59
14 " " 12	3 " " 24	4 " " 100
2 " " 15	4 " " 35	

Clockwork Motor
(not included in Outfit)

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 640 Drop Hammer

Parts required:

1 of No. 1	10 of No. 8	4 of No. 16	75 of No. 37	5 of No. 59
2 " " 1B	2 " " 9D	6 " " 20	6 " " 38	1 " " 63
4 " " 2	1 " " 11	1 " " 22A	1 " " 40	2 " " 72
1 " " 2A	1 " " 12A	2 " " 24	4 " " 48A	1 " " 95A
4 " " 3	1 " " 13	2 " " 26	2 " " 52	2 " " 97
4 " " 5	1 " " 15A	2 " " 27A	1 " " 53	4 " " 108

The construction details of this model are clearly shown in the illustration. The vertical hammer shaft is guided through $2\frac{1}{2} \times \frac{1}{2}$ " double angle strips secured in the upper frame-work. The operating cord is led from a point on the shaft near the hammer-head up to a guide pulley (Standard Mechanism No. 39) situated at the top of the model, and from thence down to the winding drum, consisting of two flange wheels butted together, in the gear box.

The rod carrying the winding drum is rotated through a chain of reduction gearing from the driving shaft carrying a sprocket wheel, which may, of course, be coupled to a Meccano motor or any other driving method. The intermediate shaft is slidable in its bearings and is controlled by the hand lever shewn in Fig. A, while its gears are so arranged that they may be easily slipped out of engagement with the driving shaft, with the result that the hammer, being released, forcibly strikes the table secured in the base of the machine. From this it will be seen that the power of the blow may be altered as desired, since the hammer may be dropped from varying heights.



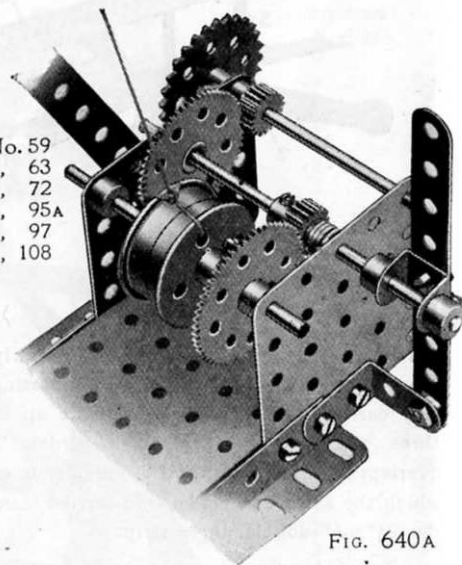


FIG. 640A

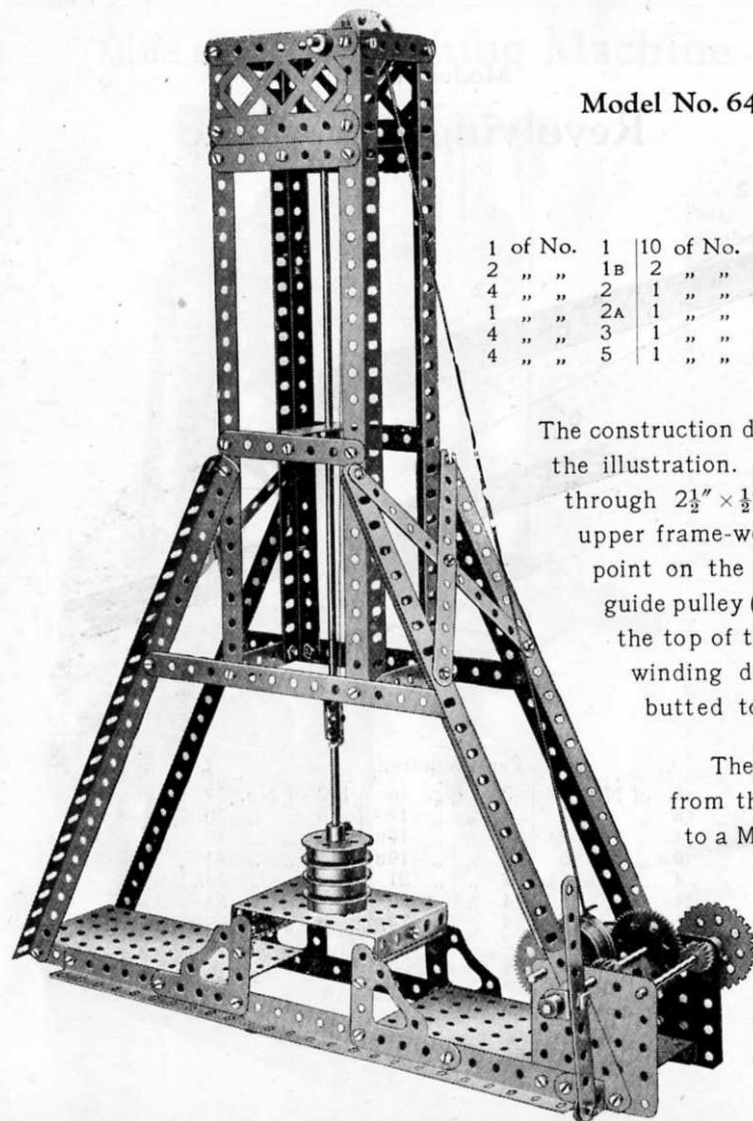

These Models can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

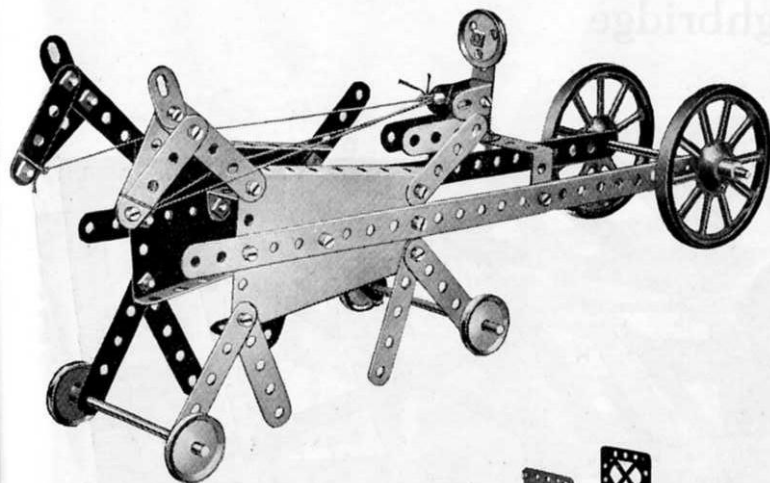


Model No. 641

Sulky and Driver

Parts required:

2 of No. 1	2 of No. 19A
10 " " 5	4 " " 22
9 " " 6	1 " " 22A
4 " " 10	32 " " 37
2 " " 11	1 " " 46
1 " " 12	2 " " 48A
3 " " 15A	2 " " 54

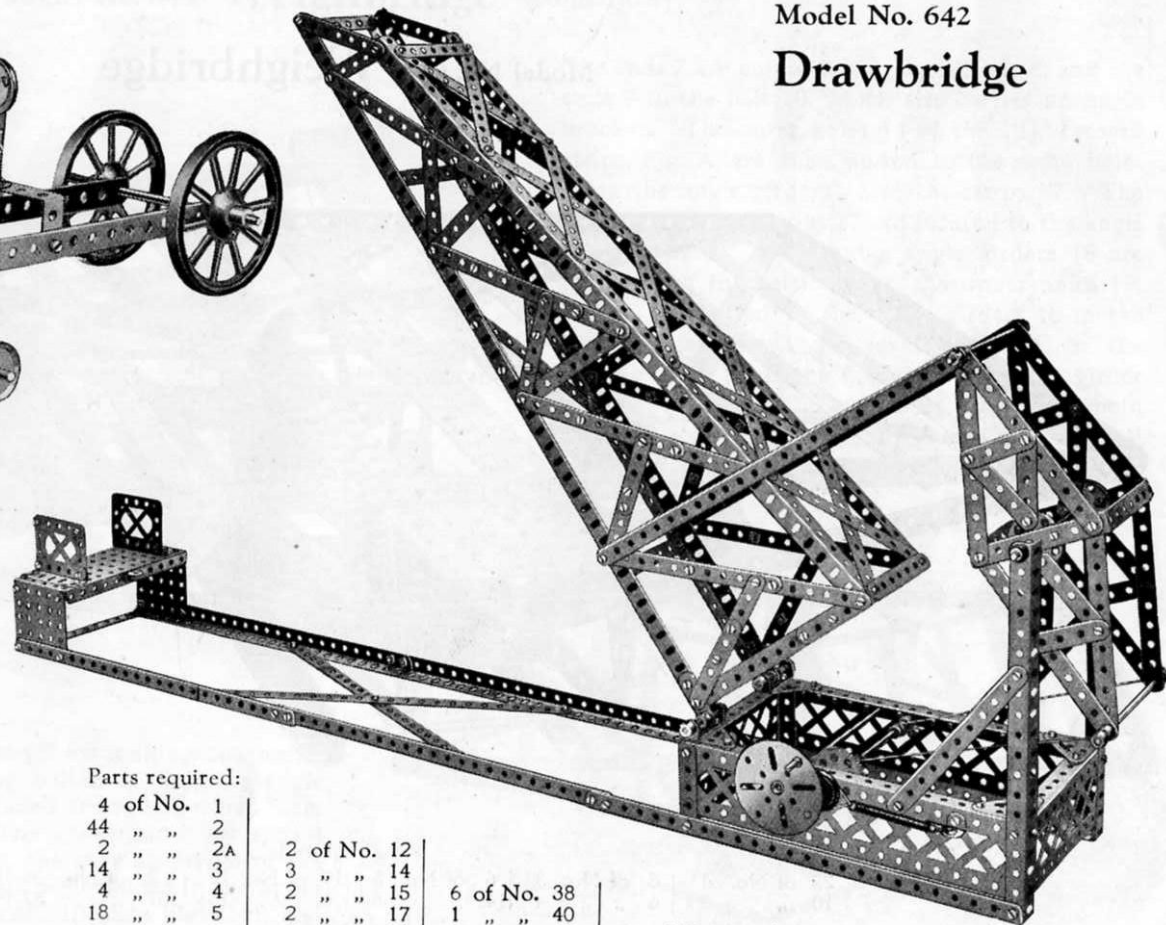

Model No. 642


Drawbridge

Parts required:

4 of No. 1	2 of No. 12	6 of No. 38	2 of No. 62	1 of No. 109
44 " " 2	3 " " 14	1 " " 40	2 " " 72	1 " " 115
2 " " 2A	2 " " 15	2 " " 43	2 " " 98	4 " " 133
14 " " 3	2 " " 17	2 " " 48	2 " " 99A	
4 " " 4	2 " " 22	2 " " 48B	2 " " 100	
18 " " 5	1 " " 24	1 " " 52		
8 " " 6	1 " " 26	1 " " 59		
14 " " 8	2 " " 27A			
4 " " 8A	1 " " 37			
2 " " 9	1 " " 37			
6 " " 9D	177 " " 37			

This Model can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 643 Weighbridge

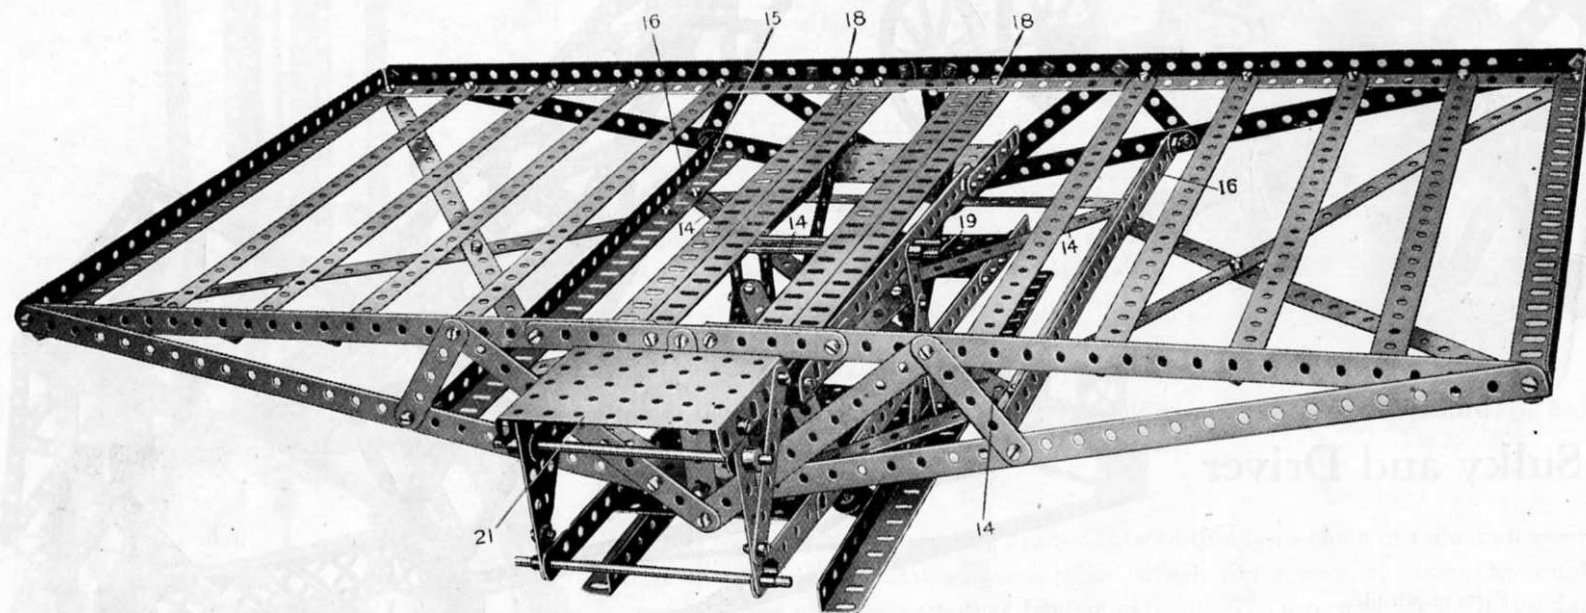

Parts required:

22 of No. 1	8 of No. 3	6 of No. 5	10 of No. 12	2 of No. 35	16 of No. 37A
10 " " 2	6 " " 4	14 " " 8	6 " " 15A	107 " " 37	6 " " 53
		6 of No. 59			

beam
girder
the fi
are jo
beam
and lo
B, lea
platfo
weigh

Model No. 643 Weighbridge (continued)

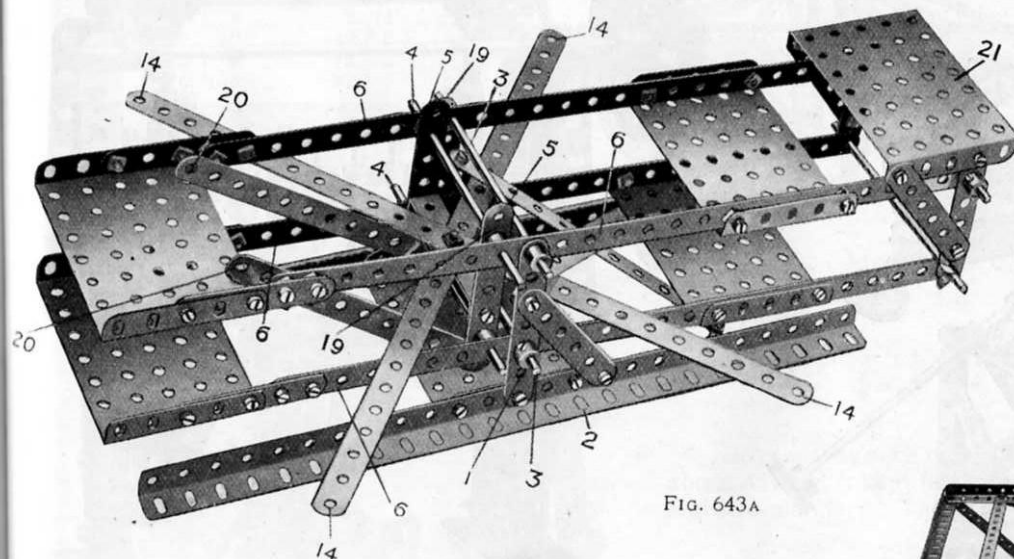


FIG. 643A

Begin the construction of this model by making the weigh beam, Fig. A. The side strips 1 are bolted to the base angle girders 2, and in the strips 1 are journaled the rods 3 which form the fixed pivots of the weigh beam. The upper and lower rods 4 are journaled in the strips 5 and form the moving pivots of the beam. All the rods 3 and 4 pass through perforations in the upper and lower strips 6 of the beam. Next construct the platform, Fig. B, leaving the strips at one side unconnected, as shown. The platform is then passed between the upper and lower parts of the weigh beam, and the unconnected strips then bolted, as follows:

The ends 7 are bolted to the lowest hole 8, and the ends 9 to the bolt 10, which also carries an angle bracket. The outer holes 14 of the $12\frac{1}{2}$ " crossed strips, Fig. A, are then bolted to the same holes 15 in the angle girders 16 as the strips 17. The other ends of the strips 17 are secured to the angle brackets at 10. The double angle girders 18 are then bolted in position, and the upper holes 19, Fig. A, are bolted to the angle girders 18 in the centre holes and the holes 20, Fig. A, to the angle girders 18 at the fifth hole from the girder ends. The load to be weighed rests on the main platform, and the weights are placed on the small rectangular plate 21 at the end of the weigh beam.


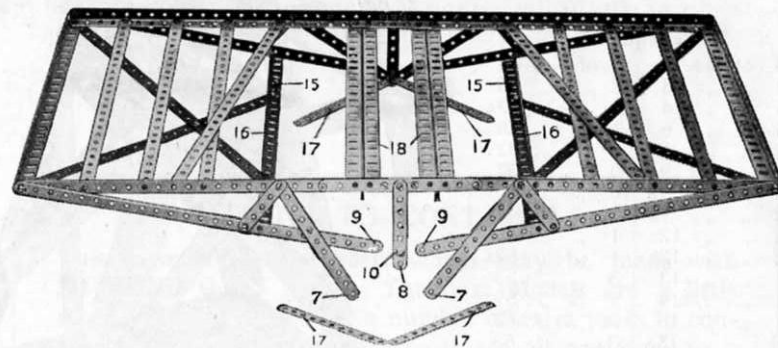


FIG. 643B


Model No. 644 Equatorial Mounting

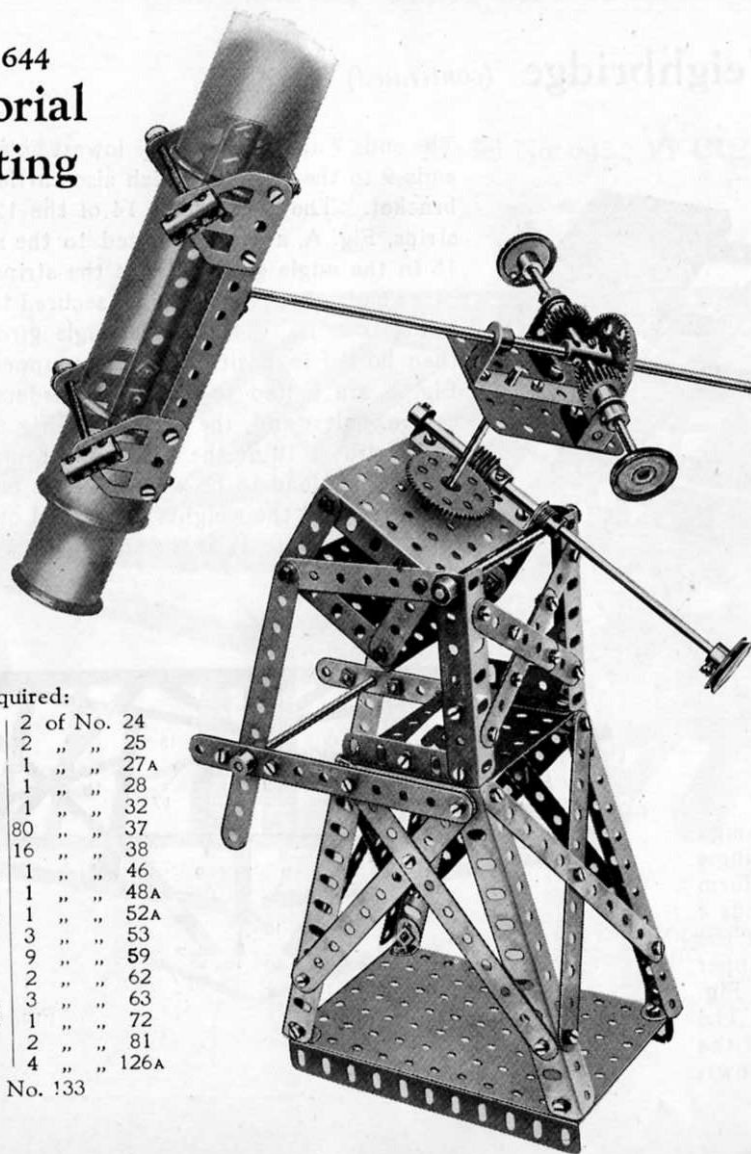

Parts required:

4	of No.	2	2	of No.	24
2	"	3	2	"	25
4	"	4	1	"	27A
4	"	6	1	"	28
2	"	6A	1	"	32
8	"	9	80	"	37
2	"	9B	16	"	38
2	"	9D	1	"	46
4	"	12	1	"	48A
2	"	12A	1	"	52A
1	"	13	3	"	53
1	"	14	9	"	59
1	"	15	2	"	62
2	"	15A	3	"	63
2	"	16B	1	"	72
1	"	21	2	"	81
3	"	22	4	"	126A
2 of No. 133					

Model No. 645 Punching Press

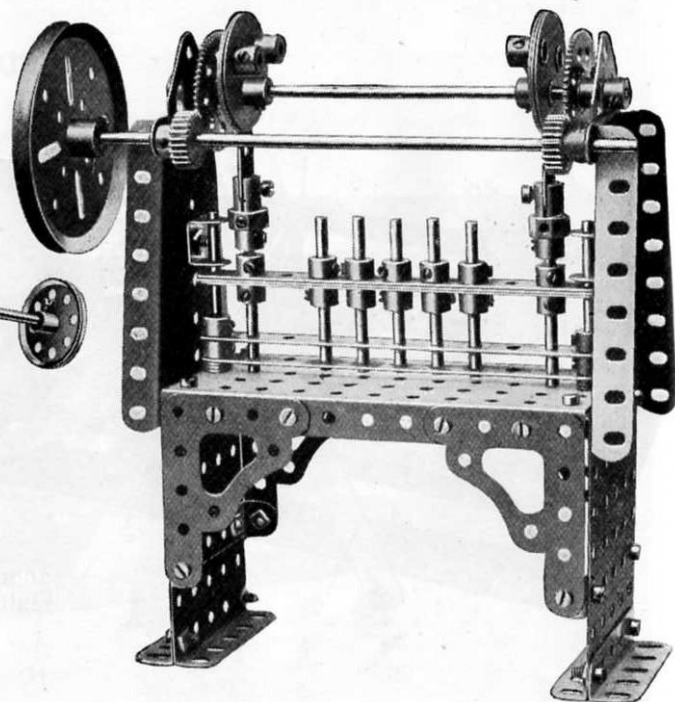

Parts required:

5	of No.	2	1	of No.	19B	2	of No.	53
2	"	6	2	"	25	2	"	54
2	"	9D	2	"	27A	21	"	59
2	"	11	34	"	37	2	"	63B
1	"	13A	6	"	38	4	"	108
1	"	14	2	"	48A	2	"	126A
9	"	17	1	"	52	2	"	130


These Models can be made with MECCANO Outfit No. 6, or No. 5 and No. 5A.

Model No. 646

Cantilever Bridge

Parts required:

16 of No. 1	8 of No. 6A	2 of No. 48B
16 " " 2	8 " " 8	14 " " 90
3 " " 3	18 " " 9	8 " " 99
4 " " 5	8 " " 12	2 " " 100
4 " " 6	136 " " 37	

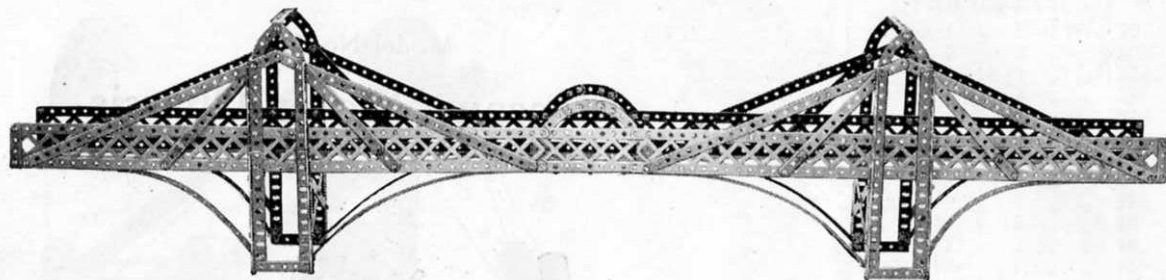


Model No. 647 The Wrestlers

Parts required:

2 of No. 3	1 of No. 9A	4 of No. 18A	6 of No. 37B	12 of No. 59
8 " " 6	4 " " 10	2 " " 22	1 " " 38	4 " " 133
3 " " 9	6 " " 12	22 " " 37	4 " " 48A	

Boys will at once recognise this familiar toy. When the cord, which should be about 4" long, is kept fairly tight and manipulated, the figures will wrestle in a most realistic manner. The model should be mounted on a board, to keep it steady.

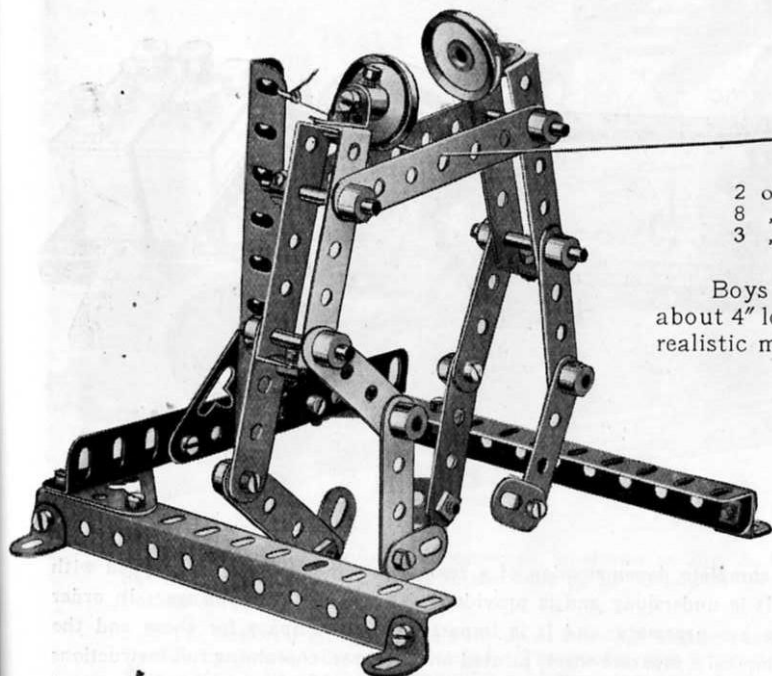


HOW TO CONTINUE

This completes the Models which may be made with MECCANO Outfit No. 6. The next Models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 6A Accessory Outfit, the price of which will be found in the List at the end of the Manual.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 701

Meccano Motor Chassis

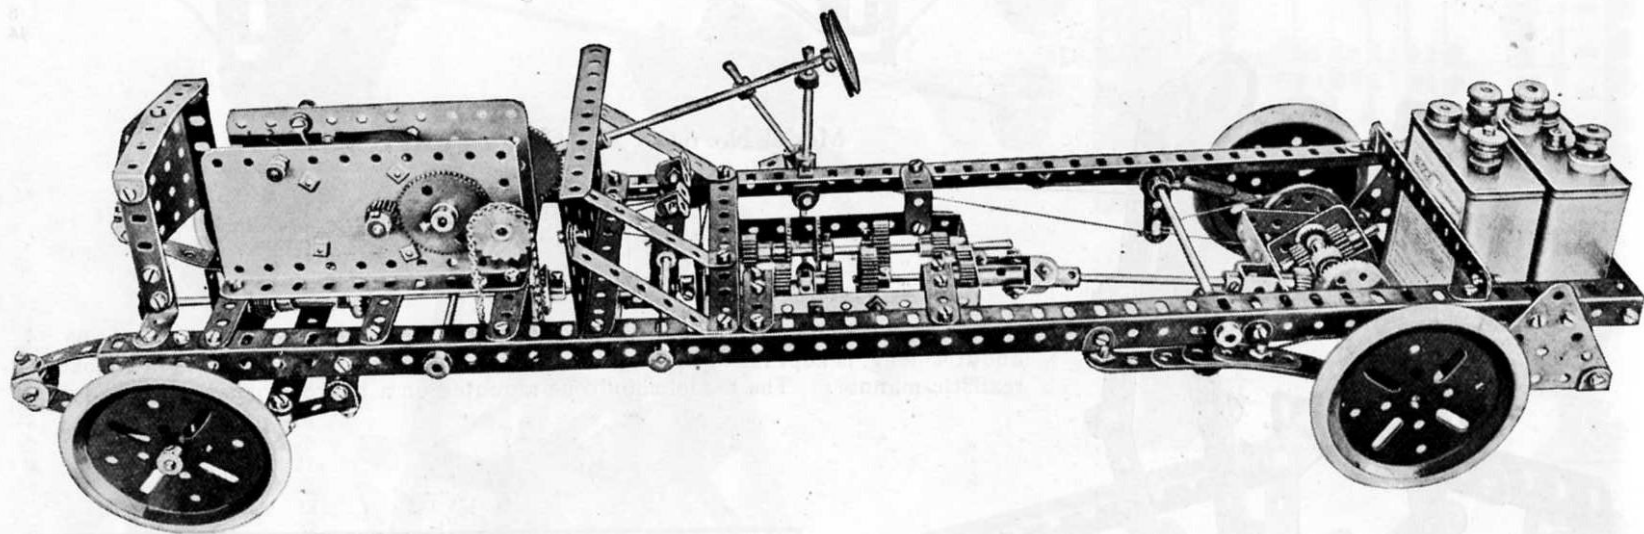


The Meccano Motor Chassis is a model of exceptional interest as it provides a complete demonstration of a real Motor Chassis. It is equipped with differential, steering gear and gear box, giving two forward speeds and a reverse. It is underslung and is provided with elliptical leaf-springs. In order to make its construction quite clear a number of sectional photographs and drawings are necessary, and it is impossible to find space for these and the necessary instructions which go with them, in this Manual. We have, therefore, compiled a separate sheet, printed on art paper, containing full instructions and clear illustrations. This may be purchased either from your dealer or from Meccano Limited, Liverpool. Price 3d. (post free 4d.)

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

153

Model No. 702

Dredger

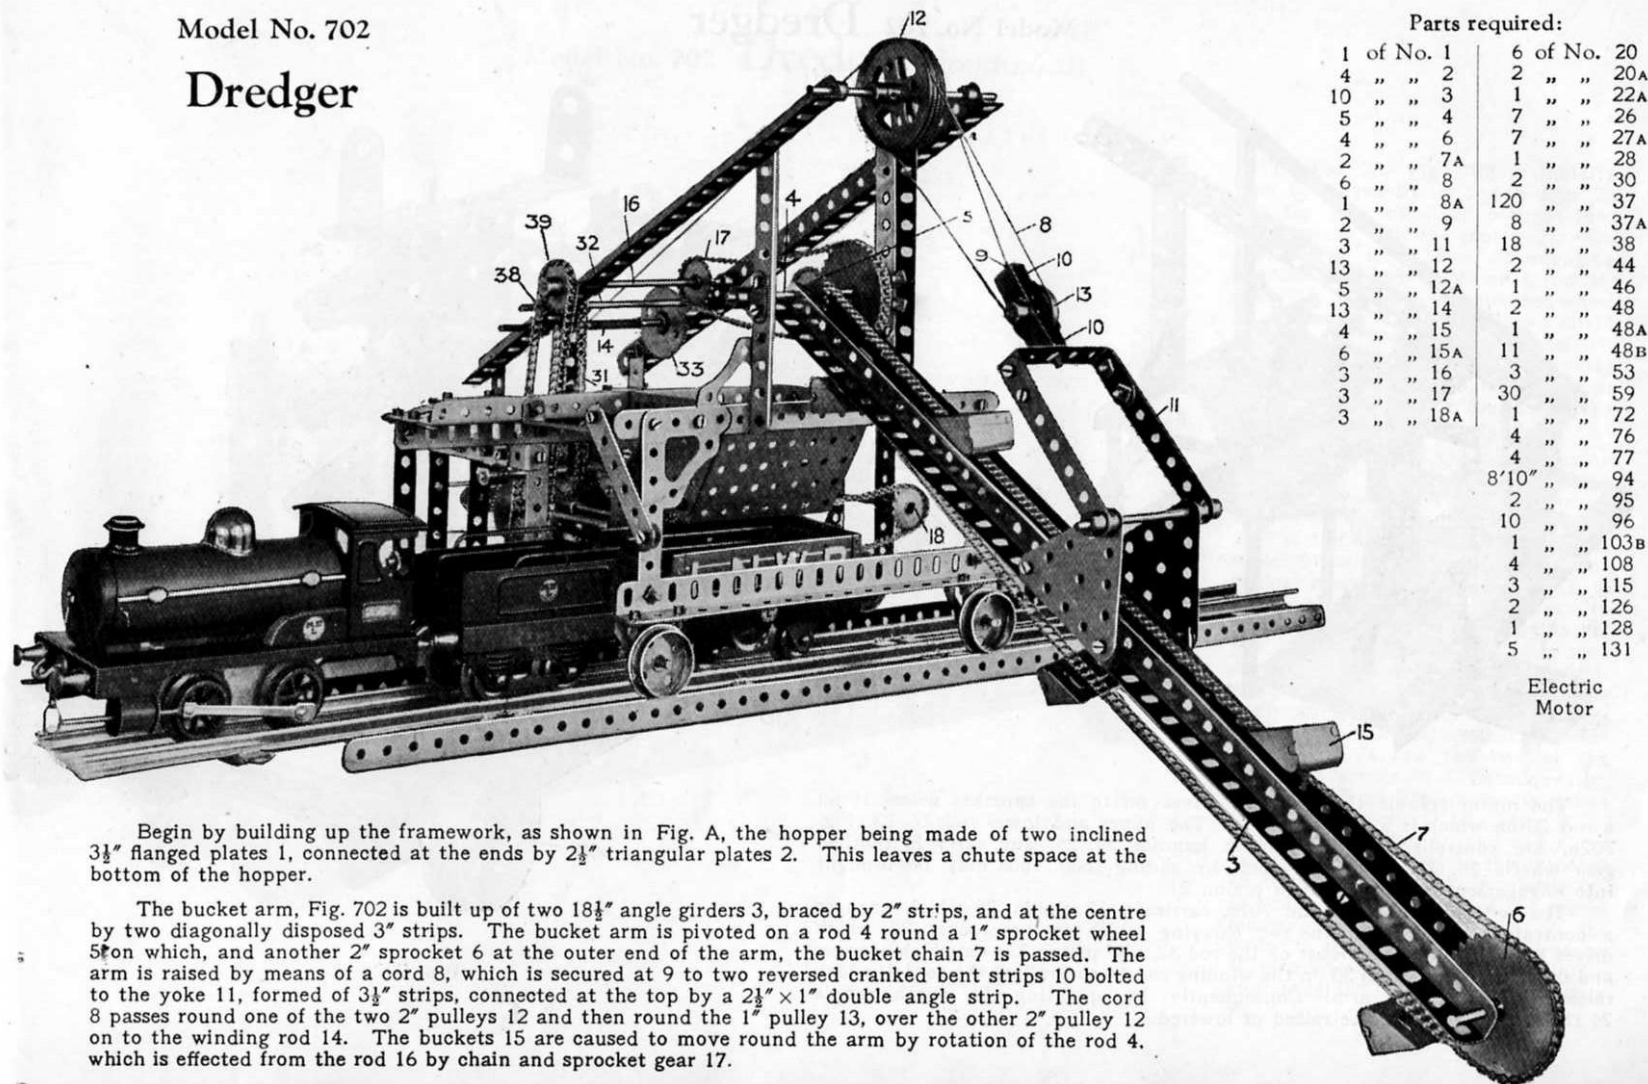

Parts required:

1 of No. 1	6 of No. 20
4 " " 2	2 " " 20A
10 " " 3	1 " " 22A
5 " " 4	7 " " 26
4 " " 6	7 " " 27A
2 " " 7A	1 " " 28
6 " " 8	2 " " 30
1 " " 8A	120 " " 37
2 " " 9	8 " " 37A
3 " " 11	18 " " 38
13 " " 12	2 " " 44
5 " " 12A	1 " " 46
13 " " 14	2 " " 48
4 " " 15	1 " " 48A
6 " " 15A	11 " " 48B
3 " " 16	3 " " 53
3 " " 17	30 " " 59
3 " " 18A	1 " " 72
	4 " " 76
	4 " " 77
	8'10" " 94
	2 " " 95
	10 " " 96
	1 " " 103B
	4 " " 108
	3 " " 115
	2 " " 126
	1 " " 128
	5 " " 131

Electric
Motor

Begin by building up the framework, as shown in Fig. A, the hopper being made of two inclined $3\frac{1}{2}$ " flanged plates 1, connected at the ends by $2\frac{1}{2}$ " triangular plates 2. This leaves a chute space at the bottom of the hopper.

The bucket arm, Fig. 702 is built up of two $18\frac{1}{2}$ " angle girders 3, braced by 2" strips, and at the centre by two diagonally disposed 3" strips. The bucket arm is pivoted on a rod 4 round a 1" sprocket wheel 5 on which, and another 2" sprocket 6 at the outer end of the arm, the bucket chain 7 is passed. The arm is raised by means of a cord 8, which is secured at 9 to two reversed cranked bent strips 10 bolted to the yoke 11, formed of $3\frac{1}{2}$ " strips, connected at the top by a $2\frac{1}{2}$ " x 1" double angle strip. The cord 8 passes round one of the two 2" pulleys 12 and then round the 1" pulley 13, over the other 2" pulley 12 on to the winding rod 14. The buckets 15 are caused to move round the arm by rotation of the rod 4, which is effected from the rod 16 by chain and sprocket gear 17.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 702 Dredger

(continued)

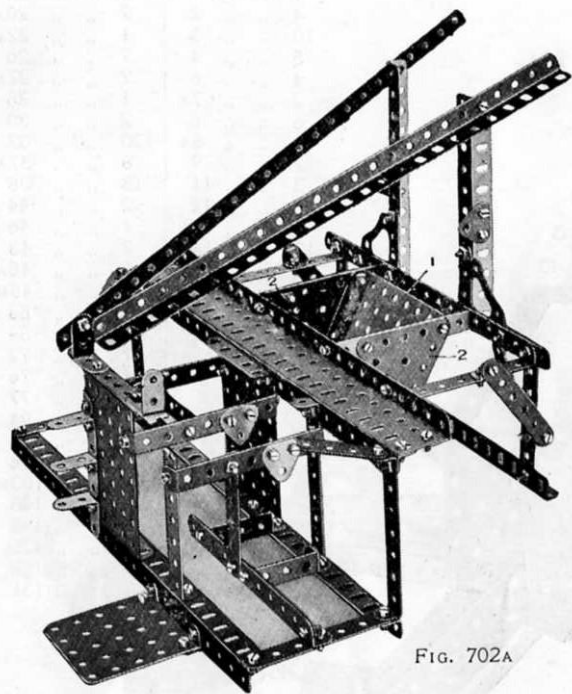


FIG. 702A

The motor spindle 18, Fig. 702, drives on to the sprocket wheel 19 on a rod 20 on which is a $\frac{1}{2}$ " pinion 21. The upper and lower rods 22, 23, Fig. 702b, are controlled by their clutch handles 24, 25, and carry 57-toothed gear wheels 26, 27, either of which by sliding their rods may be brought into engagement with the driven pinion 21.

The rod 22, Fig. 702b and 702c, carries a $\frac{1}{2}$ " pinion 28 which engages a contrate wheel 29, on the rod carrying which is a sprocket 30 which drives by a chain 31 a sprocket on the rod 32, a $\frac{1}{2}$ " pinion 33a on which engages and drives the gear wheel 33 on the winding rod 14 controlling the cord 8, which raises and lowers the arm. Consequently by operating the clutch handle 24 the bucket arm may be raised or lowered.

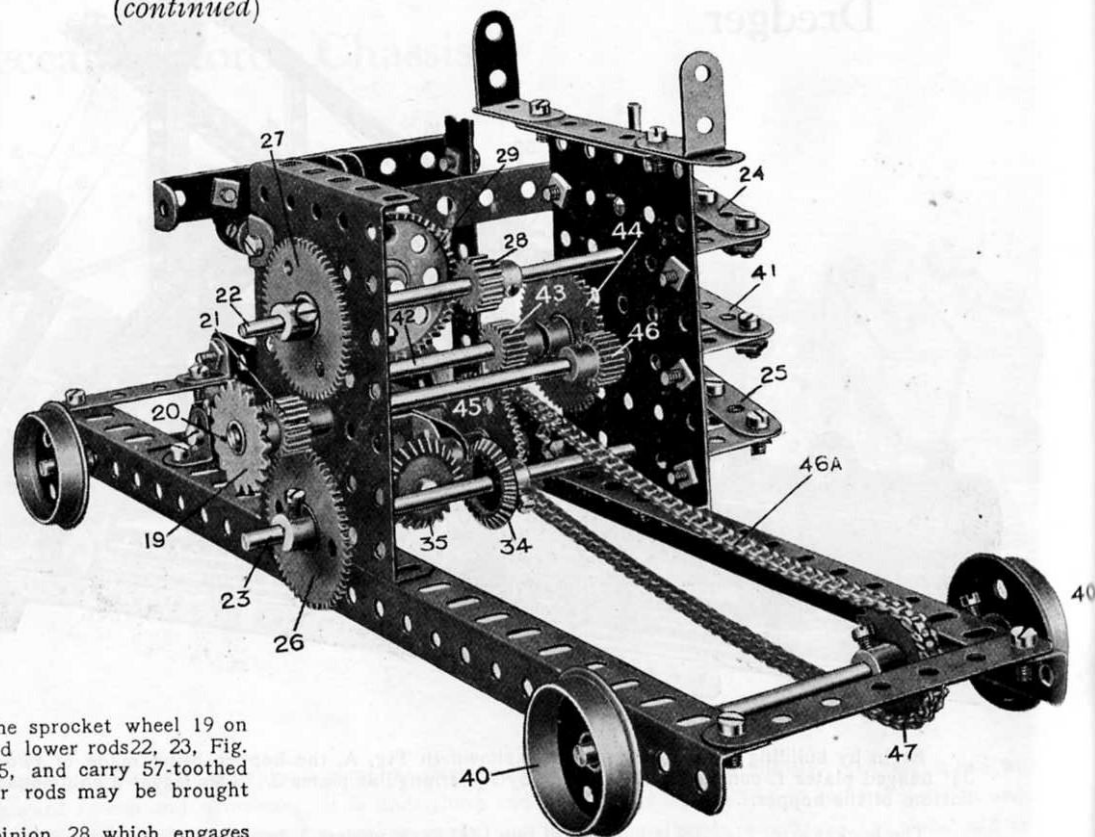


FIG. 702b

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

155

Model No. 702 Dredger (continued)

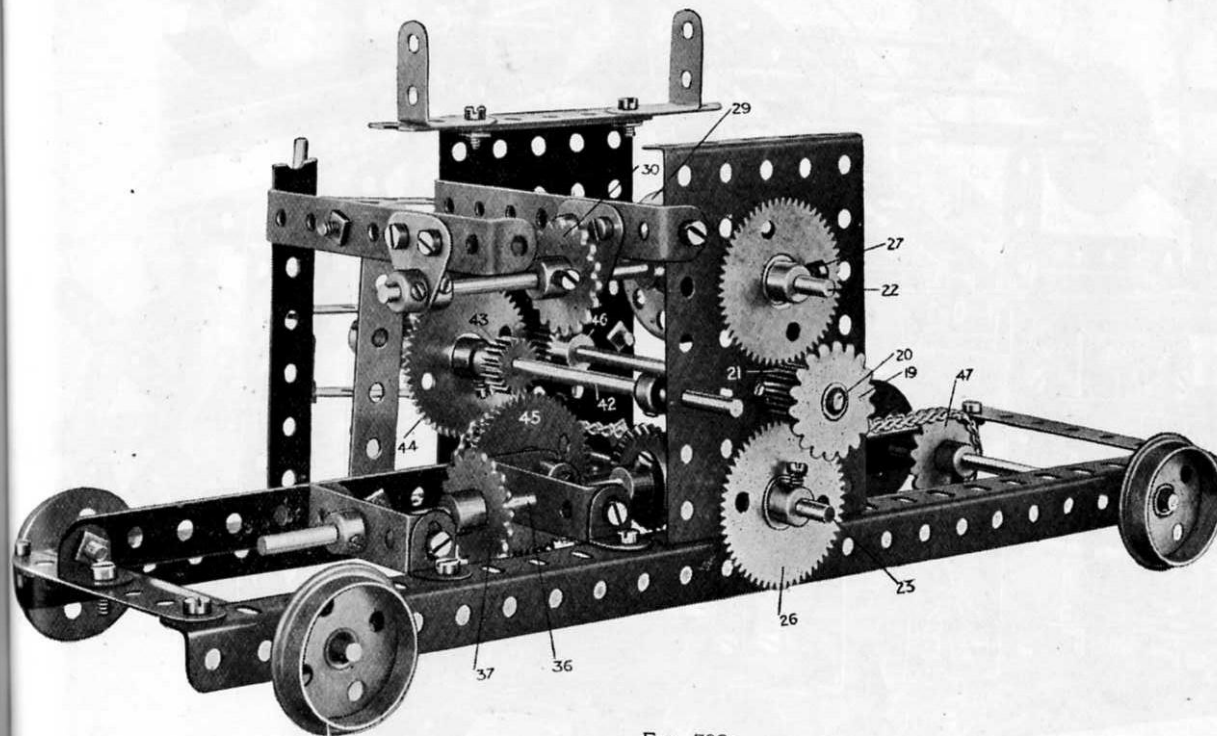


Fig. 702c

The rod 23, Fig. 702B, similarly may be moved by its clutch arm 25 and the gear wheel 26 brought into engagement with the pinion 21. On the rod 23 is a bevel 34 engaging another bevel wheel 35, on a rod 36, Fig. 702c, on which is a sprocket wheel 37. This sprocket drives by a chain 38, Fig. 702d, a sprocket wheel 39, on the rod 16, which as previously described, operates the movement of the buckets, which are thus under the control of the clutch handle 25.

The travelling of the apparatus on the wheels 40 is controlled by a middle clutch handle 41, which moves the rod 42, Fig. 702c, this rod carrying a $\frac{1}{2}$ " pinion 43 and a 57-toothed gear wheel 44, which are operated by the sliding movement of the rod 42 to engage or disengage respectively with a gear wheel 45 and a $\frac{1}{2}$ " pinion 46, the latter being on the same rod as the pinion 21, whilst the gear wheel 45 is on a short rod, carrying a sprocket 45A, Fig. 702b, which drives through a chain 46A another sprocket 47, Fig. 702b, on the rod of the travelling wheels 40. Consequently, the drive from the motor is taken from the sprocket 19, Fig. 702b, through the pinion 46 and rod 42 to the chain 46A, and so to the sprocket 47 driving the travelling wheels 40. In order to reverse any of the movements, the switch handle of the motor is connected to the bell crank 48 pivoted on the rod 49, Fig. 702d, and provided with a handle strip 50.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 702

Dredger

(continued)

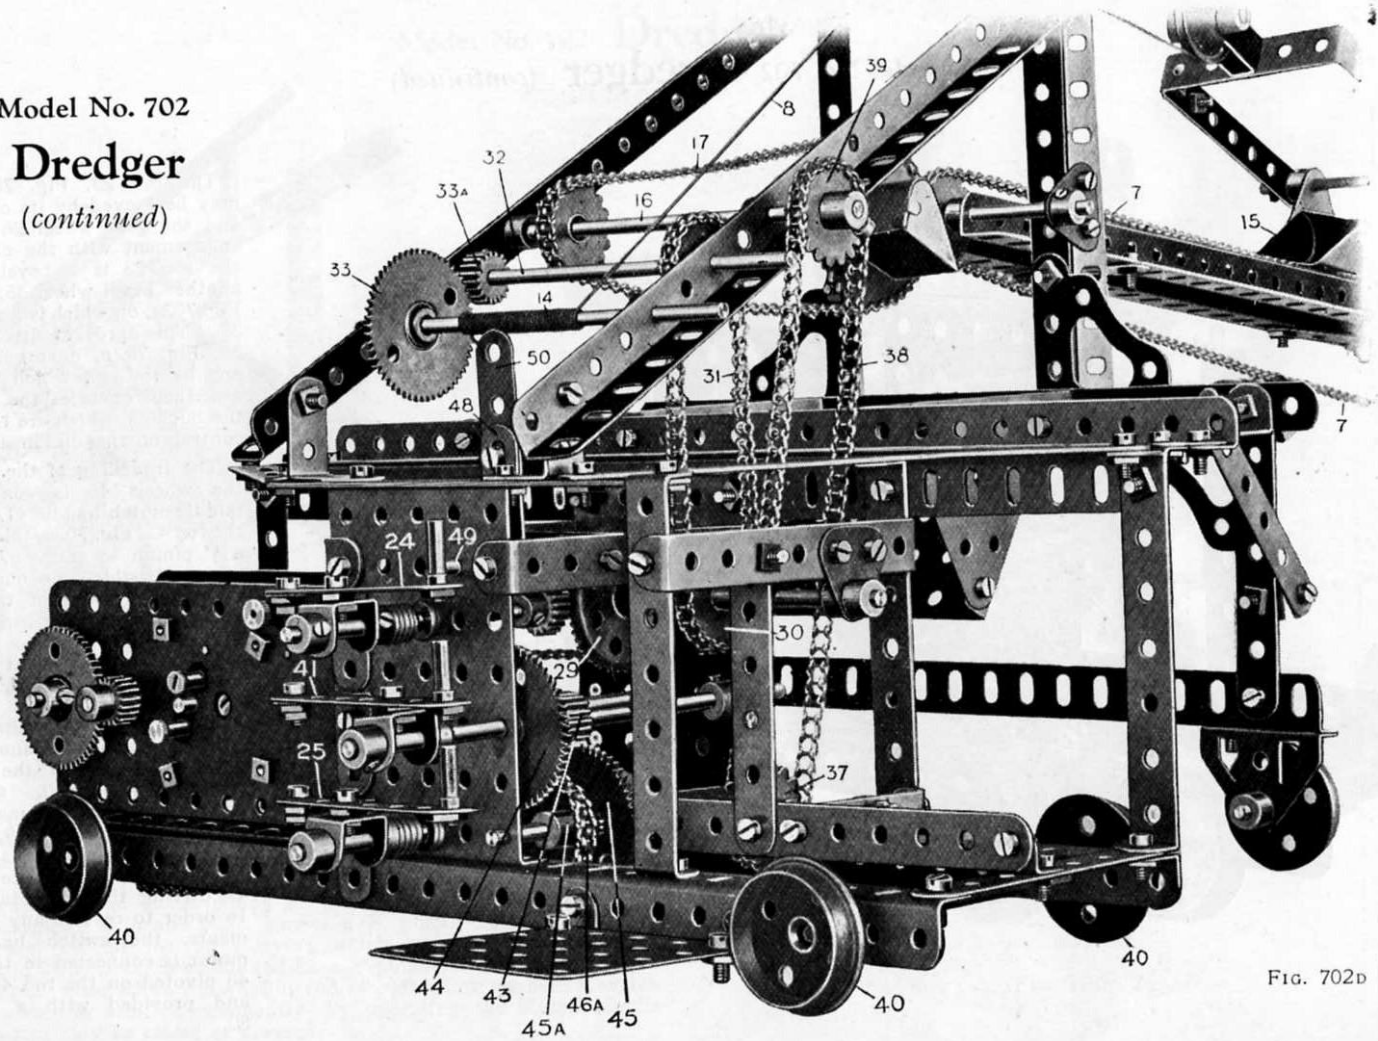


FIG. 702b

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

157

Model No. 703 Coal-Cutting Machine

Parts required:

4 of No. 2	4 of No. 26
6 " " 3	3 " " 27A
8 " " 4	1 " " 28
20 " " 6	2 " " 30
2 " " 7	6 " " 35
4 " " 8	75 " " 37
2 " " 9	1 " " 44
9 " " 12	1 " " 50
1 " " 13A	1 " " 52A
5 " " 15	6 " " 59
1 " " 16	1 " " 63
1 " " 17	4 " " 77
1 " " 18A	12 " " 94
6 " " 20	1 " " 95
1 " " 22A	1 " " 96
1 " " 24	

Clockwork Motor

This apparatus, by hauling on a rope, pulls itself along in a direction parallel to the coal-face, while its revolving cutters slice into the coal, which may afterwards be removed in large blocks.

The clockwork motor 1 drives, by the chain and sprocket gear 2, the rod 3, which is connected by bevel wheels 4 to the horizontal rod 5, a $\frac{1}{2}$ " pinion on the end of which drives a contrate wheel 7 on the rod 8 of the cutting wheel 9. The rod 3 also drives through a gear train 10 a rod 11 on which is a drum composed of two flanged wheels 12. A cord 13 winding from the drum round a pulley 14, is connected to the trolley 15. The cord 13 is fixed to the trolley 15 which runs on flanged wheels 16 on the rails 17. Consequently, as the cutting wheel 9 is rotated from the motor, the cord 13 is also slowly wound on the drum 12, and the whole carriage moving along, the cutting wheel also travels along the coal face. The post 18, carrying the pulley 14, is secured in a convenient position at the end of the track.

The mechanism may be thrown out of gear by pressing the rod 11 which slides in its bearings. The strip 18 forms a spring to hold it in gear.



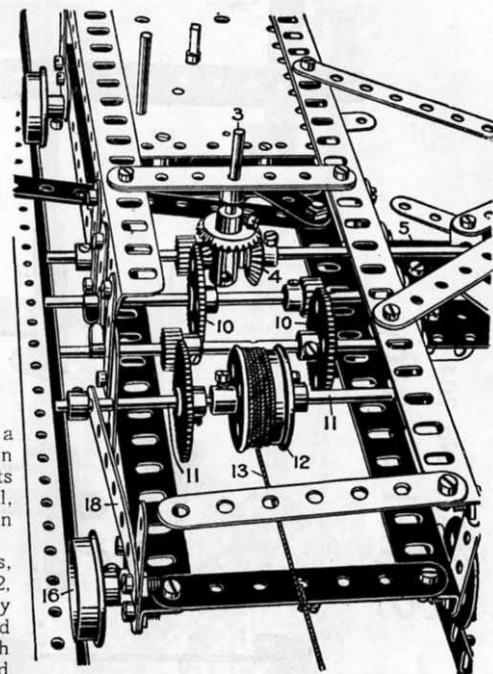


FIG. 703A

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 704

Signal Gantry

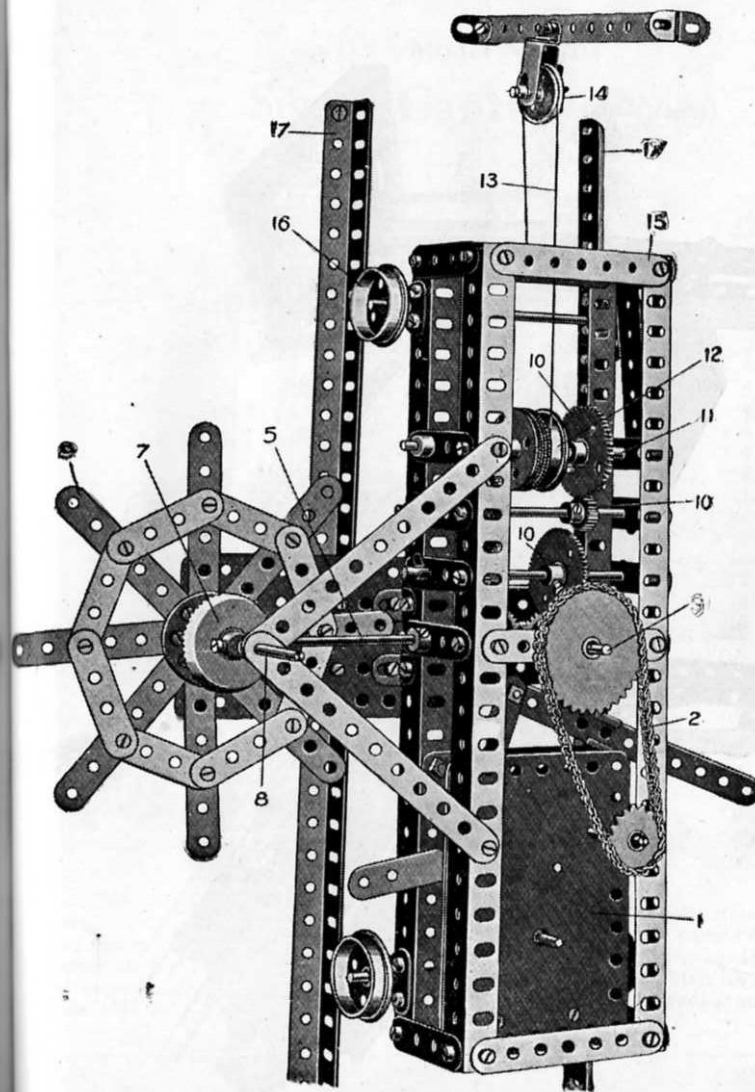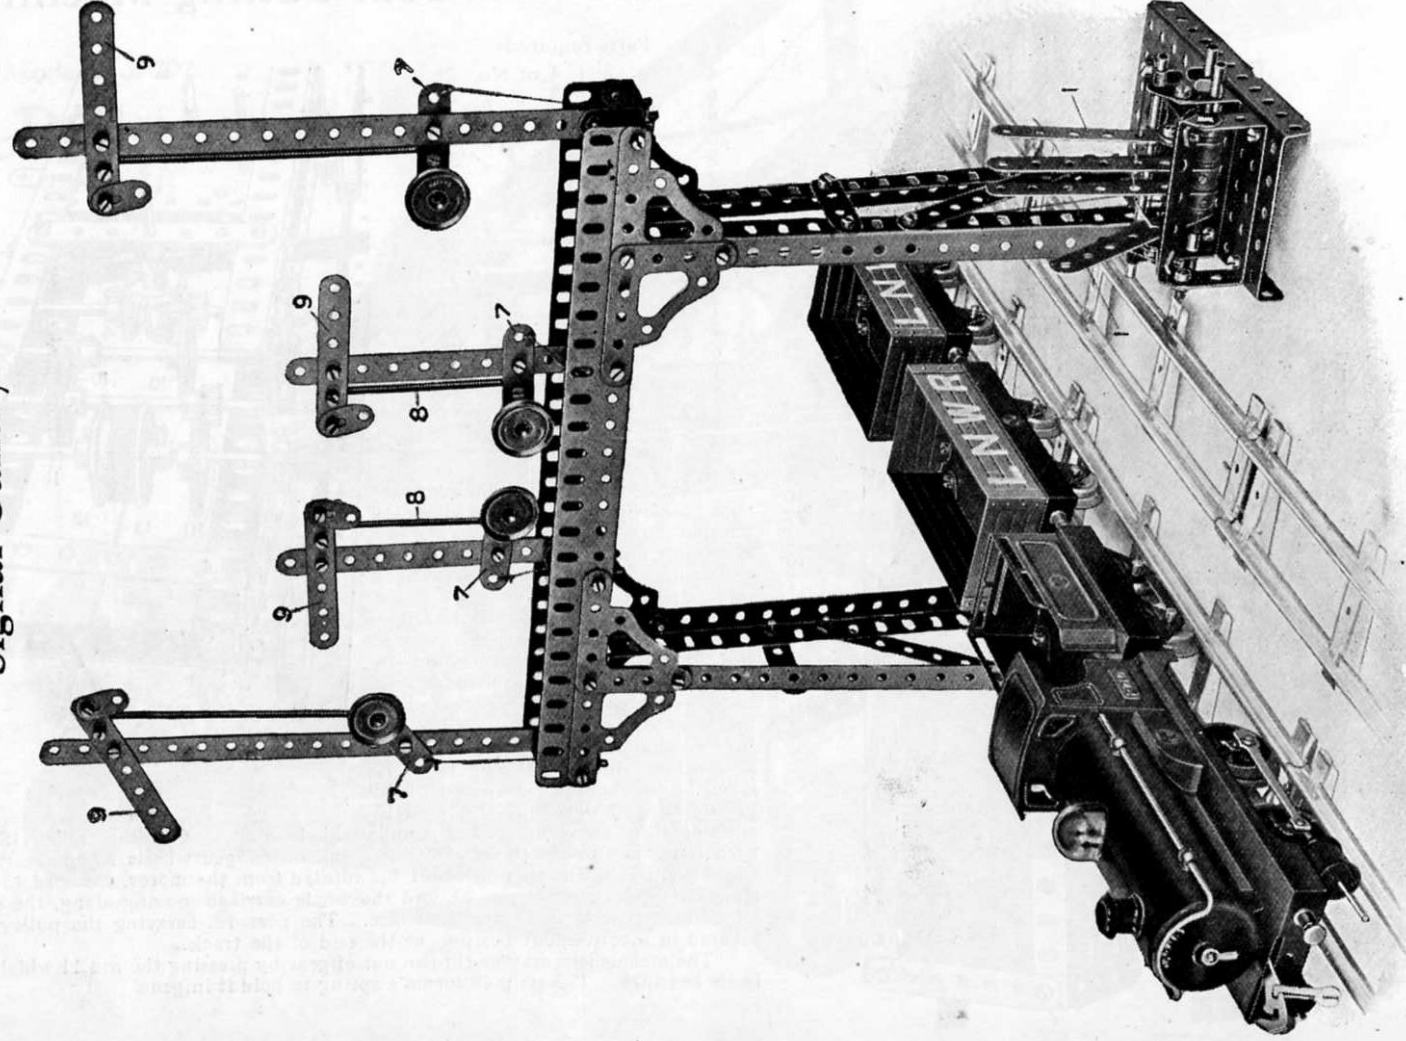

The
parts.
and low
before r
connect
rods 10

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

159

Model No. 704

Signal Gantry (continued)

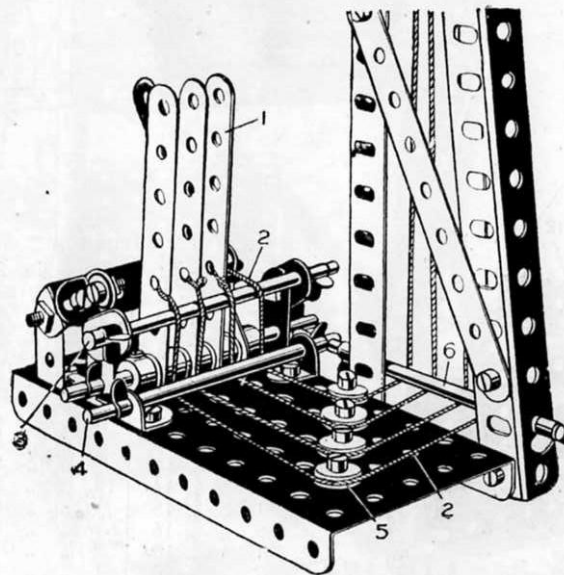


FIG. 704A

Parts required:		
2	of No.	1A
2	" "	2
2	" "	2A
6	" "	3
2	" "	4
1	" "	5
6	" "	6
4	" "	8A
6	" "	10
4	" "	12A
4	" "	16
1	" "	17
4	" "	22
8	" "	23
10	" "	35
77	" "	37
4	" "	37B
10	" "	38
2	" "	46
1	" "	48A
1	" "	52
5	" "	59
8	" "	64
2	" "	80
2	" "	80A
2	" "	103B
8	" "	108
4	" "	147B

The detail views, Figs. 704A and 704B, bring out the construction of the various parts. In Fig. 704A the levers 1 operate the cords 2 which are passed round the upper and lower rods 3 and 4, and round the $\frac{1}{2}$ " pulleys 5, giving the cords a quarter turn before they pass round the rods 6, thence to the various weighted levers 7, which are connected as shown in Fig. 704B to threaded bosses 8 on the signal arms 9 by threaded rods 10.


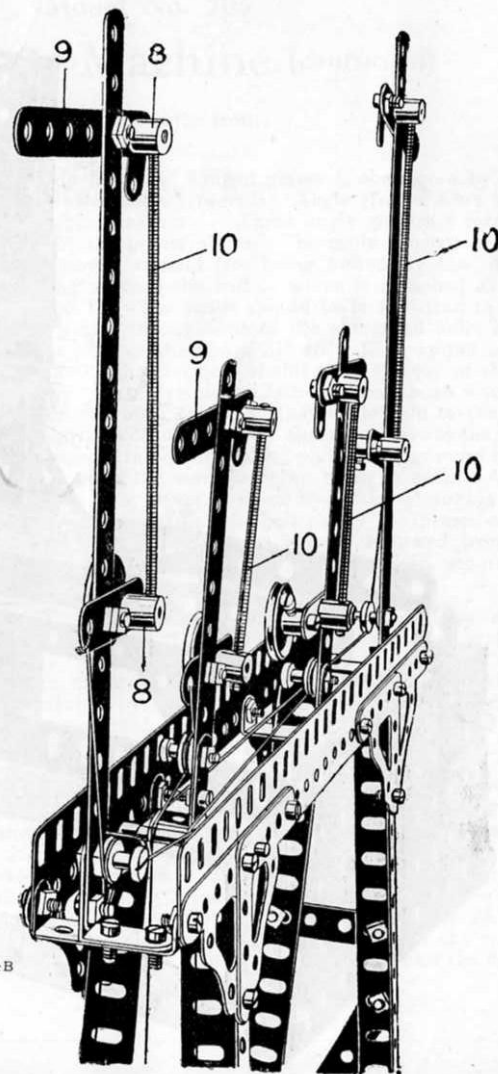


FIG. 704B

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 705 Planing Machine

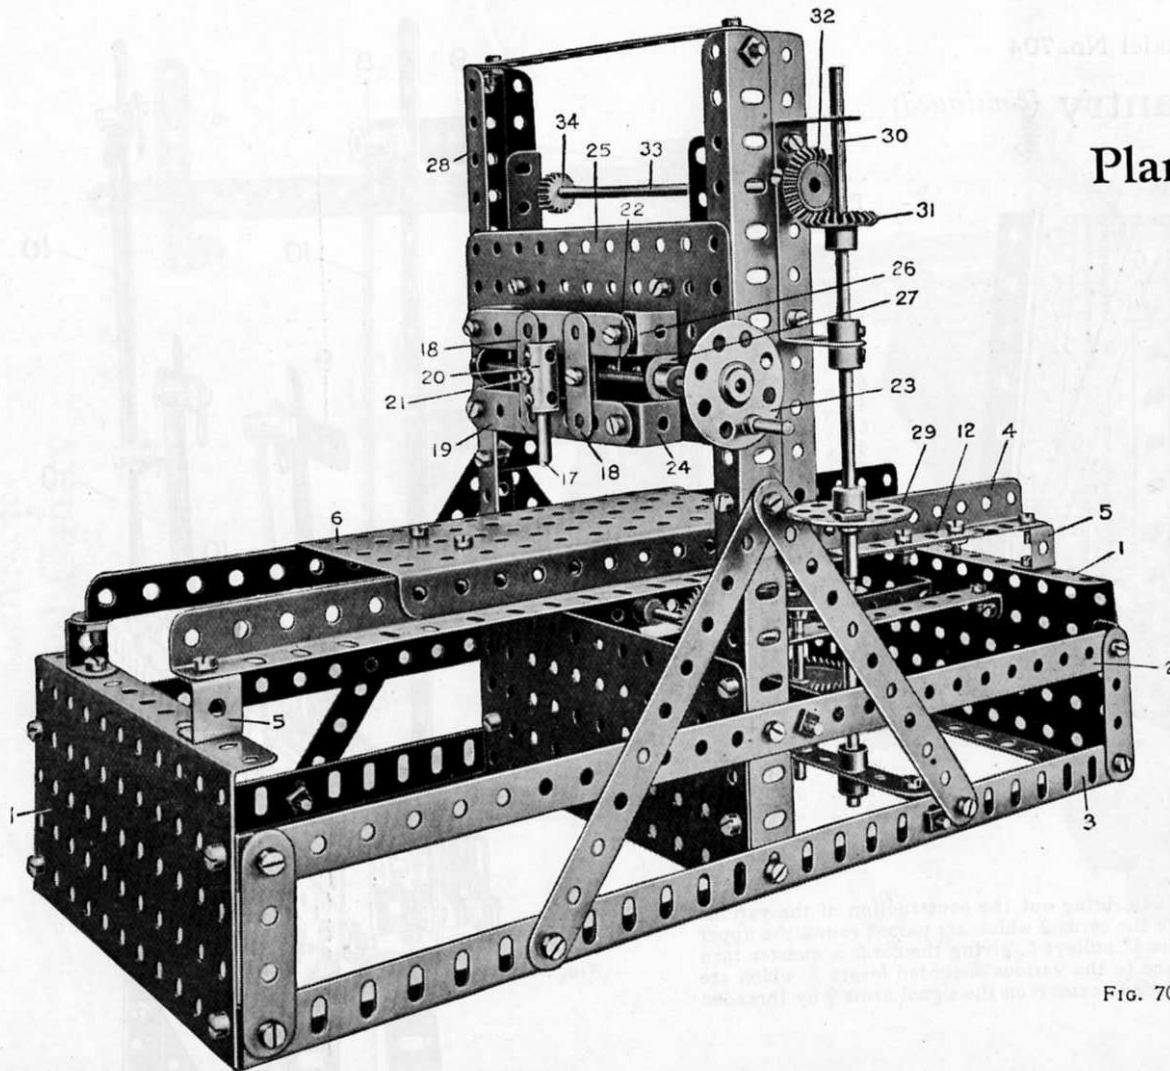

Parts required:

2 of No. 1	1 of No. 28
7 " " 2	2 " " 30
3 " " 3	74 " " 37
1 " " 5	3 " " 37A
4 " " 6	9 " " 38
3 " " 6A	2 " " 46
4 " " 8	1 " " 48B
2 " " 8A	5 " " 48D
8 " " 11	1 " " 50
12 " " 12	2 " " 52
1 " " 14	12 " " 59
1 " " 15	1 " " 63
5 " " 16	1 " " 64
1 " " 18A	2 " " 70
2 " " 20	1 " " 80
3 " " 24	2 " " 103
5 " " 26	2 " " 110
2 " " 27A	2 " " 115

FIG. 705A

Model No. 705

Planing Machine (continued)

Fig. 705A is a perspective view from the front.

Fig. 705B is a rear view.

The main frame is built up from $5\frac{1}{2}$ " flanged plates 1, connected by angle brackets to $1\frac{1}{2}$ " strips 2 and lower angle girders 3. Angle girders 4 are bolted to the flanged plate 1 by double brackets 5. These angle girders 4 form the rails upon which the table 6 of the planer slides. The table consists of a $5\frac{1}{2}$ " flanged plate. The table is moved to and fro, being bolted by the double bent strip 7, Fig. 705B, to a $5\frac{1}{2}$ " strip 8 the end of which is attached at 9 to a $3\frac{1}{2}$ " strip 10, pivoted on a rod 11. The strips should be lock-nutted to allow free movement. The rod 11 passes through one of the elongated holes in the angle girder 4, and to prevent play of the rod a $2\frac{1}{2}$ " strip 12 is bolted on the flange of the angle girder 4, and in the end hole of this strip the top of the rod 11 is pivoted. The strip 10 engages an eye piece 12A bolted to a bush wheel 13. The eye piece is lock-nutted on the bush wheel, so that while held to the bush wheel it may rotate freely about the bolt as a pivot. Consequently, as the wheel 13 rotates, the table 6 will be moved in one direction, while cutting, more slowly than on the return movement when the work is being brought back. A gear framing by which the bush wheel 13 is driven is made by $5\frac{1}{2}$ " by $\frac{1}{2}$ " double angle strips 14, Fig. 705B. The gear is driven from the belt pulley 15, formed of two flanged wheels reversed. The gear train may be clearly followed from the illustration, terminating in a pinion driving the contrate wheel 16, secured on the bush wheel rod.

The traversing movement of the cutting tool 17 is effected by means of a guide, formed of two $1\frac{1}{2}$ " strips 18, bolted to two corresponding strips at the rear of the horizontal $3\frac{1}{2}$ " strips 19, a middle spacing $1\frac{1}{2}$ " strip being horizontally arranged between the strips 18. The cutting tool 17 is carried in a coupling 20, which is connected by a threaded pin 21, to a threaded boss on a feed screw 22, which is operated from the bush wheel 23, Fig. 705A. The horizontal strips 19 are supported by double angle brackets 24 from the flat plate 25, and washers 26 are placed beneath the nuts on the strips 19, in order to give the necessary distance at the rear for clearance for the threaded boss on the threaded rod 22. The threaded rod 22 is journaled in the ends of a $3\frac{1}{2}$ " by $\frac{1}{2}$ " double angle strip 27, bolted to the plate 25. The vertical movement of the plate 25 on the upright angle girders 28 is effected from the bush wheel 29 mounted on a rod 30, a bevel wheel 31 engaging a corresponding bevel 32 on a rod 33, carrying 2 pinions 34, which engage the racks 35, secured by angle brackets 36 to $5\frac{1}{2}$ " strips 37, bolted to the plate 25, with spacing washers between, so that a clearance is provided between the ends of the strips 37 and the plate 25, to engage in a sliding movement round the flanges of the angle girders 28.


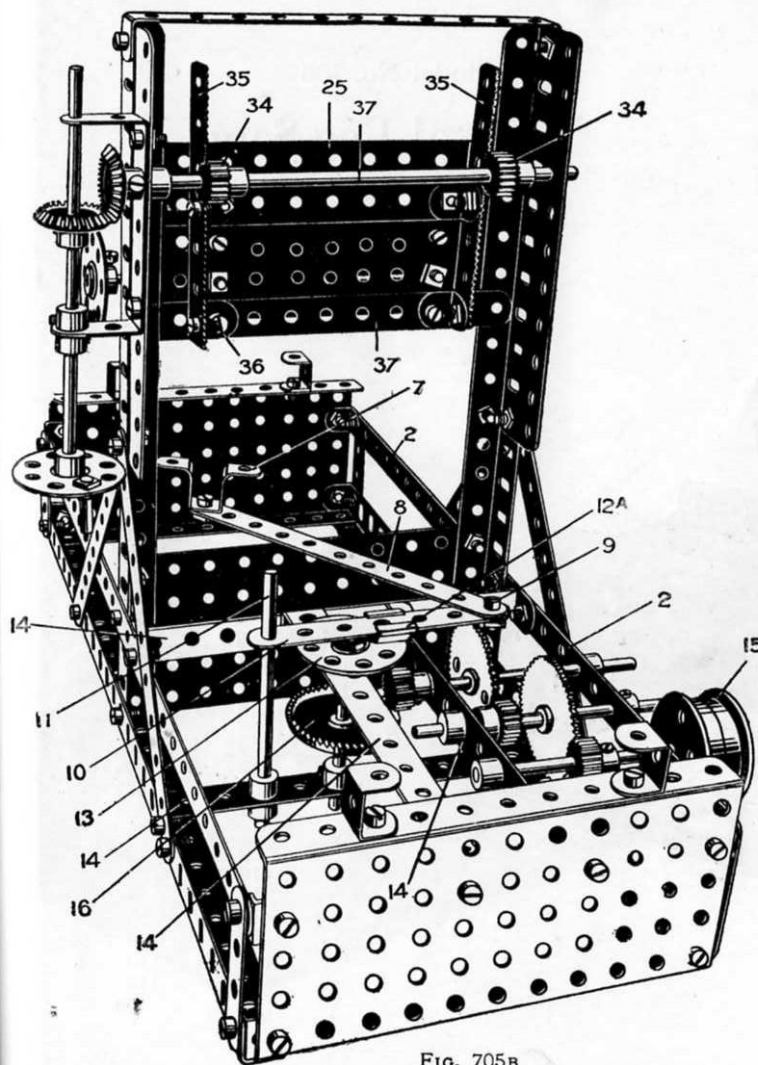


Fig. 705B

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 706

Vertical Log Saw

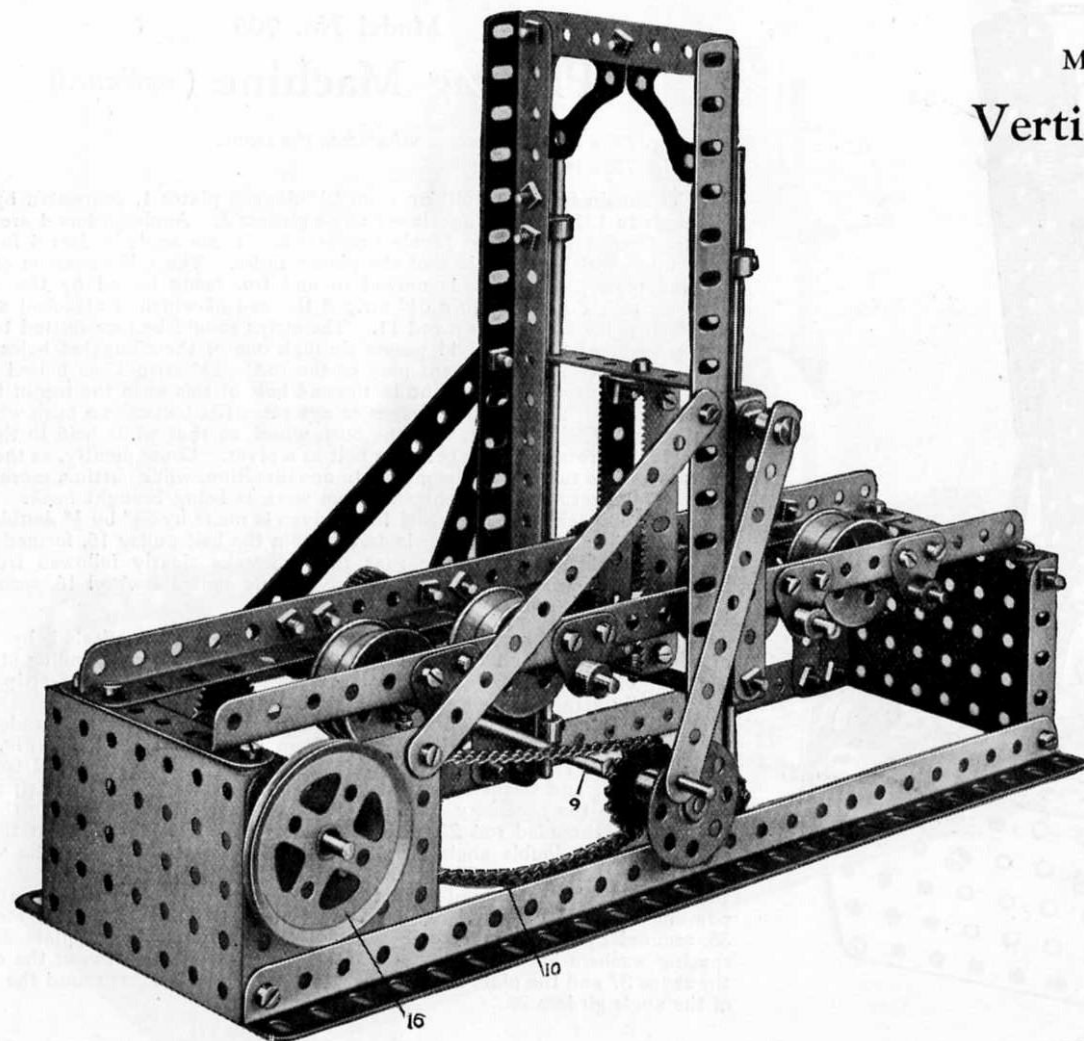

Parts required:

2	of No.	2
2	" "	2A
5	" "	3
1	" "	6
4	" "	8
2	" "	8A
12	" "	12
2	" "	12A
1	" "	13
2	" "	13A
1	" "	15
4	" "	15A
2	" "	16
8	" "	20
1	" "	20A
2	" "	24
2	" "	25
1	" "	26
1	" "	27A
2	" "	30
2	" "	32
59	" "	37
6	" "	37A
2	" "	48B
2	" "	53
17	" "	59
2	" "	72
10	" "	77
12	" "	94
2	" "	96
2	" "	108
2	" "	110
2	" "	115
2	" "	147B

Model No. 706

Vertical Log Saw

(continued)

This is a model of a machine used for sawing logs into planks.

Fig. 706 is a front perspective view of the log saw, and Fig. 706A a rear perspective view.

The saws represented by the rack strips 1 are carried in a vertical movable frame 2 which slides on the rods 3 as guides. These rods 3 are rigidly held in the angle brackets 4 by the collars 5. The saw frame is reciprocated on the guide rods 3 by the link strips 6, connected to the frame 2 by pivot bolts lock-nutted to the frame and spaced with collars and the lower holes engage the threaded pins 7 on the bush wheels 8, the rod 9 of which is connected by a sprocket chain 10 to a sprocket wheel on the spindle 11. The log is caused to move past the saws by being supported on the pairs of reversed flanged wheels 12 and 12A, the centre pairs of which are positively driven from the $\frac{3}{4}$ " pinions 13, which are engaged by the worm 14 on the rod 15. The movement of the flanged pulleys 12A and of the saws 1 are both effected from the 2" pulley wheel 16, the rod of which carries a $\frac{1}{2}$ " pinion engaging a 56-toothed wheel 19 on the rod 11. At the outer end of this rod 11 is a bevel wheel 17 engaging a corresponding bevel 18 on the rod 15. Consequently, if the pulley wheel 16 be driven, the saw frame is reciprocated vertically, and the centre pairs of the flange wheels rotated, causing the log to be fed towards the saws. The opposite end of the rod carrying the pulley wheel 16 passes through one of the holes of the 1" angle bracket forming the bearing for the rod 15.

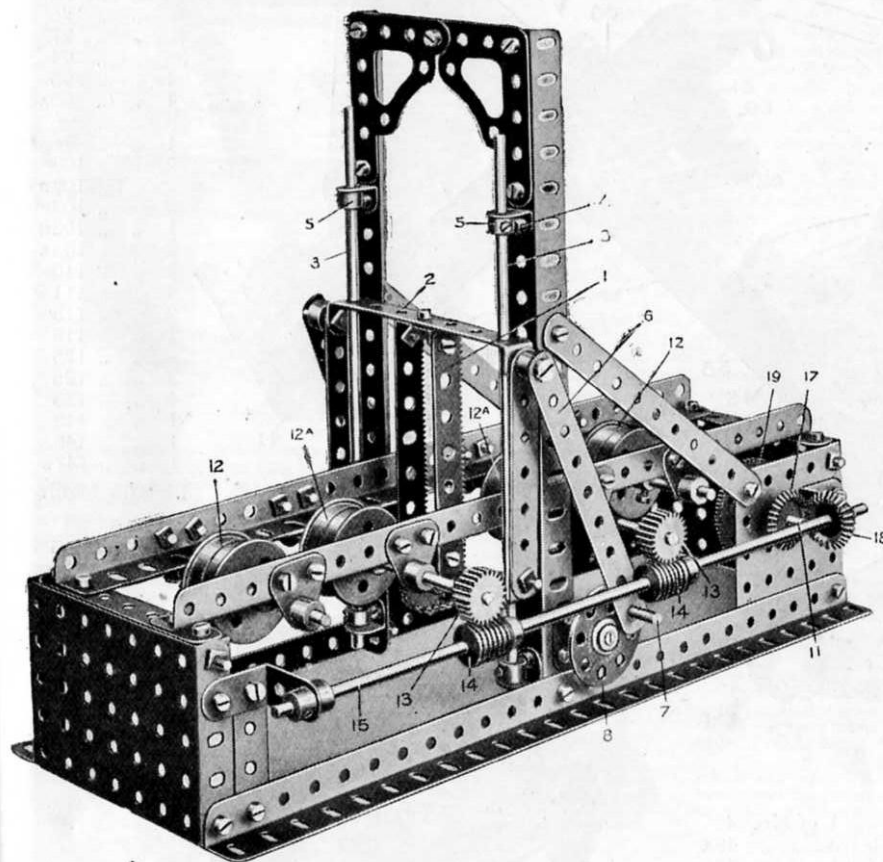
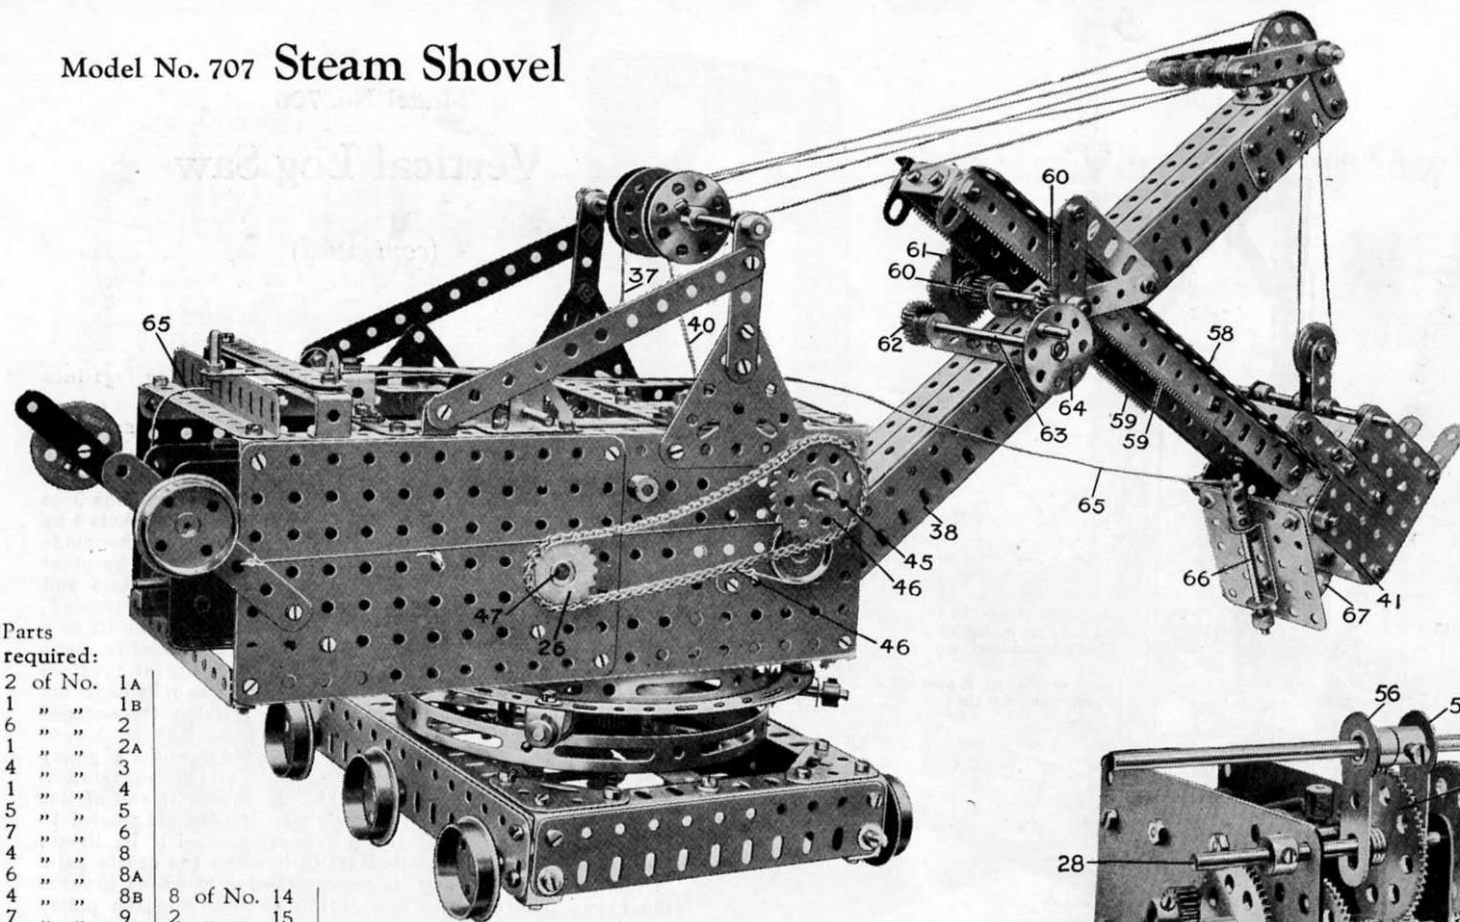


FIG 706A

Model No. 707 Steam Shovel

Parts
required:

2	of No.	1A
1	" "	1B
6	" "	2
1	" "	2A
4	" "	3
1	" "	4
5	" "	5
7	" "	6
4	" "	8
6	" "	8A
4	" "	8B
7	" "	9
2	" "	9B
4	" "	9D
4	" "	9F
7	" "	10
6	" "	11
11	" "	12
4	" "	12B
2	" "	13A

8	of No.	14
2	" "	15
1	" "	15A
7	" "	16
4	" "	16A
1	" "	18A
5	" "	18B
8	" "	20
1	" "	21
2	" "	22

4	of No.	22A
2	" "	23
4	" "	23A
5	" "	24
1	" "	25
9	" "	26

1	of No.	27
7	" "	27A
1	" "	27B
1	" "	28
2	" "	30
2	" "	31

1	of No.	32
5	" "	35
3	" "	37
1	" "	38
1	" "	40
1	" "	45

1	of No.	48
3	" "	48A
1	" "	48D
5	" "	52A
36	" "	59

Parts
required:
(continued)

3	of No.	62
2	" "	63
4	" "	72
2	" "	76
2	" "	77
36	" "	94
1	" "	95
1	" "	95A
3	" "	96
1	" "	96A
2	" "	103
2	" "	103B
2	" "	103F
1	" "	103H
2	" "	103K
4	" "	110
4	" "	111
2	" "	115
1	" "	118
4	" "	125
3	" "	126
4	" "	133
1	" "	143
1	" "	145
1	" "	147B

Electric Motor

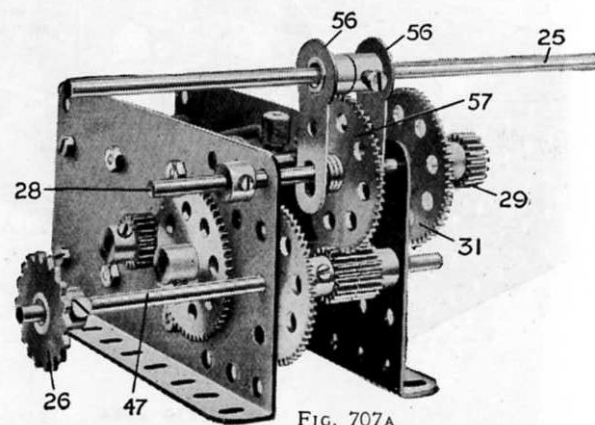


FIG. 707A

Model No. 707 Steam Shovel

(continued)

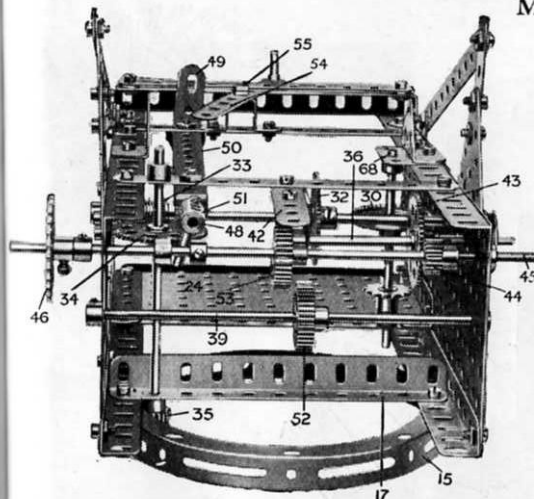


FIG. 707B

held by the same bolts, is a $5\frac{1}{2}$ " angle girder 17. Through this angle girder passes the rod 9 carrying a $\frac{3}{4}$ " sprocket wheel 18, Fig. D. A collar 19 engages above the angle girder 17.

Next build up the roller race, Fig. D, formed of four double brackets 20, bolted to a circular strip 21. $\frac{3}{4}$ " fast pulleys are secured on $1\frac{1}{2}$ " rods 22, which are journaled through the brackets 20. The whole is then placed on the top edge of the hub disc and the body is threaded on to the rod 9 in the centre hole of the angle girder 17. After the collar 19 is secured in position, the sprocket wheel 18 is bolted to the rod 9.

The top bearing for the $3\frac{1}{2}$ " rod 23 is formed by a $1\frac{1}{2}$ " flat girder, over which is secured a trunnion. A $3\frac{1}{2}$ " x $5\frac{1}{2}$ " flat plate 24 is secured to each side of the body by $3\frac{1}{4}$ " angle girders 25 in the second hole up. This provides a bed to which the electric motor is secured. On the lower part of rod 23 is secured a $\frac{3}{4}$ " sprocket wheel from which a chain drives the sprocket wheel 18 which operates the lower levels to drive the travelling wheels.

Now build up the motor unit, leaving off the rod 25 and sprocket 26. (The gear wheels and rods are clearly seen in Fig. A). The motor is then secured to the plate 24, the correct position being found when the fourth hole from the back of the motor registers with hole 27 in the plate, Fig. C.

When the motor is in position, owing to the rod 28 being slideable the pinion 29 may be engaged with the contrate wheel 30 or the gear wheel 31 with the gear wheel 32. The spindle of the latter gear wheel 32 carries a worm 33, Fig. B, which engages a gear wheel 34. On the spindle of 34 is a pinion 35, which engages and drives the $3\frac{1}{2}$ " gear wheel 11, thus rotating the Shovel.

On the $3\frac{1}{2}$ " rod 36 is wound the cord 37 for raising and lowering the jib 38, and on the 6" rod 39 is wound the cord 40 for raising and lowering the shovel 41. The rod 36 is journaled in a trunnion bolted underneath the strip 42 and carries a $1\frac{1}{2}$ " gear wheel 43, which is engaged by a pinion 44 on an 8" rod, 45. This is driven by a $1\frac{1}{2}$ " sprocket wheel 46 from the 1" sprocket wheel 26 on the motor spindle 47.

The spindle 45 is slideable by the rotation of an 8" rod 48 operated by the crank 49, the rod being journaled in the ends of a $5\frac{1}{2}$ " x $1\frac{1}{2}$ " double angle strip 50, a coupling 51 carrying a 1" rod which engages between two collars on the rod 45. In this way the pinion 44 may be meshed with the gear wheel 43 in order to raise or lower the jib, or a 1" gear wheel 52 on the rod 39 may be engaged with a 1" gear wheel 53 to raise or lower the shovel arm 58.

The rod 28 is slideable by a $4\frac{1}{2}$ " strip 54 pivoted at 55, the outer end of which engages between two cranks 56. These grip on either side of a $1\frac{1}{2}$ " gear wheel 57, several washers being placed between the cranks to take up the slack. The shovel 41 is carried on a sliding frame consisting of angle girders 58 to which are bolted racks 59. These are engaged by $\frac{1}{2}$ " pinions 60 on a $3\frac{1}{4}$ " rod. A 50-toothed gear wheel 61, which is driven by a $\frac{1}{2}$ " pinion 62 on a $3\frac{1}{4}$ " rod 63 operated by the hand wheel 64. The bottom of the shovel is released by a cord 65 connected to a sliding rod 66, the end of which enters the aperture of a flat bracket 67.

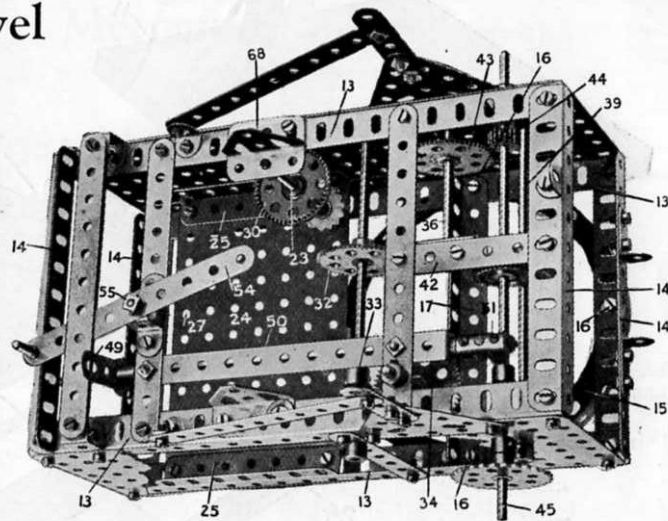


FIG. 707C


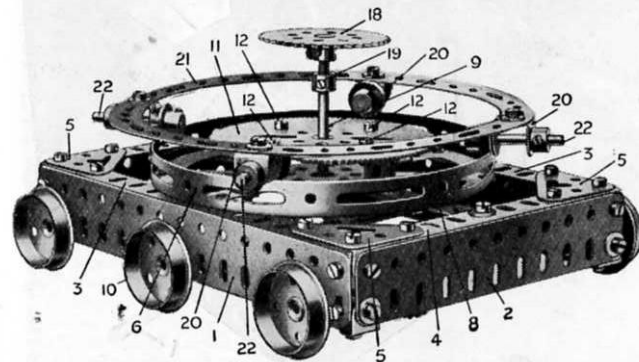



FIG. 707D

Model No. 708

Meccanograph



One of the hundreds of beautiful designs made by this model.

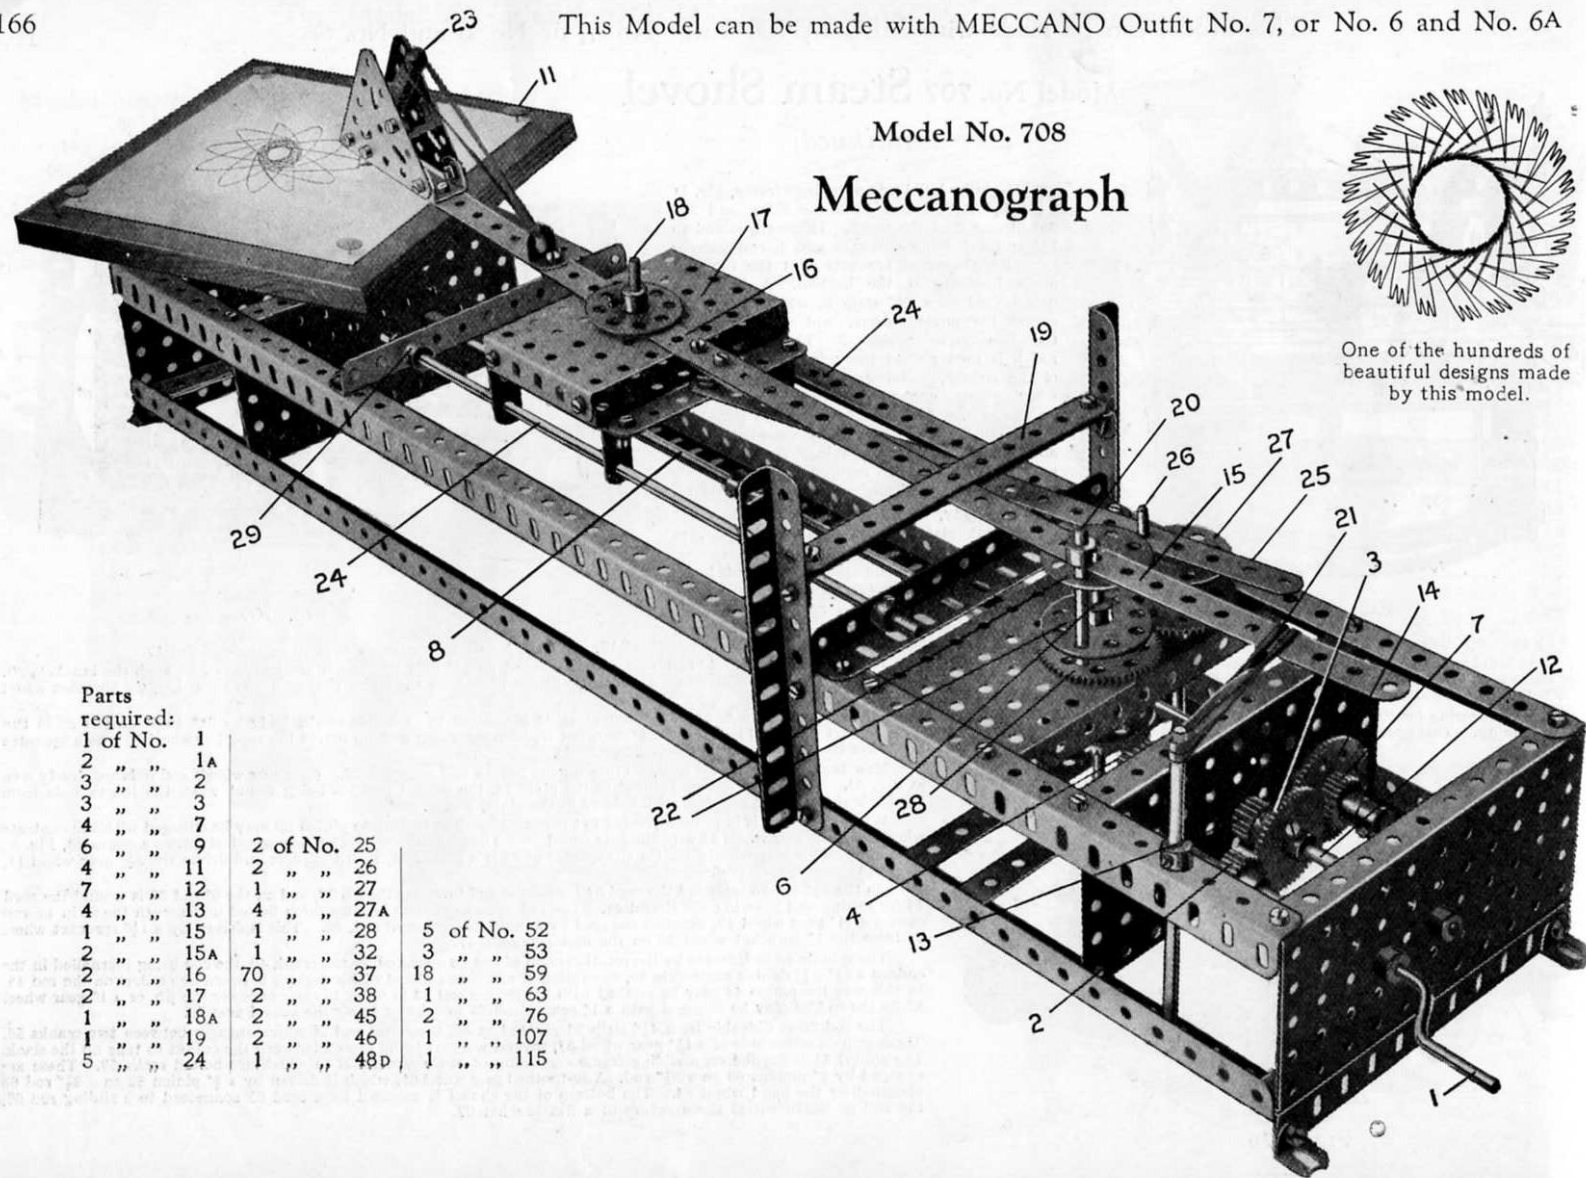

Parts
required:

1	of No.	1
2	" "	1 ^A
3	" "	2
3	" "	3
4	" "	7
6	" "	9
4	" "	11
7	" "	12
4	" "	13
1	" "	15
2	" "	15 ^A
2	" "	16
2	" "	17
1	" "	18 ^A
1	" "	19
5	" "	24

2	of No.	25
2	" "	26
1	" "	27
4	" "	27 ^A
1	" "	28
1	" "	32
70	" "	37
2	" "	38
2	" "	45
2	" "	46
1	" "	48 ^D

5	of No.	52
3	" "	53
18	" "	59
1	" "	63
2	" "	76
1	" "	107
1	" "	115

This
it. With
paper an
that has
of others
whatever
to be mad
tastefully
the effect

The
1 on which
toothed g
toothed p
on the sp
toothed p
the table
a 57-tooth
to which
wheel. In
the table
an alterna
there is lo
pinion-13
14. Conse
and 14 an
3 and 7,
its rod and
to their re
a much lo

This Model can be made with

MECCANO Outfit No. 7, or No. 6 and No. 6A.

167

Model No. 708

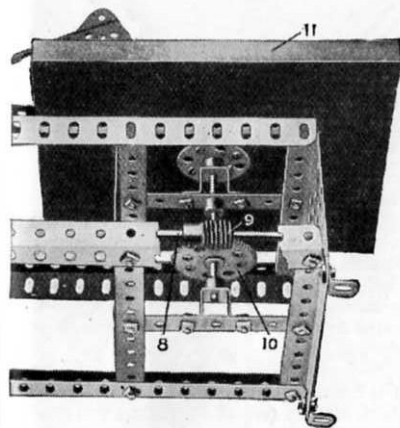


FIG. 708A

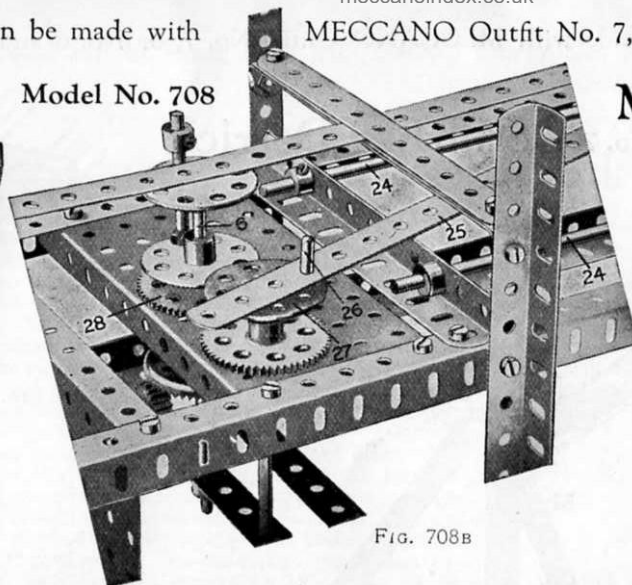


FIG. 708B

Meccanograph (continued)

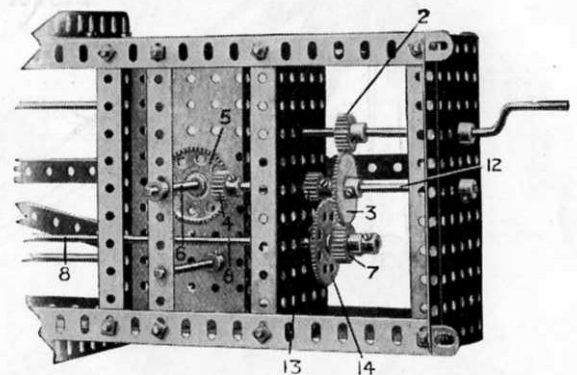


FIG. 708C

This is a model of extraordinary interest, and we hope that all Meccano boys will build it. With it any boy can make an amazing variety of exquisite designs by fixing a sheet of paper and pen in position and turning the handle. We have reproduced a neat design that has been made with the Meccanograph, and this could be supplemented by thousands of others if we had the space. We must content ourselves by saying that there is no limit whatever to the variety and beauty of the designs to be made by simply varying the adjustments. When tastefully filled-in with different tints of water colours, the effect is most pleasing.

The Meccanograph is driven from the handle 1 on which is a 25-toothed pinion 2 engaging a 50-toothed gear wheel 3 on the axle of which is a 19-toothed pinion 4 engaging a $1\frac{1}{2}$ " contrate wheel 5 on the spindle 6. The gear wheel 3 drives a 25-toothed pinion 7 on an axle rod 8 extending along to the table and by means of a worm 9 (Fig. A) drives a 57-toothed gear wheel 10 on the upright spindle to which the rotating table 11 is secured by a bush wheel. In order to vary the speed of rotation of the table 11 for a constant turning of the handle 1 an alternative drive is arranged. For this purpose there is loosely mounted on the rod 12 a 19-toothed pinion 13 adapted to engage a 57-toothed gear wheel 14. Consequently, the rod 8, when the wheels 13 and 14 are loose, is driven by the toothed wheels 3 and 7, and if the pinion 7 be disconnected from its rod and the pinion 13 and gear wheel 14 be fixed to their respective rods, the table will be driven at a much lower speed.

The arm is built up of a $12\frac{1}{2}$ " strip 15 and a $9\frac{1}{2}$ " strip 16 overlapped three holes and adjustably connected to the carriage 17 by a 1" rod 18. It passes through one of the perforations in the strip 16 so that, in order to vary the design produced, the rod 18 may be inserted in any suitable hole in the strip 16 or in any suitable hole in the carriage 17. The strip 15 is guided between the $5\frac{1}{2}$ " strips 19 spaced by washers at each end. The strip 15 of the arm continually bears against the rod 20 by the pulling action of an elastic band 21, the rod 20 passing through two bush wheels 22 secured on the rod 6. Consequently, as the bush wheels rotate, the rod 20 acts as a crank to oscillate the arm about the pivot rod 18 and moves the pen 23 to and fro across the table 11. The carriage 17 is simultaneously caused to travel to and fro along the guide-rods 24 by means of a strip 25, Fig. B, one hole of which engages a threaded pin 26 in a bush wheel 27. This is driven by means of a $1\frac{1}{2}$ " gear wheel on its axle rod, being engaged and driven by a similar gear wheel 28 secured on the vertical rod 6.

One series of designs is obtained from the Meccanograph as shown in the illustration, but an entirely different set of designs may be obtained if the strip 25 is disconnected from the threaded pin 26 and the carriage 17 locked on the guide rods 24 by means of collars 29. The pen 23 is held in the holder, Fig. D, formed by two $2\frac{1}{2}$ " triangular plates 30 connected by two double brackets 31 to the arm 16, and connected together also by two further double brackets 32. The pen 23 is retained in this holder by an elastic band 33 connected to an angle bracket 34 on the arm.

Care should be taken to see that all parts of the model work smoothly and that no jolting takes place, otherwise the lines of the design will be uneven.

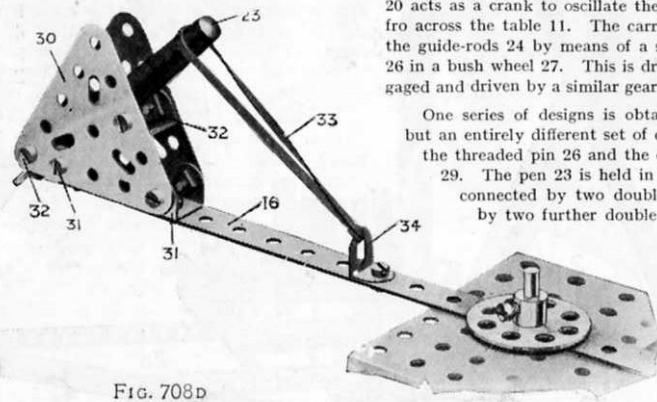


FIG. 708D

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 709 Stiff-Leg Derrick

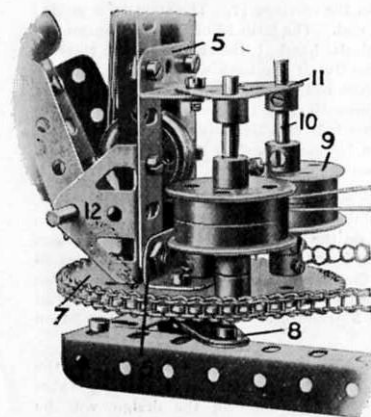
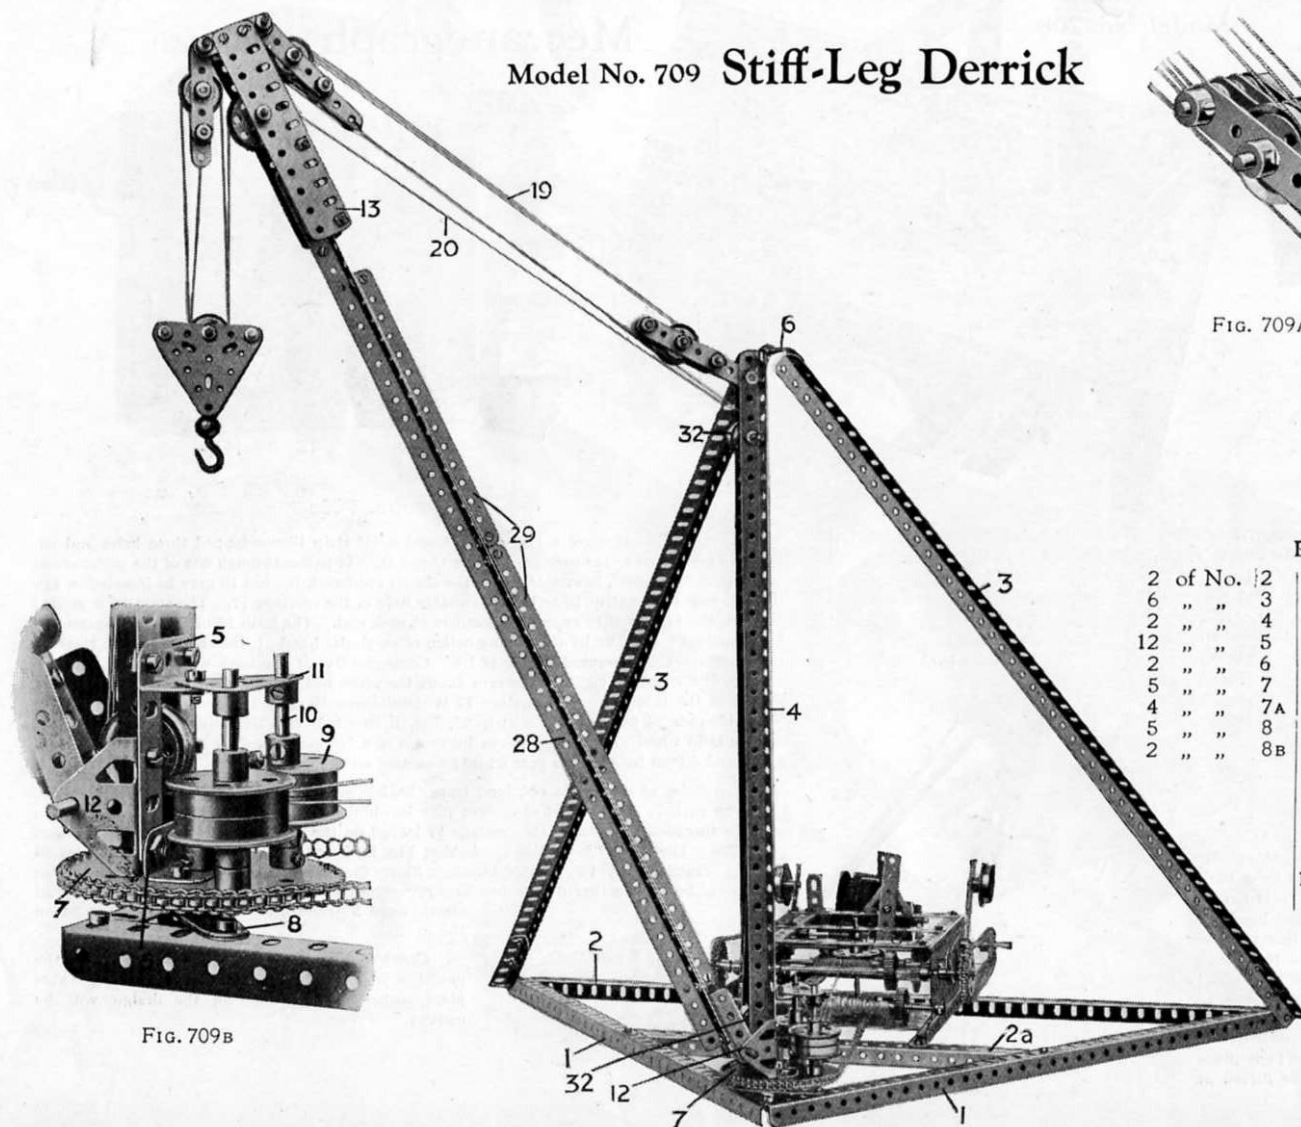


Fig. 709B

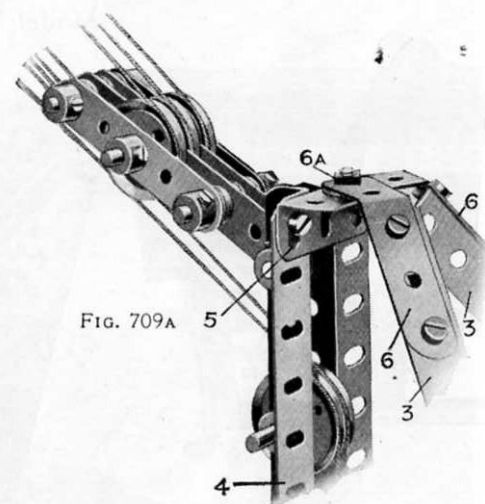


Fig. 709A

Parts required:

2 of No. 12	6 of No. 9B	3 of No. 27A
6 " " 3	2 " " 9E	2 " " 31
2 " " 4	3 " " 9F	1 " " 32
12 " " 5	2 " " 12	3 " " 35
2 " " 6	2 " " 13A	79 " " 37
5 " " 7	4 " " 14	88 " " 38
4 " " 7A	1 " " 16	2 " " 40
5 " " 8	3 " " 16A	1 " " 48C
2 " " 8B	4 " " 17	2 " " 52
	9 " " 18A	2 " " 52A
	5 " " 18B	1 " " 57B
	6 " " 20	50 " " 59
	1 " " 21	1 " " 62
	2 " " 22	1 " " 63
	15 " " 22A	2 " " 76
	2 " " 26	1 " " 94
		2 " " 95A
		1 " " 95B
		2 " " 96
		2 " " 103
		3 " " 126
		1 " " 133
		Electric Motor

The si
three
togeth
angle
to a 3'
the cen
up fro
one ab
T
T
strengt
along t
through
and thi
Mechan
bolted
Th
The dri
which i
is broug
Mechan
32 in th
the rear
upright
The
also car
1/2" pinio
mechan
the vert
pulley in
and of t
The
from the
(see Star
a 1/2" pin
carries a
rod 27 a
the 3" sp
Bra
back of

Model No. 709 Stiff-Leg Derrick (continued)

The base of the model is formed of $18\frac{1}{2}$ " angle girders 1 bolted to a $24\frac{1}{2}$ " girder 2 and held rigid by a $12\frac{1}{2}$ " girder 2a. The side members 3 are constructed from $24\frac{1}{2}$ " angle girders extended at their lower ends by $2\frac{1}{2}$ " girders overlapped three holes. $2\frac{1}{2}$ " strips 6, Fig. A, bolted to the tops of the girders 3 are slightly bent, as shown, and meeting together form a bearing for the bolt 6a, about which the upright member 4 pivots. The latter consists of $18\frac{1}{2}$ " angle girders, bolted together at each extremity by $1\frac{1}{2}$ " girders 5. The lowest of these $1\frac{1}{2}$ " girders is secured to a 3" sprocket wheel 7, which forms the swivelling base of the jib. The pivot is a $1\frac{1}{2}$ " rod passed through the centre hole of the $1\frac{1}{2}$ " girder and through the boss of the sprocket wheel and carried in a bearing 8 built up from two $2\frac{1}{2}$ " strips bolted across the base girders 1. Two collars should be placed on this rod, one above the sprocket 7 and one below the strips 8, Fig. B.

Two flanged wheels butted together form guide pulleys 9 (Standard Mechanism No. 40).

The jib is built up from two $24\frac{1}{2}$ " angle girders 28 bolted together in the form of a T and strengthened by pairs of $12\frac{1}{2}$ " and $7\frac{1}{2}$ " angle girders 29 similarly bolted together and secured along the upper sides of the girders 28. A $2\frac{1}{2}$ " rod, about which the jib pivots, is journalled through trunnions 12, Fig. B, and through the end holes of 2" girders bolted in the first and third holes from the end of the $24\frac{1}{2}$ " girders 28. The head of the jib (Standard Mechanism No. 31) is formed by two $5\frac{1}{2}$ " flat girders 13 secured to $2\frac{1}{2}$ " angle girders, bolted in the first and fourth holes of the girders 28.

The jib is raised or lowered by means of the cord 19 winding on the rod 18, Fig. C. The drive from the motor is led to this rod 18 by way of chain gear 17 and rod 16 which is slideable in its bearings. On operation of the crank 24, the 1" gear wheel 31 is brought into engagement with a similar gear secured to the shaft 18 (Standard Mechanisms). This operates the cord 19, which, after passing round 1" guide pulleys 32 in the vertical member 4, is led round the sheaves of the pulley block pivoted at the rear of the jib-head and those of the pulley-block attached to the head of the upright (Fig. A) in a similar manner to that described in Standard Mechanism No. 37.

The hoisting-block is operated by the cord 20 winding on a rod 21, Fig. C, which also carries a 57-toothed gear wheel. On moving the lever 24 over to the right, a $\frac{1}{2}$ " pinion 23 is brought into mesh with this gear wheel, so connecting the hoisting mechanism with the drive from the motor. The cord 20 is led over the pulleys in the vertical member in a similar manner to the cord 19 before passing over a $1\frac{1}{2}$ " pulley in the jib-head; it next engages alternately the sheaves of the hoisting-block and of the second fixed block in the jib-head, being finally secured to the latter.

The rotation of the jib is effected as follows: a rod 25 driven by sprocket chain from the rod 16 may be moved to and fro in its bearings on operation of a lever 26, (see Standard Mechanisms), and this movement is employed to engage or disengage a $\frac{1}{2}$ " pinion with a 57-toothed gear wheel 22 on a secondary shaft 33. The latter carries a worm wheel gearing with another 57-toothed gear wheel on a vertical rod 27 and a 1" sprocket wheel on this rod rotates by means of a sprocket chain the 3" sprocket wheel 7 forming the base of the jib.

Brakes are provided in the form of weighted levers 34 as described in Section VI, "Meccano Standard Mechanisms." This method prevents falling-back of the jib or hoisting-block when the gears are released.


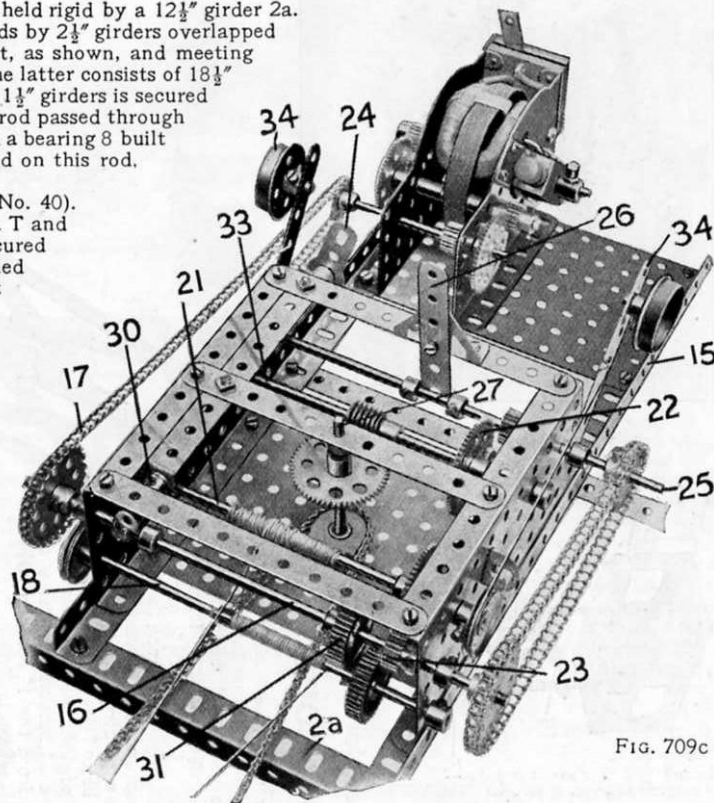


FIG. 709c

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

170



Model No. 710 Aeroscope

The rotary roller base of the model is similar to that described in "Meccano Standard Mechanisms." To this rotary frame is bolted at 1 two $3\frac{1}{2}$ " angle girders bolted together, upon which the superstructure 2 is secured. At the top of this superstructure is journaled a $6\frac{1}{2}$ " rod 3 bolted to the swinging arm 4 by means of two bush wheels 5. On the rod 3 is a 3" sprocket wheel 6 driven by a chain 7 from the 1" sprocket wheel 8 on rod 3. This sprocket wheel is driven by a $\frac{1}{2}$ " pinion 9 and a $1\frac{1}{2}$ " contrate wheel 10 which in turn are driven from a worm wheel 11 on a $4\frac{1}{2}$ " rod 12. This rod is driven by a reducing gear train from the 5" rod 13 in the motor, Fig. A.

The gear mechanism just described rotates the arm 4 about the rod 3. The arm is balanced at the foot by thirty-two $12\frac{1}{2}$ " strips 14, and the carriage 15, pivoted at 16, is balanced by a weight on each side consisting of twenty $2\frac{1}{2}$ " strips 17.

The mechanism for rotating the superstructure 2 consists of a 3" sprocket wheel 18 engaging the chain 23 and is operated by the $\frac{1}{2}$ " pinion 19, the drive from which is led through a 57-toothed gear wheel 20, and worm 21 on to the 57-toothed wheel 22.

Parts
required:

48 of No.	1	1A	1B	2	3	5	6	8	9
4	"	"	"	"	"	"	"	"	"
1	"	"	"	"	"	"	"	"	"
34	"	"	"	"	"	"	"	"	"
20	"	"	"	"	"	"	"	"	"
48	"	"	"	"	"	"	"	"	"
8	"	"	"	"	"	"	"	"	"
12	"	"	"	"	"	"	"	"	"


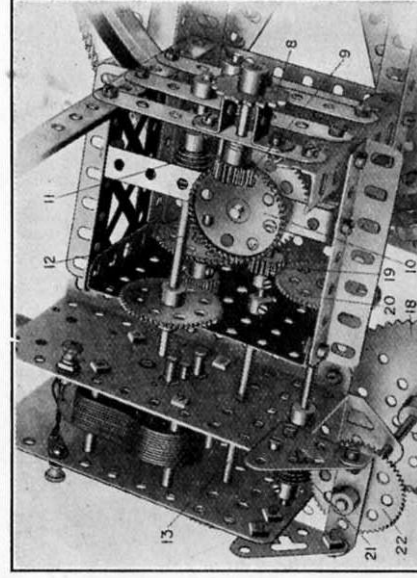


FIG. 710A

Parts required:
(continued)

4 of No.	9d	1 of No.	46
16	"	12	1
1	"	14	18
1	"	15	1
3	"	15A	2
13	"	16	1
5	"	17	2
1	"	18A	38
8	"	20	1
2	"	24	2
3	"	26	4
6	"	27A	2
1	"	28	2
2	"	32	1
240	"	37	5
15	"	38	2
1	"	45	1
			Electric Motor
			6
			103
			109
			119
			126A
			133

4 of No.	9d	1 of No.	46
16	"	12	1
1	"	14	18
1	"	15	1
3	"	15A	2
13	"	16	1
5	"	17	2
1	"	18A	38
8	"	20	1
2	"	24	2
3	"	26	4
6	"	27A	2
1	"	28	2
2	"	32	1
240	"	37	5
15	"	38	2
1	"	45	1
			Electric Motor
			6
			103
			109
			119
			126A
			133

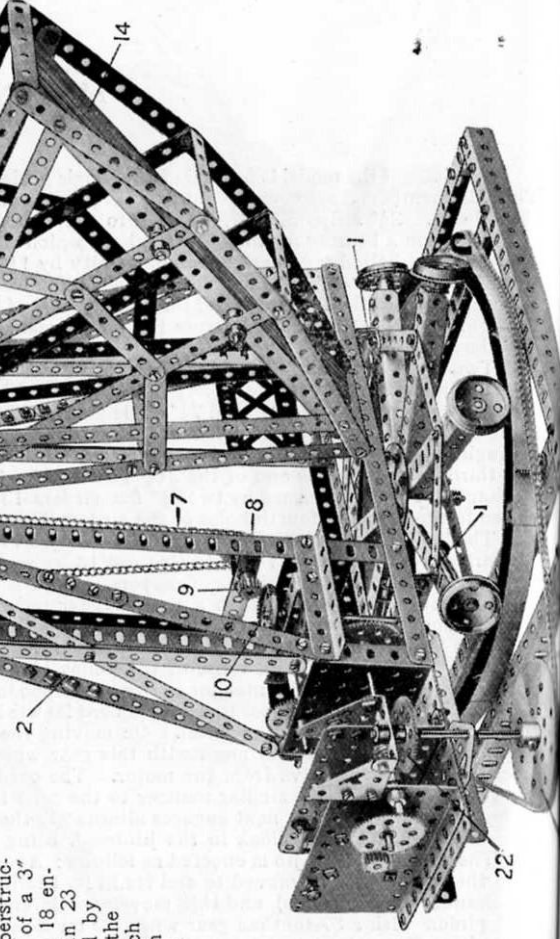

1 of
17 "
2 "
1 "
2 "
1 "
2 "
3 "
1 "
3 "
4 "
1 "
1 "
2 "
4 "

Th
24" and
This h
being h
9, on a
or dis
the wir
wound.
on the
worm f
21, form


In
the spin

It v
other, a
give a v
sisting o
the wire

Model No. 711 Wire Covering Machine

Parts required:

1 of No. 2	2 of No. 27A
7 " " 3	2 " " 30
2 " " 4	2 " " 32
1 " " 5	41 " " 37
2 " " 6A	17 " " 38
2 " " 8	2 " " 44
1 " " 10	1 " " 46
2 " " 12	1 " " 48
3 " " 12A	2 " " 50
1 " " 13	4 " " 53
3 " " 15	12 " " 59
4 " " 15A	2 " " 62
1 " " 21	1 " " 63
1 " " 22	1 " " 81
2 " " 24	1 " " 106
4 " " 26	1 " " 301

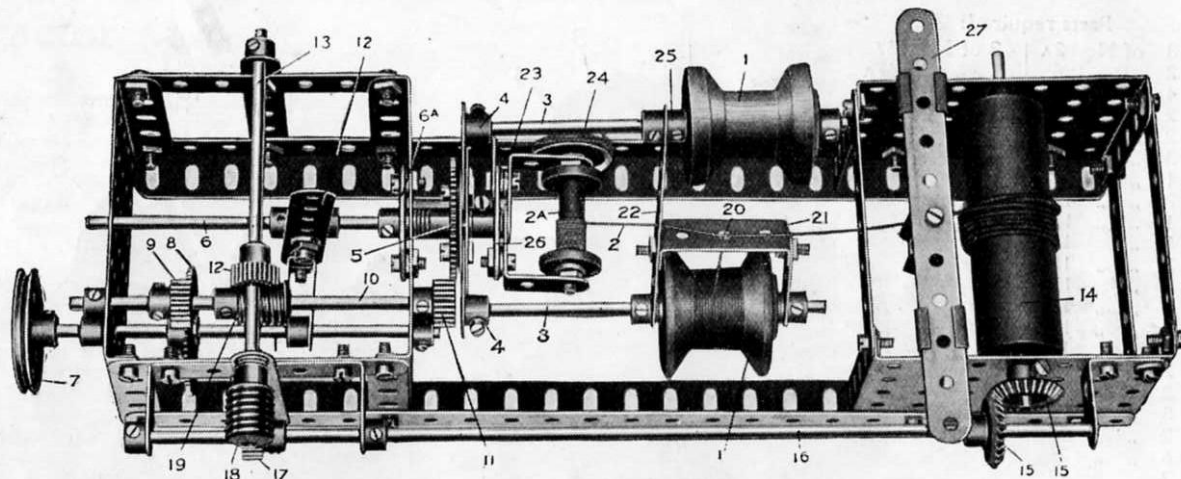

The bobbins 1, carrying the thread by means of which the wire 2 is covered, are carried in a yoke consisting of two rods 3, secured in cranks 4, between a $2\frac{1}{2}$ " and $1\frac{1}{2}$ " strip, and bolted to a 57-toothed gear wheel 5, rotatable loosely on a fixed 5" rod 6. On the rod 6, is a bush wheel 6A, bolted thereto and to the frame. This holds the rod against rotation. The bobbin 2A is carried in the two 1" angle brackets, forming a frame which is bolted to the bush wheel 26, the latter being held by its screw fixedly on the rod 6. The yoke is rotated from the pulley wheel 7, a 57-toothed gear wheel 8, on the spindle of which drives a $\frac{1}{2}$ " pinion 9, on an upper 4" rod 10, another $\frac{1}{2}$ " pinion 11, on the end of which engages and drives the gear wheel 5; this rotates the yoke. The gear 8 is caused to engage or disengage with the pinion 9 by a clutch mechanism operated by the handle 12. As the yoke rotates, the thread from the bobbins is wound closely round the wire 2, and in order to ensure an even wrapping of the thread on the wire, the take-up roller 14, is provided, on to which the wire as it is covered is wound. The take-up roller is driven with a very slow movement by bevel pinions 15, from a side rod 16, a $\frac{1}{2}$ " pinion 17 on which is driven by a worm 18, on the rod 13. Consequently, the same rotary movement of the rod 10, to drive the bobbin yoke, also operates the worm 19, engaging the pinion 12 and worm 18, engaging the pinion 17, which drives the take-up roller 14, bringing the uncovered wire 2 slowly past a perforation 20, in the guide strip 21, formed of $1\frac{1}{2}$ " by $\frac{1}{2}$ " double angle strip and carried from the yoke arm 22.

In order to prevent the wire 2 unwinding too freely from its bobbin 2A, a brake is provided, consisting of a cord 23, passing round a pulley 24, on the spindle of the bobbin 2A, and connected to a flat bracket bolted on the bush wheel 26.

It will be noticed that a collar 25 is placed on one side of the yoke strip 22, which has the effect of setting one of the bobbins slightly to the rear of the other, and the effect of this is to give two windings round the wire, one over the other. The thread on the bobbins may be of different colours, which would give a variegated effect to the covering. In order to cause the covered wire to be wound evenly on the take-up roller 14, a distributor is provided, consisting of a strip 27, beneath which is bolted a double bracket through which the covered wire passes. By moving the strip 27 from one side to the other, the wire winds evenly on the roller 14.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 712 Tractor

Parts required:

3	of No.	2A	2 of No. 137
2	"	6	2 " " 147A
4	"	6A	2 " " 147B
2	"	8B	2 " " 148
2	"	9B	
3	"	9c	
1	"	11	Electric Motor
3	"	12A	
1	"	13A	
1	"	14	
3	"	15	
1	"	15A	
3	"	16	
2	"	16B	
1	"	17	
2	"	19B	
2	"	21	
5	"	24	
2	"	25	
6	"	26	
2	"	27	
4	"	27A	
2	"	30	
1	"	32	
180	"	37	
60	"	38	
1	"	47	
1	"	48	
2	"	48D	
1	"	50	
4	"	52A	
2	"	53	
20	"	59	
1	"	62	
2	"	63	
4	"	72	
18"	"	94	
4	"	95A	
2	"	96A	
2	"	103H	
2	"	115	
4	"	118	
2	"	130	
1	"	132	

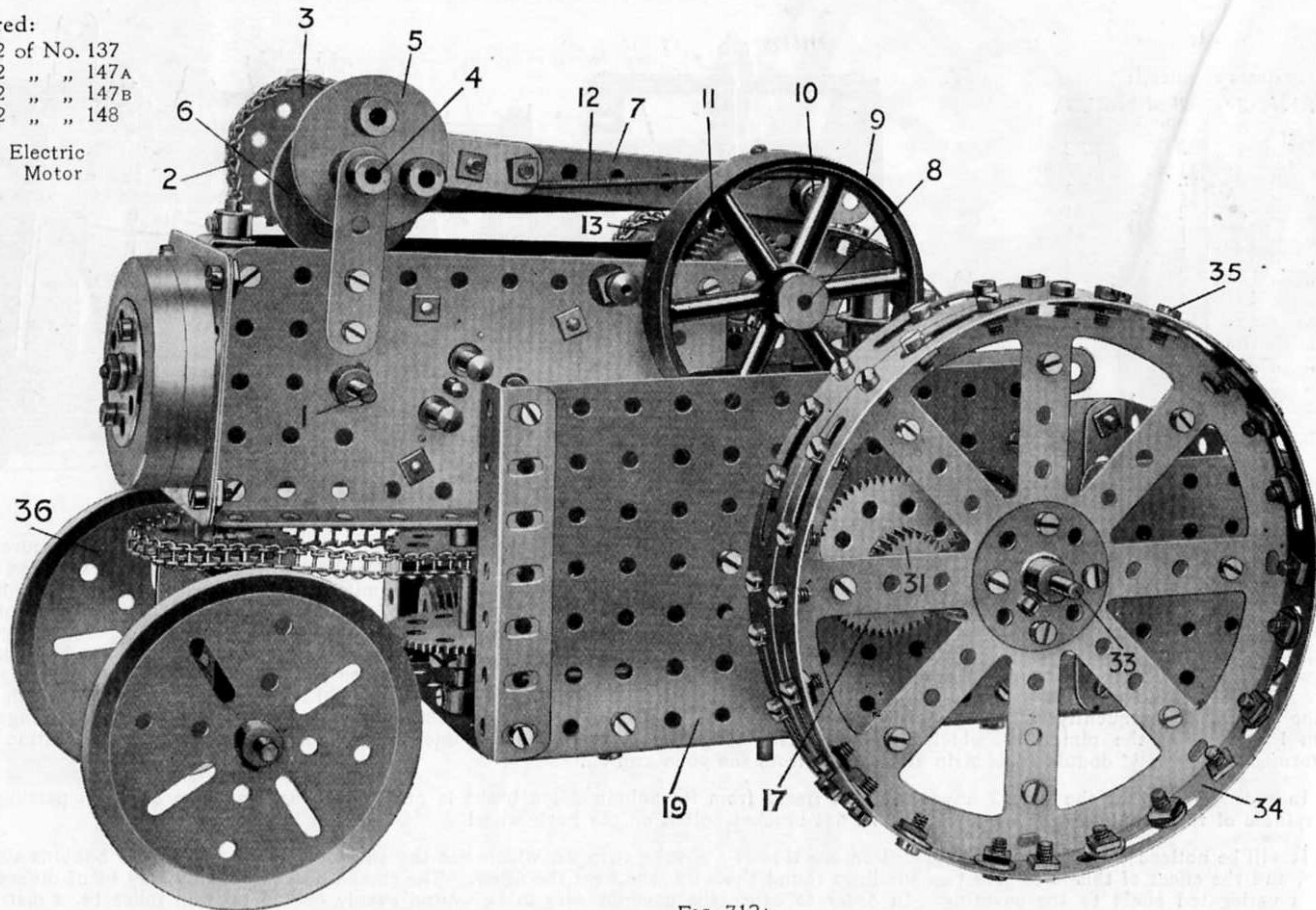


FIG. 712A

TH
wheel,
Se
pivot b
about a
double
cord 12
the gear
Con
pawls to
the rod
of the ro
This rod
wheel 17
forming
The
ment is
Drive-ch
On
crank 20
this pinio
mounted
55 on th



Model No. 712 Tractor (continued)

The driven spindle 1, Fig. A, of the electric motor carries a $\frac{3}{4}$ " sprocket wheel, which is coupled by a chain 2 to a $1\frac{1}{2}$ " sprocket wheel 3 on the rod 4.

Secured on this rod are two eccentrics 5 and 6 connected by $4\frac{1}{2}$ " strips 7 to pivot bolts 10, Fig. B. These are secured to $1\frac{1}{2}$ " flat girders 10a pivoting about a rod 8 carrying the fly wheel 9. On the pivot bolts 10 are pivoted double pawls, which engage two 1" gear wheels 11 secured on the rod 8. Spring cord 12 connected to the screws 11b keep the pawls in engagement with the gear wheels 11.

Consequently, when the motor is running, the eccentrics 5 and 6 cause the pawls to rock to and fro about the rod 8 and so rotate the gear wheels 11 and the rod 8 to which the wheels are secured. A $\frac{3}{4}$ " sprocket wheel 13 on the end of the rod 8 is coupled by a chain to a $1\frac{1}{2}$ " sprocket wheel 14, Fig. C, on a rod 15. This rod carries at its other end a $\frac{1}{2}$ " pinion 16 engaging a 57-toothed gear wheel 17 on a rod 18, which is mounted to slide in the rectangular plates 19 forming the sides of the tractor.

The rod 18 is caused to slide by turning the crank 20, Fig. C. This movement is fully explained in "Meccano Standard Mechanisms" (see Section V., Drive-changing Gear).

On the rod 18 is a $\frac{1}{2}$ " pinion 53 and when the short rod mounted in the crank 20 is moved to the left to the next hole in the bush wheel 29, this pinion moves into gear with another $\frac{1}{2}$ " pinion 54. This pinion 54 is mounted on a short rod and permanently in engagement with another pinion 55 on the rod 33, upon which are fixed the travelling wheels 34.

The rod 33 also carries two 50-toothed gear wheels 32. Two $\frac{3}{4}$ " pinions 31 on the rod 18 are adapted to be engaged with these 50-toothed gear wheels when the crank 20 is moved one hole to the right in the bush wheel 29 and the pinion 53 is out of engagement with the pinion 54. In this manner the pinions 53, 54 and 55 form a reversing gear, and by moving the crank 20 in either direction a forward or reverse drive of the tractor may be obtained. The central position of the

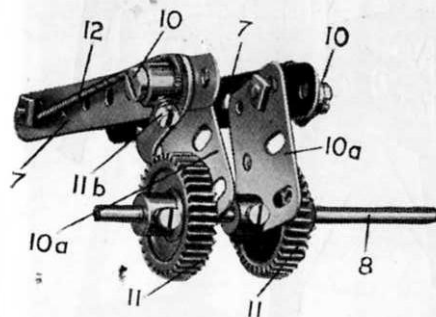


FIG. 712B

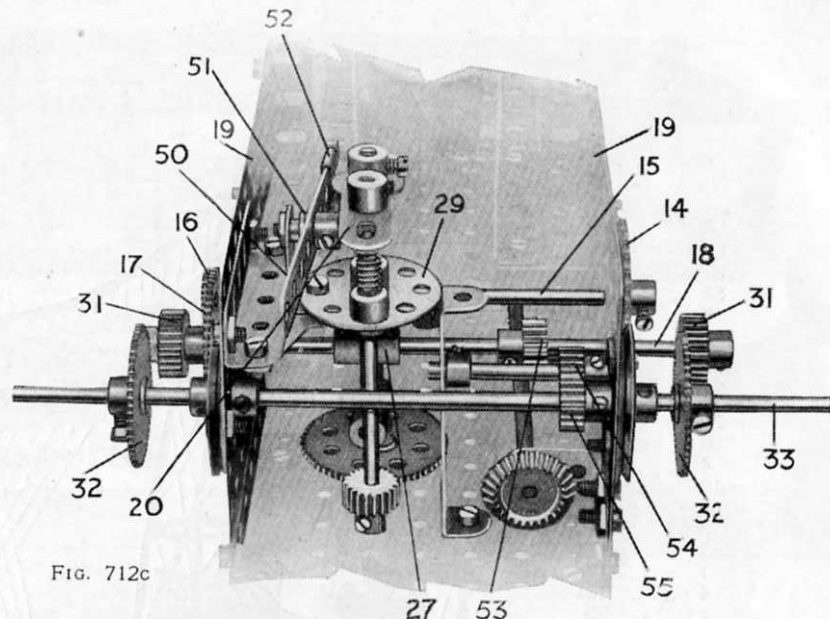


FIG. 712C

crank 20 throws all three pinions on the rod 18 out of gear; the motor is then allowed to run freely.

Each of the road-wheels 34 is made up of two hub discs bolted back to back, a number of bolts 35 being secured round the flanges to enable the wheels to obtain a grip on the ground.

The steering gear is described in "Meccano Standard Mechanisms."

The switching of the motor on or off is controlled by the strip 50, Fig. C, pivoted at 51 and connected to the control lever of the motor by an eye piece 52.

It will therefore be seen that if the motor is switched on and the clutch (formed by the pinions 31) be placed in gear, the drive from the motor to the wheels 34 will be effected through the eccentrics 5 and 6, gear wheels 11 and gear train 16, 17, 31 and 32 to the rod 33 carrying the wheels 34. While the motor is still running the drive may be declutched by operating the crank handle 20.

It should be noted that the eccentrics 5 and 6 are opposed to one another when secured to the Rod 4. In this way they alternately impart the thrust, or driving motion, to the rod 8.

An accumulator may be carried in a box formed from two $2\frac{1}{2}$ " x $2\frac{1}{2}$ " flat plates and one $3\frac{1}{2}$ " x $2\frac{1}{2}$ " flanged plate at the rear of the road wheels, Fig. A.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 713


Transporter Bridge

Parts

required:

32 of No.	1
52	2
8	3
32	4
120	5
32	6
4	7
20	8
8	9
4	10
10	11
89	12
3	14
2	15A
1	17
4	18A
4	20
1	21
5	22
1	26
1	27A
507	37
10	48A
6	52
7	53
15	59
10	94
4	96
3	97
8	99
6	100

Electric Motor

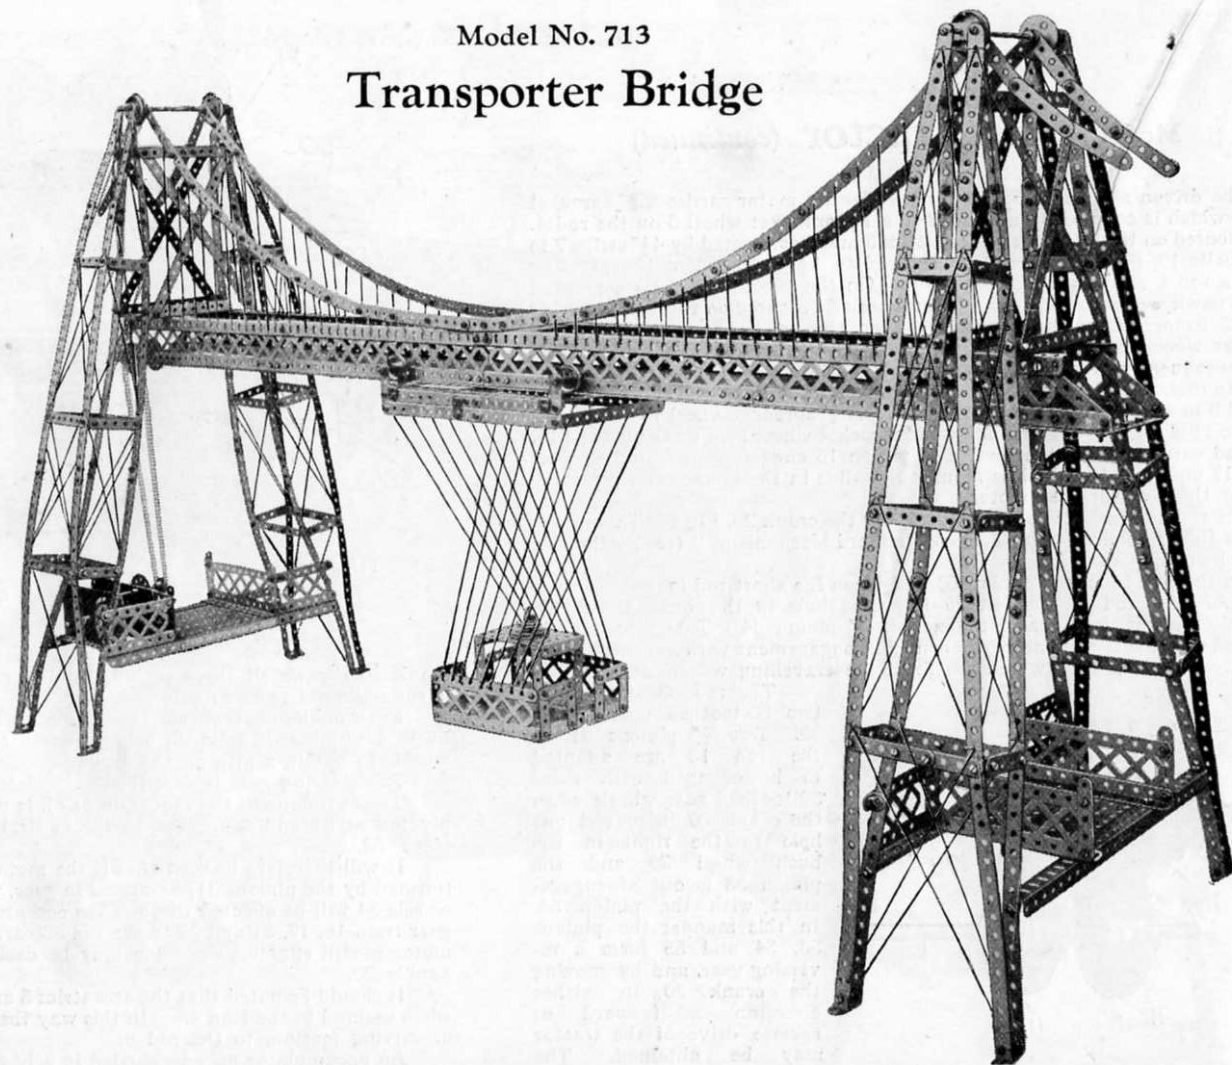

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

175

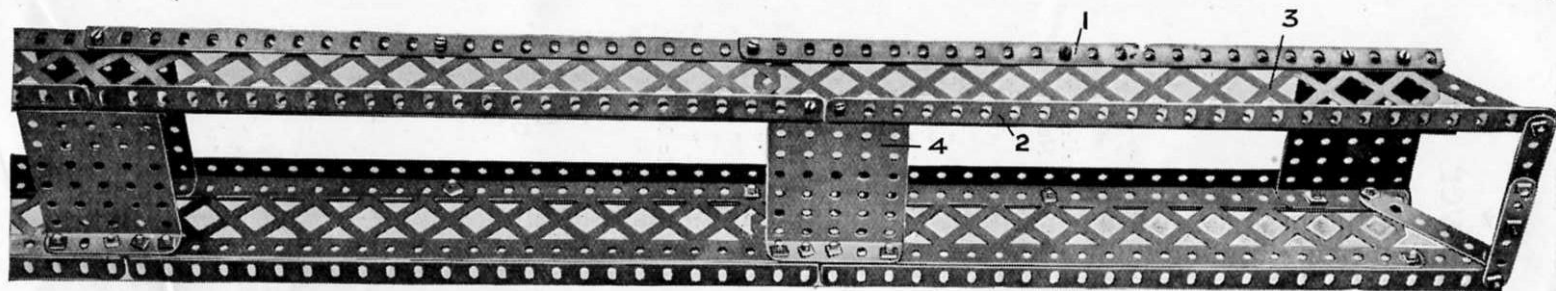


Fig. 713A

Model No. 713 Transporter (continued)

The main girder is built up of side pieces, consisting of top and bottom angle girders 1 and 2 (Fig. A) reversed, and connected together by the braced girder 3. The sides are connected across by small rectangular plates 4. The ends of the main girder are supported from the end towers, as shown in Fig. B. The travelling platform 5 (Fig. C), supported from the carriage 6, runs on 1" pulleys, which travel along the outer edges of the lower angle girders 2. The carriage 6 is moved by a sprocket chain 7 passing round wheels 8 supported in the main girder and operated from the pinion and 57-toothed gear wheel 9 by the sprocket chain 10 driven by the motor.



Fig. 713B


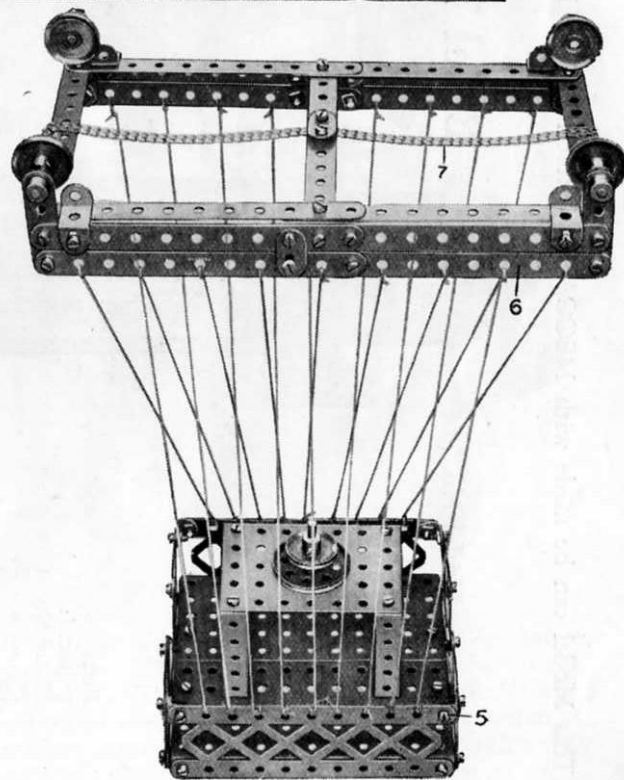


Fig. 713C

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 714

Eiffel Tower

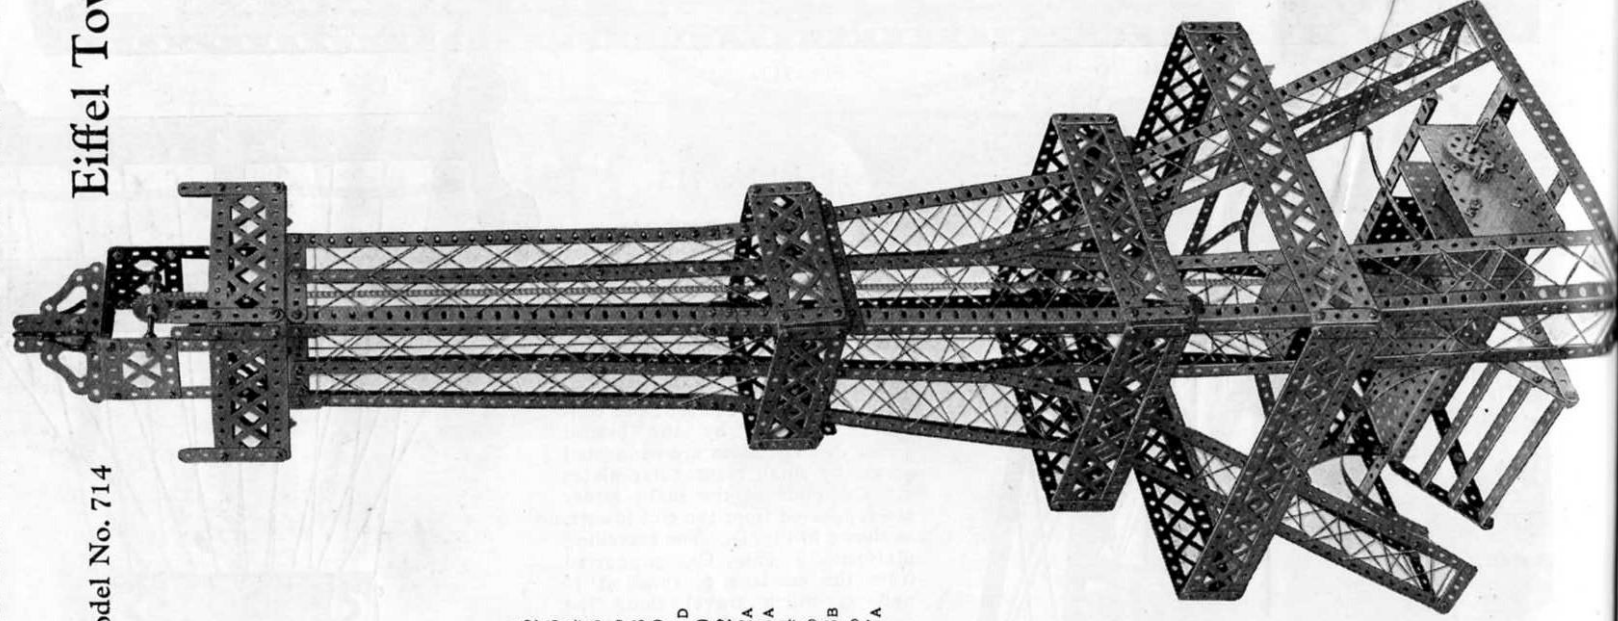

Parts required:	
22	of No. 1
24	" 2
8	" 3
16	" 4
20	" 5
24	" 6
18	" 8
16	" 9
2	" 9D
4	" 10
72	" 12
4	" 12A
1	" 13A
2	" 14
1	" 16
1	" 18B
1	" 26
2	" 27A

Parts required:	
337	1 of No. 32
6	" 37
1	" 40
6	" 47
1	" 48A
1	" 48B
3	" 48D
3	" 52
4	" 53
8	" 59
2	" 72
3	" 94
2	" 96
4	" 98
4	" 99
16	" 100
4	" 108
	Electric Motor

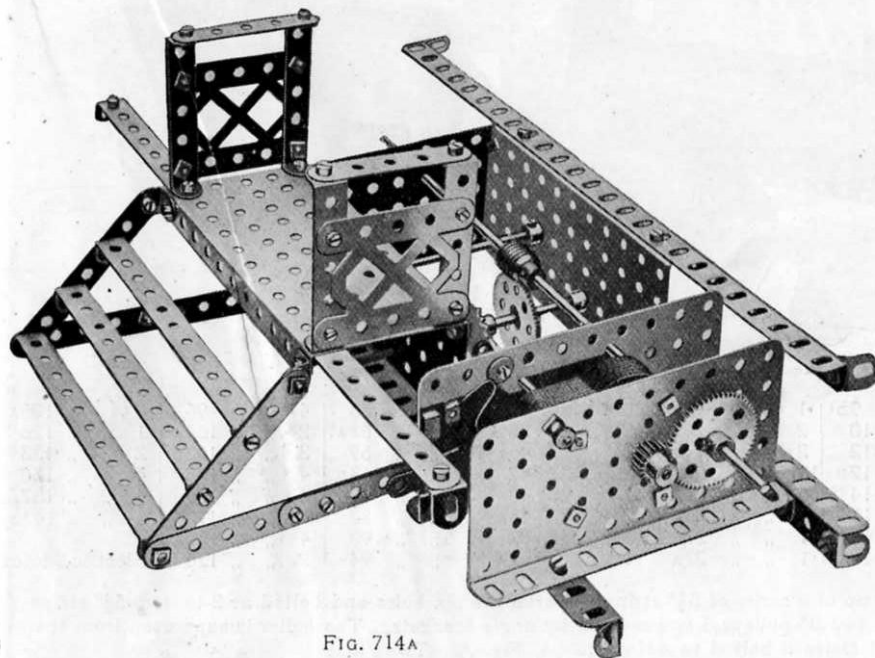
Model No. 714 **Eiffel Tower** *(continued)*

FIG. 714A

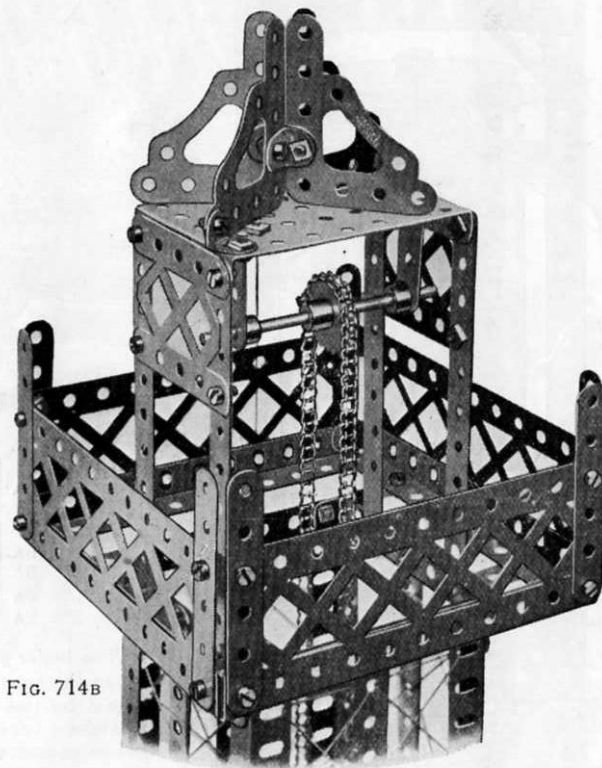


FIG. 714B

The construction of the tower may be followed from the illustrations. The lift carriage is built up from two $3\frac{1}{2}$ " by $2\frac{1}{2}$ " flange plates and two $2\frac{1}{2}$ " by $2\frac{1}{2}$ " flat plates and runs on a length of cord which acts as a guide line. This cord is secured to the top of the tower and to a transverse rod in the base, and passes through holes in the plates of the lift. The operation of the lift is affected by means of a length of sprocket chain passing round the 1" sprocket wheel situated in the top of the tower, Fig. 714B, and round a similar wheel in the base, Fig. 714A. The ends of the chain are secured to the lift. The lower sprocket wheel is operated through worm gearing from the electric motor, Fig. 714A.

Model No. 715 Locomotive and Tender


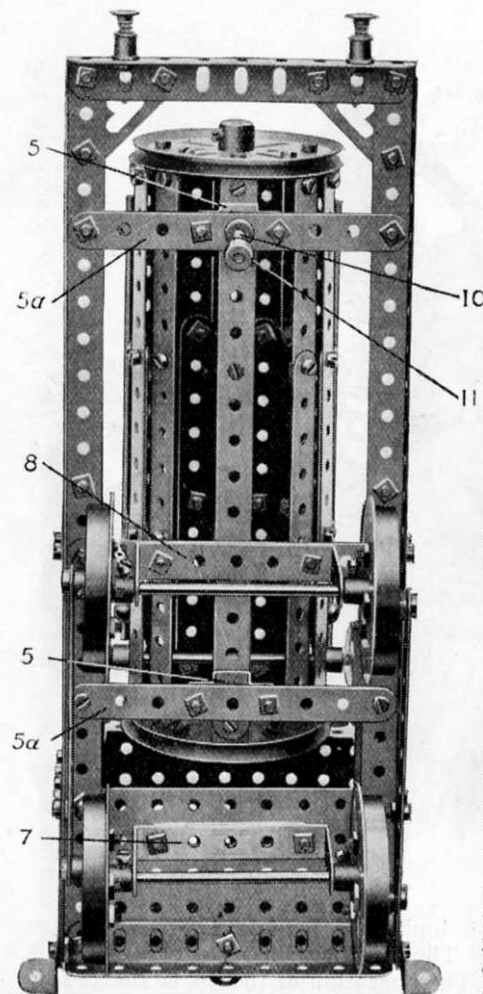


FIG. 715A

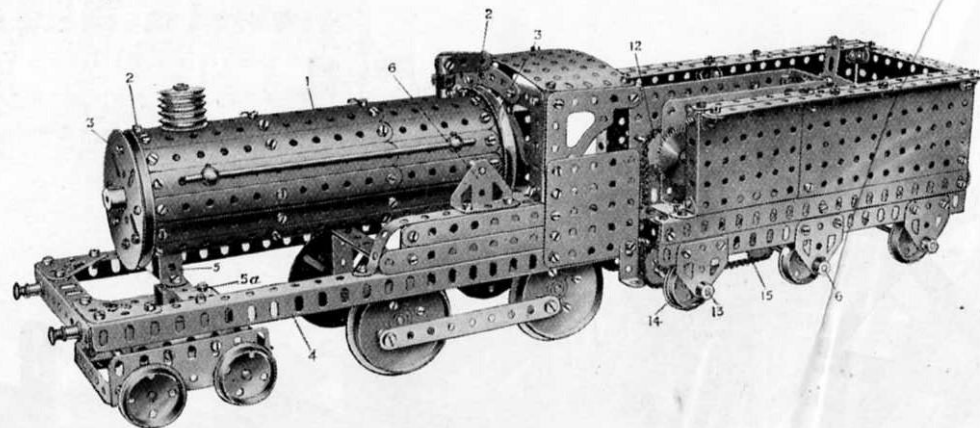

Parts required:

37 of No. 2	4 of No. 9D	1 of No. 18A	230 of No. 37	2 of No. 53	4 of No. 96	6 of No. 126A
10 " " 2A	1 " " 10	2 " " 18B	12 " " 38	3 " " 53A	2 " " 103A	1 " " 128
2 " " 3	31 " " 12	2 " " 19B	3 " " 45	16 " " 59	3 " " 103D	2 " " 133
2 " " 5	4 " " 12B	10 " " 20	2 " " 47	1 " " 63B	4 " " 108	4 " " 136
1 " " 6A	2 " " 14	5 " " 22A	1 " " 48	3 " " 72	4 " " 109	4 " " 137
2 " " 8	3 " " 15	1 " " 25	2 " " 48A	1 " " 82	1 " " 115	4 " " 147B
2 " " 8A	4 " " 16	1 " " 27	2 " " 52	1 " " 90	4 " " 120A	
4 " " 9A	2 " " 16A	1 " " 27A	1 " " 52A	1 " " 94	2 " " 126	Electric Motor

The boiler shell is built up of a series of $5\frac{1}{2}$ " strips 1 overlapped six holes and bolted at 2 to two $5\frac{1}{2}$ " strips bent to the curvature of the two 3" pulleys 3 and secured by angle brackets. The boiler is supported from the frame 4 by two double bent strips 5 bolted to $4\frac{1}{2}$ " strips 5a, Fig. A. Two trunnions 6, one on each side of the boiler, are bolted to the frame and a $3\frac{1}{2}$ " rod passed through the boiler and secured at each side by a collar and set screw, the ends resting in the top hole of the trunnions to steady the boiler. The floor of the cab is formed by bolting a $4\frac{1}{2}$ " x $2\frac{1}{2}$ " flat plate to the frame, and to the underside of this is bolted a $2\frac{1}{2}$ " x $1\frac{1}{2}$ " double angle strip 7, which forms the bearings for the axle of the rear driving wheels; two $2\frac{1}{2}$ " strips are spaced between this strip and the footplate to allow proper clearance for the wheels. A similar double angle strip 8 is also bolted to a cross strip and spaced away from the engine frame by a washer on each bolt. The bogie, Fig. B, is connected pivotally to the frame by means of a double bent strip 9, into the hole of which is entered the end of a 1" rod




FIG. 715B

Mod

10,
end
moto
by
the
14.
15 (6
16,
The
The
house

Model No. 715 Locomotive and Tender

(continued)


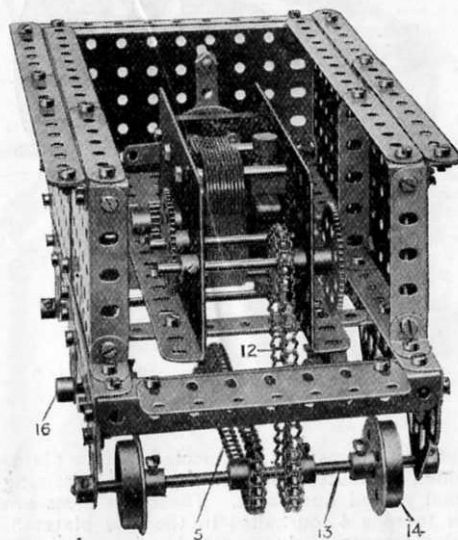


FIG. 715c

10, Fig. A, and retained by two collars 11 on the end of the rod. The loco is propelled from the motor in the tender, Fig. C, the motor driving by the sprocket chain 12 (containing 52 links) the 5" axle rod 13 carrying the flanged wheels 14. The rod 13 is coupled by another chain 15 (containing 59 links) to the middle axle rod 16, thus driving four of the travelling wheels. The four sprocket wheels are 1" in diameter. The accumulator for supplying the current is housed in the tender behind the motor.

Model No. 716

Beaming Frame

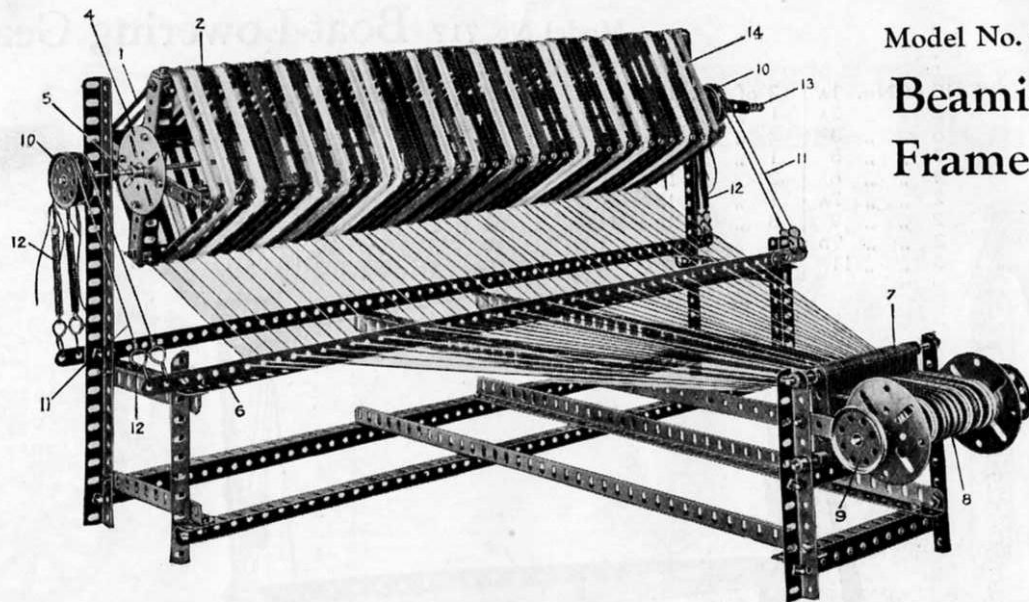

Parts required:

2 of No. 1	4 of No. 7	8 of No. 12	253 of No. 37	10 of No. 59	1 of No. 147A
4 " " 2	2 " " 7A	2 " " 13	89 " " 38	1 " " 63	1 " " 147B
44 " " 5	12 " " 8	3 " " 14	4 " " 43	1 " " 103	1 " " 148
4 " " 6	10 " " 9	6 " " 21	8 " " 57	4 " " 109	

The frame upon which the warp threads are wound is built up of 12 1/2" angle girders, 2, overlapped seven holes and bolted to a 5 1/2" girder 1 and 5 1/2" strip crossed and connected to face plates 4 on the 1 1/2" rod 5. Inside the frame, two 5 1/2" angle girders are bolted nine holes from each end to form the inner bearings for the rods 5. Another 5 1/2" girder is bolted crosswise to these in the centre to form a stay.

The warp threads are first wound upon the warp-frame, and pass through the holes in a 2 1/2" angle girder 6, and, converging together, pass between the 2 1/2" strips 7 forming the reed, and so on to the beam 8. On the far side of the beam rod is a 1/2" pinion engaged by a pawl (not shown on the photograph) which prevents backward rotation of the beam as the warp threads are wound thereon by turning the 1 1/2" pulley wheels 9.

A brake mechanism for tensioning the frame 2 is provided by securing two 1" pulley wheels 10 at each end of the frame rod 5, cords 11, secured by hooks passing over the pulleys 10 and being kept taut by the springs 12.

A handle 13 is provided on the rod 5 by means of which the warp threads 14 are originally wound on the frame.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 717 Boat-Lowering Gear

Parts required:

10 of No. 1A	2 of No. 12	6 of No. 23	2 of No. 48B	3 of No. 109
2 " " 2A	1 " " 12A	4 " " 26	5 " " 52A	1 " " 115
6 " " 3	2 " " 12B	2 " " 27A	6 " " 53	2 " " 126
7 " " 5	1 " " 13	2 " " 31	2 " " 57	2 " " 126A
8 " " 6	2 " " 13A	2 " " 32	13 " " 59	4 " " 129
2 " " 7A	1 " " 15	142 " " 37	2 " " 62	4 " " 147B
2 " " 9	3 " " 16	14 " " 38	2 " " 63	
2 " " 9D	2 " " 16A	1 " " 40	8 " " 90	
3 " " 11	1 " " 18A	5 " " 48A	4 " " 102	

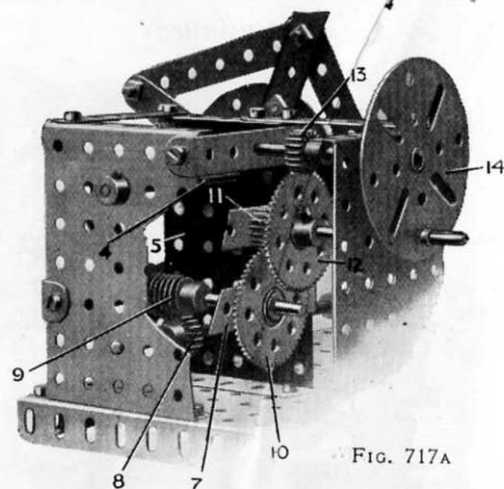
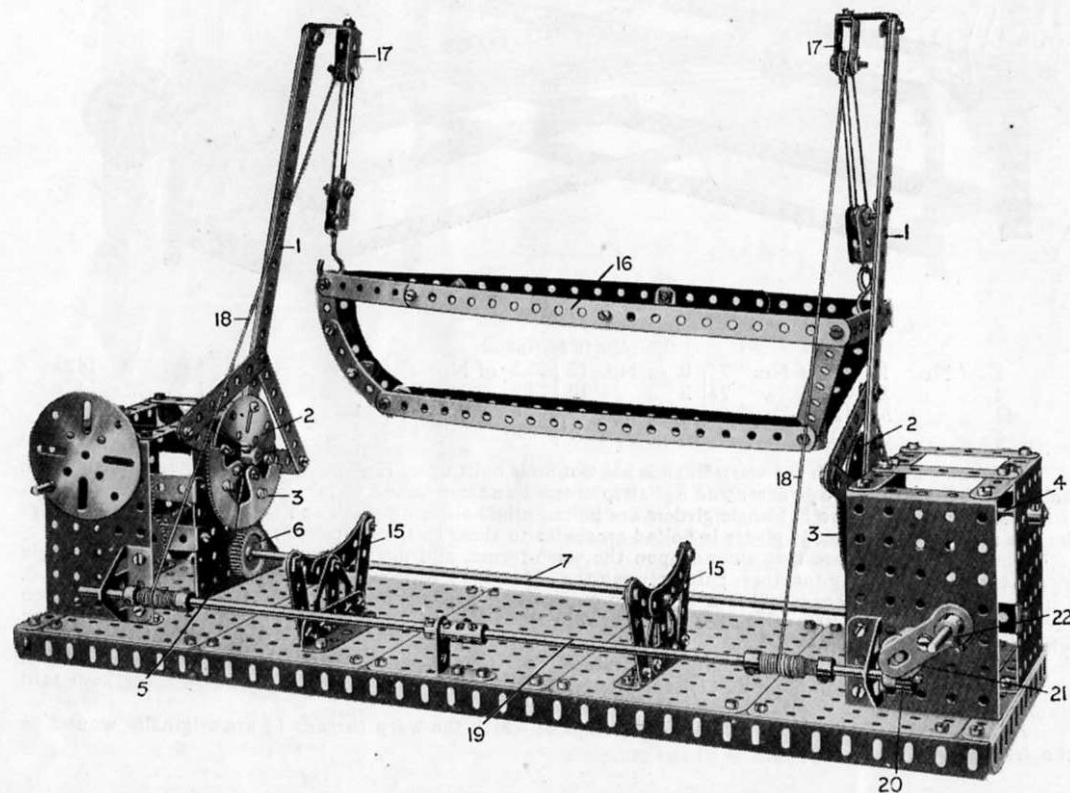



FIG. 717A

The davit arms 1 are connected to face plates 2 to which are bolted two rack segments 3 forming the usual geared quadrants. The davit arms are secured to rods 4 journalled in the face plates 5, the rack segments 3 being engaged and driven by 1" gear wheels 6 on an axle rod 7. This rod 7 carries a pinion 8, Fig. A, driven by a worm 9 and a rod, to which is secured a $1\frac{1}{2}$ " gear wheel 10. This is driven by a $\frac{1}{2}$ " pinion 11 on a rod to which is also secured a $1\frac{1}{2}$ " gear wheel 12 driven by a $\frac{1}{4}$ " pinion 13 rotated by a hand wheel formed by a face plate 14. As the hand wheel is rotated, the davit arms are raised outward when launching the boat 16 or inward when it is desired to deposit the boat on the chocks 15.

The boat 16 is raised or lowered from the blocks 17 by the ropes 18 which wind on to a rod 19. On this rod is secured a $\frac{1}{2}$ " pinion 20 engaged by a worm 21 which is rotated by the crank handle 22 formed of two cranks bolted together, and in this way the boat may be lowered over the ship's side.


Model
The
Per

A Gay Start

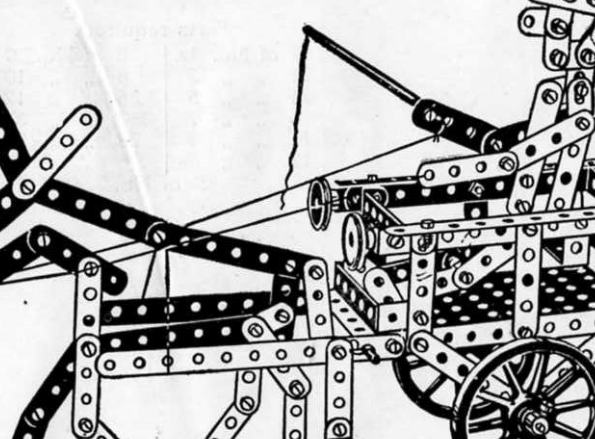


Parts required: 6 of No.	
2	2
2	3
5	4
10	5
24	6
23	10
8	12
1	15
1	15A
1	16
2	19B
2	22
2	35
71	37
2	46
3	48A
1	52

The End of a Perfect Day

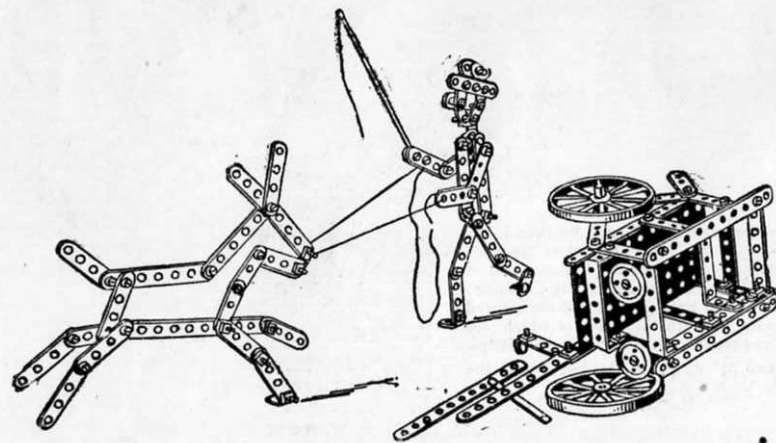

Knife

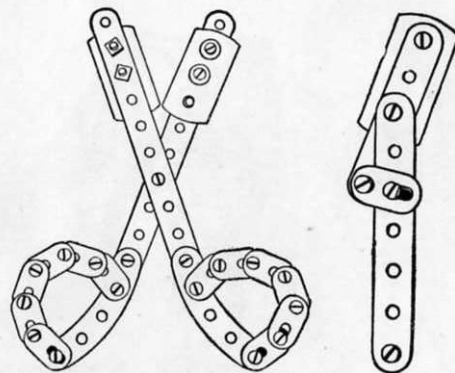

Suggestions for using old safety razor blades to make a pair of scissors and photographer's trimming knife.

Parts required:

Model No. 720	Model No. 721
2 of No. 2	2 of No. 3
12 " " 10	1 " " 5
21 " " 37	1 " " 10
2 " " 90	5 " " 37
2 razor blades	1 razor blade

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 722 Forth Bridge

Parts required:

12 of No. 1A	8 of No. 9
74 " " 2	6 " " 10
24 " " 5	36 " " 12
6 " " 7	350 " " 37
12 " " 8	26 " " 38
12 " " 8A	6 " " 52
3 of No. 52A	

Each of the cantilever spans is made of $9\frac{1}{2}$ " angle girders, connected by their lower ends to a $5\frac{1}{2}$ " angle girder. The inclined $12\frac{1}{2}$ " angle girders are connected at the apex of the cantilever to the top holes of the inclined girders coupled by flat brackets and at their lower outer ends to horizontal angle girders. The horizontal girders are connected across by $5\frac{1}{2}$ " strips disposed at intervals of about 11 holes apart. On these are secured gauge 0 track rails, held to the cross strips by bolts, beneath the heads of which are washers engaging the lower flange of the track rails and binding them on to the cross strips.


The bases of the cantilevers are formed by two $5\frac{1}{2}$ " flanged plates coupled at the centre by a $5\frac{1}{2}$ " flat plate.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 723 Revolving Crane

Parts required:

9 of No.	2	1 of No.	27A
17	3	30	
2	4	31	
10	5	35	
2	6	37	
2	6A	38	
6	8	45	
2	9	46	
1	11	52	
4	12	53	
2	15	57	
2	15A	59	
4	16	62	
4	17	63	
1	18A	63A	
6	20	80	
1	22	100	
1	22A	111	
1	23	115	
1	26		

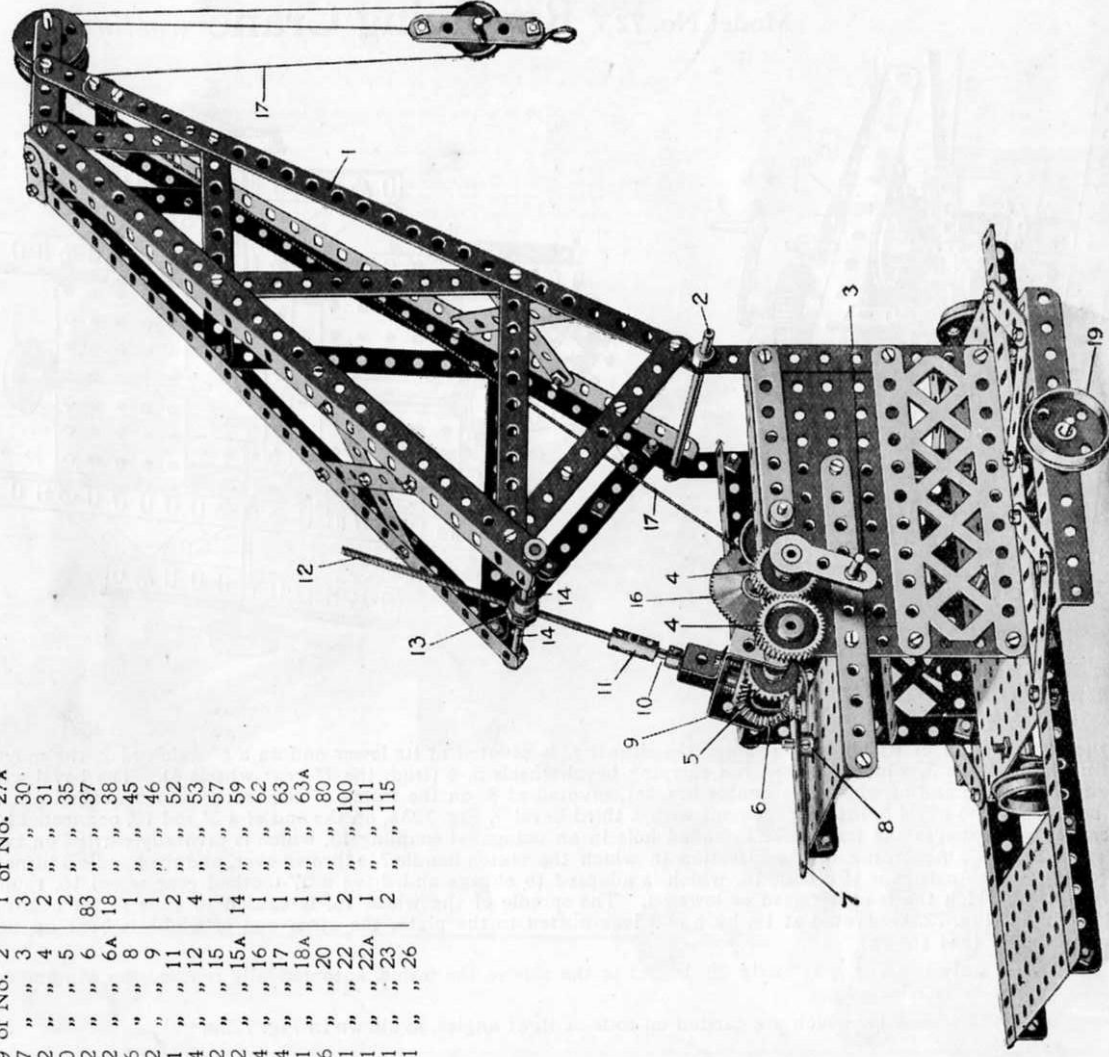

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 723 Revolving Crane (continued)

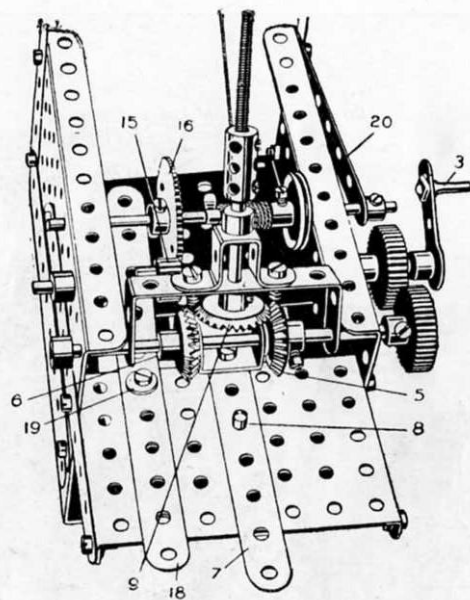


FIG. 723A

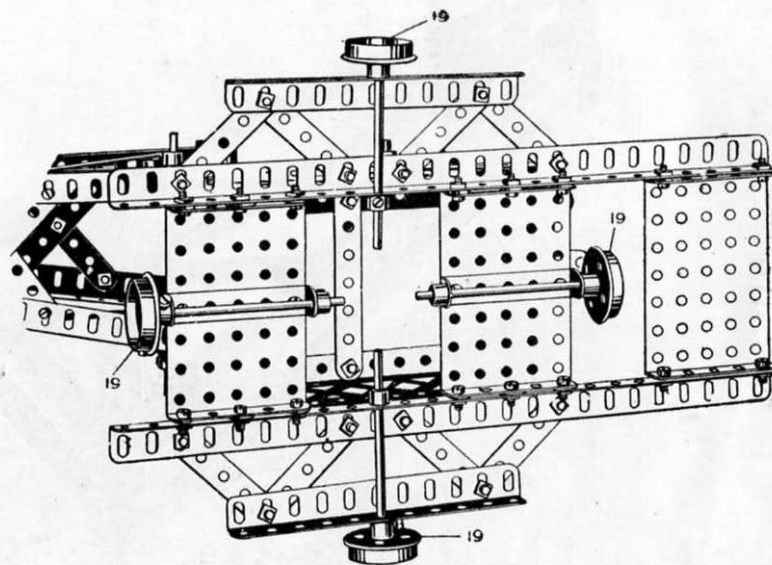


FIG. 723B

The jib 1, the construction of which is clear from the drawing, is pivoted at its lower end on a 5" axle rod 2, the movement of the jib about this pivot being obtained from the handle 3, which drives a rod carrying bevel wheels 5, 6 (from the 1" gear wheels 4). The bevel wheel rod is arranged to slide in its bearings by the strip 7, at the end of which is a double bracket, pivoted at 8, on the frame of the crane, on a threaded pin under which is a collar, and thus bring either the bevel 5, or the bevel 6, into engagement with a third bevel 9, Fig. 723A, on the end of a 2" rod 10, connected by the coupling 11, to a 5" screwed rod 12. This screwed rod engages the transverse threaded hole in an octagonal coupling 13, which is pivotally carried on two 2" rods 14, so as to give a clear way for the screwed rod 12. According to the direction in which the clutch handle 7 is thrown over, and the handle 3 turned, the jib will be raised or lowered. The rod of the handle 3, also carries a $\frac{1}{2}$ " pinion 15, which is adapted to engage and drive a 57-toothed gear wheel 16, round the spindle of which is wound the cord 17, by means of which the load is raised or lowered. The spindle of the wheel 16, is caused to slide in its bearings by the pinion 15, by means of the $5\frac{1}{2}$ " strip 18, Fig. 723A, pivoted at 19, by a bolt lock-nutted to the plate, the other end of which is bent up to engage between the boss of the gear wheel 16, and a collar (not shown).


A spring formed by slightly bending a $3\frac{1}{2}$ " strip 20, bolted to the side of the frame, automatically releases the winding spindle from engagement with the pinion 15 when the handle 18 is released.

The crane rotates on the wheels 19, which are carried on rods at right angles, as shown in Fig. 723B.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 724

Hydraulic Crane

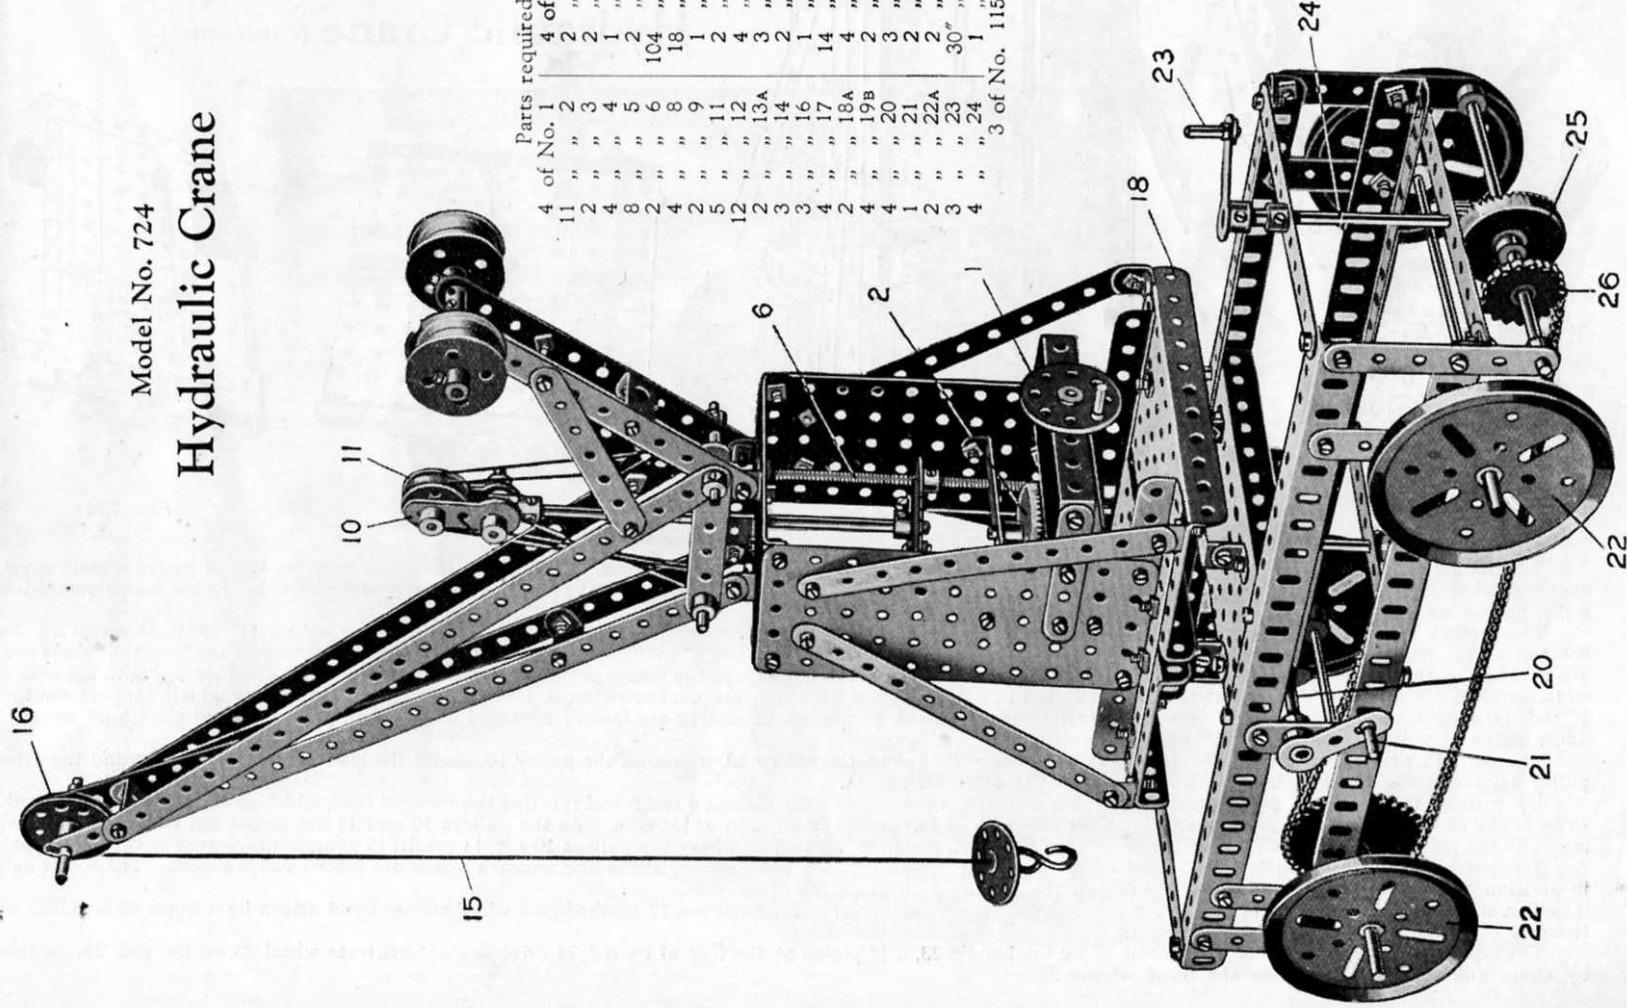

Parts required:	
4 of No. 1	4 of No. 26
11	2
2	2
3	2
4	2
5	1
6	2
8	104
2	18
4	8
2	9
5	11
12	12
2	13A
3	14
3	16
4	17
2	18A
4	19B
4	20
1	21
2	22A
3	23
4	24
3 of No. 115	
1	
27A	
28	
32	
35	
37	
38	
45	
48A	
48B	
52	
53	
57	
59	
62	
62A	
63	
70	
80	
94	
95	

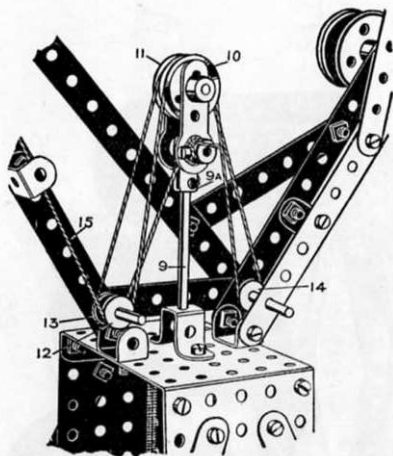


FIG. 724B

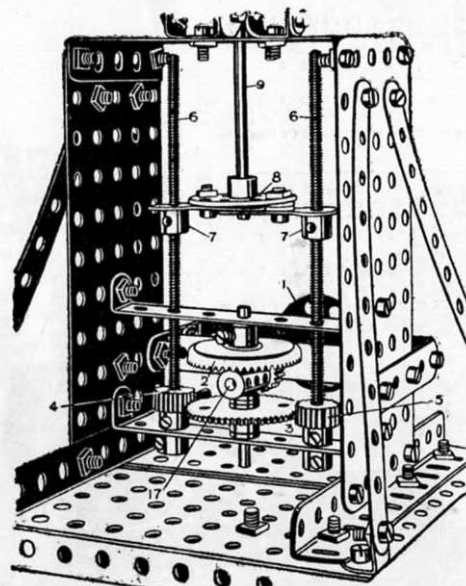


FIG. 724C

Model No. 724 Hydraulic Crane (continued)

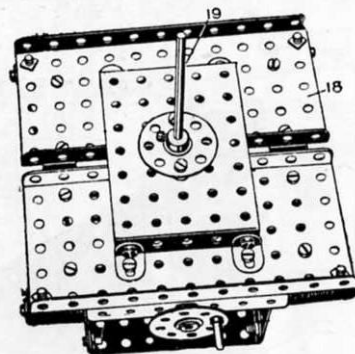


FIG. 724D

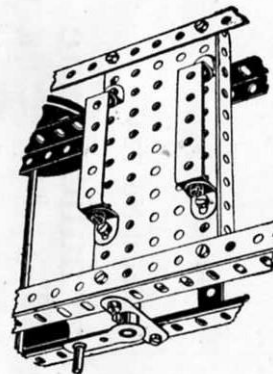


FIG. 724E

This model is designed to illustrate the operating of a Hydraulic Crane, in which great power is utilised to force two or more sets of pulley wheels apart, chains passing round the pulley wheels so that by a small movement of the operating power a great movement of the load is effected. In the model, instead of water-power, screws are used to move the chain or cord pulleys.

The weight is raised or lowered by operating the hand-wheel 1. The rod of this wheel carries a pinion which gears with a $1\frac{1}{2}$ " contrate wheel 2. On the rod of the contrate wheel is a lower 57-toothed gear wheel 3, which engages two $\frac{1}{2}$ " pinions 4 and 5, secured on vertical screwed rods 6, so that these rods are rotated in the same direction on the turning of the handle 1. The rods engage the bosses of threaded cranks 7, secured on a bush wheel 8, in the boss of which is fixed a 6" rod 9. This rod at the top is secured in a coupling 9A, to which are connected on a 1" transverse rod two cranks which support another 1" rod, forming a bearing for two 1" loose pulleys 10 and 11. Two $\frac{1}{2}$ " pulleys 12 and 13 are loosely mounted on a 2" rod at the base of the jib on one side, and a single $\frac{1}{2}$ " pulley 14 on another 2" rod at the other side.

The cord 15 passes over the pulley 16 at the top of the jib, round the pulley 12, up round the pulley 10, round the lower pulley 14, back round the other pulley 11, round the small pulley 13, and is made fast to the coupling 9A.

By turning the handle 1 the contrate wheel 2 is rotated, thus driving the pinions 4 and 5 and rotating the screwed rods, which causes the threaded cranks to be raised or lowered, and the rod 9, carrying the pulleys 10 and 11, also to be raised or lowered. As the pulleys 10 and 11 are forced up, the cord 15 travels round all the pulleys, and, due to the number of loops of the cord, the small movement of the top pulleys 10 and 11 results in a larger movement of the crane hook.


The rod of the bush wheel 1, which carries a $\frac{1}{2}$ " pinion, is journaled in a coupling 17, above and beneath which are placed two washers. The rod is held in position by the wheel 1 on one side of the cross strip, and by a collar on the other side.

The crane is carried on a platform 18, pivoting about a vertical rod 19, on which is a 57-toothed gear wheel engaged and driven by a worm on a rod 20, on the end of which is the operating handle 21.

The crane is caused to travel on the wheels 22 by the handle 23, a $\frac{1}{2}$ " pinion at the foot of its rod 24 driving a $1\frac{1}{2}$ " contrate wheel 25 on the rod 26, coupled by chain and sprocket wheels to the front wheels 22.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 725 Loom

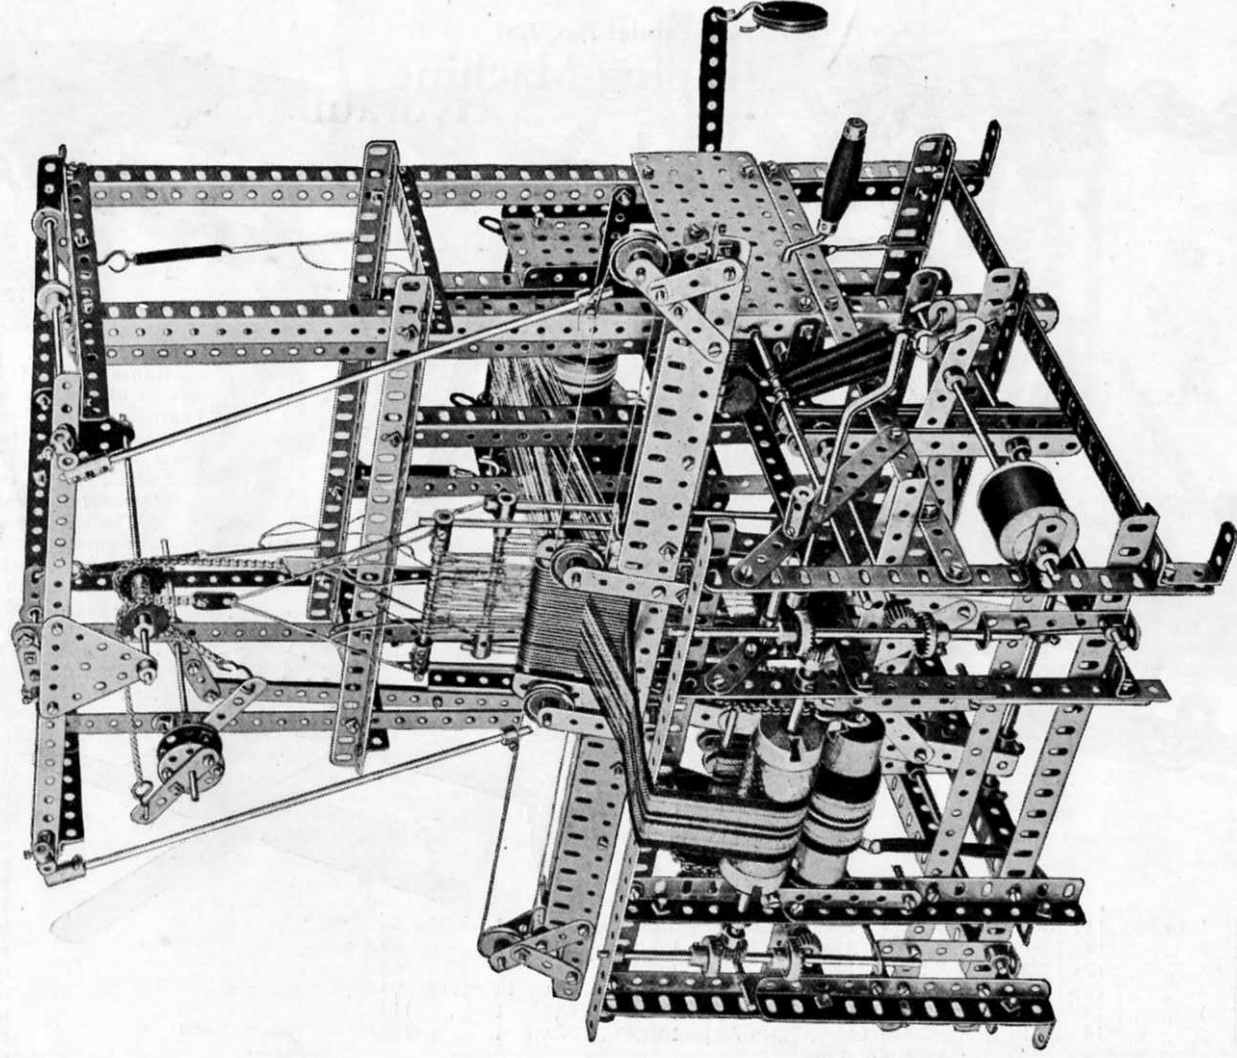

The Meccano Loom is one of the most remarkable and interesting models that can be made with Meccano. It is absolutely automatic and beautiful material may be woven by simply turning the handle. It is a somewhat complicated model, requiring careful construction and accurate adjustment and as it is impossible to do justice to it in this book, we have compiled a special sheet of instructions in which it is illustrated and described in detail. This may be purchased either from your local Meccano dealer or from Meccano Limited, Liverpool. Price 3d. (post free, 4d.)

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 726 Reaping Machine

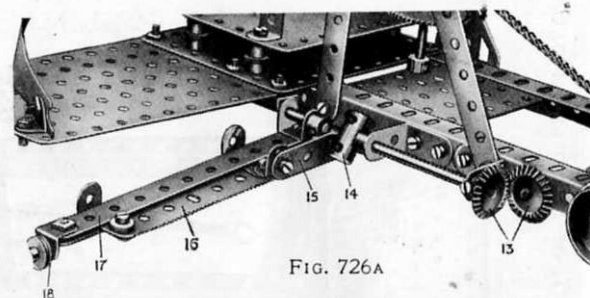
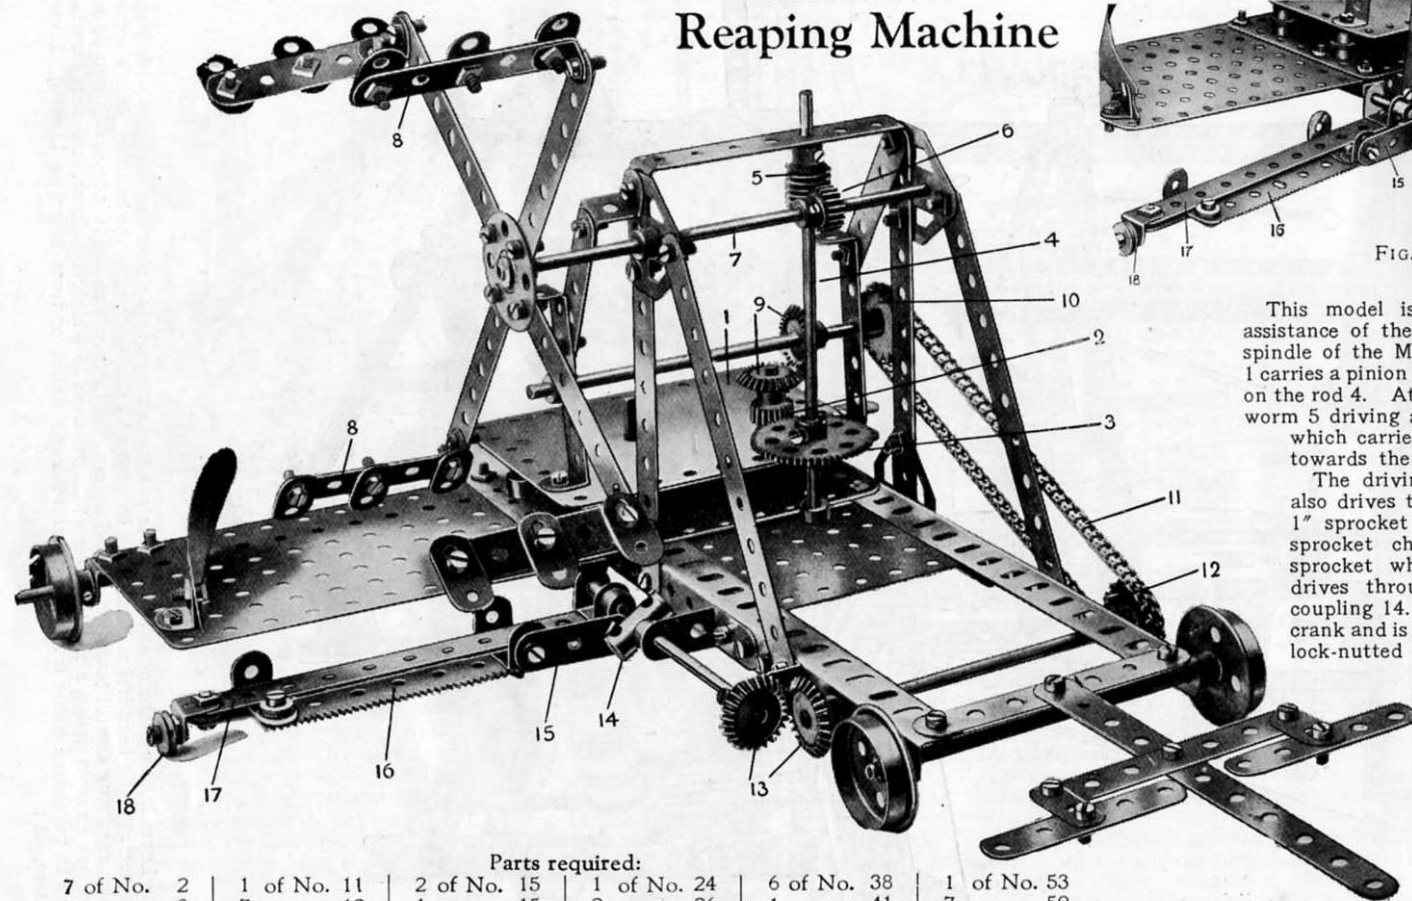


FIG. 726A

This model is constructed with the assistance of the following details. The spindle of the Meccano clockwork motor 1 carries a pinion 2 engaging a gear wheel 3 on the rod 4. At the top of this rod 4 is a worm 5 driving a $\frac{1}{2}$ " pinion 6 on a rod 7 which carries the arms 8 that sweep towards the knife.

The driving spindle of the motor also drives through bevel pinions 9 a 1" sprocket wheel 10 coupled by a sprocket chain 11 to another 1" sprocket wheel 12, which in turn drives through bevel wheels 13 a coupling 14. This coupling acts as a crank and is connected by $1\frac{1}{2}$ " strip 15 lock-nutted to the cutter 16. The

cutter is formed by a rack strip guided to and fro by two $1" \times \frac{1}{2}"$ angle brackets between two $5\frac{1}{2}"$ strips 17 spaced apart by washers at each end. The outer end of these strips is fitted with a $\frac{1}{2}"$ pulley 18 on which the cutter knife travels. The remainder of the detail of the model will be made quite clear from our illustration. When completed the model works in a very realistic manner.

Parts required:


7 of No. 2	1 of No. 11	2 of No. 15	1 of No. 24	6 of No. 38	1 of No. 53
6 " " 3	7 " " 12	1 " " 15A	1 " " 26	1 " " 41	7 " " 59
8 " " 5	2 " " 12A	2 " " 16B	1 " " 27A	1 " " 48	1 " " 63
1 " " 6A	4 " " 12B	1 " " 17	4 " " 30	2 " " 48A	16 " " 94
2 " " 8A	1 " " 13	4 " " 20	1 " " 32	1 " " 48B	1 " " 110
14 " " 10	2 " " 14	1 " " 23	66 " " 37	1 " " 52A	1 " " 125
3 of No. 126A					
Clockwork Motor					

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

189

Model No. 727

Travelling Gantry Crane

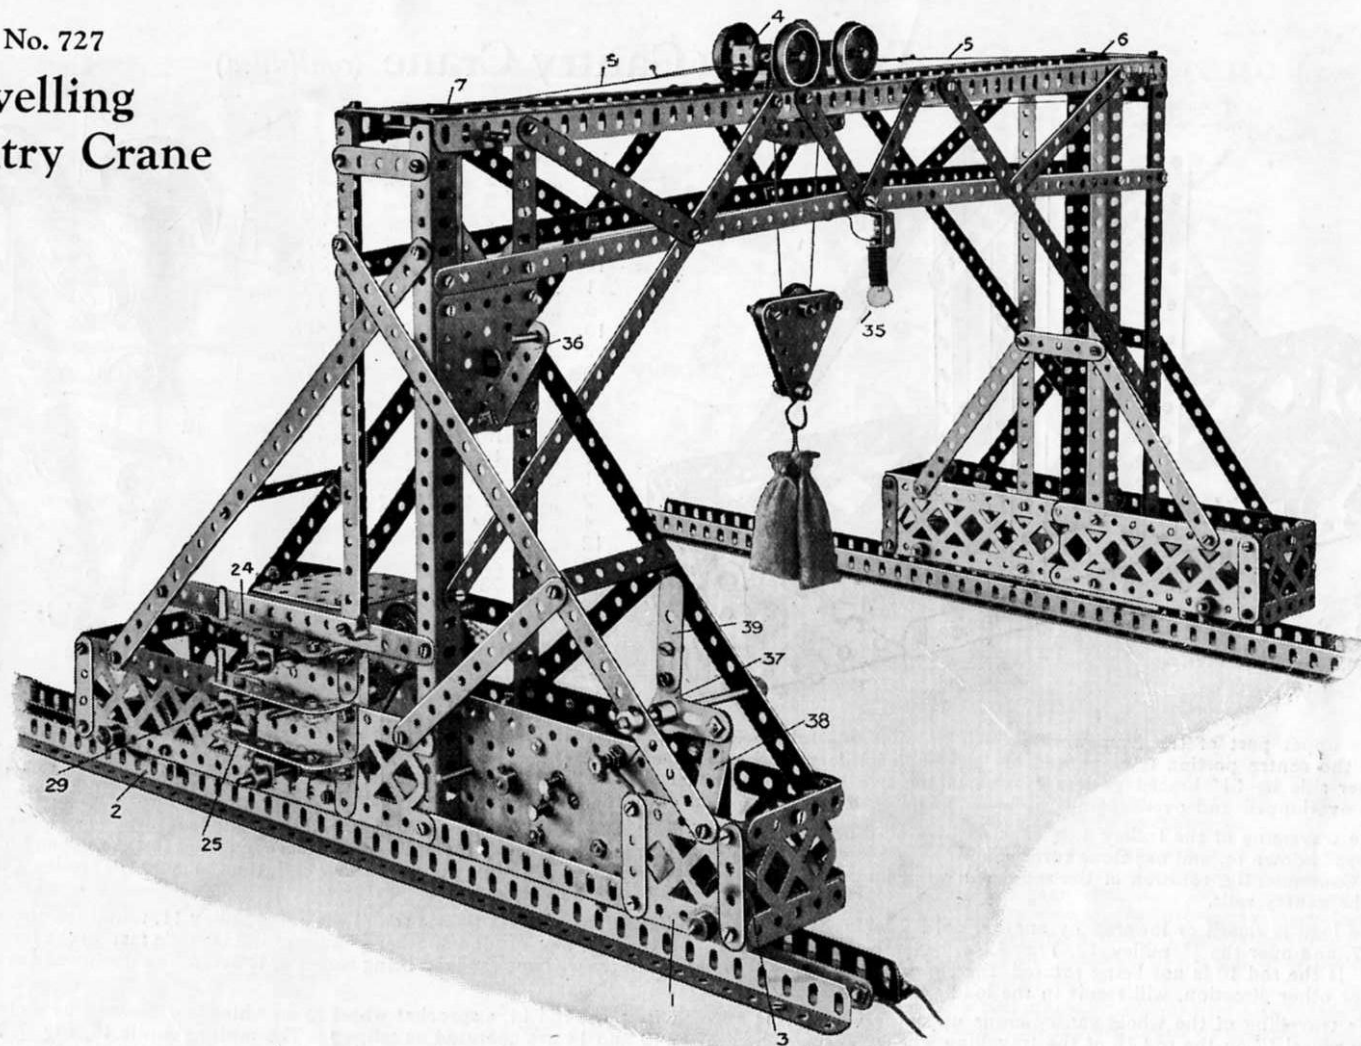

Model No. 727 Travelling Gantry Crane (continued)

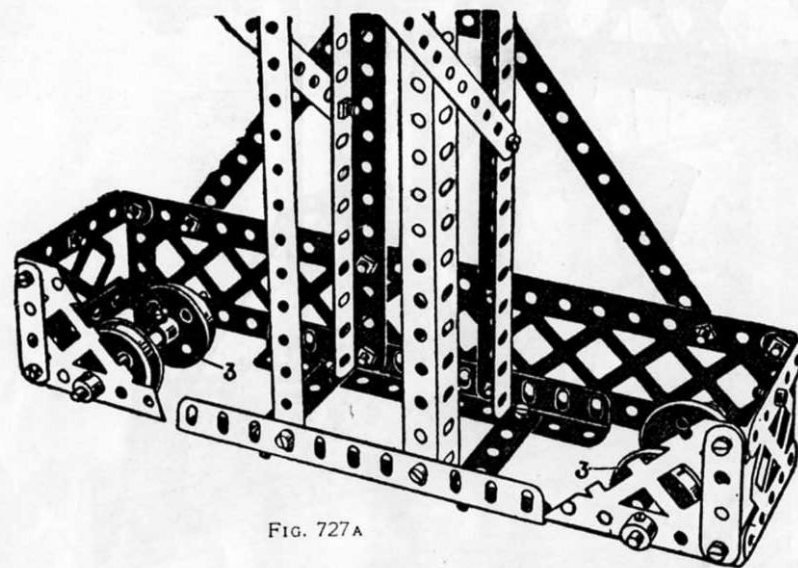


FIG. 727A

Parts required:

12 of No. 1	3 of No. 26
12 " " 2	3 " " 27
6 " " 3	3 " " 27A
3 " " 4	11 " " 35
17 " " 5	149 " " 37
14 " " 6	10 " " 37A
1 " " 6A	38 " " 38
6 " " 7	3 " " 44
10 " " 8	9 " " 48A
2 " " 9	2 " " 53
6 " " 11	1 " " 57
4 " " 12A	30 " " 59
2 " " 15	1 " " 72
2 " " 15A	2 " " 76
11 " " 16	2 " " 90
1 " " 16A	26 " " 94
2 " " 17	1 " " 95
4 " " 18A	3 " " 96
12 " " 20	8 " " 98
8 " " 22A	6 " " 100
2 " " 23	2 " " 111
2 " " 25	1 " " 128

Electric Motor

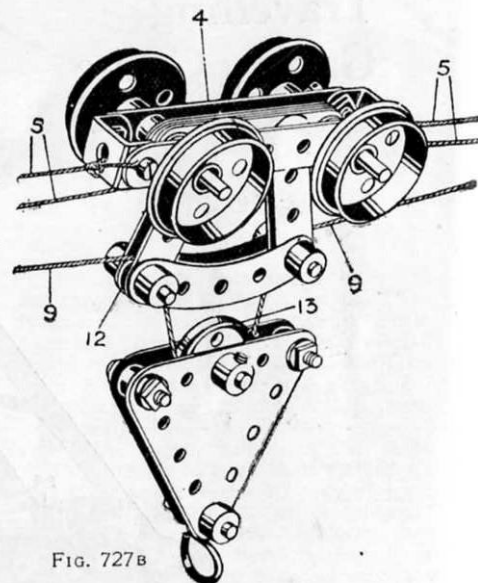


FIG. 727B

The upper part of the framework is well brought out in the illustration. It is to be noted that as regards the feet carrying the motor and the travelling wheels, the centre portion is composed of 12 1/2" angle girders at the lower edge, extended on one side by 2 1/2" braced girders 1, overhanging 4 holes, and on the other side by 5 1/2" braced girders 2 overhanging five holes. The other shorter foot on the gantry is shown in Fig. 727A, and is built up of 5 1/2" braced girders overlapped and overhanging the lower angle girders five holes on each side. The travelling wheels 3 are carried in the lower holes of the braced girders.

The traversing of the trolley 4, is effected by a cord 5 which passes from the far end of trolley 4, round a pulley 6, and is returned and passed over one of the 1" pulleys 7, down to, and has three turns round the rod 8, then passing up and round another of the pulleys 7, and is connected to the near end of the trolley, Fig. 727B. Consequently, rotation of the rod 8 will wind up one end of the traversing cord 5 and pay out the other end, thus causing the trolley 4 to travel to or fro along the gantry rails.

The load is raised or lowered by another cord 9 which is wound round the upper rod 10, thence round the guide pulley 11, round the third of the pulleys 7, Fig. 727, and over the 1/2" pulley 12, Fig. 727B, beneath the 1" pulley 13, on the load block round another 1/2" pulley, and is made fast on the far end of the gantry frame. If the rod 10 is not being rotated, therefore, the trolley 4 travels to and fro without the load being raised or lowered. Rotation of the rod 10, however, in one or other direction, will result in the load being raised or lowered.

The travelling of the whole gantry crane upon the wheels 3 is effected from the rod 14, a sprocket wheel 15 on which is connected by a chain 16 to another sprocket wheel 17 on the rod 18 of the travelling wheels, 727c. The rods 8, 10 and 14 are operated as follows: The motor spindle 19, Fig. 727D, drives by the chain 20 a 2" sprocket wheel 21 on a rod 22, on which is a 1/2" pinion 23, Fig. 727c. The rods 10 and 8 are slideably controlled by the clutch operating handles 24,

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

191

Model No. 727 Travelling Gantry Crane *(continued)*

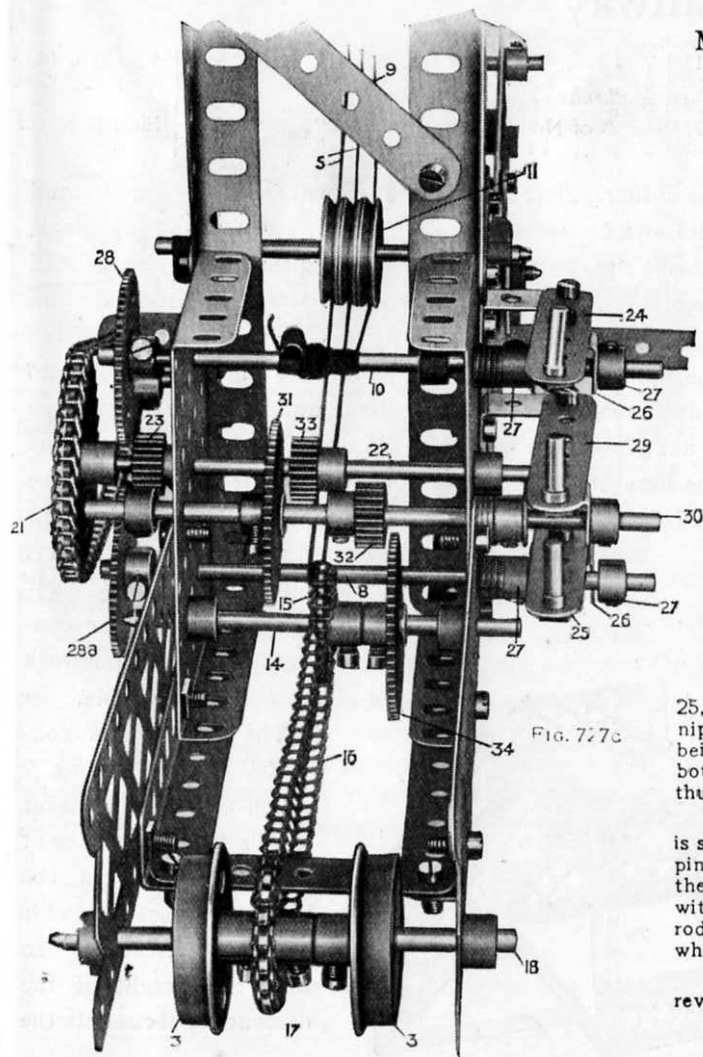


FIG. 727C

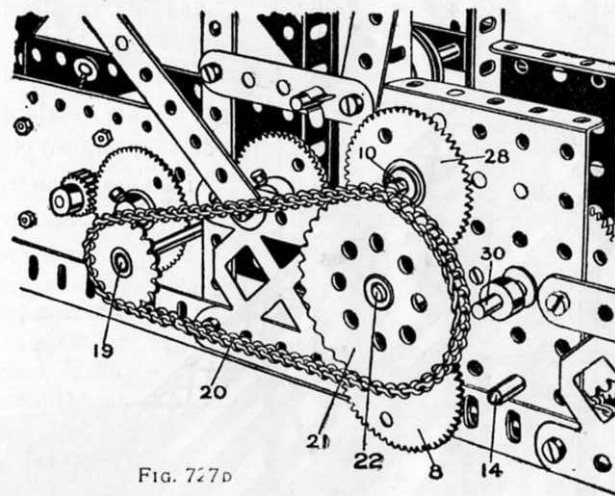


FIG. 727D

25, which are bolted and lock-nutted to double bent strips 26, engaging between collars 27 nipped on the rods. On the outer end of the rod 10 is a 57-toothed wheel 28, a similar wheel being secured on the outer end of the rod 8. By operating the clutch handles 24, 25, either or both of the gear wheels 28 or 28A may be brought into engagement with the $\frac{1}{2}$ " pinion 23 and thus cause the load to be raised or lowered, or the trolley 4 to be traversed.

The third clutch handle 29 similarly controls the sliding movement of a rod 30, on which is secured a 57-toothed gear wheel 31 and $\frac{1}{2}$ " pinion 32, and on the rod 22 is secured another $\frac{1}{2}$ " pinion 33, while on the rod 14 is a further 57-toothed gear wheel 34. By moving the handle 29, therefore, the gear wheel 31 and the pinion 32 may be brought into engagement respectively with the pinion 33 and the gear wheel 34, thus providing a reduced gear train from the driven rod 22 to the rod 14, and as the latter is coupled by the chain 16 to the rod 18 of the travelling wheels 3 the whole gantry is caused to move to and fro.


The reversal of the motor is controlled by a bell crank 37, coupled by a $2\frac{1}{4}$ " strip 38 to the reversing lever of the motor, a strip 39 being bolted to the bell crank as an extension handle.

A small electric globe 35 may be mounted on the crane, and controlled by switch 36, Fig. 727.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 728 Funicular Railway

Parts required:											
9 of No. 1	18 of No. 5	4 of No. 8A	12 of No. 9D	2 of No. 17	7 of No. 48D	8 of No. 90	1 of No. 96A	4 of No. 103			
6 " " 1B	6 " " 6	8 " " 8B	22 " " 12	8 " " 20	4 " " 52	4 " " 94	5 " " 97	8 " " 126A			
4 " " 2	6 " " 7	4 " " 9	2 " " 13A	4 " " 26	6 " " 52A	2 " " 95	4 " " 98				
4 " " 2A	4 " " 7A	2 " " 9B	5 " " 16	3 " " 27A	19 " " 59	1 " " 95B	9 " " 99	Electric Motor			
4 " " 4	13 " " 8	2 " " 9C	4 " " 16B	270 " " 37	2 " " 70	6 " " 96	8 " " 100				

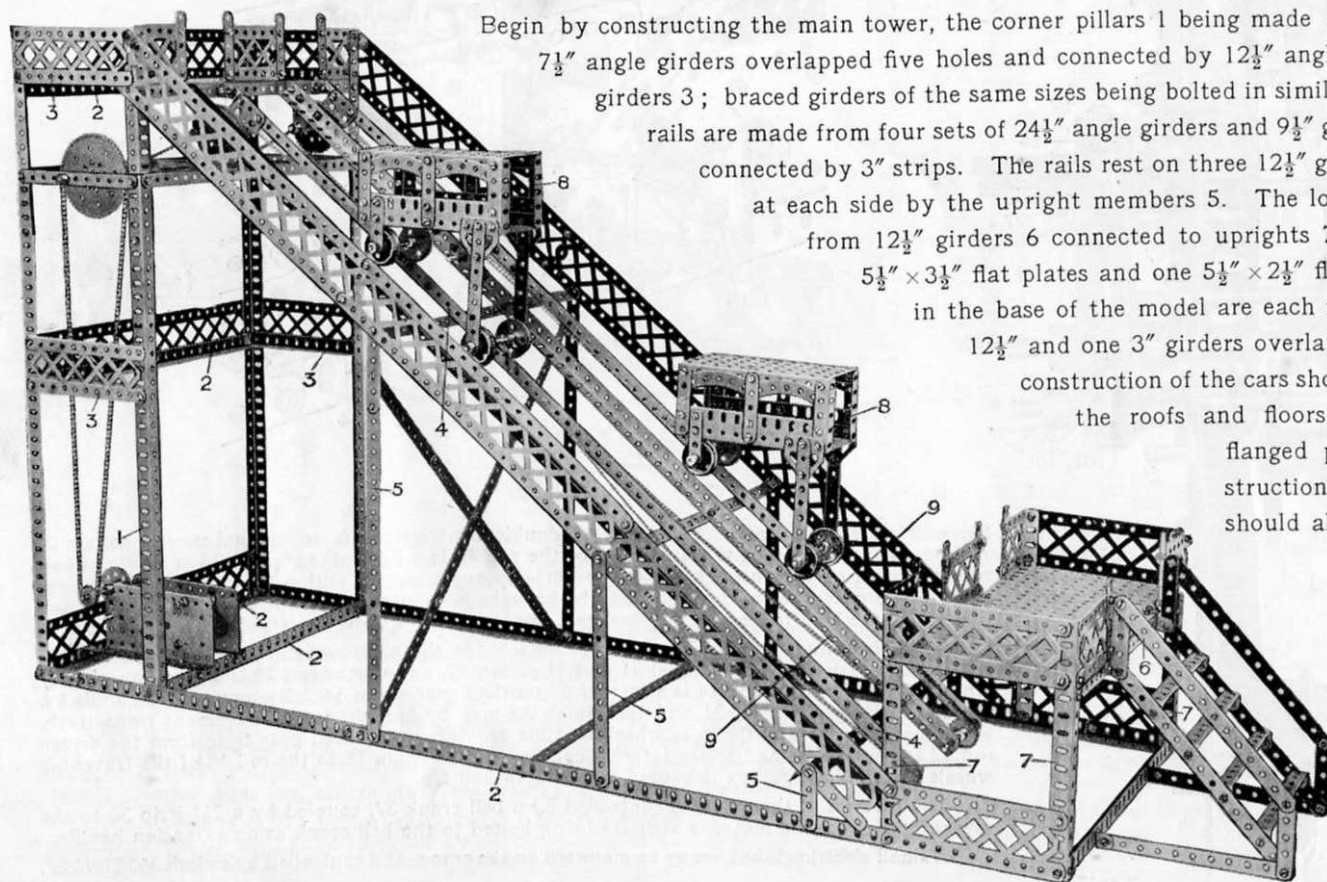

Begin by constructing the main tower, the corner pillars 1 being made of $18\frac{1}{2}$ " angle girders and $7\frac{1}{2}$ " angle girders overlapped five holes and connected by $12\frac{1}{2}$ " angle girders 2 and $5\frac{1}{2}$ " angle girders 3; braced girders of the same sizes being bolted in similar positions. The inclined rails are made from four sets of $24\frac{1}{2}$ " angle girders and $9\frac{1}{2}$ " girders butted together and connected by 3" strips. The rails rest on three $12\frac{1}{2}$ " girders 4, and are supported at each side by the upright members 5. The loading platform is built up from $12\frac{1}{2}$ " girders 6 connected to uprights 7 and the floor from three $5\frac{1}{2} \times 3\frac{1}{2}$ " flat plates and one $5\frac{1}{2} \times 2\frac{1}{2}$ " flat plate. The side girders in the base of the model are each formed from one $24\frac{1}{2}$ ", one $12\frac{1}{2}$ " and one 3" girders overlapped two holes each. The construction of the cars should present little difficulty, the roofs and floors being made of $5\frac{1}{2} \times 2\frac{1}{2}$ " flanged plates, and the other constructional details of the framework should also present no trouble.

The cars 8, are connected to the chains 9 which pass over sprocket wheels 10, 2" diameter at the top and 1" at the bottom. The cars move in opposite directions so that the weight of the descending car assists the

Model No. 728 Funicular Railway (*continued*)


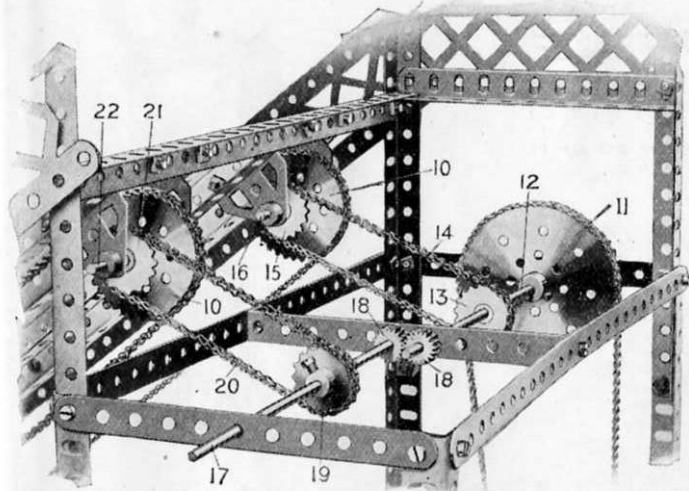


FIG. 728A

other car to ascend. This is effected by driving a 3" sprocket wheel, 11, Fig. A, from the motor, the 8" rod 12 of the sprocket wheel 11 carrying a 1" sprocket wheel 13 which is coupled by the chain 14 to a similar sprocket wheel 15 on the 3" rod 16. The rod 12 is coupled to another 8" rod 17 by a pair of $\frac{1}{2}$ " pinions 18 in order to obtain a reversed rotation, and a 1" sprocket wheel 19 on the rod 17 is coupled by a chain 20 to another 1" sprocket wheel 21 on a 3" rod 22 which drives the chain of the other car. In this way, opposite movement of the two cars is always taking place. The cars, having reached their destinations, are returned by reversing the motor.

Model No. 729 High-Speed Ship Coaler

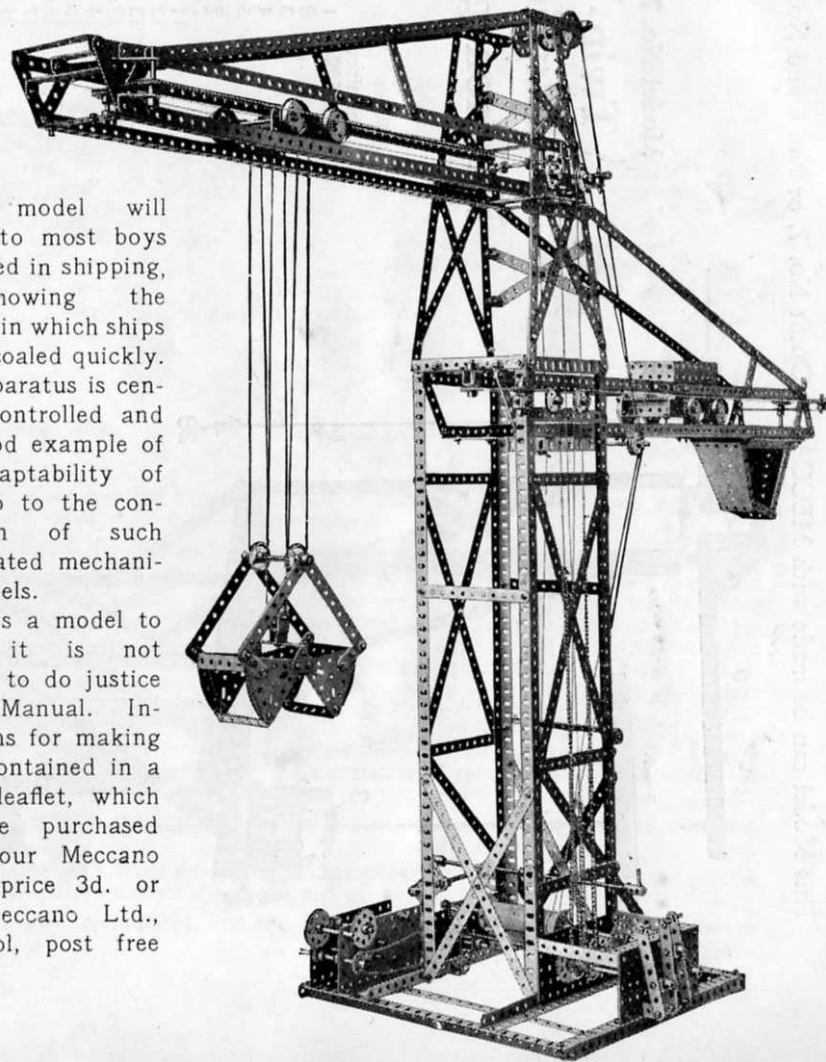


This model will appeal to most boys interested in shipping, as showing the manner in which ships can be coaled quickly. The apparatus is centrally controlled and is a good example of the adaptability of Meccano to the construction of such complicated mechanical models.

This is a model to which it is not possible to do justice in this Manual. Instructions for making it are contained in a special leaflet, which may be purchased from your Meccano dealer, price 3d. or from Meccano Ltd., Liverpool, post free 4d.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

Model No. 730

Twin-Elliptic Harmonograph

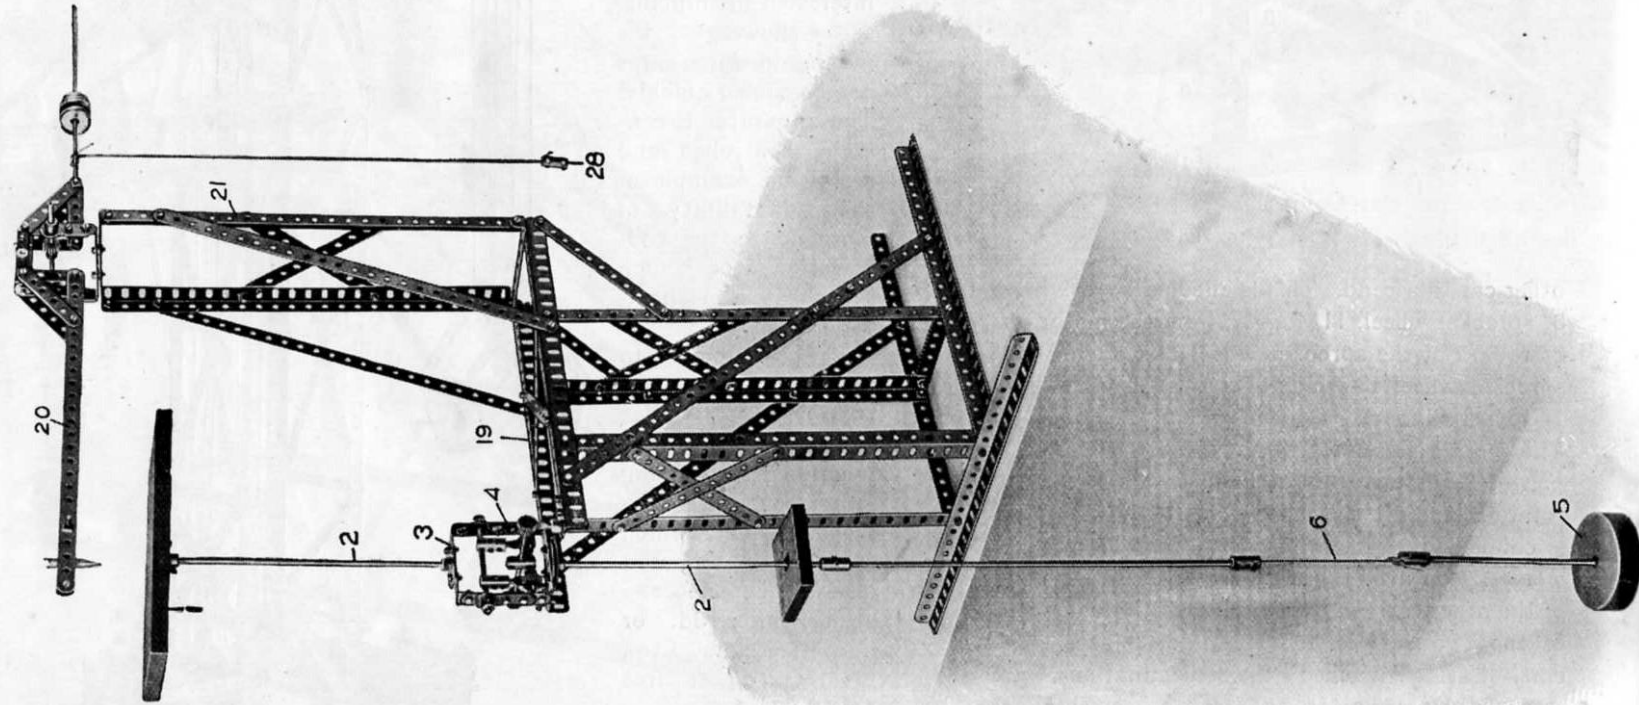

Parts required:	1	2	3	4	5	6	7	11	12	13	13A	14	16	16A	17	21	22	22A	24	26	37	37A	38	46	48B	59	62	63	65	107	111
8 of No.	10	3	3	4	4	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4

The
a fram
I
T
bearin
edges
bolted
cranks
The in
21, Fig
to form
from t
weight
pencil
In
engage
Th
smooth
To
paper,

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

195

Model No. 730 Twin-Elliptic Harmonograph (continued)

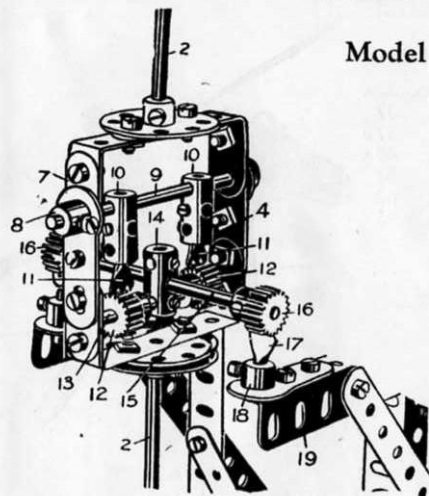


FIG. 730A

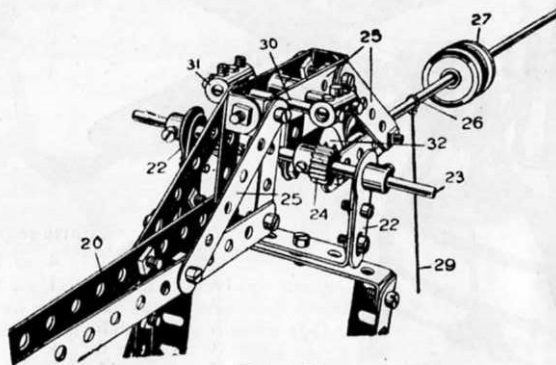


FIG. 730B




FIG. 730C

The table 1, upon which the paper for the design rests, is carried on a rod 2, the lower end of which is bolted to a bush wheel 3, which in turn is bolted to a frame 4, Fig. 730A, the lower rod 2 being similarly bolted to the frame 4 and carrying a somewhat heavy weight 5.

In order to obtain a flexible movement of the weight 5, the lower parts of the rod are coupled by a short length of string 6.

The frame 4 is built up as shown in Fig. 730A, of double angle strips $2\frac{1}{2}$ " by 1", connected by $2\frac{1}{2}$ " side strips 7, outside which are bolted cranks 8 to provide bearings for a rod 9 secured in the crank bosses. On the rod 9 are secured couplings 10 in the lower ends of which are mounted centre forks 11 forming knife edges engaging between the teeth of two $\frac{1}{2}$ " pinions 12 fixed on a 2" rod 13, which is secured in a centre coupling 14 across which, in the centre hole of each, is bolted a $3\frac{1}{2}$ " rod 15. On the outer ends of this rod 15 are two $\frac{1}{2}$ " pinions 16 which rest upon centre forks 17 forming lower knife edges, secured in the bosses of cranks 18 carried on angle girders 19. Consequently, the frame 4 is balanced so as to swivel in two directions about the knife edges 17 and the knife edges 11. The ink pencil is gripped between the ends of two $12\frac{1}{2}$ " strips 20, forming an arm which is pivotally supported as shown in Fig. 730. At the top of the arm 21, Fig. 730B, are bolted two cranks 22, in the bosses of which is secured a rod 23 carrying two pinions 24. The strips 20 are coupled by 3" and 2" strips 25 to form a yoke, in the rear of which is fixed a rod 26 on which is a balance weight 27, formed by a number of pulleys, and a further weight 28 is suspended from the rod 26 by cord 29. The balance weight is adjusted along the rod so that the pencil will just rest lightly on the paper on the table 1, and the extra weight 28, when hanging free, as in Fig. 730, just lifts the pencil clear of the paper. By lifting the weight 28 and resting it somewhere on the frame, the pencil is brought into light contact with the table 1.


In the yoke 25 are inserted two rods 30, each carrying couplings 31 in the centre holes of which are secured centre forks 32 forming knife-edges, which engage the $\frac{1}{2}$ " pinions 24 about which the pencil arm swivels.

The pencil is made by drawing out a short length of $\frac{1}{8}$ " glass tubing in a bunsen or methylated spirit lamp, about $\frac{1}{8}$ " taper, Fig. 730C, and the end ground smoothly on a clean wet hone laid on the table; the tube is then filled with ink, which flows freely through the fine perforation in the point.

To operate the apparatus, if the weight 5 be given a swinging movement, the table 1 is oscillated, and the stationary pencil describes a diagram on the paper, which is varied according to the direction in which the weight swings.

Model No. 731

St. George and Dragon

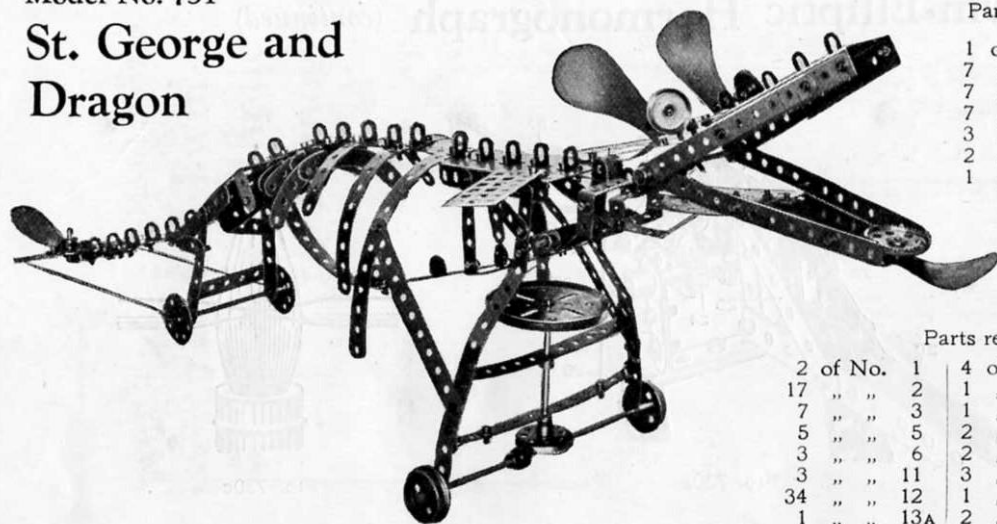

Parts required, St. George:

1 of No. 3	1 of No. 22A
7 " " 5	31 " " 37
7 " " 6	1 " " 37B
7 " " 10	2 " " 48A
3 " " 11	2 " " 53
2 " " 12	1 " " 62
1 " " 14	1 " " 95




Parts required, Dragon:

2 of No. 1	4 of No. 16	2 of No. 35
17 " " 2	1 " " 18A	126 " " 37
7 " " 3	1 " " 19B	7 " " 38
5 " " 5	2 " " 20	4 " " 41
3 " " 6	2 " " 22	1 " " 43
3 " " 11	3 " " 24	3 " " 46
34 " " 12	1 " " 26	9 " " 48A
1 " " 13A	2 " " 28	4 " " 54
		6 of No. 59
		2 " " 61
		1 " " 69
		2 " " 72
		6 of No. 90
		2 " " 110
		2 " " 114

This model requires little description. The jaws of the dragon work by means of a cord fastened to a $3\frac{1}{2}$ " strip which is attached to the $2\frac{1}{2} \times 2\frac{1}{2}$ " flat plate forming the head. The cord is passed through a hole in the $12\frac{1}{2}$ " strip, which forms the back-bone. It is attached at its other end to the periphery of a 3" pulley wheel, which is caused to rotate as the dragon moves along the ground. To make the tail wag, cords are fastened to each end of the pivoted $3\frac{1}{2}$ " strip which carries the bush wheel and propeller blade forming the tail, and attached at the other ends to angle brackets bolted to the back wheels. As the model moves along the ground the tail wags in quite a realistic way.

Model No. 732 The Tilters

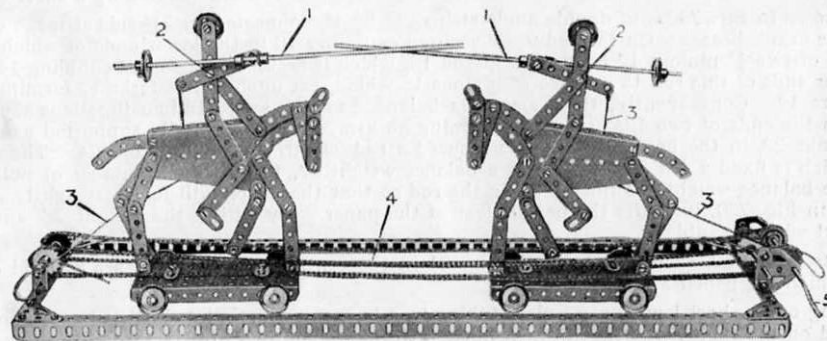

Parts required:

2 of No. 3	2 of No. 31
4 " " 4	73 " " 37
22 " " 5	2 " " 37A
2 " " 7	4 " " 38
2 " " 8B	1 " " 46
10 " " 10	1 " " 47
2 " " 11	2 " " 52
10 " " 12	2 " " 54
2 " " 13	8 " " 59
1 " " 15A	6 " " 90
5 " " 16	2 " " 94
1 " " 19	4 " " 96
10 " " 22	2 " " 126A
2 " " 22A	4 " " 133

The lances 1 pivoted at 2 are raised into position by the cords 3 and the figures caused to advance together by the chains 4 on turning the handle 5.

The cords 3, instead of being tied where indicated in the illustration, should, after aim, be made fast to some part of the moving figures.

This Model can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.

197

Model No. 733 Warehouse

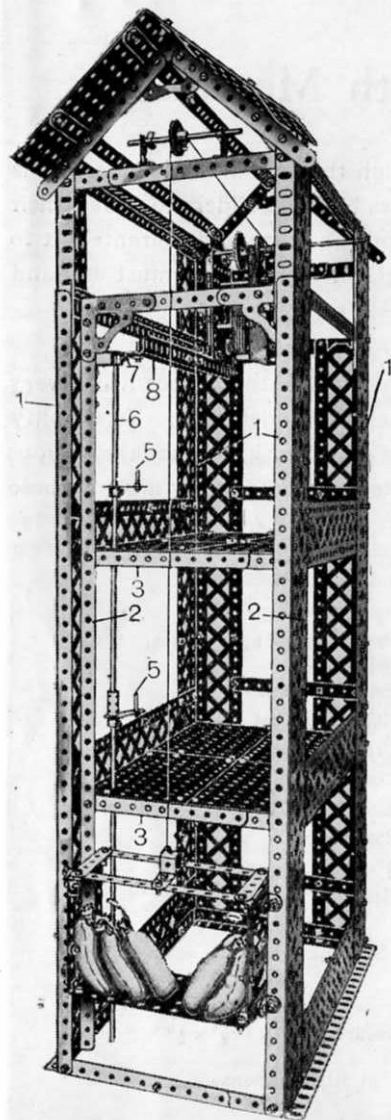


FIG. 733A

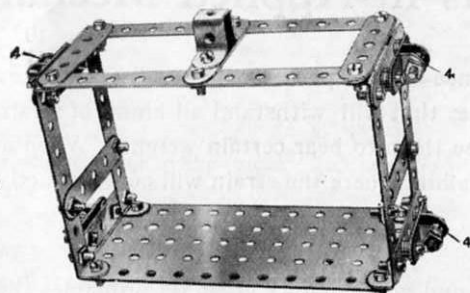


FIG. 733B


Commence this model by building the framework. $24\frac{1}{2}$ " angle girders are used to form the corner uprights 1 with $5\frac{1}{2}$ " angle girders overlapped eight holes at the top. Two $24\frac{1}{2}$ " angle girders 2 are also used to carry the front portion of the warehouse floors, the latter being bolted to two $5\frac{1}{2}$ " angle girders 3 overlapped eight holes and connected across to the two inner angle girders 2. Two similar $5\frac{1}{2}$ " angle girders are bolted to the back of the framework, to carry the other end of each of the floors. The floor is formed of four $5\frac{1}{2}$ " \times $3\frac{1}{2}$ " flat plates butted together and bolted in the centre to a $5\frac{1}{2}$ " flat girder on the underside—the two outer ends being bolted to the angle girders 3. The horizontal side-strips are formed of $12\frac{1}{2}$ " strips to which are bolted the braced girder strips.

Fig. A shows the construction of the cage. This is guided by bolt heads 4, at each side riding along the inwardly turned flanges of the angle girders 2. The bolts are attached to angle brackets, which are secured to a $1\frac{1}{2}$ " strip, this latter being secured to the side-strips of the cage, spaced with three washers to take up the play between the cage and the upright girders 2.

Fig. B shows the position of the motor, and this may be started and stopped from the control crank handles 5, one on each floor of the warehouse. These crank handles are fixed on a vertical rod 6 composed of two $11\frac{1}{2}$ " rods connected by a coupling. A crank 7 is secured to the upper end of this rod and is connected by a $5\frac{1}{2}$ " angle girder and strip 8 to the operating lever of the motor.

$1\frac{1}{2}$ " brackets secured to the sides of the warehouse by strips form the bearings for the upper and lower ends of the vertical rod.

When the motor is wired up to the accumulator, the elevator is ready to be operated.

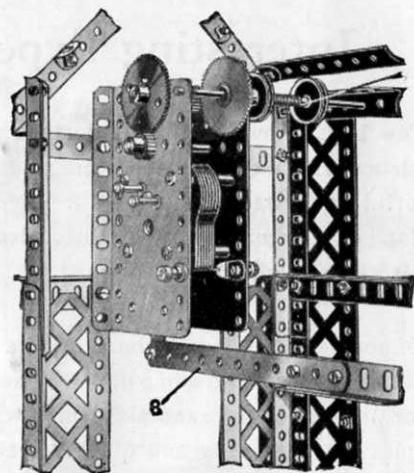

Parts required:

18 of No. 1	2 of No. 13	1 of No. 59
21 " " 2	1 " " 14	4 " " 62
9 " " 5	1 " " 16	1 " " 63
1 " " 6	3 " " 22	3 " " 70
4 " " 6A	2 " " 35	18 " " 99
6 " " 7	240 " " 37	4 " " 100
6 " " 8	30 " " 38	2 " " 103
23 " " 9	1 " " 45	4 " " 108
16 " " 12	1 " " 46	4 " " 115
2 " " 12A	8 " " 52A	

Electric Motor

Interesting Experiments in Applied Mechanics with Meccano

Few boys know what an important part the science of "Applied Mechanics" plays in everything which they see around them. It is this science which enables engineers to design machines that will withstand all kinds of strains. It enables bridge builders to make their wonderful structures so that they are able to guarantee them to bear certain weights. When an engineer builds a crane and guarantees it to lift a load of so many tons, "Applied Mechanics" tells him where the strain will come, exactly what strength of materials he must use, and how his crane ought to be designed.

Of course "Applied Mechanics" is a big subject, and you can only grasp its principles thoroughly after a lot of study; but it is a very fascinating subject, and some of the elementary principles are most interesting and novel and not at all difficult to understand. To simplify the working out of the examples which will be found on the following pages, we have introduced a standard framework, so that the various examples may be easily and quickly set up. Any boy can get lots of fun and learn a lot of useful points in mechanics, by making these experiments.

The following is a list of the parts required to build all the Scientific Examples illustrated here:—

No. 1.	2 Perforated strips, 12½"
" 2.	12 " " 5½"
" 3.	6 " " 3½"
" 4.	6 " " 3"
" 5.	6 " " 2½"
" 7.	4 Angle girders, 24½"
" 7A.	4 " " 18½"
" 8.	6 " " 12½"
" 9.	1 " " 5½"
" 10.	24 Flat brackets
" 11.	2 Double "
" 12.	12 Angle "
" 12A.	4 " " 1"
" 13.	1 Rod, 11½"

No. 13A.	1 Rod, 8"
" 15.	6 " 5"
" 16.	1 " 3½"
" 17.	6 " 2"
" 19.	1 Crank handle
" 19B.	6 Pulley wheels, 3"
" 20.	4 Flanged and grooved wheels
" 21.	2 Pulley wheels, 1½"
" 22.	1 " " 1"
" 24.	1 Bush wheel
" 37.	48 Nuts and bolts
" 38.	12 Washers
" 43.	1 Spring
" 48A.	6 Double angle strips, 2½" × ½"

No. 52.	3 Perforated flanged plates, 5½" × 2½"
" 57A.	6 Scientific hooks
" 59.	12 Collars and set screws
" 62.	2 Cranks
" 63.	4 Couplings
" 66.	12 50-gramme weights
" 67.	2 25 " "
" 68.	12 ½" wood screws
" 81.	3 Screwed rods, 2"
" 82.	1 " " 1"
" 94.	5' Sprocket chain
" 95.	1 " wheel 2"
" 96.	1 " " 1"
	1 Board, 12½" × 11½" × ½"



The board is not provided in this Outfit on account of its size. This, however, can be provided at little expense.

Model No. 734 Triangle of Forces


The first example is called the "Triangle of Forces." Briefly, if three forces meet at a point and balance each other, and we know one of the forces, we can find out the other two by drawing a triangle, making each side parallel to the direction of one of the forces. To demonstrate this, two large pulleys 7 are carried on rods in the top rails, and cords 8, 9, passed over these pulleys and their ends joined to another cord 10. Weights 11, 12, and 13 are then hung on the ends of the cords 8, 9, and 10, and when the point of junction (a) of the three cords has come to rest, lines in the direction of the cords are drawn on the sheet of paper, which is afterwards removed and a triangle drawn, as shown in the illustration, with its sides 8, 9, and 10 parallel to the directions of the three cords. This triangle is shown in dotted lines. If the sides of the triangle are measured it will be found that they are in the same proportion as the weights 11, 12, and 13. For instance, if the weight 12 were 15 units and the weight 13 were 9 units, and the weight 11 were 7 units, the lengths of the sides of the triangle would be 15, 9, and 7 units. By this experiment, therefore, we demonstrate that when three forces meet at a point, and we know

their direction and the value in grammes or pounds of one of the forces, if we construct a triangle, making that side of the triangle which corresponds to the known force equal to a number of units of length, each unit representing a gramme or pound of the known force, then by scaling off the other two sides of the triangle we can determine the value of the other two forces in grammes or pounds. Several experiments with different weights should be tried and triangles drawn, and the accuracy of the apparatus for different weights tested.

As an example of the triangle of forces, when a boy pulls a bow to shoot an arrow, if we know the force he pulls with, we can find the pull along each part A and B of the string by measuring the angle which the string forms.

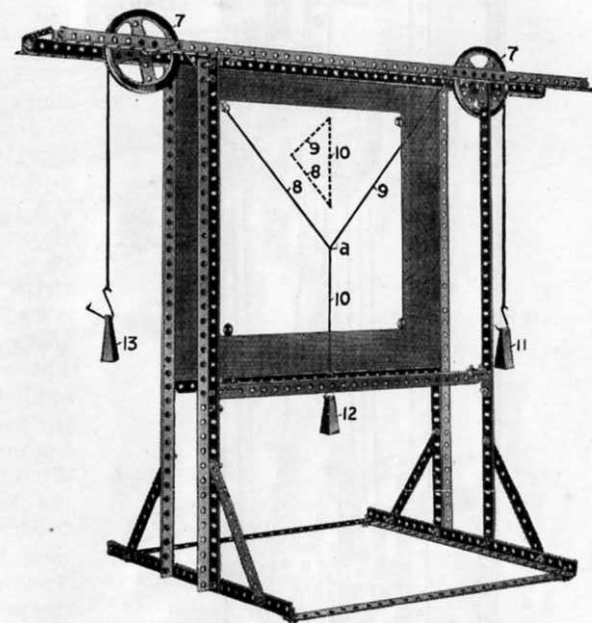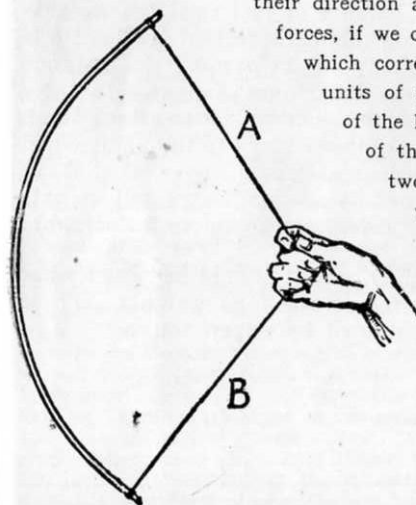

Little difficulty will be experienced in constructing the Meccano Demonstration Frame from this illustration. It may be well to mention, however, that the rear uprights, which consist of $18\frac{1}{2}$ " angle girders, are secured to the sides of the board shown in the illustration by ordinary wood screws. The $24\frac{1}{2}$ " girder at the top is secured in the same manner, as is also the $12\frac{1}{2}$ " girder at the bottom. The board is used for pinning on sheets of paper, upon which the diagrams are drawn.

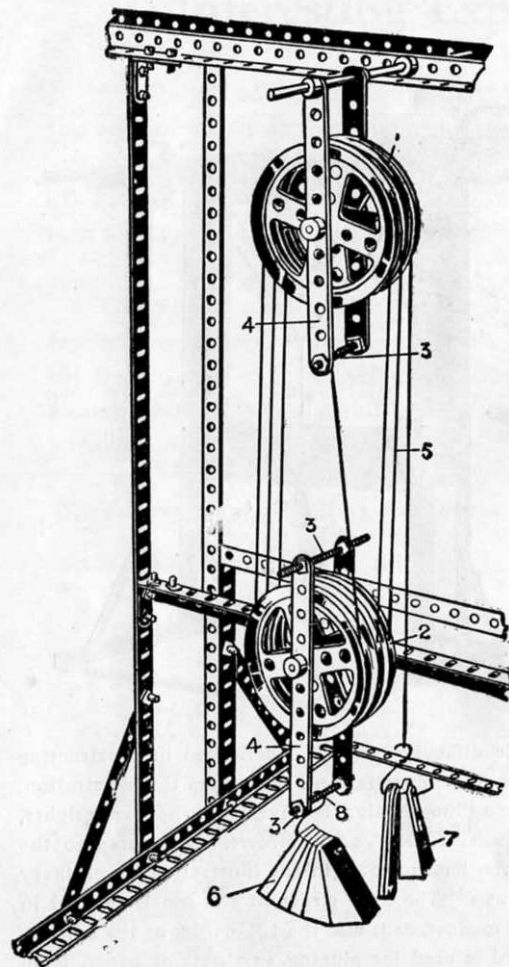

Model No. 735

Pulleys

In this model the principle of a purchase pulley block is demonstrated. In engineering shops and other places where heavy weights are required to be lifted by hand, it is necessary to provide some means so that the ordinary power that a man can exert is multiplied to such an extent as to enable him to lift much heavier weights than would otherwise be possible without a pulley block. Whenever an apparatus for this purpose is used, what is gained in power is lost in speed. The pulley block shown consists of three 3" pulley wheels 1 in the upper block and a similar number of wheels 2 in the lower block. The construction of these blocks may be seen from the illustration, the rods 3 being screwed throughout their length, and the side strips 4 held thereon by nuts on the rods 3 inside and outside of the strips. The upper block 1 is fixed from the top girders of the frame, but the lower pulley block 2 is supported on the loops of the cord 5 and rises and falls carrying with it the weights 6 suspended from the lower block. The weights 6 represent the load to be lifted and the smaller weight 7 represents the power applied such as the pull of a man. If there were no such thing as friction in the bearings of the pulleys, then the proportion of the weight 7 necessary to balance or just raise the weights 6 would be as 1 is to 6. Of course the weight 7 moves six times the distance that the load 6 is lifted or lowered, so that although the heavy load 6 is overcome by a light power 7 the distance the power weight 7 has to move is considerably greater, in fact it is six times as great. In order to ascertain the amount of friction to be overcome, it is necessary in the first place to attach small weights to a hook 7, sufficient to counterbalance the weight of the lower block to the point when it commences to move. After the weights have been added as indicated above, that is, in the proportion of 1 to 6, the amount of friction can be ascertained by again adding small weights to the point when it commences to move, the weights added representing the amount of friction.

Different load weights 6 should be hung on the lower pulley, and it should be noted what are the corresponding power weights 7 required just to overcome the load weights. These results should be tabulated like the following, which were obtained by experiment:


Power.	Load.	Friction.
$25 + 3.3 = 28.3$ grammes	150 grammes	2.2 per cent.
$50 + 6.6 = 56.6$ "	300 "	2.2 "
$75 + 8.8 = 83.8$ "	450 "	1.9 "

If
lever v
we say
to the
this ca
a mom
of the
would
call th
way ar
be stra
is at ri
bell-cra
of mom
angle g
holes in
we can
If we h
hole, or
 100×1
on the o
150 inc
though

These Models can be made with MECCANO Outfit No. 7, or No. 6 and No. 6A.


201

Model No. 736 Levers

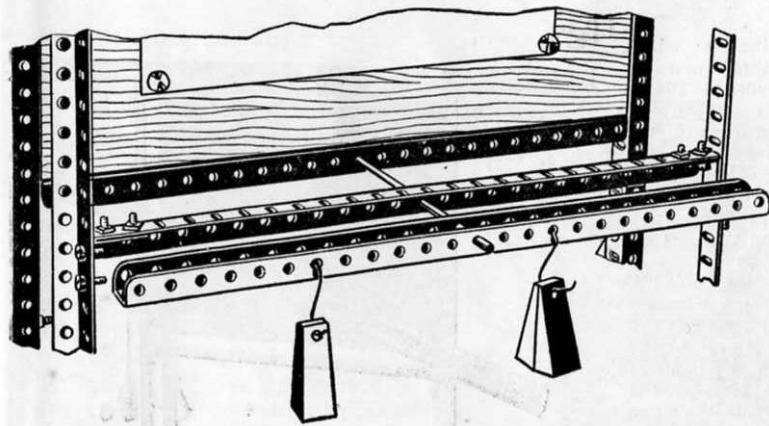


If we have a lever 6" long and pivoted 4" from one end, the arms of the lever will be 4" and 2", and if we hang a 2-lb. weight at the end of the 2" arm, we say that the moment of the force of the 2-lb. weight about the pivot is equal to the weight in pounds multiplied by the length of the arm in inches. In this case the moment, therefore, would be $2 \times 2 = 4$, and this would be called a moment of 4 inch-lbs. Similarly if a weight of 1-lb. were hung at the end of the 4" arm of the lever we would say that the moment of that weight would be 1-lb. multiplied by the length of the arm, $1 \times 4 = 4$, and we would call this 4 inch-lbs. Now when the moments of a lever obtained in this way are equal, the lever is balanced. Levers are of various kinds; they may be straight levers or bell-crank levers, that is to say, where one of the arms is at right angles to the other. A straight lever is shown in this Model and a bell-crank lever in Model No. 736A. Now we will demonstrate the principle of moments in the case of the straight lever. This is made up of two $12\frac{1}{2}$ " angle girders bolted together as shown, and pivoted on a short rod. The holes in the Meccano strips are all at a standard distance of $\frac{1}{2}$ " apart, so that we can easily fix the lengths of the lever arms in inches by counting the holes. If we hang two weights of 50 grammes (that is 100 grammes) from the third hole, or $1\frac{1}{2}$ " from the pivot at one side, the moment of that weight will be $100 \times 1\frac{1}{2} = 150$ inch-grammes. Now if we hang a single weight of 50 grammes on the other side at six holes or 3" from the pivot the moment will be $50 \times 3 = 150$ inch-grammes, and as the moments are equal the lever will balance, though the weights themselves are unequal.

Model No. 736a Bell Crank

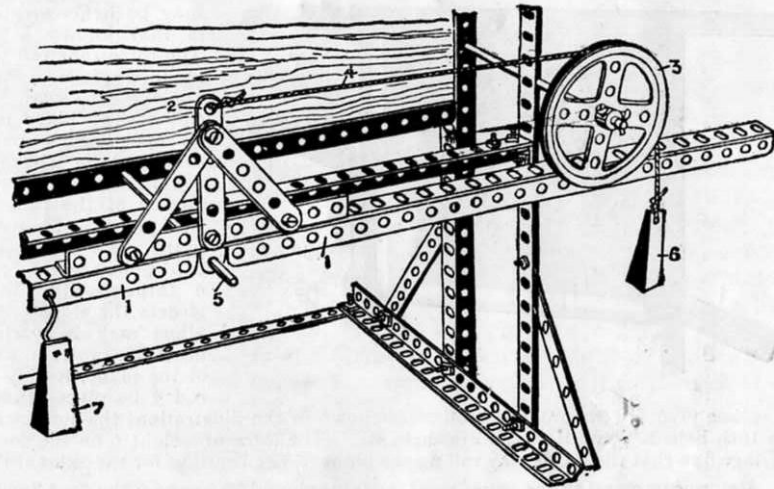


This Model is made up of two $12\frac{1}{2}$ " angle girders 1 braced to a vertical strip 2, pivoted through a double bracket. A large wheel 3 is mounted on a rod in the side girders, care being taken that the cord 4 coming over the top of the pulley is parallel to the angle girders 1 of the lever. The arms of this lever are the left angle girder 1 and the vertical strip 2, and in order that this lever may balance about its pivot 5, the moment of the forces about the pivot must be equal, as we have previously described. Supposing, therefore, we hang a weight 6 of 50 grammes on the end of the cord 4 round the pulley 3, and connect the cord 4 to the strip 2 at 6 holes or 3" distance from the pivot 5 then the moment of the force will be the weight 50 multiplied by 3 = 150. The lever will be kept balanced if we hang an equal weight 7 of 50 grammes on the angle girder 1 at 6 holes or 3" distance from the pivot 5, because the moments $50 \times 3 = 150$ inch-grammes, are then equal. If, on the other hand, we hang two weights 6 of 50 grammes each on the end of the cord 4, the lever will be balanced by one 50 gramme weight 7 at 12 holes or 6" distance from the pivot.

Model No. 737 Inclined Plane

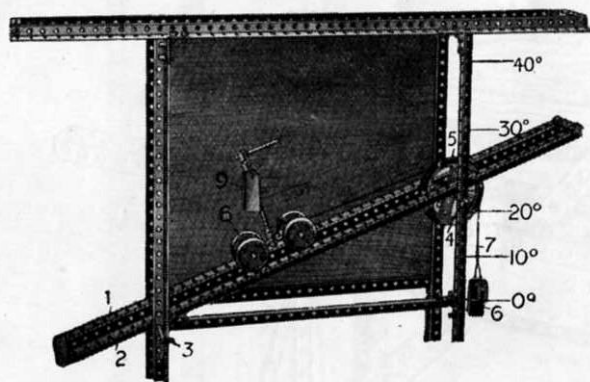

Another interesting principle which may be demonstrated on this apparatus is that known as the Inclined Plane. The force required to raise a body up an inclined plane varies according to the angle of the plane, that is to say, the slope. The plane is made of two angle girders 1, 2, connected together at each end by $2\frac{1}{2}$ " strips and fixed on a rod 3 passed through holes in the vertical girders of the frame and the girders of the plane, and the other end of the plane rests on a rod 4 which carries a 3" pulley wheel 5. By placing the rod 4 through different holes in the side girders the slope or angle of the inclined plane may be varied. To obviate the need of a protractor to ascertain the slope of the plane, it may be stated that if the rod 4 be placed in the fourth hole with

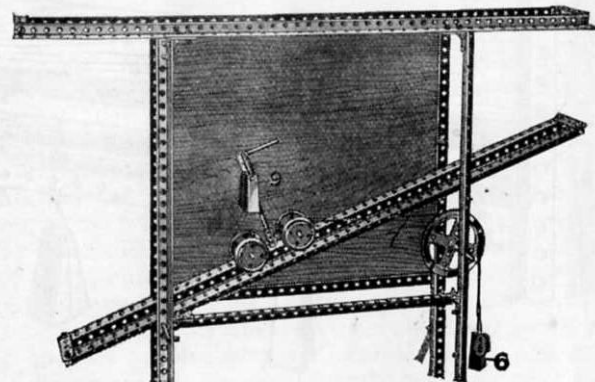

the plane pivotally mounted on rod 3 (as shown in the illustration) the surface of the plane will represent an incline of 10° . If placed in the 9th hole, 20° . If in the 15th hole 30° , and if in the 21st hole 40° . The force or weight 6 on the cord 7 is arranged to act parallel to the plane, and the cord is connected to the carriage 8 so that the latter may roll up the plane. The bearings for the axles of the wheels are formed of couplings and connected by a 2" rod.

Before commencing the experiment, weights should be hung on the cord 7, which are just sufficient to balance the carriage 8. If a weight 9 be then hung on the carriage it should be noted what additional weight is required to be hung on the end of the cord 7 just to make the carriage slowly ascend the plane. The weight 9 should then be varied and the alteration in the weight 6 on the cord 7 to make the carriage ascend the plane noted, and these results should be tabulated.

When the student has finished this experiment he should try the second example illustrated above, where the force along the cord 7 is not parallel to the slope of the plane, but is horizontal, first hanging on weights 6 until the carriage is just balanced on the plane, and then hanging different weights 9 on the carriage and noting what additional weights at 6 are necessary just to cause the carriage to begin to move up the plane. These results should also be tabulated.

Experiments made with the apparatus have yielded the following results

When forces are parallel to the plane :		
At	FORCE 6 Grammes.	WEIGHT 9 Grammes.
10°	22.2	100
20°	40.54	100
30°	58.8	100
40°	70	100


When forces are horizontal :		
At	FORCE 6 Grammes.	WEIGHT 9 Grammes.
10°	23.31	100
20°	43.87	100
30°	63.2	100
40°	89.43	100

A good example of an inclined plane is a horse pulling a cart up a slope, the horse being the force and the cart the weight.

Model No. 738

Centrifugal Governor

In this model an apparatus is shown for demonstrating the controlling effect of a governor. A governor is a device which is fitted on an engine in order to make its speed constant. In the case of an engine driving a works, for instance, if all the machinery in the shop were running, the engine would be driving a heavy load and would be using a certain amount of steam. If a great portion of the machinery were stopped and the engine were allowed to take the same amount of steam, owing to the lightness of the load then on the engine it would race at great speed and probably be damaged. To prevent this engineers fit a governor device which, as the load on the engine is lightened, automatically shuts off the steam, or throttles it, and which, as the load comes again on the engine, permits it to take more steam. The governor thus arranges the steam supply to the engine to be suitable for the load which the engine bears and to drive it at a constant speed. Most governors are of the centrifugal ball type, that is to say, they have a pair of ball weights which are spun round by the engine. As the engine's speed increases, the ball weights fly out, and this flying out or centrifugal action is arranged to shut off the steam.

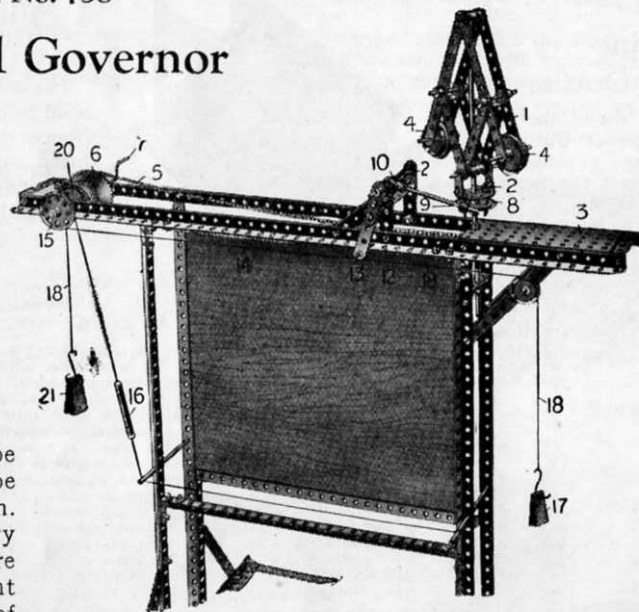

The governor 1, the construction of which is quite clear from the illustration, is mounted on a spindle 2 in a rectangular plate 3 fitted in the top girders. The flanged pulley wheels 4 represent the ball weights of the governor. Below the rectangular plate 3 and on the spindle 2 is a sprocket wheel 22 connected by the sprocket chain 5 to another sprocket wheel 6 on the cranked axle 7.

A bush wheel and a $1\frac{1}{2}$ " pulley wheel 8 are fixed on the spindle of the governor a slight distance apart, and the head of a bolt in the collar 9 engages between the wheels 8. The collar 9 is connected by a coupling 10 to a rod 11 pivoted in the strips 12. The near end of the rod carries a strip 13, clamped between two cranks, to which is connected a cord 14 passed once round the $1\frac{1}{2}$ " pulley 15 and connected to the spring 16. The cord 14 acts as a brake on the pulley 15, another cord 18 connected to the strip 13 carries a weight 17, and another cord 19, which is wound on the flanges of two reversed flanged and grooved wheels, is loaded with different weights 21 in order to conduct the experiments. The weights 21 correspond

to the driving force of the engine, and the governor controls this varying driving force by applying the brake which is the cord 14. Different weights 21 should be hung on the cord 19, and the cord then wound up to the top by the crank axle 7. The time taken for different weights 21 to fall should be noted, and if the apparatus has been properly adjusted the different weights 21 should take nearly the same time to fall to the floor. If heavy weights are hung on, the governor ball weights 4 fly out and raise the discs 8 which swing the strip 13 and apply the brake thus retarding the fall of the weights. The student should tabulate his results, using different weights and noting the variation in seconds taken for the weights to fall. The following are examples:—

Weight.	Time in falling.
75 grammes	12 Secs.

Weight.
100 grammes

Time in falling.
11 Secs.

Weight.
200 grammes

Time in falling.
10 Secs.

MECCANO ACCESSORY OUTFITS AND MOTORS



Meccano Accessory Outfits

Our illustration shows one of the Meccano Accessory Outfits. As has already been explained, these Outfits connect the main Outfits from No. 00 to No. 7, making it possible for a boy who commences with one of the earlier Outfits to build up his equipment by easy stages, until he is the possessor of parts that cover the entire system. For prices see page 208.


Electrical Outfit

All Meccano boys are fascinated by electricity and never become tired of learning more about this wonderful subject. The application of electricity to the Meccano system adds a further and wonderful charm, and the joys of model-building are now increased by the fascinating pastime of carrying out delightful electrical experiments.

The Meccano Electrical Outfit contains a number of specially designed electrical parts which may be used in conjunction with any of the regular Outfits.



For price see page 208.



Electric Motor No. 1 (4-Volt)

The 4-volt motor is specially designed to build into Meccano models. It may be run from a 4-volt accumulator. The motor is fitted with reversing motion, provided with stopping and starting controls, and the gearing is interchangeable.


For price see page 208.

Electric Motor No. 2 (100-250-Volt AC or DC)

This Electric Motor may be employed for any purpose for which a small motor is suitable, but it is specially adapted for driving Meccano models. The side plates are perforated with standard equidistant holes, thus allowing the motor to be built into any Meccano model. The motor is specially designed for connection with the electric-light main. It is supplied for 100-120 volts or 200-250 volts (alternating or direct), and is fitted with 6 ft. length of flex, an insulated plug for connection with the motor terminals, and an adaptor for connection with an ordinary lamp socket.

A suitable resistance is required when the motor is run with a 200-250 volt current, and this is supplied by connecting a 60-watt lamp in series with the motor. A board, on which are mounted a suitable lamp-holder (lamp not included) and a switch, is provided separately.

For price see page 208.



4-Volt Accumulator


This is an excellent type of accumulator that has been adapted to drive the Electric Motor No. 1. It has been subjected to the severest tests and has proved itself to be the most suitable accumulator for use with any type of electric motor. It is non-spillable, has remarkable recuperative powers, and will continue to supply current when nominally exhausted.

For price see page 208.

Clockwork Motor

How splendid it is, after spending hours in building a model, to be able to set it in motion with a motor, just as do real engineers! The Meccano Clockwork Motor is specially made for this purpose and is a fine piece of mechanism—simple, powerful, and reliable. It is fitted with starting and stopping levers, and has a reversing movement.

For price see page 208.



HORNBY CLOCK WORK TRAINS

205

HORNBY TRAINS are manufactured by Meccano Limited, and they are made from the finest materials obtainable. A most valuable feature of the Locos is that all the parts are standardised and any lost or damaged units may be replaced with new ones.

Each Train is a beautiful piece of workmanship with perfect mechanism, ensuring smooth running. A guarantee of efficiency is furnished with each Loco.

A HORNBY TRAIN LASTS FOR EVER!

No. 0 Passenger Set


Each Set contains Loco, Tender, two Passenger Coaches and Rails to form either a circle 2 ft. in diameter or an oval 2 ft. in width by 2 ft. 10 in. in length. One of the curved rails is a brake rail by means of which the train may be braked from the track. The doors of the coaches open.

Gauge 0, in colours to represent the principal British Railway Companies' rolling stock. Richly enamelled and highly finished; fitted with brake and governor; non-reversing.

No. 0 Goods Set

The Goods Set is the same as the Passenger Set but contains one Wagon in place of Passenger Coaches. In colours to represent the principal British Railway Companies' rolling stock. Gauge 0.

For prices see page 208.

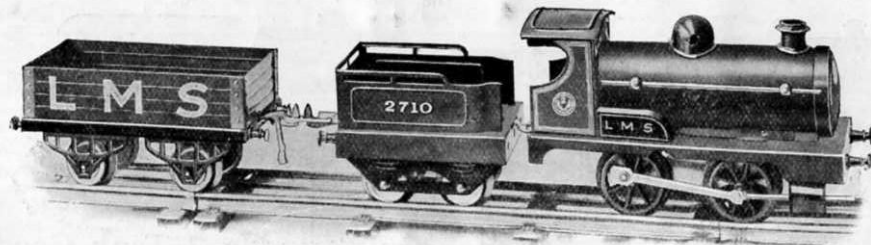

No. 0 GOODS SET

No. 1 Passenger Set

Each Set contains Loco, Tender, and two Coaches, with Rails to form either a circle 2 ft. in diameter or an oval 2 ft. in width by 2 ft. 10 in. in length. One of the curved rails is a brake rail by means of which the train may be braked from the track. The Loco is fitted with reversing gear, brake and governor. In colours to represent the principal British Railway Companies' rolling stock. The doors of the Coaches open. Gauge 0.

No. 1 Goods Set

This Set is similar in every way to No. 1 Passenger Set, except that it contains one Wagon in place of Coaches.

For prices see page 208.

No. 2 Pullman Set


This Set includes Loco and Tender of a larger type, measuring 17 in. in length. The Coaches are beautiful both in colour and finish. Each Set includes Loco, Tender, and two Pullman Coaches, with Set of Rails making a 4 ft. diameter circle. The rails include one brake rail by means of which the train may be both braked and reversed from the track. In colours to represent the principal British Railway Companies' rolling stock. The Loco is fitted with reversing gear, brake and governor. Gauge 0.

No. 2 Goods Set

This Set contains Loco, Tender, and Rails as in No. 2 Pullman Set, and two Wagons. Gauge 0.

For prices see page 208.


No. 1 PASSENGER SET

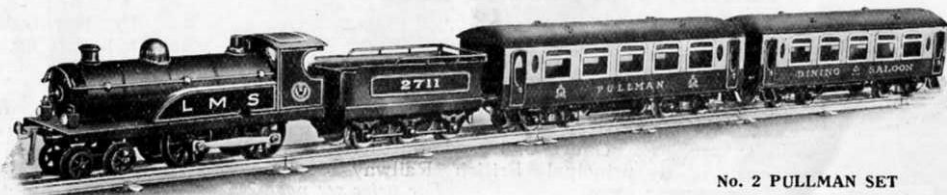

No. 2 PULLMAN SET

HORNBY CLOCK WORK TRAINS

THE following Hornby Tank Goods and Passenger Sets have become immensely popular since they were introduced into the series last year. Each set contains one of the famous Hornby Tank Locos with attractive rolling stock.

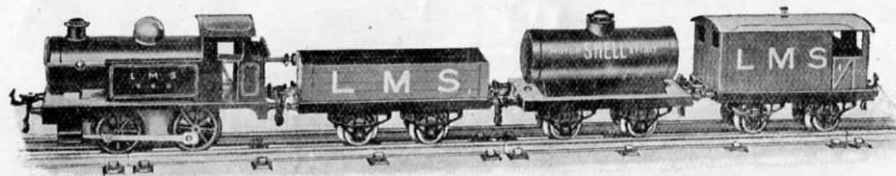

No. 1 TANK GOODS SET

No. 1 Tank Goods Set

This Set contains a No. 1 Hornby Tank Loco, Hornby Wagon, Petrol Tank Wagon, Brake Van and set of rails to form either a circle 2 ft. in diameter or an oval 2 ft. in width by 2 ft. 10 in. in length. One of the curved rails is a brake rail by means of which the train may be braked from the track.

Gauge 0, in colours to represent the principal British Railway Companies' rolling stock. The loco is fitted with reversing gear, brake and governor. *For price see page 208.*

No. 2 Tank Goods Set


The famous No. 2 Hornby Tank Loco is included in this set. It is 11½ in. in length and is fitted at both ends with a four-wheeled bogie. In addition the set includes a Hornby Wagon, a Petrol Tank Wagon, a No. 1 Cattle Truck and a Brake Van, with a set of rails to form a circle 4 ft. in diameter. The rails include one brake rail by means of which the train may be both braked and reversed from the track.

Gauge 0, in colours to represent the principal British Railway Companies' rolling stock. The loco is fitted with reversing gear, brake and governor. *For price see page 208.*

No. 2 Tank Passenger Set

This set contains a No. 2 Hornby Tank Loco and rails as in the No. 2 Goods set, but three Passenger Coaches and one Guard's Van are included in place of the wagons and vans.

Gauge 0, in colours to represent the principal British Railway Companies' rolling stock. *For price see page 208.*

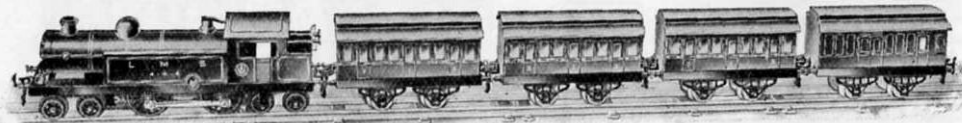

No. 2 TANK PASSENGER SET

HORNBY TANK LOCOS

Hornby No. 1 Tank Loco




A strong and durable Loco capable of any amount of hard work; richly enamelled and highly finished; fitted with brake, governor and reversing gear.

Gauge 0, in colours to represent the principal British Railway Companies' locos. *For price see page 208.*

Hornby No. 2 Tank Loco

The Hornby No. 2 Tank Loco is a splendid model. It is 11½ in. in length and is fitted at both ends with a four-wheeled bogie.

Beautifully finished in colours to represent the principal British Railway Companies' locos. Fitted with reversing gear, brake and governor. *For price see page 208.*

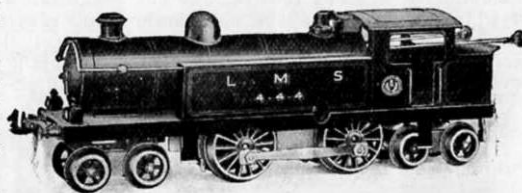

1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100		101		102		103		104		105		106		107		108		109		110		111		112		113		114		115		116		117		118		119		120		121		122		123		124		125		126		127		128		129		130		131		132		133		134		135		136		137		138		139		140		141		142		143		144		145		146		147		148		149		150		151		152		153		154		155		156		157		158		159		160		161		162		163		164		165		166		167		168		169		170		171		172		173		174		175		176		177		178		179		180		181		182		183		184		185		186		187		188		189		190		191		192		193		194		195		196		197		198		199		200		201		202		203		204		205		206		207		208		209		210		211		212		213		214		215		216		217		218		219		220		221		222		223		224		225		226		227		228		229		230		231		232		233		234		235		236		237		238		239		240		241		242		243		244		245		246		247		248		249		250		251		252		253		254		255		256		257		258		259		260		261		262		263		264		265		266		267		268		269		270		271		272		273		274		275		276		277		278		279		280		281		282		283		284		285		286		287		288		289		290		291		292		293		294		295		296		297		298		299		300		301		302		303		304		305		306		307		308		309		310		311		312		313		314		315		316		317		318		319		320		321		322		323		324		325		326		327		328		329		330		331		332		333		334		335		336		337		338		339		340		341		342		343		344		345		346		347		348		349		350		351		352		353		354		355		356		357		358		359		360		361		362		363		364		365		366		367		368		369		370		371		372		373		374		375		376		377		378		379		380		381		382		383		384		385		386		387		388		389		390		391		392		393		394		395		396		397		398		399		400		401		402		403		404		405		406		407		408		409		410		411		412		413		414		415		416		417		418		419		420		421		422		423		424		425		426		427		428		429		430		431		432		433		434		435		436		437		438		439		440		441		442		443		444		445		446		447		448		449		450		451		452		453		454		455		456		457		458		459		460		461		462		463		464		465		466		467		468		469		470		471		472		473		474		475		476		477		478		479		480		481		482		483		484		485		486		487		488		489		490		491		492		493		494		495		496		497		498		499		500		501		502		503		504		505		506		507		508		509		510		511		512		513		514		515		516		517		518		519		520		521		522		523		524		525		526		527		528		529		530		531		532		533		534		535		536		537		538		539		540		541		542		543		544		545		546		547		548		549		550		551		552		553		554		555		556		557		558		559		560		561		562		563		564		565		566		567		568		569		570		571		572		573		574		575		576		577		578		579		580		581		582		583		584		585		586		587		588		589		590		591		592		593		594		595		596		597		598		599		600		601		602		603		604		605		606		607		608		609		610		611		612		613		614		615		616		617		618		619		620		621		622		623		624		625		626		627		628		629		630		631		632		633		634		635		636		637		638		639		640		641		642		643		644		645		646		647		648		649		650		651		652		653		654		655		656		657		658		659		660		661		662		663		664		665		666		667		668		669		670		671		672		673		674		675		676		677		678		679		680		681		682		683		684		685		686		687		688		689		690		691		692		693		694		695		696		697		698		699		700		701		702		703		704		705		706		707		708		709		710		711		712		713		714		715		716		717		718		719		720		721		722		723		724		725		726		727		728		729		730		731		732		733		734		735		736		737		738		739		740		741		742		743		744		745		746		747		748		749		750		751		752		753		754		755		756		757		758		759		760		761		762		763		764		765		766		767		768		769		770		771		772		773		774		775		776		777		778		779		780		781		782		783		784		785		786		787		788		789		790		791		792		793		794		795		796		797		798		799		800		801		802		803		804		805		806		807		808		809		810		811		812		813		814		815		816		817		818		819		820		821		822		823		824		825		826		827		828		829		830		831		832		833		834		835		836		837		838		839		840		841		842		843		844		845		846		847		848		849		850		851		852		853		854		855		856		857		858		859		860		861		862		863		864		865		866		867		868		869		870		871		872		873		874		875		876		877		878		879		880		881		882		883		884		885		886		887		888		889		890		891		892		893		894		895		896		897		898		899		900		901		902		903		904		905		906		907		908		909		910		911		912		913		914		915		916		917		918		919		920		921		922		923		924		925		926		927		928		929		930		931		932		933		934		935		936		937		938		939		940		941		942		943		944		945		946		947		948		949		950		951		952		953		954		955		956		957		958		959		960		961		962		963		964		965		966		967		968		969		970		971		972		973		974		975		976		977		978		979		980		981		982		983		984		985		986		987		988		989		990		991		992		993		994		995		996		997		998		999		1000		1001		1002		1003		1004		1005		1006		1007		1008		1009		1010		1011		1012		1013		1014		1015		1016		1017		1018		1019		1020		1021		1022		1023		1024		1025		1026		1027		1028		1029		1030		1031		1032		1033		1034		1035		1036		1037		1038		1039		1040		1041		1042		1043		1044		1045		1046		1047		1048		1049		1050		1051		1052		1053		1054		1055		1056		1057		1058		1059		1060		1061		1062		1063		1064		1065		1066		1067		1068		1069		1070		1071		1072		1073		1074		1075		1076		1077		1078		1079		1080		1081		1082		1083		1084		1085		1086		1087		1088		1089		1090		1091		1092		1093		1094		1095		1096		1097		1098		1099		1100		1101		1102		1103		1104		1105		1106		1107		1108		1109		1110		1111		1112		1113		1114		1115		1116		1117		1118		1119		1120		1121		1122		1123		1124	
---	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--

No.	DESCRIPTION OF PART.	00 00A 0 0A 1 2A 3 3A 4										5A 6 6A 7			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14
1	Perforated Strips, 12"
1A	"
1B	"
2	"
2A	"
3	"
4	"
5	"
6	"
6A	"
7	Angle Girders, 2 1/2"
7A	"
8	"
8A	"
8B	"
9	"
9A	"
9B	"
9C	"
9D	"
9E	"
9F	"
10	Flat Brackets...
11	Double Brackets
12	Angle Brackets, 1" x 1"
12A	"
12B	"
13	Axle Rods, 1 1/2"
13A	"
14	"
15	"
15A	"
16	"
16A	"
16B	"
17	"
18	"
18A	"
19	Crank Handles
19A	Wheels, 3"
19B	Pulley Wheels, 3"
20	Flanged Wheels
20A	Pulley Wheels, 2"
21	"
22	"
22A	"
23	"
23A	"
24	Bush Wheels
25	Pinion Wheels
26	"
27	Gear Wheels, 50 Teeth
27A	"
27B	"
28	Contrate Wheels, 1 1/2"
29	"
30	Bevel Gears
31	Gear Wheels, 1", 38 Teeth
32	Worm Wheels
33	Spanners
34	Spring Clips
35	Screw Drivers
36	"
37	Nuts and Bolts, 7/32"
37A	"
38	Washers
38A	"
40	Hanks of Cord
41	Propeller Blades
43	Spring
44	Cranked Bent Strips
45	Double Bent Strips
46	"
47	Double Angle Strips
47A	"
48	"
48A	"
48B	"
48C	"
48D	"
50	Eye Pieces
52	Perforated Flanged Plates, 5 1/2" x 2 1/2"
52A	"
53	Perforated Flanged Plates, 3 1/2" x 2 1/2"
53A	"
54	Perforated Flanged Plates (Sector)
55	Instruction Manuals
56	Meccano Standard Mechanisms Manual
57	Hooks
57A	" (Scientific)
57B	" (Loaded)
58	Spring Cord, 40" length
59	Collars with Set Screws
61	Windmill Sails
62	Cranks
62A	Threaded Cranks
63	Couplings
63A	Octagonal Couplings
63B	Strip Couplings
64	Threaded Bosses
65	Centre Forks

[CONTINUED OVERLEAF]

INDEX TO MODELS

Description.	Model No.	Description.	Model No.	Description.	Model No.	Description.	Model No.
A Gay Start ...	718	Cable Railway ...	405	Crane, Travelling ...	526	Funicular Railway ...	728
Acrobat ...	247	Cake Walk ...	434	" " Gantry ...	515 and 727	Furrow Roller ...	39
Aerocar ...	610	Candy Puller ...	226	" " Jib ...	105 and 218		
Aeroplane, Revolving ...	639	Carrier Tricycle ...	227	" " Swivel ...	441	Gangway ...	23 and 209
(see also Monoplanes)		Cart ...	524	(see also Derricks)		" Ferry ...	246
Aeroplage, Seashore ...	239	" Bullock ...	525	Croix de Guerre ...	436	" Turntable ...	204
Aeroscope ...	710	" Luggage ...	3 and 12	Crossbow ...	309	Geometrical Apparatus ...	410
Anchor ...	55	" Manure-Distributing ...	514	Cutlery Rest ...	61	Go-Chair ...	16
Armoured Motor Tricycle ...	542	" Station ...	518	Cutting Machine ...	251	Gondola ...	255
Automatic Weighing ...		" Tandem ...	101			Gong ...	48
Machine ...	607	Catapult ...	435	Deck Chair ...	118	Gong, Automatic ...	413
Automobile ...	528 and 540	Centrifugal Governor ...	738	Delivery Van ...	531	" Dinner ...	241
(see also Motors)		Chair, for Wounded Soldier ...	250	Derrick, Dwarf ...	242	Grab, Derricking ...	608
Baby Chair ...	229	" Baby ...	229	" Stiff Leg ...	709	Grill ...	58
Bagatelle Table ...	618	" Bath ...	15	Derricking Grab ...	608	Gun, Anti-aircraft ...	232 and 452
Bale Lifter ...	443	" Coronation ...	45	Devil Wagon ...	56	" Field ...	623
Bale Press ...	430	" Deck ...	118	Dinner Wagon ...	111	" Field, and carriage ...	516
Barrow ...	6	" Ducking ...	537	Diplodocus ...	403	" Machine ...	612
Barrow, Coster ...	13 and 523	" Go ...	16	Distance Indicators ...	416 and 541	" Quick Firing ...	41
" Luggage ...	10	" Invalid's ...	57, 132 and 538	Drafting Machine ...	331		
Bath Chair ...	15	" Rocking ...	512	Dredger ...	702	Hammer, Drop ...	640
Battleship ...	62	Chinese Palanquin ...	325	Drill, Breast ...	409	" Double ...	214
Beam Engine ...	609	Clay-Modelling Machine ...	418	" Rock ...	31	" Mechanical ...	51 and 243
Beaming Frame ...	716	Clothes-Horse ...	69	" Vertical ...	509	" Treadle ...	421
Bed Tables ...	120 and 420	Coal Cutting Machine ...	703	Drilling Machines ...	29 and 312	" Trip ...	451
Belgian Water Wheel ...	502	Coaler, High-speed Ship ...	729	Drop Hammer ...	640	Hand Car ...	503
Bell Crank ...	736a	Coaster ...	234	Drop Hammer, Double ...	214	" Trolley ...	340
Bellows ...	131	Coffee Grinder ...	313	Drop Stamp ...	122	Harmonograph, Twin Elliptic ...	730
Bellows, Forge ...	134	Conductor's Punch ...	438	Drop the Nigger ...	316	Hatchet ...	121
Big Wheel ...	606	Coronation Chair ...	45			Hay Tedder ...	228
Boat Lowering Gear ...	717	Cot ...	21	Easel ...	244	Heliograph ...	634
Boat, Rowing ...	130	Cot on Wheels ...	212	Eiffel Tower ...	714	High Speed Ship Coaler ...	729
" Sailing ...	64	Crane ...	625	Elevator ...	219	Hoisting Block ...	27
(see also Submarine and Battleship)		" Automatic Weighing ...	627	Elliptic Lathe ...	428	Horizontal Engine ...	631
Bogey Car ...	59	" Double Action ...	128	Embossing Machine ...	240	Hot-Saw, Swinging ...	404
Boring Machine ...	326	" Elevated Jib ...	401	End of a Perfect Day, The ...	719		
Box Ball Alley ...	616	" Gantry ...	425	Endless Rope Railway ...	109	Ice Boat ...	335
Breast Drill ...	409	" Girder ...	407	Engine, Horizontal ...	307	Inclined Delivery Chute ...	447
Brewer's Dray ...	534	" Hydraulic ...	724	" Steam, Oscillating ...	614	" Plane ...	737
Bridges: Cantilever Bridge ...	646	" Jib ...	30, 119 and 127	" Vertical ...	644	Invalid Chair ...	57, 132 and 538
Drawbridge ...	642	" Overhead ...	116	Equatorial Mounting ...	644		
Forth Bridge ...	722	" Portable ...	603	Farm Tractor ...	506	Jack ...	620
High-Level Bridge ...	222	" Radial Travelling ...	630	Field Roller ...	424	Jaunting Car ...	611
Jack-Knife Bridge ...	619	" Railway Breakdown ...	318	Fire Alarm ...	129	Joy Wheel ...	206 and 615
Railway Footbridge ...		" Railway Wagon ...		Fire Escape ...	338	Jumping Jack ...	248
and Signals ...	253	" Swivelling ...	308	Fire Stand ...	60		
St. Malo Transporter ...		" Revolving ...	723	Fire Watertower ...	532	Knife ...	721
Bridge ...	626	" Rotating ...	301	Flax Cleaner ...	334	Knife Grinder ...	629
Swing Bridge ...	445	" Swivelling ...	38, 42 and 104	Fly Boats ...	638		
Transporter Bridge ...	713	" " and ...		Flying Machine ...	422	Lace Jennier ...	333
Buffers ...	32	" Luffing Jib ...	415	Fret Saw ...	510	Ladder, Extending, on ...	
Buffing Spindle ...	35	" Swivelling Jib ...	113			Running Carriage ...	245
Butter Churn ...	444						

INDEX TO MODELS (continued)

Description.	Model No.	Description	Model No.	Description.	Model No.	Description.	Model No.
Ladder on Wheels ...	210	Pantograph ...	446	Scales, Platform ...	622	Swinging Cot ...	330
Ladder, Step ...	103 and 507	Pastry Designer ...	311	" Spring ...	521	Table Croquet ...	431
Ladder, Travelling ...	102	Pen Rack ...	70	(see also Automatic Weighing Machine and Letter Balance)		Telegraph Key ...	46
Lathes ...	123, 203, 321 and 604	Perambulator ...	517	Scarifier ...	320	Telpher Span ...	36 and 108
Lathe, Elliptic ...	428	Periscope ...	437	Scissors ...	720	Theodolite ...	605
Lawn Marker ...	332	Pile Driver ...	341	Scooter ...	133	Ticca Gharry ...	43
Lawn Mower ...	40	Pit Head Gear ...	208, 319 and 513	Searchlight ...	635	Tilters, The ...	732
Letter Balance ...	306	Planing Machine ...	705	Searchlight Tower ...	423	Timber Carriage ...	522
Level Crossing Barrier ...	24	Plough ...	504	See-saw ...	18	Timber Drag ...	14
" " Gates ...	601	" Motor ...	527	See-saw, actuated ...	339	Toboggan ...	302
Levers ...	736	" Snow ...	110	See-saw, roundabout ...	216	Touring Tram Car ...	539
Linen Winder ...	613	Polishing Spindle ...	207	Semaphore ...	621	Towel Rail ...	237
Locomotive ...	225	Potato Chopper ...	432	Settee ...	53	Tractor ...	712
Locomotive and Tender ...	715	Potato Reaper ...	530	Sextant and Theodolite ...	433	" Farm ...	506
Locomotive, Electric (High Power) ...	628	Potter's Wheel ...	20	Shipyards Bogie ...	68	Treadle Hammer ...	241
Loom ...	725	Press, Automatic Dial ...	107	Sifter ...	236	Triangle of Forces ...	734
Lurry ...	63	" Bale ...	430	Sifter, coal ...	223	Trip Hammer ...	451
Lurry, Motor ...	126	" Punching ...	645	Sighting Apparatus ...	508	Truck ...	4 and 201
		Pulleys ...	735	Signals, Footbridge and, Railway ...	253	" Covered ...	7
Magic Sector Plates ...	252	Pulley Blocks ...	442	Signal Gantry ...	704	" Flat ...	1 and 9
Mail Bag Hanger ...	67	Pulley Shaft ...	26	Signal, Railway ...	19 and 28	" Luggage ...	5
Mat Frame ...	220	Pullman Car ...	543	" Three-Arm ...	450	" Motor ...	211
Measuring Machine ...	535	Punching Machine ...	52 and 637	Skate, Roller ...	632	" Revolving ...	202
Meccano Family, The ...	427	Railway, Cable ...	405	Skein Winder ...	533	" Steering ...	136
Meccanograph ...	708	" Endless Rope ...	109	Sleigh ...	304	" Timber ...	8 and 11
Mechanical Cross Bow ...	419	" Funicular ...	728	Sleigh, Bob ...	310 and 505	" with Sides ...	2
Mechanical Hammer ...	51 and 243	Railway Footbridge and Signals ...	253	Smoothing Iron ...	303	Try-your-Strength Machine ...	224
Monoplanes ...	213 and 217	" Gauge ...	324	Speed Indicator ...	233	Turnstile ...	249
Motor 'Bus ...	429	" Signal ...	19 and 28	Spinning Top ...	49 and 238	Twin-Elliptic Harmonograph ...	730
" Car ...	519	Rattle ...	315	Spooling Machine ...	520	Vegetable Chopper ...	66
" Armoured ...	529	Reaping Machine ...	726	St. George and Dragon ...	731	Vertical Drill ...	509
" Chassis, Meccano ...	701	Rock Drill ...	31	Stamping Machine ...	54	Vertical Steam Engine ...	614
" Lurry ...	126	Roman Balance ...	65	" Mill ...	231		
" Plough ...	527	Roulette Wheel ...	50	Steam Engine, Oscillating ...	307		
" Tricycle, Armoured ...	542	Roundabout ...	112, 256, 322 and 602	" Vertical ...	614		
" Truck ...	211	Rowing Boat ...	130	Steam Shovel ...	707		
" Wagon, Tipping ...	215	Sailing Boat ...	64	Stone Sawing Machine ...	617		
" Van ...	114, 230 and 254	Sawing Machine ...	47	Street Lamp ...	449		
(see also Automobile) 528 and 540		" Stone ...	617	Stretcher ...	135		
Mountain Transport ...	125	Saws, Band ...	115 and 417	Submarine ...	411		
Mouse Trap ...	536	Saw, Fret ...	510	Sulky and Driver ...	641		
		" Log ...	624	Swing ...	33, 106, 323, and 336		
Needlework Basket ...	235	" Vertical Log ...	706	" Alternating ...	402		
Newton's Disc ...	317	" Swing ...	412	" Boat, Automatic ...	337		
		" Swinging Hot ...	404	" Giant Auto ...	511		
Oilcake Chopper ...	329	Scales ...	22, 205, 314, 343 and 633	" Lawn ...	328		
Ore Crusher ...	34	" Beam ...	257 and 501	" Cot ...	342		
Oscillating Steam Engine ...	307						

MECCANO

Hornby's Original System, First Patented 1901

PATENTS AND DESIGNS

GREAT BRITAIN :

3,869/14	139,125	671,485	682,934
4,183/14	177,430	671,534	683,011
4,564/15	577,207	671,790	686,112
0,535/13	577,272	680,416	698,054
1,117/12	648,958	682,208	699,653
22,962/13	671,484	682,209	699,654
7,732/25			718,731
7,733/25			718,404

Meccano is more than a Toy

IT is important to remember that when a boy is playing with MECCANO he is using engineering parts in miniature, and that these parts act in precisely the same way as do the corresponding engineering elements in actual practice. No other system of model construction can be correct, and other toys which attempt the same object by other methods must avail themselves of constructive elements which are not correct engineering elements. Consequently, though a boy may succeed in building playthings with them, they are merely toys and nothing else, and his mind, as regards proper mechanical construction and methods, is distorted instead of instructed. He thus learns wrong principles, and when his ambition tempts him to invent or construct more elaborate models, he will find that he cannot do so because of the deficiencies of his non-mechanical system.

No Outfit is genuine unless it bears the Trade Mark **MECCANO**