

MECCANO

TRADE MARKS 296321, 501113, 76, 12633, 10274, 55/13476, 569/13, 884/25, 2913, 80, 124, 336, 4174, 91637, 83171, 157149, 32822, 200639, 209733, 214061, 214062, 12892, 29094, 33316, 1818, 16737, 383/13, 5848, 50204, 10/12256, 22826, 18982, 20063/925, 9048, 5549, 2189, 16900, 72286, 2389, 41812, 5403, 7315, 18066, 139420, 494833-4-5-6, 29041, 26877, 6593, 404718, 410379, 58096, 12240

HORNBY'S ORIGINAL SYSTEM—FIRST PATENTED 1901

INSTRUCTIONS

FOR OUTFITS

00 to 3



Copyright by MECCANO LIMITED, LIVERPOOL, throughout the world

No. 31.3

ENGLISH EDITION

MECCANO

The Finest Hobby in the World for Boys

The Meccano system is composed of over two hundred and fifty different parts, mostly made of steel or brass, each one of which has a definite mechanical purpose. These parts combine to form a complete miniature engineering system with which practically any mechanical movement may be reproduced in model form. More can be accomplished with Meccano than with any other constructional toy, for no other system has such possibilities. The genius is in the parts and you can commence to build models as soon as you get your Outfit home. A screwdriver, provided in the Outfit, is the only tool necessary.

There is no limit to the number of models that can be built with Meccano—Cranes, Clocks, Motor Cars, Ship-Coalers, Machine Tools, Locomotives—in fact everything that interests boys. The most wonderful feature about the system is that it is *real engineering* in miniature; it is fascinating and delightful and it gives you a satisfaction beyond anything that you have ever previously experienced.

The "Meccano Magazine"

The *Meccano Magazine* is the Meccano boy's own newspaper. It tells him of the latest Meccano models; what Meccano Clubs are doing; how to correspond with other Meccano boys; the Competitions that are running, etc. It contains splendid articles on such subjects as Railways, Famous Engineers and Inventors, Electricity, Bridges, Cranes, Wonderful Machinery, Aeronautics, Latest Patents, Radio, Stamps, Photography, Books and other topics of interest to boys, including suggestions from Meccano boys for new Meccano parts and correspondence columns in which the Editor replies to his readers' enquiries. The publishing date is the first of each month. If you are not already a reader of the *Meccano Magazine* write to the Editor for full particulars, or order a copy from your Meccano dealer or from any newsagent.

Model-Building with Meccano


Make the simple models first—they will provide hours of fun—and then try to improve them. Every model can be made in a dozen different ways. It is important to screw up all the nuts and bolts tightly to ensure that your models will be strong and firm when they are completed.

Every keen and inventive Meccano model-builder should obtain copies of the special Manuals "How to use Meccano Parts" and "Meccano Standard Mechanisms." In the former the principal uses of Meccano parts are outlined, while the latter shows a large number of real engineering mechanisms, built of Meccano parts, that can be incorporated in various models. You can obtain copies of these Manuals from your dealer, or direct from Meccano Ltd., Old Swan, Liverpool.

How to Build up Your Outfit


Meccano is sold in ten different Outfits, numbered 000 to 7. All Meccano parts are of the same high quality and finish, but the larger Outfits contain a greater quantity and variety of parts, making possible the construction of more elaborate models. Each Outfit from No. 00 upwards may be converted into the one next higher by the purchase of an Accessory Outfit. Thus, a No. 00 may be converted into a No. 0 by adding to it a No. 00A. A No. 0A would then convert it into a No. 1, and so on. In this way, no matter with which Outfit you commence, you may build it up by degrees until you possess a No. 7 Outfit. It is important to remember that Meccano Parts may be bought separately at any time in any quantity from your Meccano dealer.

Amateurs To-day—
Experts To-morrow



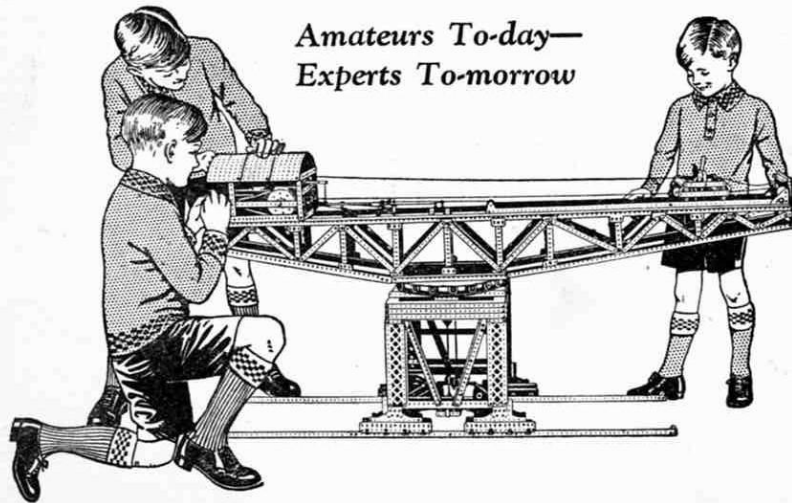


All these Models can be built with MECCANO Outfit No. 00

1

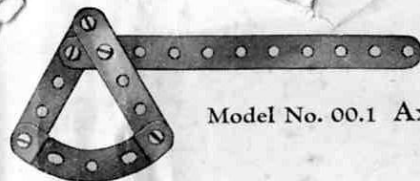



Model No. 00.1 Axle

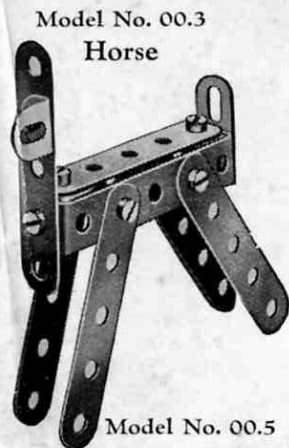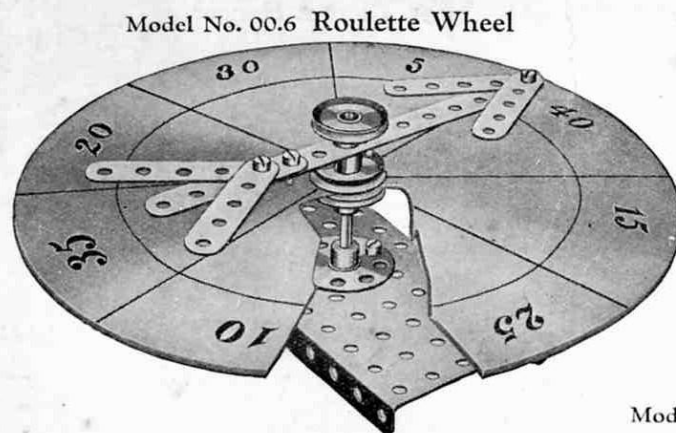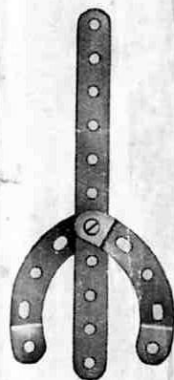Model No. 00.3
HorseModel No.
00.2
Fork

Model No. 00.6 Roulette Wheel




Cut out a circular piece of cardboard and mark as shown to form scoring board. This is clamped between two 1" Pulley Wheels. The pointer revolves freely on the upright spindle and is held in position by another 1" Pulley Wheel.

Model No. 00.7 Pulley Shafting

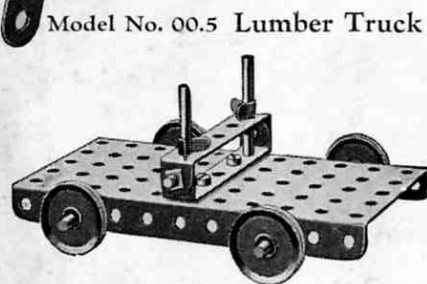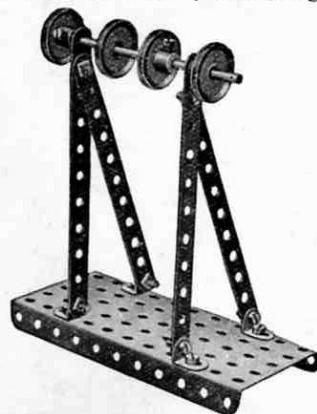


Model No. 00.5 Lumber Truck




Model No. 00.8 Two-Hand Saw

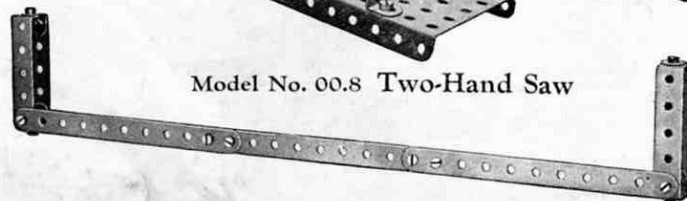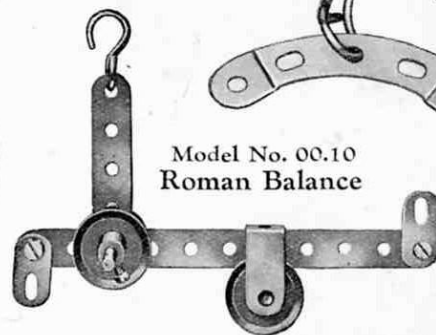Model No.
00.9 Coat
HangerModel No. 00.10
Roman Balance

Model No. 00.11 Grill


Model No.
00.13
Hoe

Model No. 00.12 Trolley

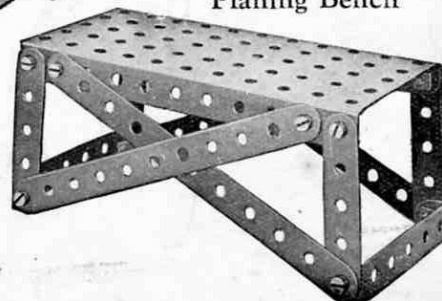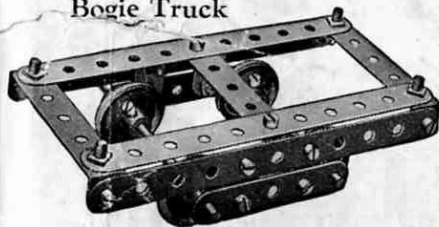Model No. 00.14
Planing BenchModel No. 00.4
Bogie Truck

All these Models can be built with MECCANO Outfit No. 00

Model No. 00.15 Table




Model No. 00.17 Dividers



Model No. 00.18 Bench




Model No. 00.22 Clothes Hanger

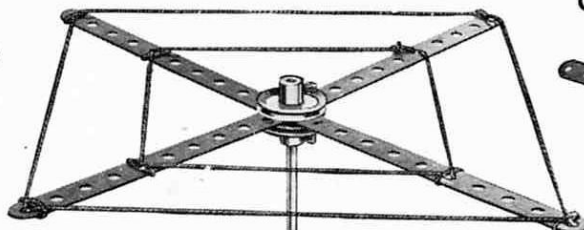


Model No. 00.26 Carpenter's Square




Model No. 00.27 Shipyard Bogie



Model No. 00.16 Meat Saw




Model No. 00.19 Hand Cart



Model No. 00.21 Fire-Axe




Model No. 00.23 Velocipede



Model No. 00.24 Ladder



Model No. 00.28 Desk



Model No. 00.29 Farm Sight



Model No. 00.30 Trowel




Model No. 00.32 Rifle with Bayonet




Model No. 00.20 Plough



Model No. 00.25 Sled

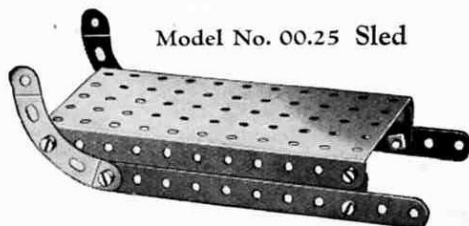


Model No. 00.31 Barrow

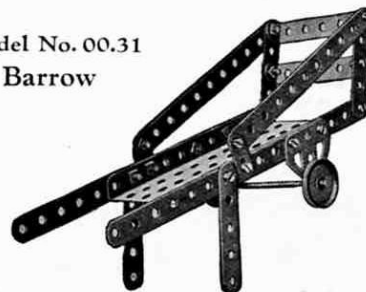



All these Models can be built with MECCANO Outfit No. 00

3

Model No. 00.33 Flat Truck

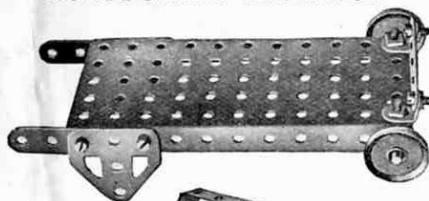Model No.
00.34
SpadeModel No.
00.35
Cement
Marker

Model No. 00.36 Motor Boat

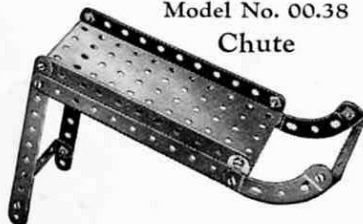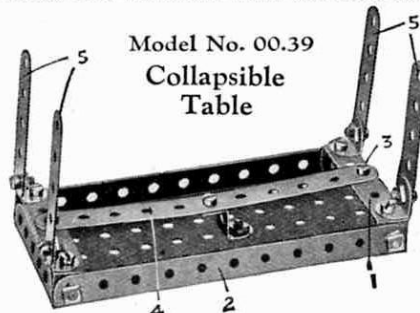Model No.
00.37
Plasterer's
HawkModel No. 00.38
ChuteModel No. 00.39
Collapsible
Table

The $2\frac{1}{2}'' \times \frac{1}{2}''$ Double Angle Strips 1 are attached to the $5\frac{1}{2}'' \times 2\frac{1}{2}''$ Flanged Plate 2 by lock-nutted bolts as in Standard Mechanism No. 263. The Bolts 3 are secured to the $5\frac{1}{2}''$ Strip 4 and their shanks engage with the centre holes in the $2\frac{1}{2}'' \times \frac{1}{2}''$ Double Angle Strips 1, thus maintaining the legs 5 in an upright position. When it is desired to fold up the legs 5, it is only necessary to raise the ends of the Strip 4, thus freeing the Double Angle Strips 1. The table is shown in the folded position in Fig. 00.39A.

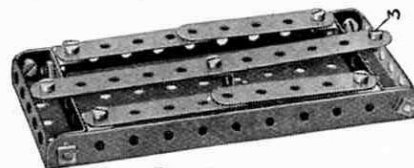
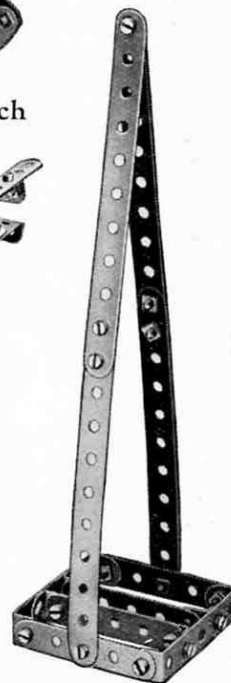





FIG. 00.39A

Model No. 00.40
Spinning Top

Model No. 00.41 Trolley


Model No.
00.46
Potato
ChopperModel No. 00.42
Lewis Gun

Model No. 00.43 Switch

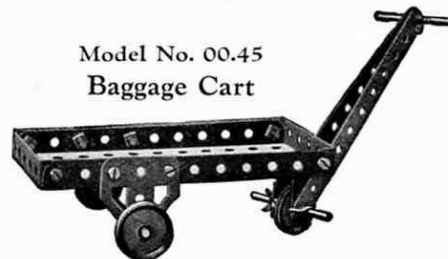
Model No. 00.44
Mason's TrowelModel No. 00.45
Baggage Cart

All these Models can be built with MECCANO Outfit No. 00


Model No. 00.47
Road Sign



Model No. 00.50
Razor




Model No. 00.54
Buffing Spindle

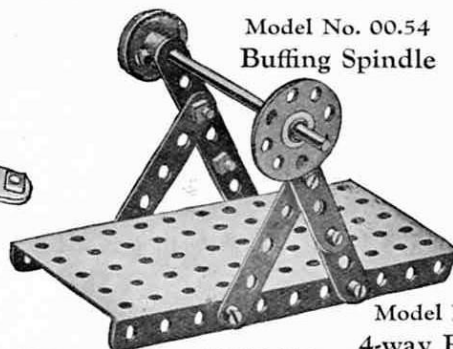


Model No. 00.58 Tweezers Model No. 00.60
Battle Axe




Model No.
00.51
1-way
Sign Post

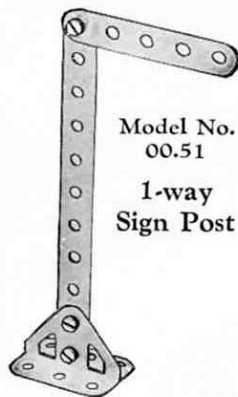


Model No. 00.52
2-way Sign Post

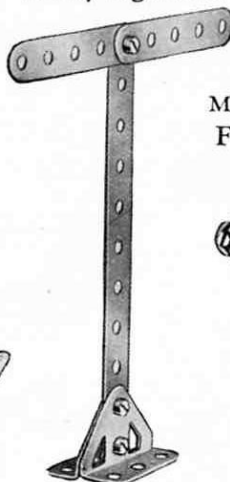


Model No. 00.53
Frame Aerial

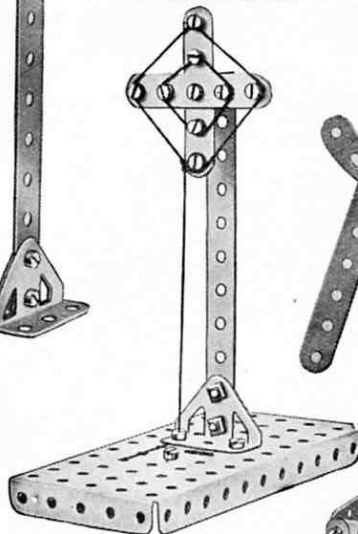


Model No.
00.55
Dividers

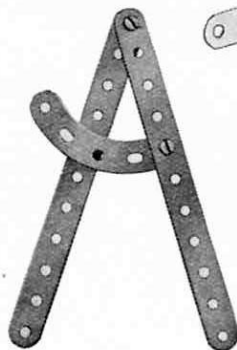


Model No. 00.56
4-way Road Sign

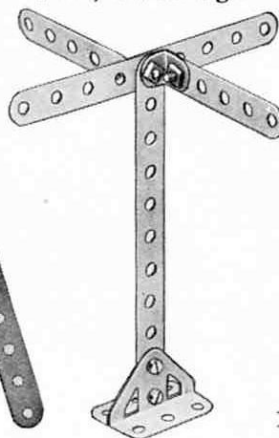


Model No. 00.59
3-way Road Sign

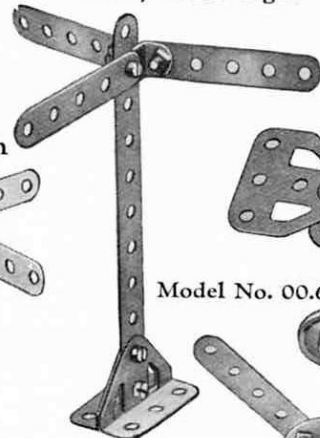


Model No. 00.48
Glider




Model No. 00.61 Ceiling




Model No. 00.49 Cart

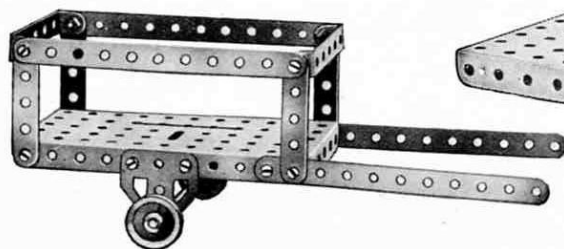

Model No. 00.62 Roundabout

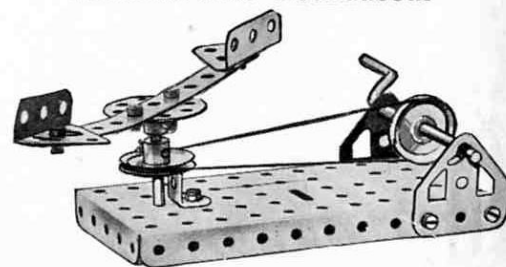


Model No. 00.57
Drinking Trough




All these Models can be built with MECCANO Outfit No. 00

5

Model No. 00.63
Grandfather's Clock

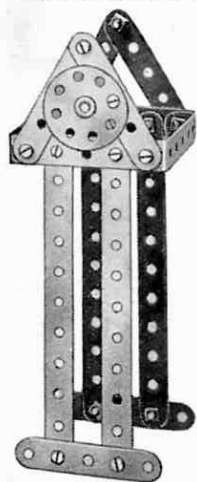


Model No. 00.66
Crib



Model No. 00.70 Table




Model No. 00.72
Liner

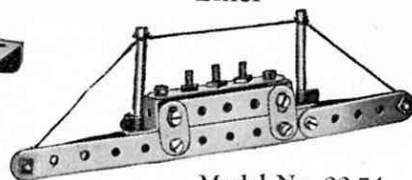

Model No. 00.75
Mail Bag Hanger




Model No. 00.67
Refreshment Wagon




Model No. 00.68
Rake



Model No. 00.74
Gravel Sifter



Model No. 00.73
Anchor

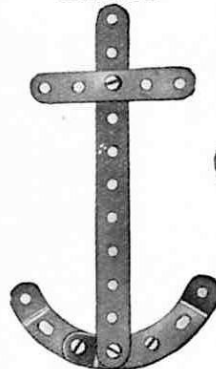


Model No. 00.76
Devil Wall



Model No. 00.64
Tin Opener




Model No. 00.65 Timber Truck

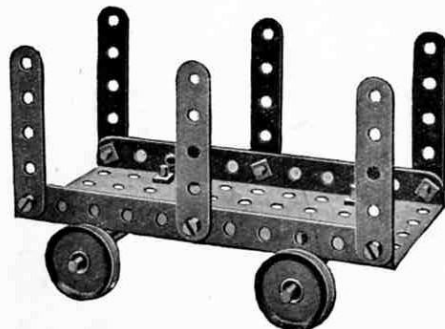


Model No. 00.69 Stool



Model No. 00.71
Hanging Scales

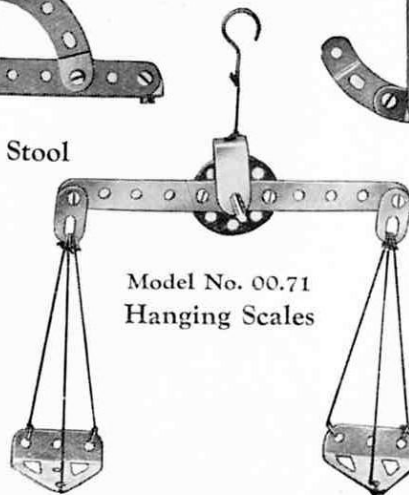

Model No. 00.77 Lever
of the First Order

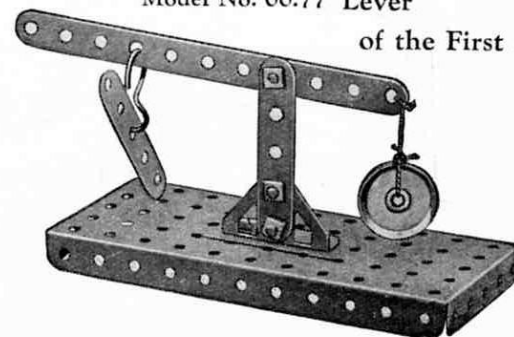


All these Models can be built with MECCANO Outfit No. 00


Model No. 00.78
Friction Grip Tong



Model No. 00.79
Telegraph Pole

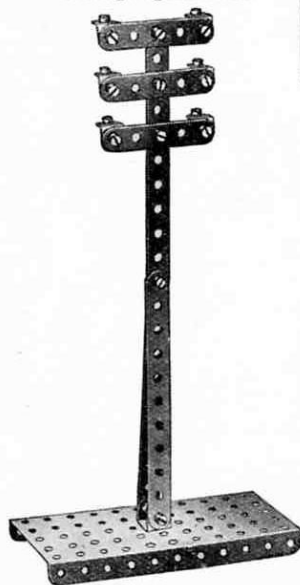


Model No. 00.80 Gate



Model No. 00.81
Clothes Horse




Model No. 00.82
Meccano Man

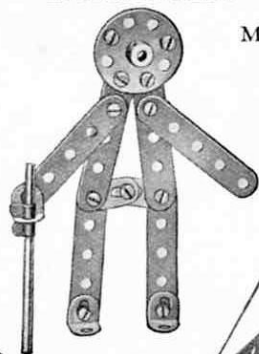


Model No. 00.85
Ladder on
Wheels



Model No.
00.83
Birdcage
and
Stand




Model No. 00.84
Barge

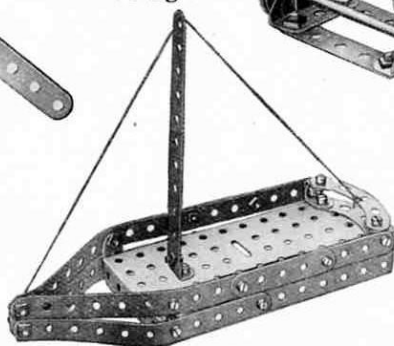


Model No. 00.86
Garden Hose Reel




Model No. 00.87 Turnstile

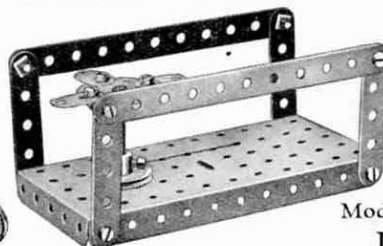


Model No. 00.90
Elevator Car

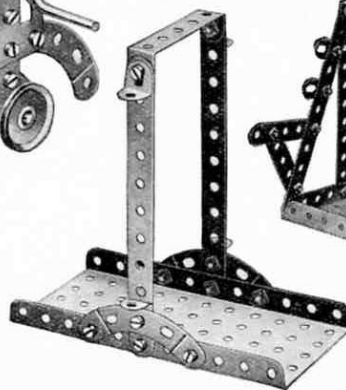

Model No.
00.88
Scrap
Reel




Model No. 00.91
Pen Rack




Model No. 00.92
Violin



Model No. 00.89
Propeller

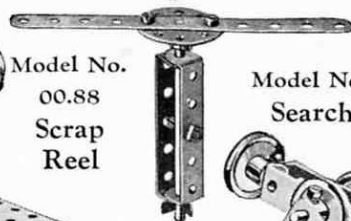


Model No. 00.93
Searchlight

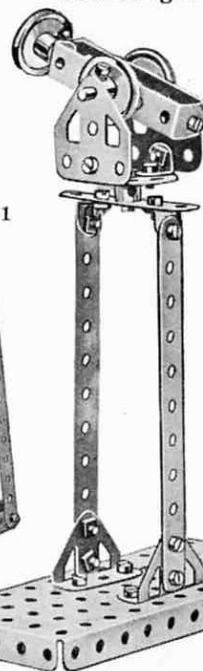

All these Models can be built with MECCANO Outfit No. 00

7


Model No. 00.94 Field Roller

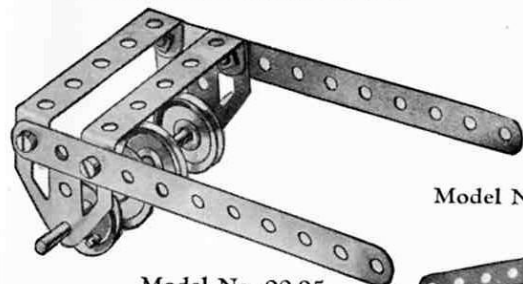


Model No. 00.100 Magic Plate

The cord is wound once round a 2" Axle Rod that is journalled in a Flat Bracket and a $\frac{1}{2}$ " Reversed Angle Bracket, which are bolted to the Plate. If the cord is held loosely the plate will drop, but as soon as the cord is tightened the plate becomes immovable.


Model No. 00.97 Scales

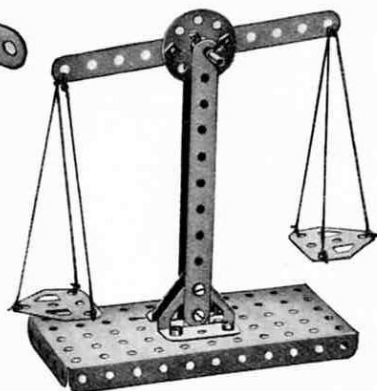


Model No. 00.95
Organ

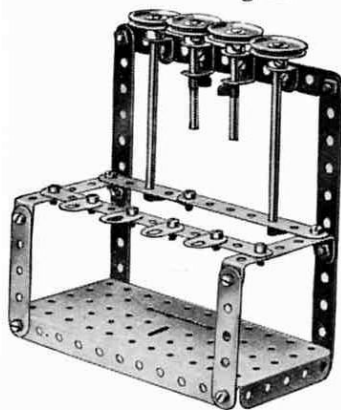

Model No. 00.98
Book End

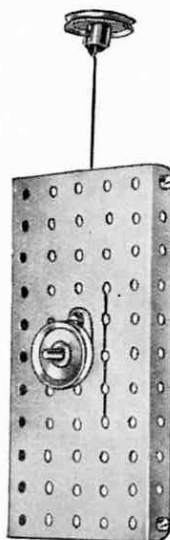


Model No. 00.96
Radial Travelling
Crane

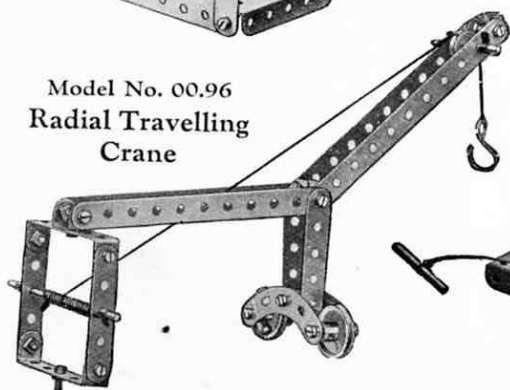


Model No. 00.99
Cheese Cutter




Model No. 00.101
Hand Car



Model No. 00.104
Towel Horse

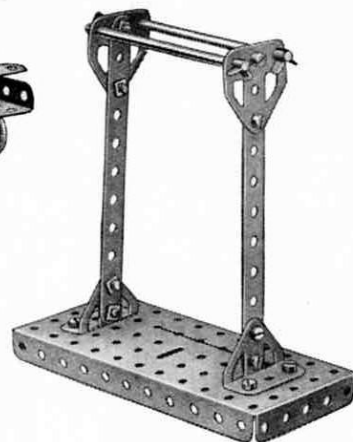

Model No.
00.102
French
Railway
Signal

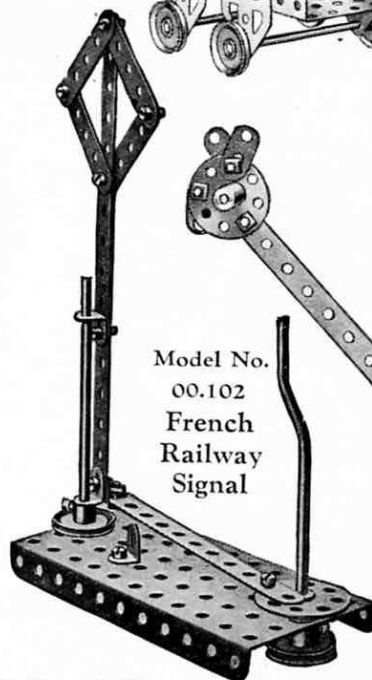

Model No. 00.105
Prehistoric Bird




Model No. 00.103
Cannon




All these Models can be built with MECCANO Outfit No. 00


Model No. 00.106
Cage Aerial

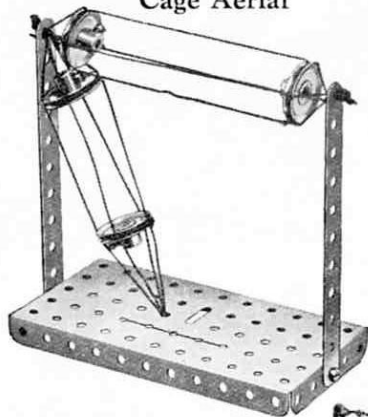


Model No. 00.108 Double Wire
L Aerial




Model No. 00.110
Jumping Jack

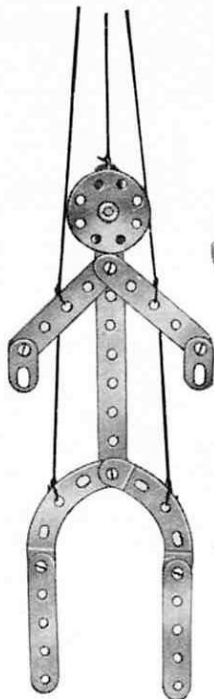


Model No. 00.112
Single Wire
T Aerial



Model No. 00.114
Direction Aerial

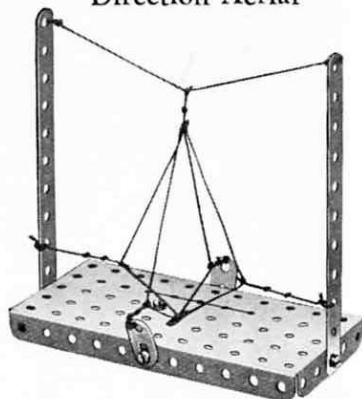


Model No. 00.107
Revolving Crane

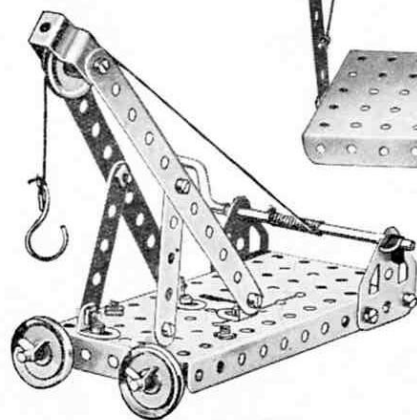


Model No. 00.109
Single Wire
L Aerial




Model No. 00.113
Double Wire
T Aerial

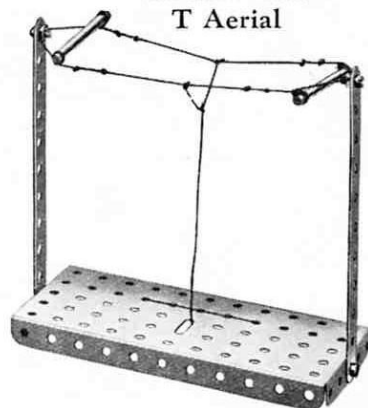

Model No. 00.115
Swing

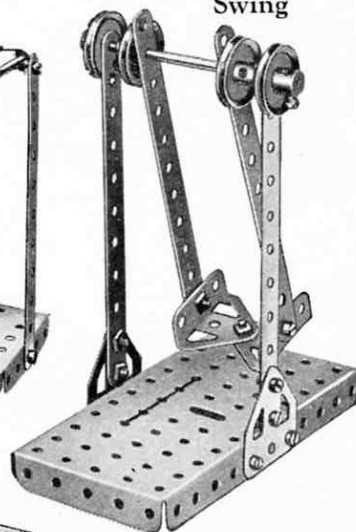

Model No. 00.111
Timber Wagon

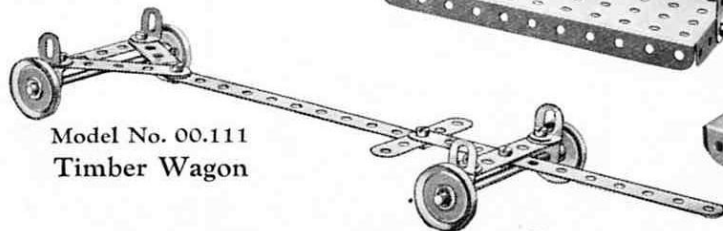


All these Models can be built with MECCANO Outfit No. 00




Model No. 00.116
Baggage Truck

Model No. 00.117
Mail Bag
Hanger

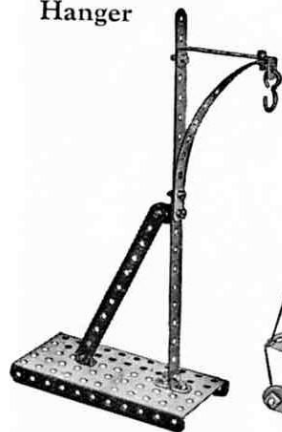


Model No. 00.118
Yacht

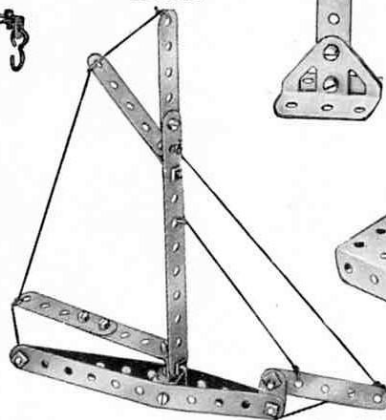


Model No. 00.119
Road Sign




Model No. 00.120 Airship

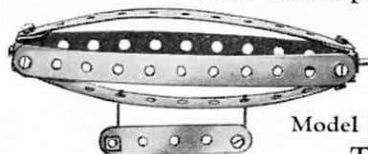

Model No. 00.121 Semaphore

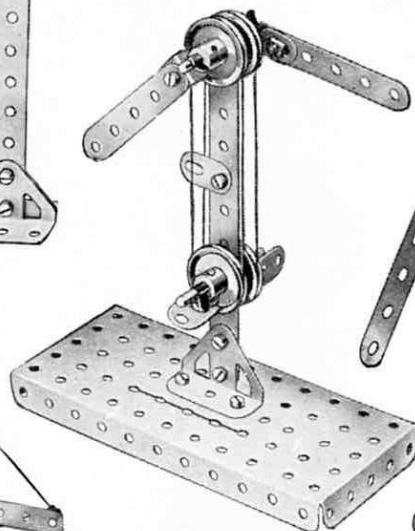


Model No. 00.122
Tripod

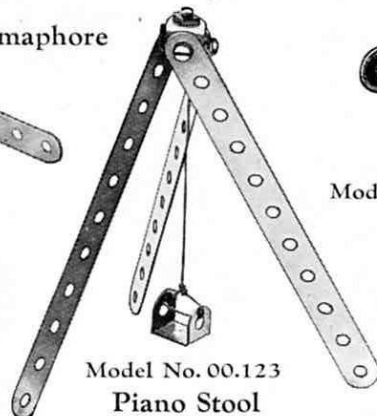


Model No. 00.123
Piano Stool



Model No. 00.124
Toy Horse

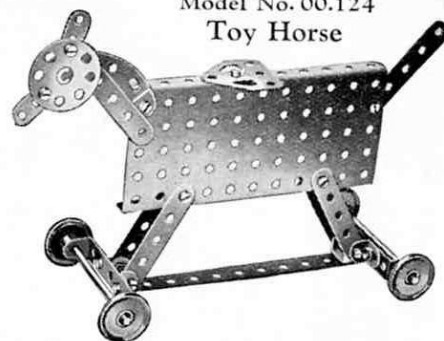


Model No. 00.125
Sword

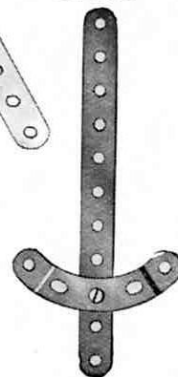

Model No. 00.126
Umbrella Stand




Models Nos. 00.127—00.134 Gradient Indicators




00.127




00.128




00.129




00.130




00.131



00.132



00.133




00.134


Model No. 00.135
Street
Lamp



Model No. 00.137
Watch and Chain

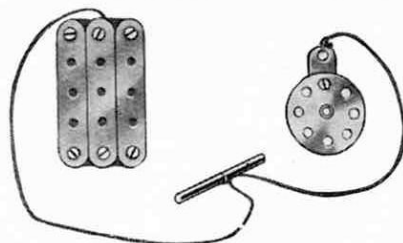


Model No. 00.138 Pit-Head Gear

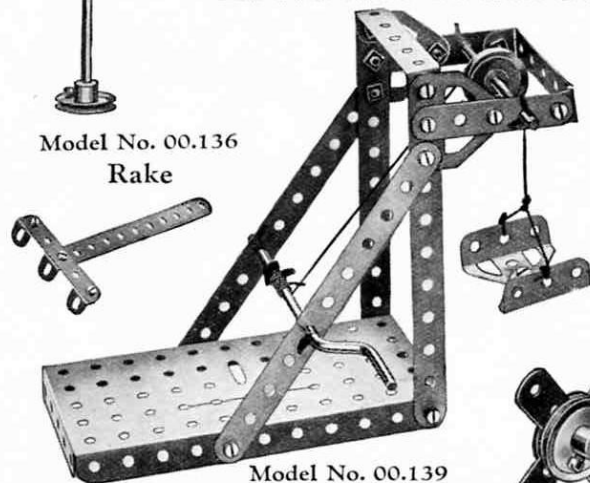


Model No. 00.136
Rake



Model No. 00.139
Dog

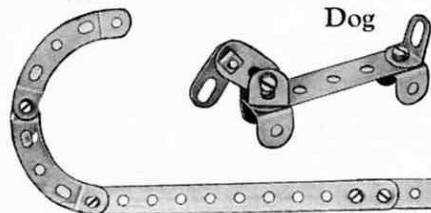

Model No. 00.142
Track Gauge

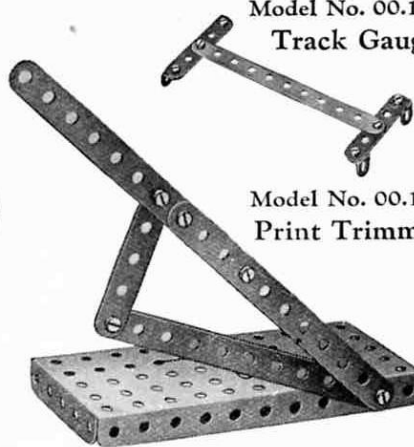


Model No. 00.143
Print Trimmer



Model No. 00.144
Motor Car




Model No. 00.140
Cutlery Rest



Model No. 00.141 Walking Stick



Model No. 00.146
Porter's Trolley

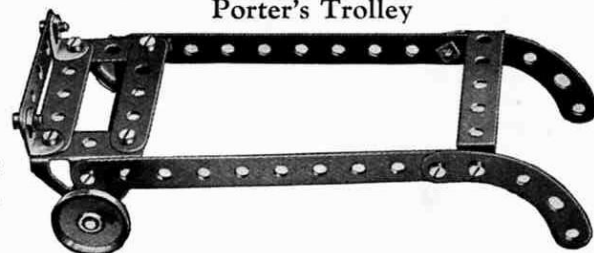


Model No. 00.148
Step Ladder



Model No. 00.147
Ostrich




Model No. 00.145
Ice Yacht

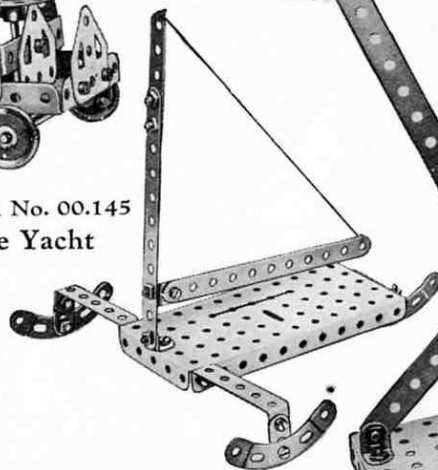


All these Models can be built with MECCANO Outfit No. 00

11


Model No. 00.149
Dinner Wagon

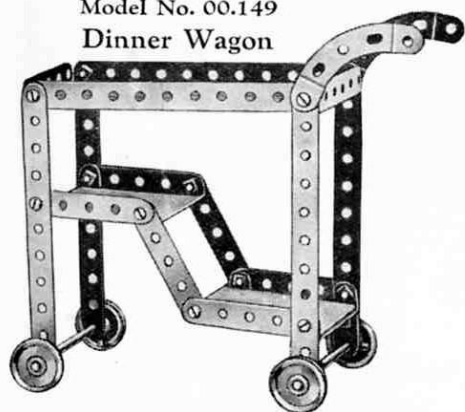


Model No. 00.152 Lumber Truck

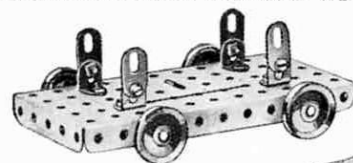


Model No. 00.156 Mono Rail

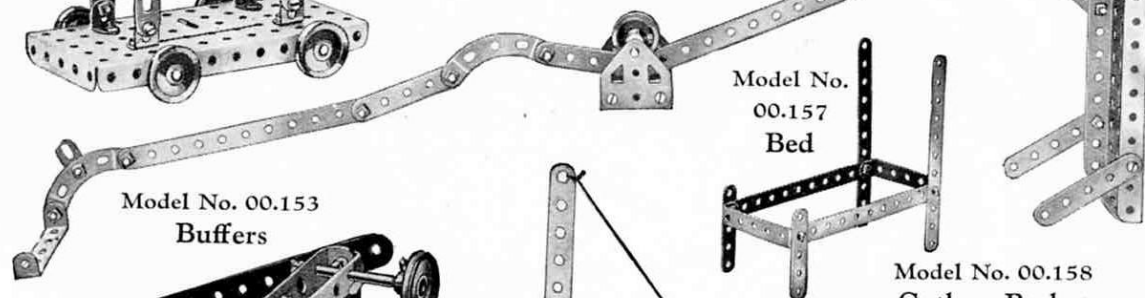

Model No.
00.157
Bed




Model No. 00.158
Cutlery Basket

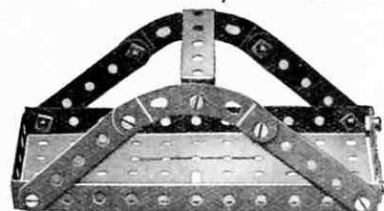


Model No.
00.150
Sawing
Horse




Model No. 00.153
Buffers

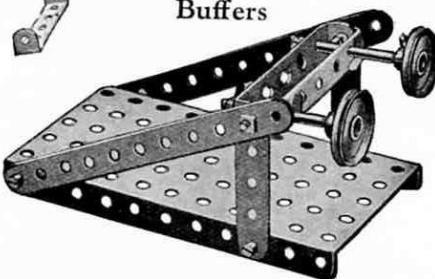


Model No. 00.154
Escape

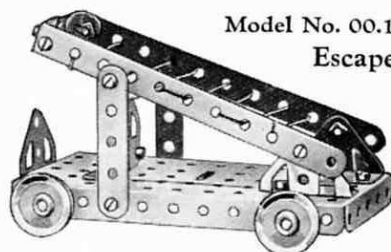


Model No.
00.155
Sailing
Boat

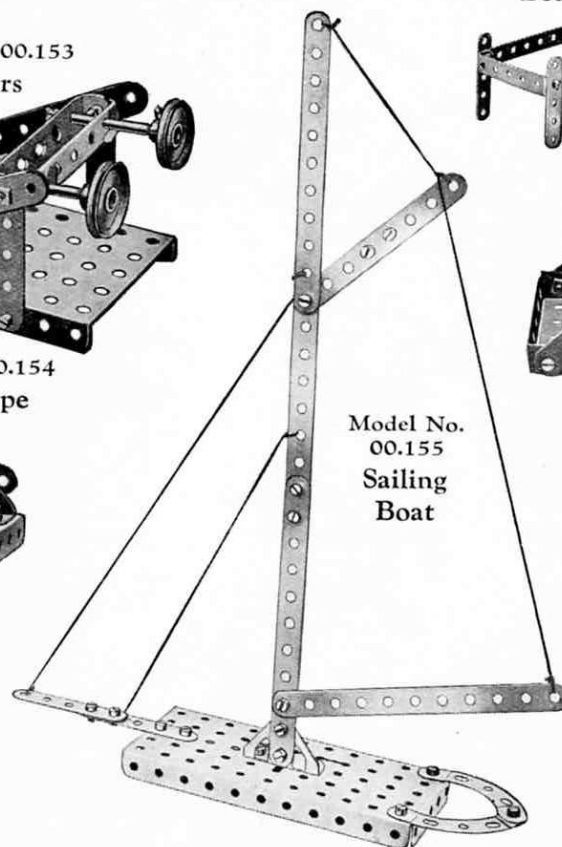


Model No. 00.159
Clothes Drying Frame

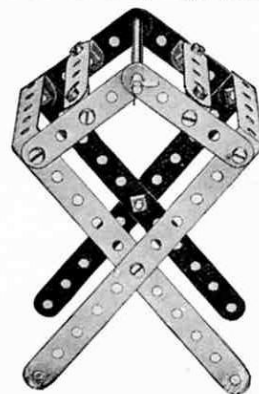


Model No. 00.151 Sledge

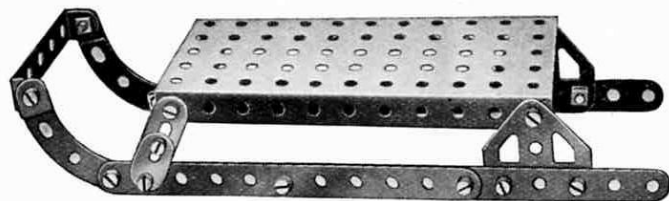


Model No. 00.160
Arc Lamp

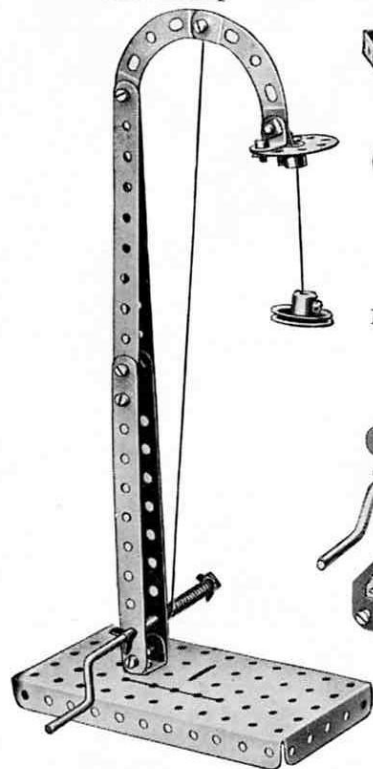

Model No. 00.162
Tea Wagon

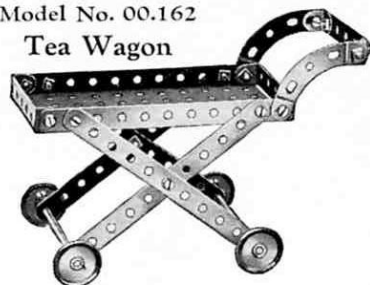

Model No. 00.164
Windmill

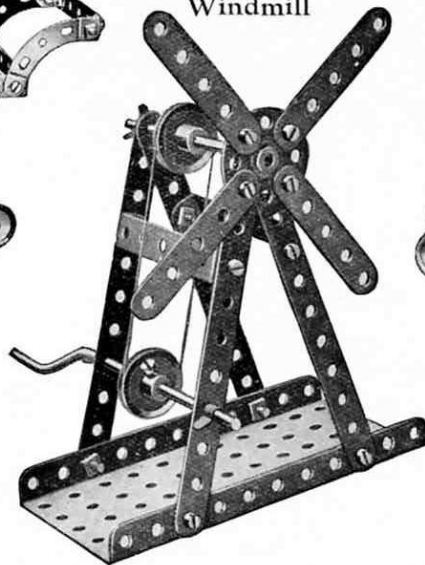


Model No. 00.166
Bed Table




Model No.
00.167
Garden
Roller


Model No. 00.168
Airship Mooring Mast

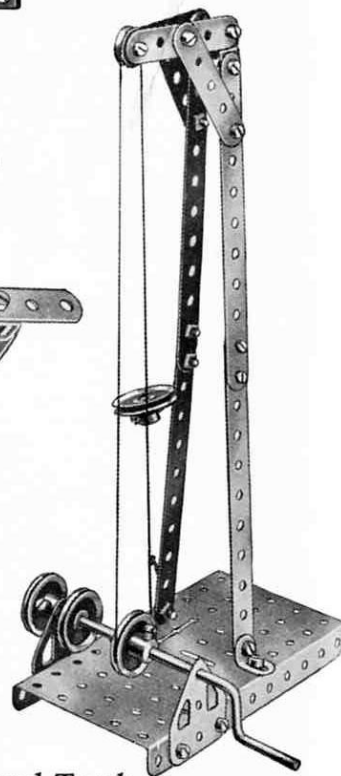


Model No. 00.163
Trip Hammer

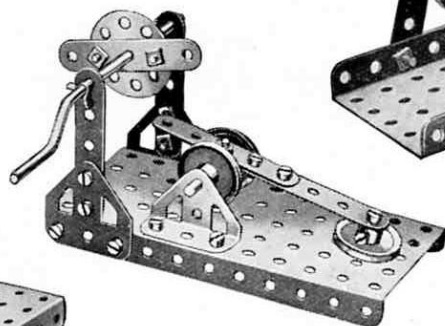


Model No. 00.165
Gallows

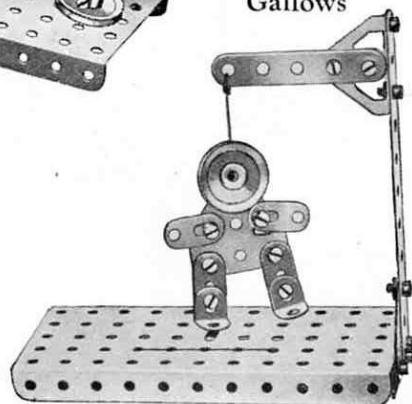

Model No. 00.161
Bath Chair

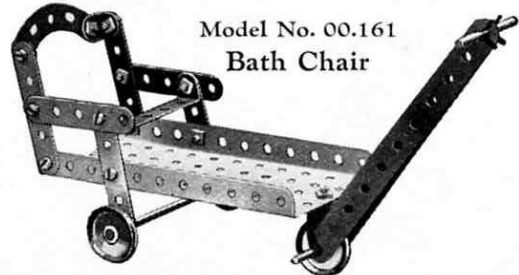


Model No. 00.169 Hand Truck

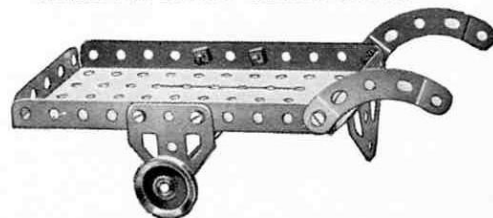

All these Models can be built with MECCANO Outfit No. 00


Model No. 00.170
Level Crossing
Barrier

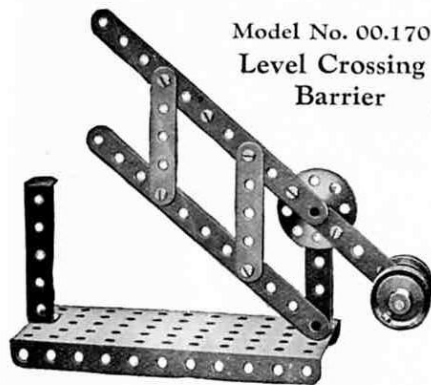


Model No.
00.172
Flower Pot
Stand



Model No. 00.174
Letter Balance

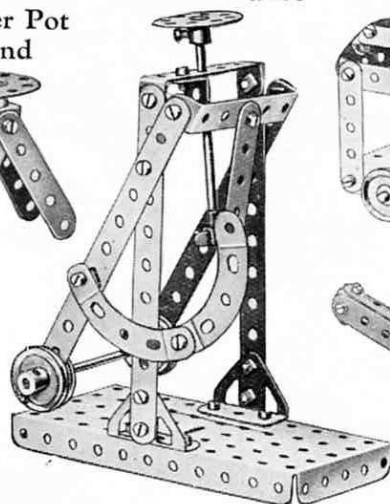


Model No. 00.176
Pullman Car

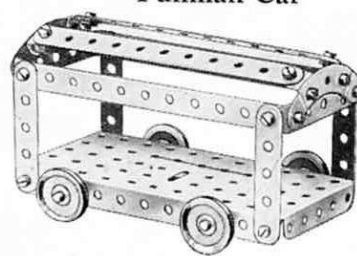


Model No. 00.178
Catapult


The pivoted arm is connected to the base by means of a short piece of elastic, which is not provided in the Outfit.

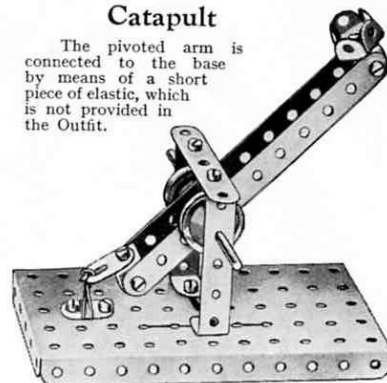


Model No. 00.173
Ore Crusher

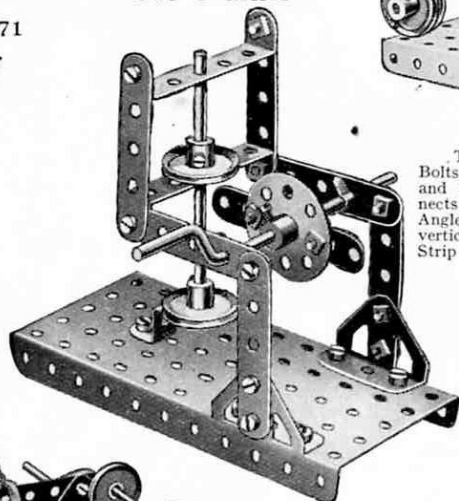


Model No. 00.171
Well Driller

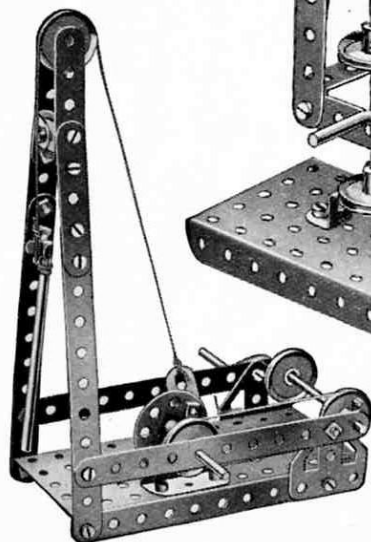

Model No. 00.177
Big Gun

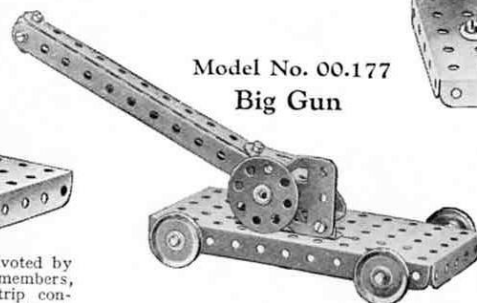


Model No. 00.179
Blacksmith

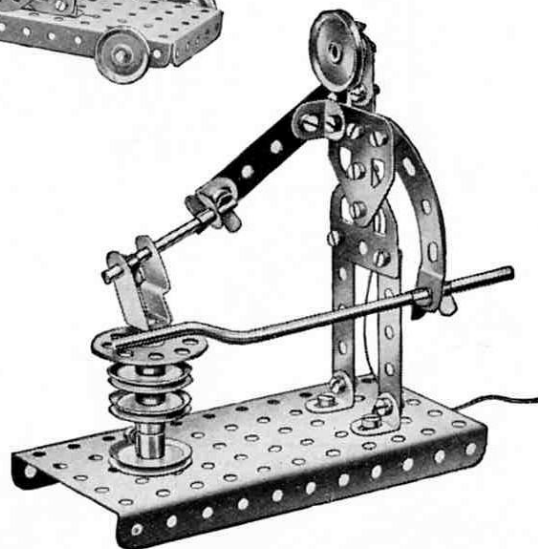


The weighted $5\frac{1}{2}$ " Strips are pivoted by Bolts and lock-nuts to the vertical members, and a $2\frac{1}{2} \times \frac{1}{2}$ " Double Angle Strip connects their upper ends. This Double Angle Strip is connected, in turn, to the vertical $3\frac{1}{2}$ " Axle Rod by means of a $2\frac{1}{2}$ " Strip and an Angle Bracket.

Model No. 00.175 Joy Wheel

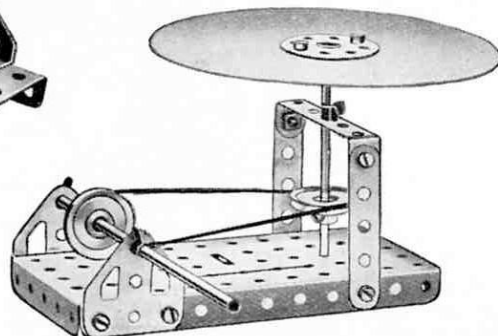


All these Models can be built with MECCANO Outfit No. 00


Model No. 00.180 Hand Truck

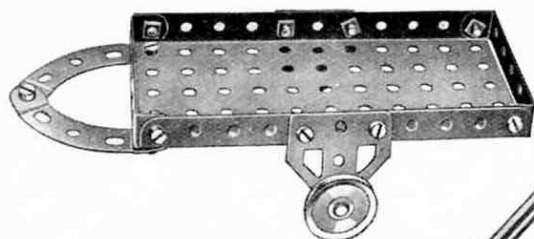

Model No.
00.184
Stamping
Mill

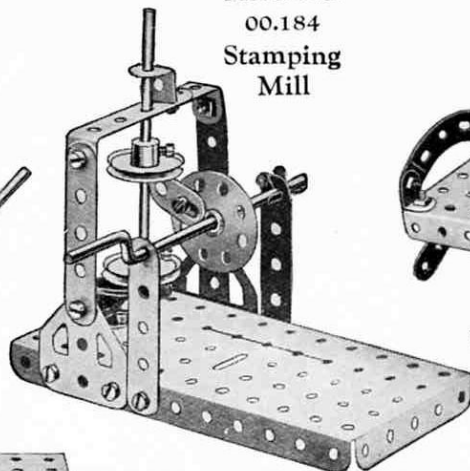


Model No. 00.186
Garden Seat

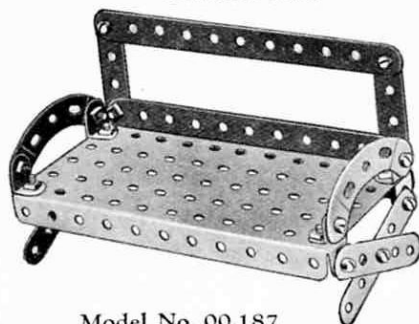


Model No. 00.188
Watch Stand




Model No. 00.181
Band Saw

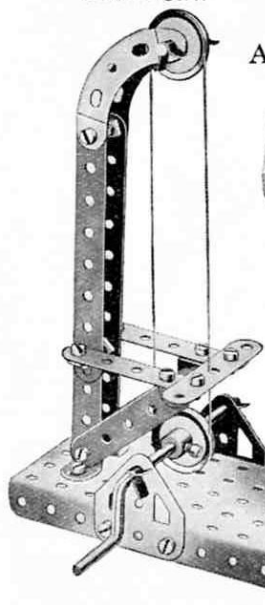

Model No.
00.182
Anti-Aircraft
Gun

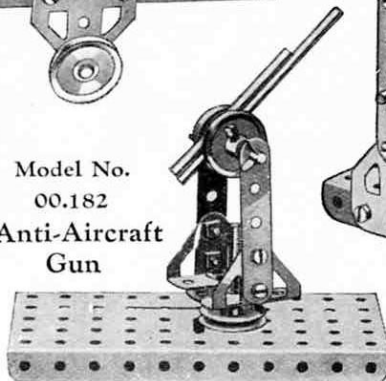


Model No. 00.187
Ski-Runner

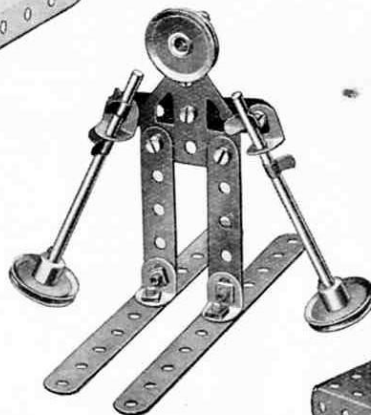


Model No. 00.189
Pulley Shafting



Model No. 00.185
Circular Saw

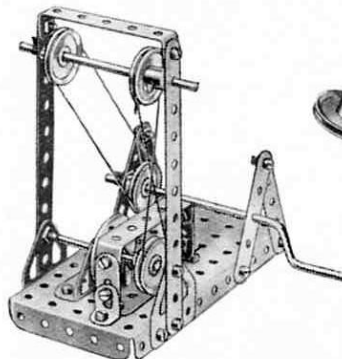

Model No. 00.183
Telegraph Key




HOW TO CONTINUE

This completes our examples of models that may be made with MECCANO Outfit No. 00. The next models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 00A Accessory Outfit, the price of which may be obtained from any Meccano dealer.

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)


Model No. 0.1 Scooter

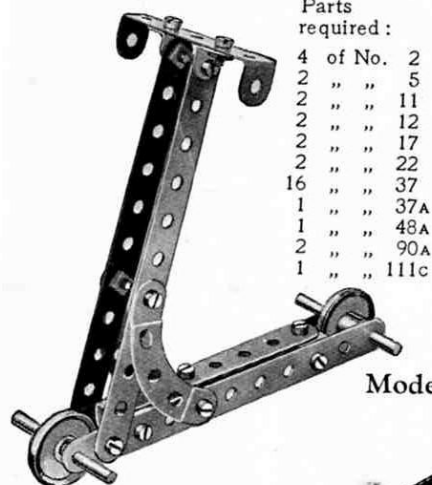

Parts
required:

4	of No.	2
2	" "	5
2	" "	11
2	" "	12
2	" "	17
2	" "	22
16	" "	37
1	" "	37A
1	" "	48A
2	" "	90A
1	" "	111c


Model No. 0.4 Push Cart

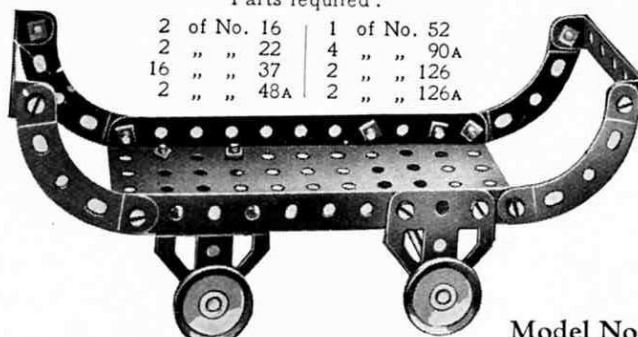

Parts required:

2	of No.	16	1	of No.	52
2	" "	22	4	" "	90A
16	" "	37	2	" "	126
2	" "	48A	2	" "	126A


Model No. 0.7 Dog Kennel

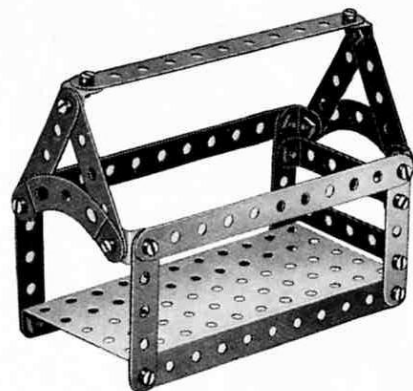

Parts
required:

3	of No.	2
8	" "	5
6	" "	12
16	" "	37
4	" "	37A
2	" "	48A
1	" "	52
2	" "	90A
4	" "	111c


Model No. 0.3 Tipping Cart

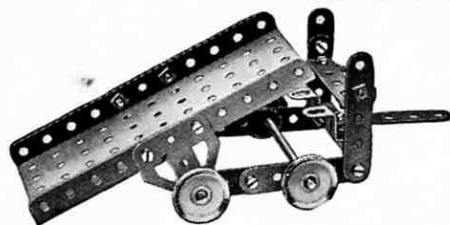

Parts required:

7	of No.	5	15	of No.	37	1	of No.	90A
2	" "	16	2	" "	48A	2	" "	125
4	" "	22	1	" "	52	2	" "	126A

Model No. 0.5 Horse Rake

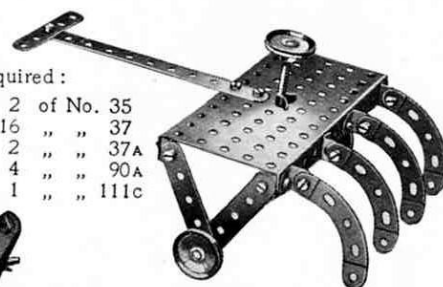


Parts required:

1	of No.	2	2	of No.	35
5	" "	5	16	" "	37
8	" "	12	2	" "	37A
1	" "	17	4	" "	90A
3	" "	22	1	" "	111c

Model No. 0.2 Luggage Truck

Parts
required:

2	of No.	2
6	" "	5
2	" "	12
1	" "	16
2	" "	22
12	" "	37
1	" "	52
3	" "	90A

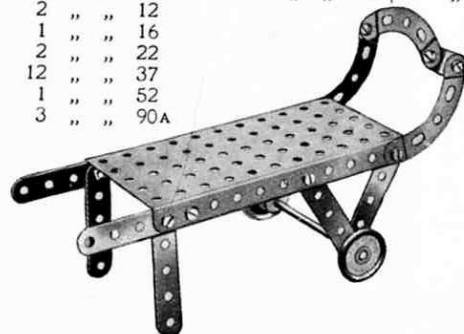


Model No. 0.8 Chaff Cutter

Parts required:

2	of No.	2	1	of No.	24
8	" "	5	2	" "	35
1	" "	11	16	" "	37
2	" "	12	5	" "	37A
1	" "	16	1	" "	40
1	" "	19s	1	" "	52
2	" "	22	5	" "	111c
2 of No. 125					


Model No. 0.6 Jib Crane

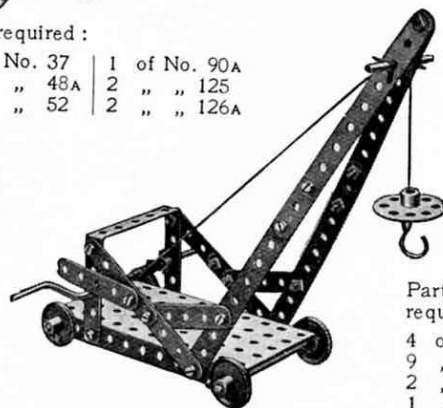

Parts
required:


4	of No.	2
9	" "	5
2	" "	16
1	" "	17

1	of No.	19s
4	" "	22
1	" "	23
1	" "	24
4	" "	35
16	" "	37
1	" "	37A
1	" "	40
1	" "	48A
1	" "	52
1	" "	57
1	" "	111c

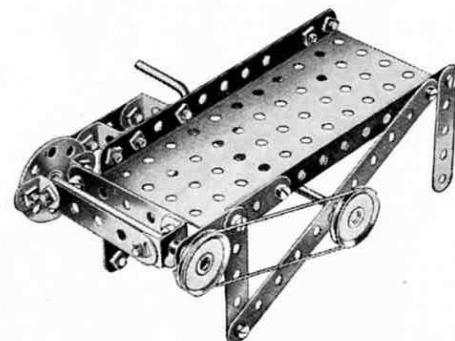

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)

Model No. 0.9

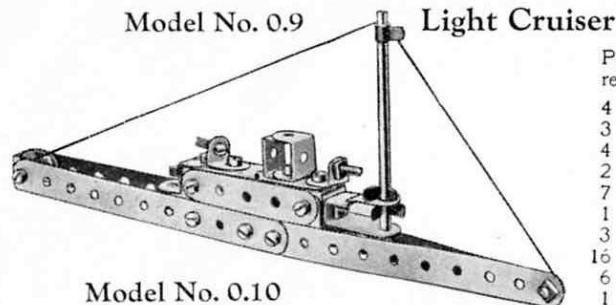


Light Cruiser


Parts
required :

4	of No.	2
3	"	5
4	"	10
2	"	11
7	"	12
1	"	16
3	"	35
16	"	37
6	"	37A
1	"	40
1	"	44
6	"	111c
1	"	125

Model No. 0.13 Medal

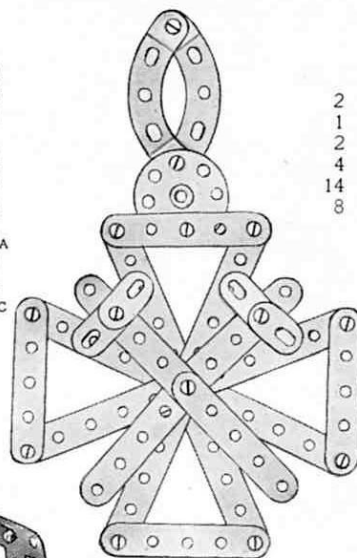

Model No. 0.14 Prehistoric Bird

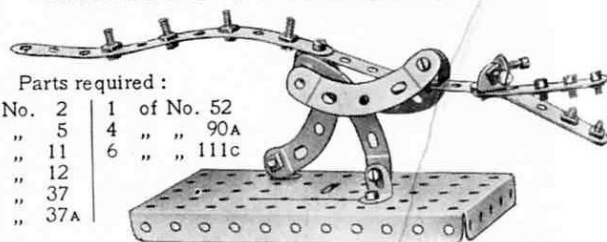

Parts
required :

2	of No.	2	1	of No.	52
1	"	5	4	"	90A
2	"	11	6	"	111c
4	"	12			
14	"	37			
8	"	37A			


Model No. 0.16 Church

Parts
required :

4	of No.	2	2	of No.	12	6	of No.	37A	9	of No.	90A
8	"	5	1	"	24	4	"	48A	6	"	111c
3	"	10	16	"	37	1	"	52	1	"	126A

Model No. 0.10
Three-Wheel Auto


2	of No.	2	1	of No.	17	2	of No.	37A
3	"	5	3	"	22	1	"	48A
2	"	10	1	"	23	2	"	111c
8	"	12	1	"	24	2	"	126
1	"	16	16	"	37			

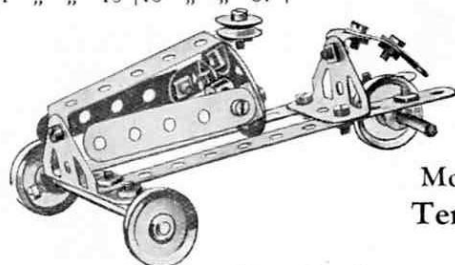

Model No. 0.12
Tennis Player

Parts
required :

3	of No.	5
2	"	10
2	"	11
2	"	12
1	"	23
13	"	37
1	"	52
2	"	90A
1	"	111c
1	"	126A

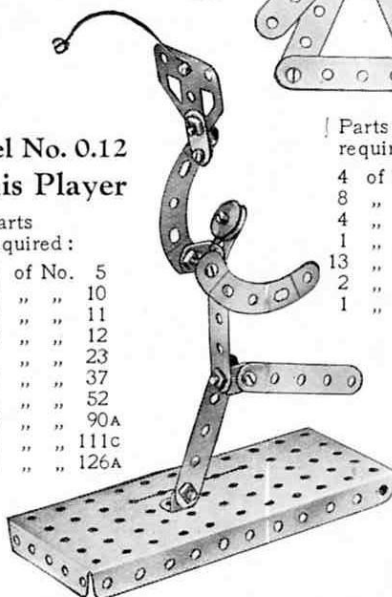


Parts
required :

4	of No.	2
8	"	5
4	"	10
1	"	24
13	"	37
2	"	90A
1	"	111c


Model
No. 0.15
Angler

Parts
required :

5	of No.	5
2	"	10
2	"	11
2	"	12
1	"	16
1	"	23
1	"	35
11	"	37
1	of No.	37A
1	"	52
1	"	111c

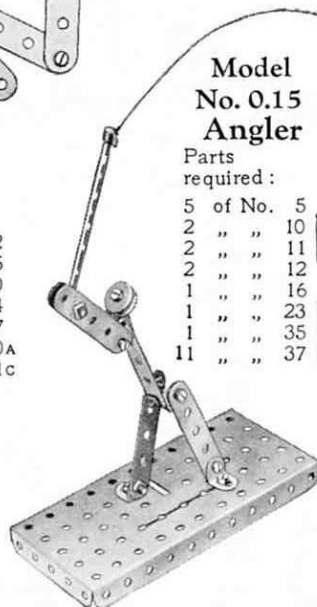

Model No. 0.11 Pen Rack




Parts
required :

2	of No.	11	1	of No.	52
6	"	37	4	"	90A
2	of No.	125			


Model No. 0.17 Submarine

Parts
required :

4	of No.	2	8	of No.	12
4	"	10	1	"	17
2	"	11	2	"	35
			15	"	37
			1	"	44

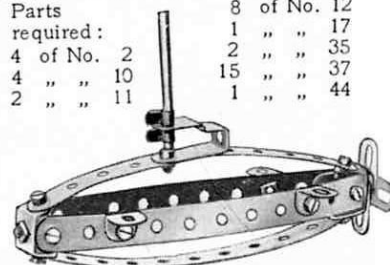

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)

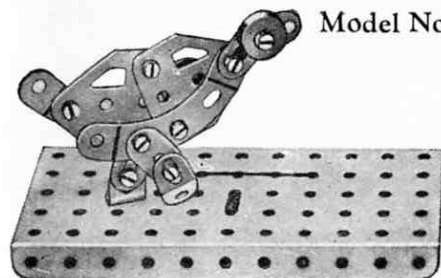


Model No. 0.18 Goose

Parts
required:

4	of No.	10
2	"	12
1	"	23
8	"	37
1	"	37A
1	"	52
2	"	90A
1	"	111c
2	"	126A


Model No. 0.19 Strong Man



Parts
required:

4	of No.	5
4	"	10
2	"	11
4	"	12
2	"	17
4	"	22
1	"	23
13	"	37
1	"	37A
1	"	52
4	"	90A
1	"	111c


Model No. 0.20
Aeroplane



Parts required:

4	of No.	2	8	of No.	37
3	"	5	1	"	111c
2	"	12	2	"	125
1	"	24	1	"	126A


Model No. 0.21 Cattle Truck

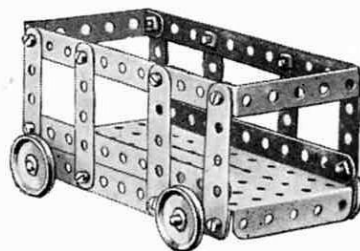

Parts
required:

4	of No.	2
8	"	5
2	"	16
4	"	22
16	"	37
2	"	37A
2	"	48A
1	"	52
2	"	111c

Model No. 0.22
Lazy Tong

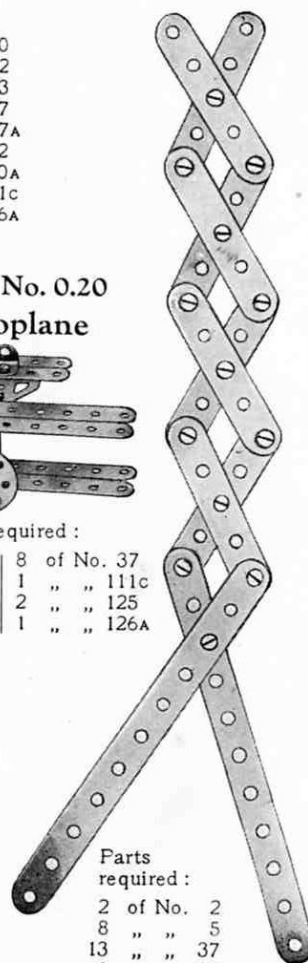


Parts
required:

2	of No.	2
8	"	5
13	"	37
9	"	37A


Parts required:

4	of No.	2	1	of No.	44
3	"	5	6	"	111c
4	"	10	2	"	125
2	"	11			
9	"	12			
2	"	16			
6	"	35			
16	"	37			
6	"	37A			
1	"	40			

Model No. 0.23 Battleship

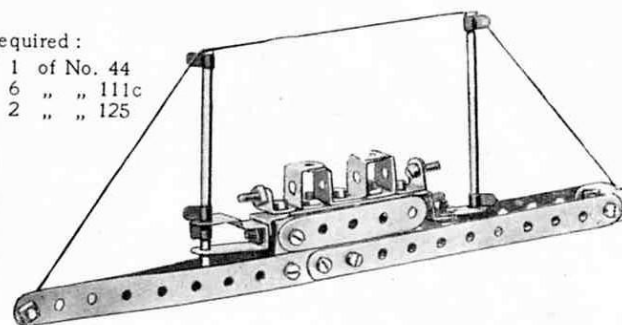

Model No. 0.24 Gymnast

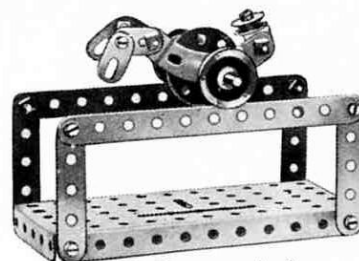

Parts required:

2	of No.	2	1	of No.	24
4	"	5	12	"	37
4	"	10	1	"	37A
1	"	12	1	"	52
1	"	16	1	"	90A
2	"	22	1	"	111c
1	"	23			


Parts
required:

2	of No.	2
6	"	5
2	"	12
16	"	37
2	"	48A
1	"	52
4	"	90A


Model No. 0.25
Rocking Horse

Parts
required:

7	of No.	5
4	"	10
2	"	11
2	"	12
1	"	23
13	"	37
1	"	40
4	"	90A
3	"	111c
1	"	126A




Model No. 0.26
Cot

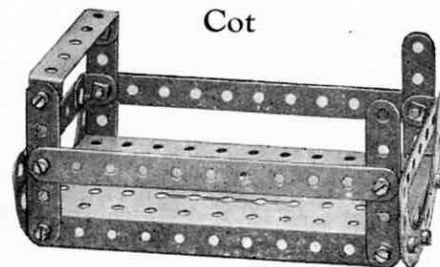

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)


Model No. 0.27 Table

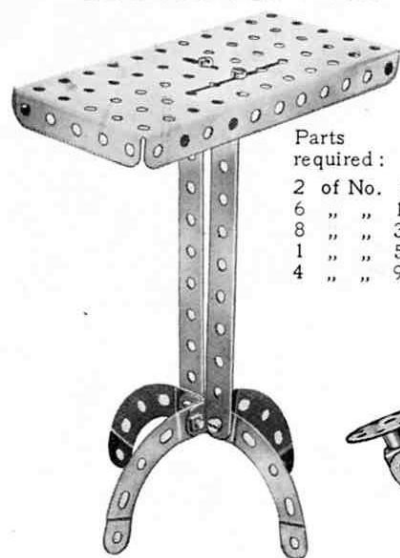


Parts required:
2 of No. 2
6 " " 12
8 " " 37
1 " " 52
4 " " 90A

Model No. 0.29 Saxophone

Parts required:
2 of No. 2
2 " " 10
2 " " 11
2 " " 12
1 " " 23
1 " " 24
12 " " 37
1 " " 37A
4 " " 90A
2 " " 111c

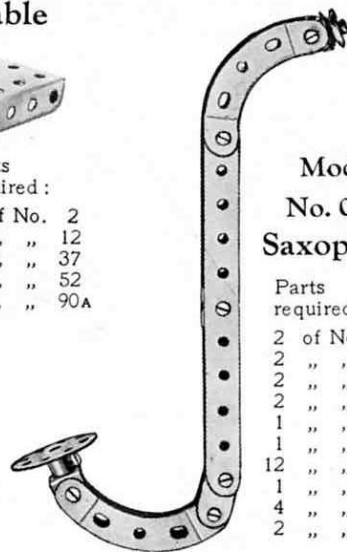

Model No. 0.30 Trolley

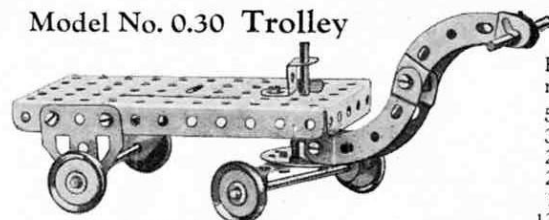


Parts required:

1 of No. 11	4 of No. 35	4 of No. 90A
2 " " 16	12 " " 37	1 " " 125
2 " " 17	1 " " 48A	2 " " 126A
1 " " 24	1 " " 52	

Model No. 0.33 Ape

Parts required:

5 of No. 5
3 " " 10
2 " " 11
2 " " 12
1 " " 23
12 " " 37
1 " " 37A
1 " " 52
4 " " 90A
1 " " 111c

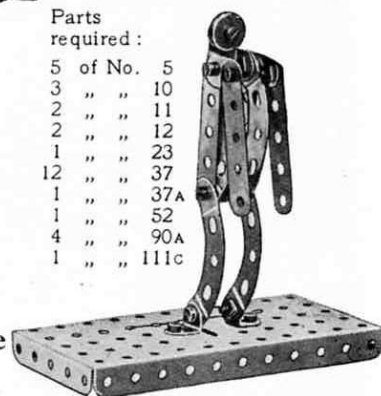

Model No. 0.31 Field Gun and Carriage




Parts required:

8 of No. 5	2 of No. 17	1 of No. 44
2 " " 10	4 " " 22	1 " " 111c
2 " " 11	13 " " 37	1 " " 125
6 " " 12	1 " " 37A	

Model No. 0.34 Gangway

Parts required


4 of No. 2	16 of No. 37
2 " " 5	2 " " 37A
2 " " 10	1 " " 40
2 " " 12	2 " " 48A
1 " " 19s	1 " " 52
1 " " 23	1 " " 111c
3 " " 35	

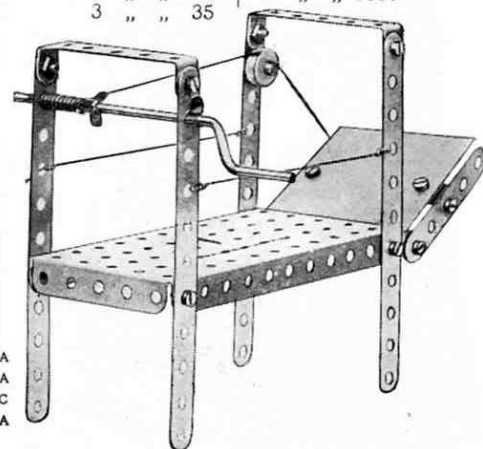

Model No. 0.28 Crocodile

Parts required:


4 of No. 2	6 of No. 12
4 " " 5	16 " " 37
4 " " 10	6 " " 37A
2 " " 11	6 " " 111c

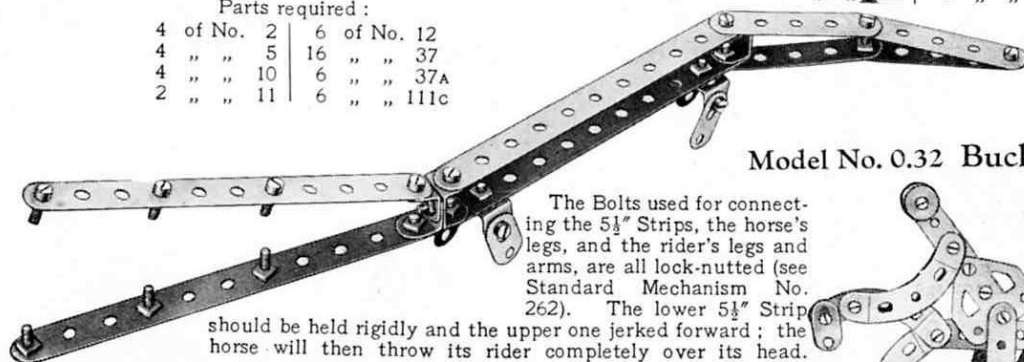

Model No. 0.32 Bucking Broncho


Parts required:

2 of No. 2
6 " " 5
2 " " 10
1 " " 23
12 " " 37
9 " " 37A
4 " " 90A
1 " " 111c
1 " " 126A

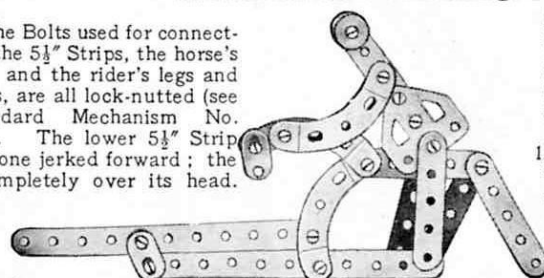

The Bolts used for connecting the $5\frac{1}{2}$ " Strips, the horse's legs, and the rider's legs and arms, are all lock-nutted (see Standard Mechanism No. 262). The lower $5\frac{1}{2}$ " Strip should be held rigidly and the upper one jerked forward; the horse will then throw its rider completely over its head.


**Model No. 0.35
Tramway Car**



Parts required:

3 of No. 2	16 of No. 37
6 " " 5	6 " " 37A
2 " " 10	2 " " 48A
2 " " 16	1 " " 52
2 " " 17	4 " " 90A
4 " " 22	6 " " 111c
6 " " 35	2 " " 125

**Model No. 0.36
Motor Boat**



Parts required:

2 of No. 2	1 of No. 23
2 " " 5	7 " " 37
3 " " 10	1 " " 37A
1 " " 11	1 " " 111c


**Model No. 0.37
Arm Chair**



Parts required:

2 of No. 2
7 " " 5
14 " " 37
2 " " 48A
3 " " 90A


**Model No. 0.38
Torpedo Boat**



Parts required:

2 of No. 2
2 " " 5
3 " " 10
2 " " 11
2 " " 12
1 " " 17
11 " " 37
4 " " 37A
5 " " 111c

Model No. 0.39 Piano

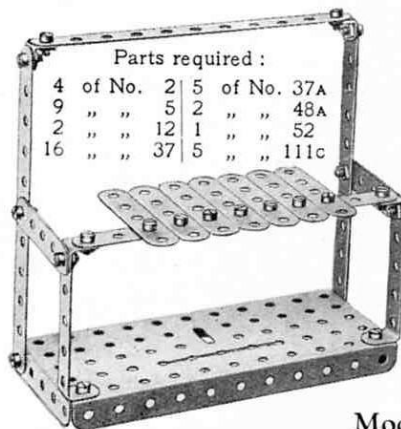


Parts required:

4 of No. 2	5 of No. 37A
9 " " 5	2 " " 48A
2 " " 12	1 " " 52
16 " " 37	5 " " 111c

**Model No. 0.40
Gramophone**

Parts required:


2 of No. 12
1 " " 22
1 " " 23
1 " " 24
3 " " 37
1 " " 37A
1 " " 52
2 " " 90A
3 " " 111c




Parts required:

4 of No. 10
1 " " 11
8 " " 12
16 " " 37
4 " " 37A
1 " " 40
2 " " 48A
1 " " 52
4 " " 90A
4 " " 111c

**Model No. 0.43
Prehistoric Armadillo**

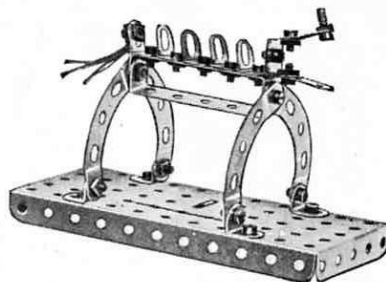

**Model No. 0.44
Motor Cycle and
Side Car**




Parts required:

1 of No. 5	10 of No. 37
4 " " 10	1 " " 37A
2 " " 11	1 " " 44
3 " " 12	3 " " 90A
1 " " 16	1 " " 111c
3 " " 22	1 " " 125
1 " " 23	1 " " 126A

Model No. 0.41 Milk Maid

Parts required:


5 of No. 5
3 " " 10
2 " " 11
4 " " 12
2 " " 22
1 " " 23
14 " " 37
1 " " 37A
1 " " 40
1 " " 52
1 " " 90A
1 " " 111c

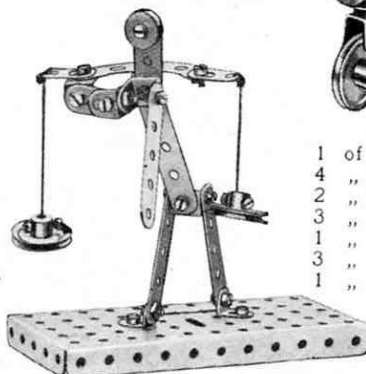

Model No. 0.42 Sword

Parts required:

4 of No. 2	10 of No. 37	3 of No. 90A
------------	--------------	--------------


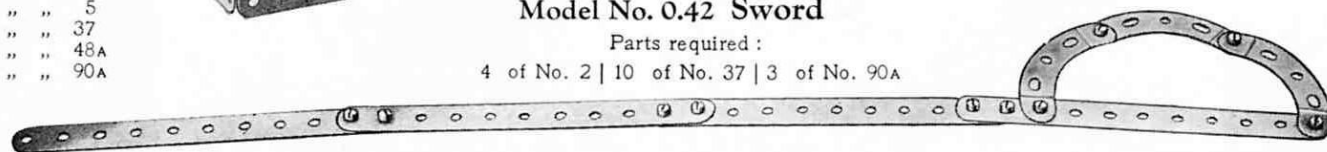


**Model No. 0.45
Loud Speaker**Parts
required:


1	of No.	11
1	"	23
1	"	24
6	"	37
1	"	37A
4	"	90A
2	"	111c
2	"	126

Model No. 0.46 BicycleParts
required:


9	of No.	5
2	"	11
5	"	12
2	"	17
2	"	22
11	"	37

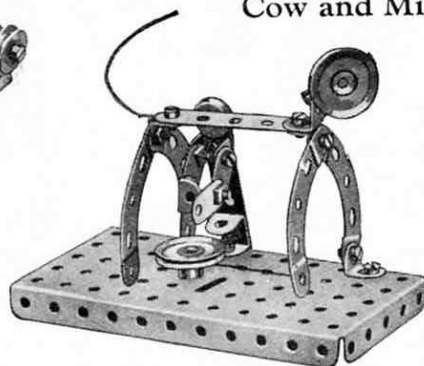**Model No. 0.47
Cow and Milkmaid**Parts
required:

2	of No.	5
4	"	10
2	"	11
5	"	12
2	"	22
1	"	23
16	"	37
2	"	37A
1	"	52
4	"	90A
4	"	111c
1	"	125

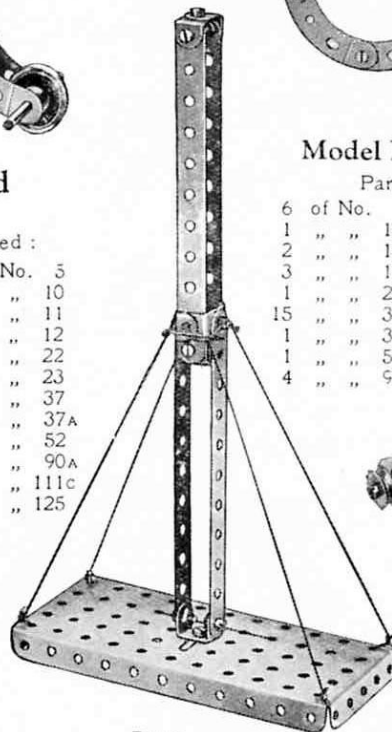**Model No. 0.49
Telescopic
Mast**Parts
required:

4	of No.	2
2	"	11
6	"	12
11	"	37
1	"	40
1	"	52

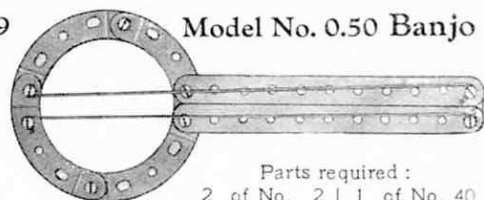**Model No. 0.50 Banjo**



Parts required:

2	of No.	2	1	of No.	40
1	"	10	4	"	90A
8	"	37			

Model No. 0.51 Wiretail

Parts required:

6	of No.	5	1	of No.	111c
1	"	10			
2	"	11			
3	"	12			
1	"	23			
15	"	37			
1	"	37A			
1	"	52			
4	"	90A			

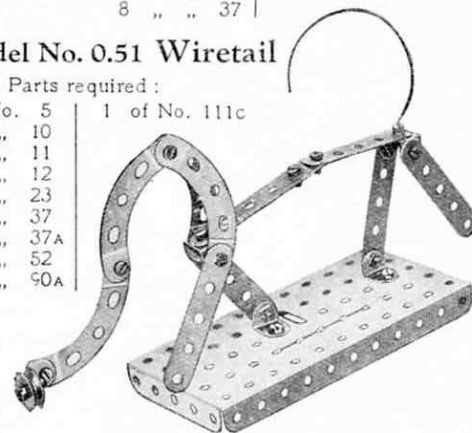**Model No. 0.53
Catapult**

Parts


required:

4	of No.	37
4	"	90A


Small piece
of elastic.**Model No. 0.48 Meccano Boy**

Parts required:

2	of No.	2	1	of No.	24
2	"	5	16	"	37
4	"	10	1	"	40
2	"	11	1	"	52
6	"	12	1	"	57
1	"	22	1	"	111c

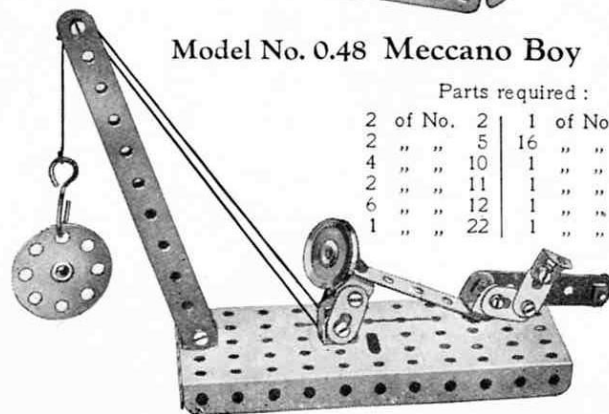
**Model No. 0.52 Bacon Slicing Machine**Parts
required:

1	of No.	16	12	of No.	37
1	"	19s	2	"	37A
2	"	22	1	"	40
3	of No.	5	2	"	48A
2	"	11	1	"	52
1	"	12	4	"	90A
			1	"	35

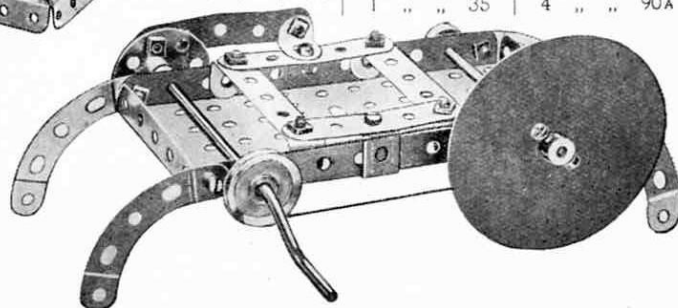

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)


Model No. 0.54
Camera

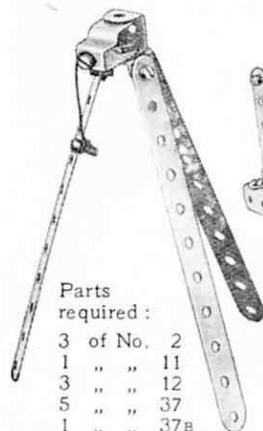

Parts
required :

3	of No.	2
1	"	11
3	"	12
5	"	37
1	"	37A
1	"	44


Model No. 0.55
Scooter

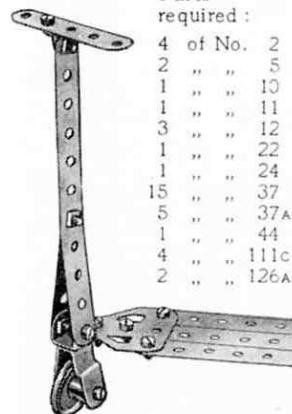

Parts
required :

4	of No.	2
2	"	5
1	"	10
1	"	11
3	"	12
1	"	22
1	"	24
15	"	37
5	"	37A
1	"	44
4	"	111c
2	"	126A

Model No. 0.56
The Execution




Parts required :

9	of No.	5	16	of No.	37
3	"	10	3	"	37A
2	"	11	1	"	48A
5	"	12	1	"	52
2	"	22	1	"	90A


Model No. 0.57 Pistol

Parts required :

2	of No.	11	1	of No.	35
1	"	12	5	"	37
1	"	16	2	"	90A
2	"	22			



Model No. 0.58
Crane

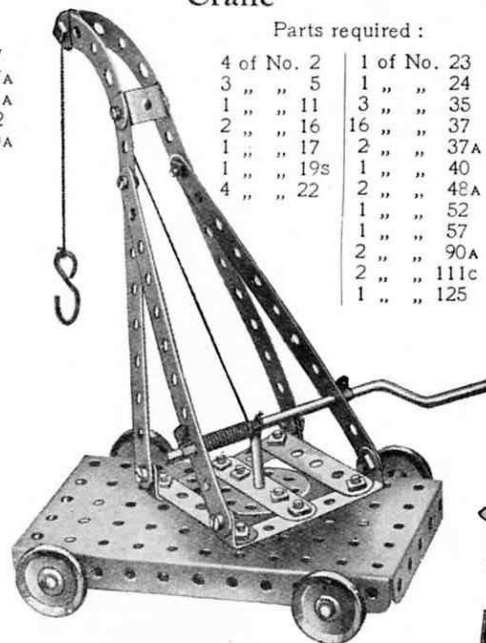

Parts required :


4	of No.	2	1	of No.	23
3	"	5	1	"	24
1	"	11	3	"	35
2	"	16	16	"	37
1	"	17	2	"	37A
1	"	19s	1	"	40
4	"	22	2	"	48A
			1	"	52
			1	"	57
			2	"	90A
			2	"	111c
			1	"	125

Model No. 0.59 Pecking Hen


By alternately pushing and pulling the lower of the $5\frac{1}{2}$ " Strips, the hen can be made to peck vigorously at the "bowl" (a 1" Pulley). The Bolts used for securing the $5\frac{1}{2}$ " Strips together should be lock-nutted, care being taken to ensure that no "side play" is permitted.

Parts required :

2	of No.	2	11	of No.	37
2	"	5	5	"	37A
3	"	10	2	"	90A
1	"	12	2	"	111c
1	"	22	2	"	126A
1	"	23			

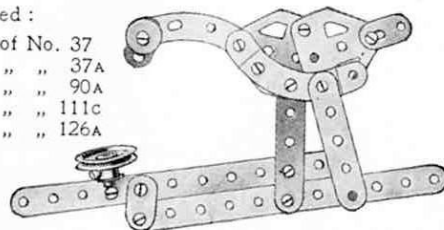


Model No. 0.60 Hurdler



Parts required :

3	of No.	5	1	of No.	37A
1	"	10	2	"	48A
2	"	11	1	"	52
2	"	12	4	"	90A
1	"	23	1	"	111c
12	"	37			

Model No. 0.62
Pliers

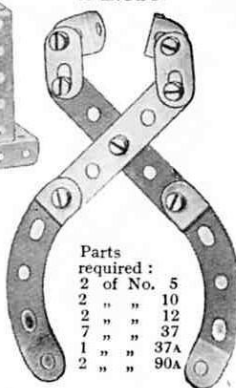

Parts
required :

2	of No.	5
2	"	10
7	"	12
1	"	37
2	"	37A
2	"	90A

Model No. 0.63

Model No. 0.61 Centrifugal Engine Governor
Tricycle




Parts required :

4	of No.	5	3	of No.	35
2	"	10	16	"	37
1	"	11	6	"	37A
4	"	12	1	"	40
1	"	16	1	"	48A
1	"	19s	1	"	52
4	"	22	6	"	111c
1	"	24	1	"	125
			2	"	126


Parts
required :

4	of No.	10
1	"	11
2	"	12
1	"	17
3	"	22
6	"	37
3	"	37A
1	"	44
2	"	111c
1	"	126A

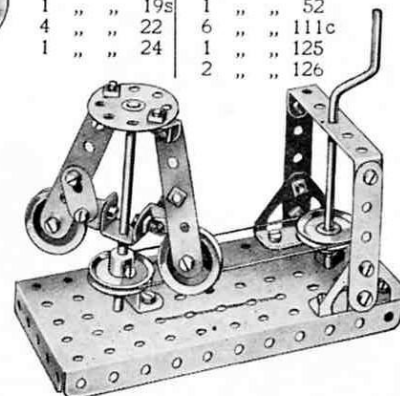

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)


Model No. 0.64 Wrestlers

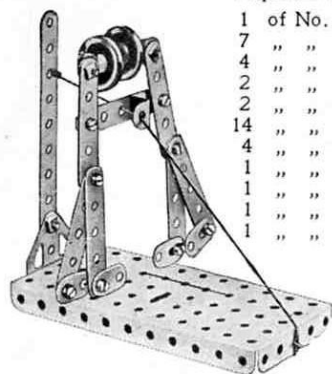

Parts required:

1	of No.	2
7	" "	5
4	" "	10
2	" "	12
2	" "	22
14	" "	37
4	" "	37A
1	" "	40
1	" "	52
1	" "	125
1	" "	126A

Model No. 0.66 Aerial Flight

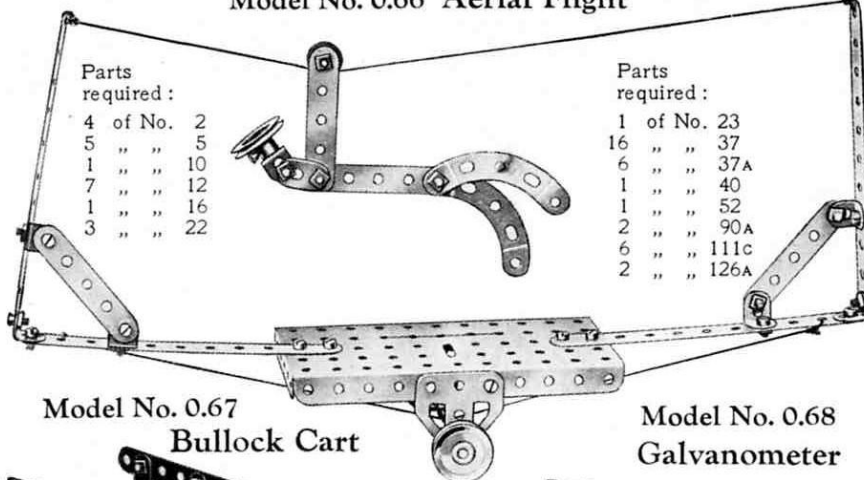

Parts required:

4	of No.	2
5	" "	5
1	" "	10
7	" "	12
1	" "	16
3	" "	22

Parts required:

1	of No.	23
16	" "	37
6	" "	37A
1	" "	40
1	" "	52
2	" "	90A
6	" "	111c
2	" "	126A

Model No. 0.70 The Missing Link

Parts required:

4	of No.	5
4	" "	10
8	" "	12
1	" "	24
16	" "	37
6	" "	37A
1	" "	52
4	" "	90A
6	" "	111c




Model No. 0.65 A Chase

Parts required:

1	of No.	5	16	of No.	37
1	" "	10	1	" "	37A
2	" "	11	1	" "	52
7	" "	12	4	" "	90A
1	" "	22	2	" "	111c
1	" "	23	2	" "	126A




Model No. 0.67 Bullock Cart

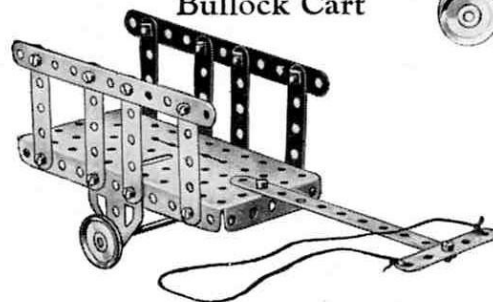

Parts required:

3	of No.	2	2	of No.	37A
9	" "	5	1	" "	40
1	" "	16	1	" "	52
2	" "	22	2	" "	111c
16	" "	37	2	" "	126A

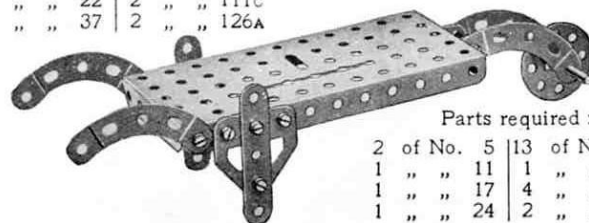


Parts required:

2	of No.	5	13	of No.	37
1	" "	11	1	" "	52
1	" "	17	4	" "	90A
1	" "	24	2	" "	126A

Model No. 0.68 Galvanometer

Parts required:


1	of No.	12
1	" "	17
5	" "	37
4	" "	37A
1	" "	40
1	" "	52
4	" "	90A
2	" "	111c



Model No. 0.71 Steeple-chaser


Parts required:

7	of No.	5	1	of No.	37A
4	" "	10	1	" "	48A
1	" "	12	1	" "	52
1	" "	23	4	" "	90A
13	" "	37	1	" "	111c
			1	" "	126A

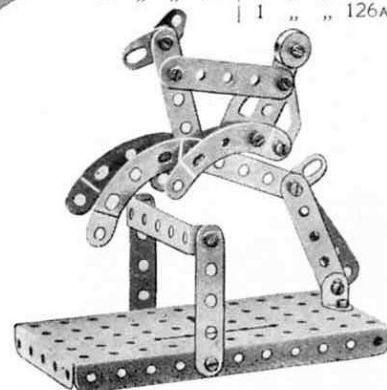

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)

Model No. 0.72 Pen Rack

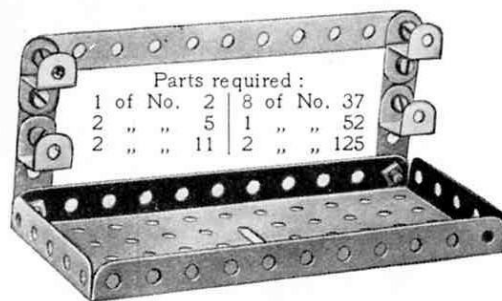


Parts required:
 1 of No. 2 | 8 of No. 37
 2 " " 5 | 1 " " 52
 2 " " 11 | 2 " " 125


Model No. 0.76 Coast Guard

Parts required:

1 of No. 5
 2 " " 10
 2 " " 11
 6 " " 12
 2 " " 17
 1 " " 22
 3 " " 35
 15 " " 37
 1 " " 52
 4 " " 90A
 1 " " 111c

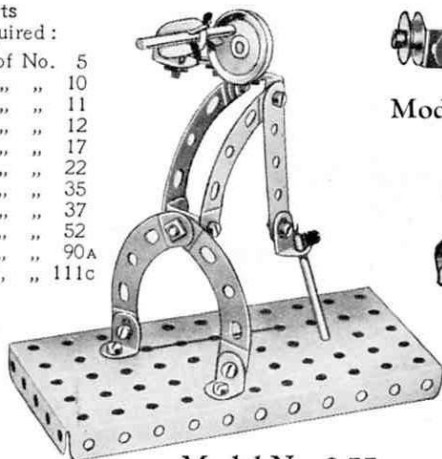


Model No. 0.78 Snake

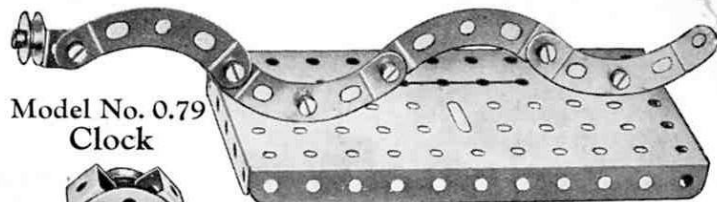

Parts required:

3 of No. 12 | 1 of No. 37A
 1 " " 23 | 1 " " 52
 8 " " 37 | 4 " " 90A
 1 of No. 111c


Model No. 0.73 Boxer



Parts required:

4 of No. 5
 4 " " 10
 2 " " 11
 4 " " 12
 1 " " 23
 15 " " 37
 1 " " 37A
 1 " " 52
 1 " " 111c

Model No. 0.75 Fan




Parts required:

9 of No. 5 | 2 of No. 37A
 1 of No. 111c


Model No. 0.77 Break-Down Crane

Parts required:

2 of No. 2	13 of No. 37	1 of No. 57
2 " " 10	1 " " 40	2 " " 90A
1 " " 11	1 " " 48A	2 " " 125
2 " " 16	1 " " 52	2 " " 126
2 " " 17		
1 " " 19s		
4 " " 22		
1 " " 23		
1 " " 24		
6 " " 35		

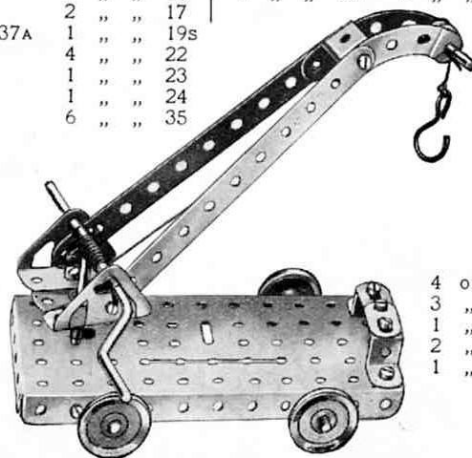

Model No. 0.74 Horseman's Fall

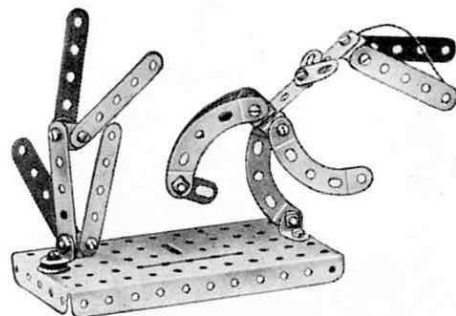

Parts required:

8 of No. 5
 3 " " 10
 2 " " 11
 8 " " 12
 1 " " 23
 16 " " 37
 4 " " 37A
 1 " " 52
 4 " " 90A
 4 " " 111c


Model No. 0.80 Windmill

Parts required:

4 of No. 2
 6 " " 5
 1 " " 16
 1 " " 19s
 2 " " 22
 1 " " 24
 14 " " 37
 1 " " 40
 2 " " 48A
 1 " " 52
 4 " " 90A




Model No. 0.81 Frog

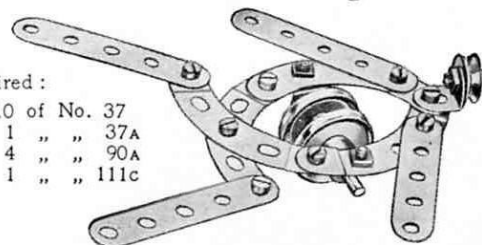

Parts required:

4 of No. 5 | 10 of No. 37
 3 " " 12 | 1 " " 37A
 1 " " 17 | 4 " " 90A
 2 " " 22 | 1 " " 111c
 1 " " 23


Model No. 0.82
Pneumatic Grain Elevator

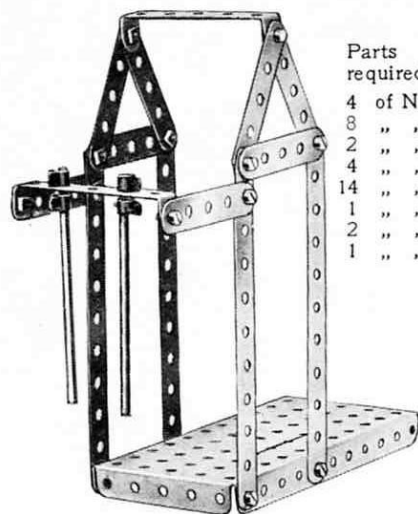

Parts
required :

4	of No.	2
8	" "	5
2	" "	16
4	" "	35
14	" "	37
1	" "	40
2	" "	48A
1	" "	52

Model No. 0.84 Footbridge

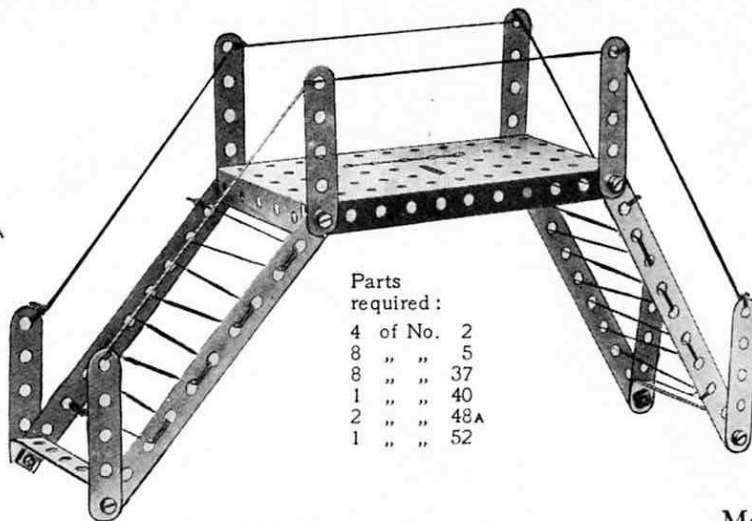


Parts
required :

4	of No.	2
8	" "	5
8	" "	37
1	" "	40
2	" "	48A
1	" "	52


Model No. 0.86 Crane Grab

Parts
required :

6	of No.	5
2	" "	10
7	" "	12
1	" "	16
6	" "	35
15	" "	37
1	" "	40
2	" "	48A
4	" "	90A

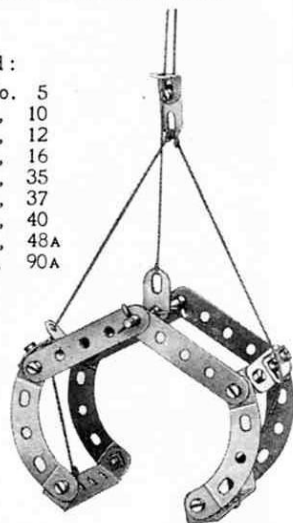


Model No. 0.83
Baboon

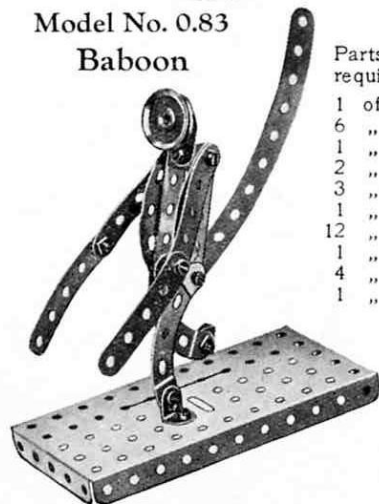

Parts
required :

1	of No.	2
6	" "	5
1	" "	10
2	" "	11
3	" "	12
1	" "	22
12	" "	37
1	" "	52
4	" "	90A
1	" "	111c

Model No. 0.85 Cross-Bow

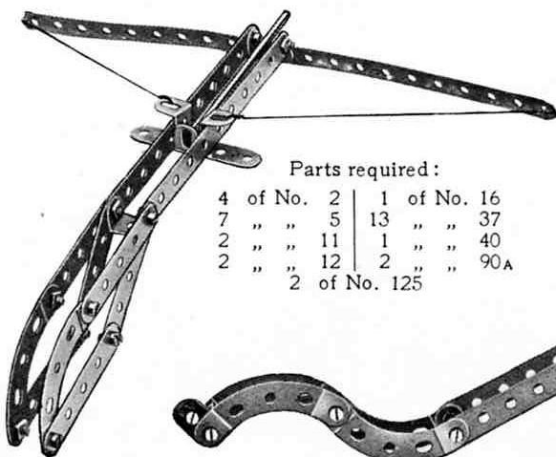


Parts required :


4	of No.	2	1	of No.	16
7	" "	5	13	" "	37
2	" "	11	1	" "	40
2	" "	12	2	" "	90A
2 of No. 125					

Model No. 0.87 Switchback

Parts required :

4	of No.	2	2	of No.	22
4	" "	5	16	" "	37
1	" "	10	3	" "	37A
2	" "	11	1	" "	52
2	" "	12	4	" "	90A
1	" "	17	3	" "	111c

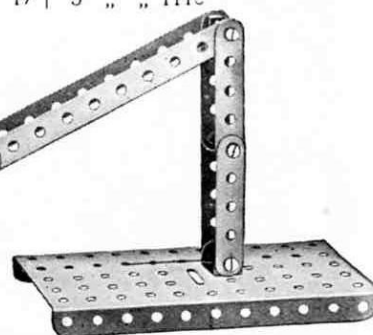


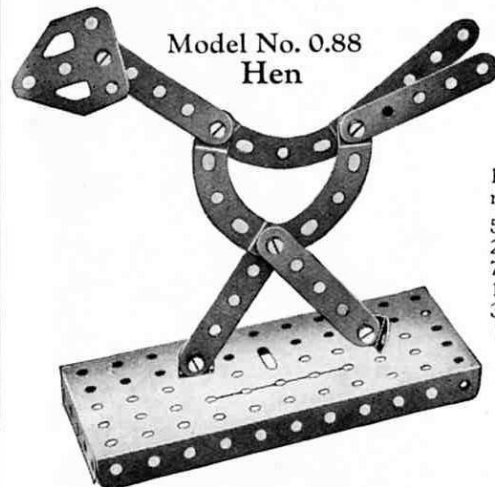

Model No. 0.88
Hen

Parts
required :

5	of No.	5
2	" "	12
7	" "	37
1	" "	52
3	" "	90A
1	" "	126A

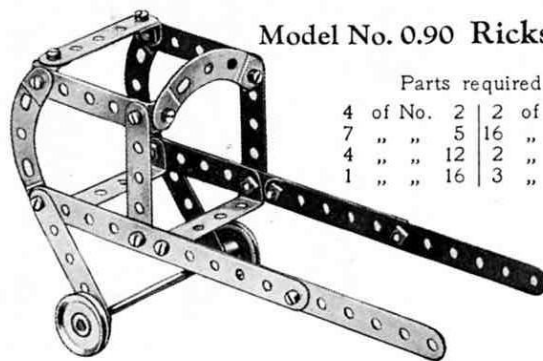


Model No. 0.90 Rickshaw

Parts required :

4	of No.	2	2	of No.	22
7	" "	5	16	" "	37
4	" "	12	2	" "	48A
1	" "	16	3	" "	90A

Model No. 0.93 Fly Boats

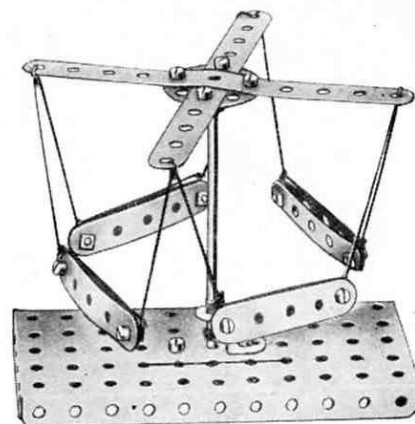

Parts required :

2	of No.	2	13	of No.	37
8	" "	5	1	" "	40
1	" "	16	1	" "	52
1	" "	24	1	" "	125

Model No. 0.89
Grass Cutter


Parts
required :

2	of No.	2
7	" "	5
2	" "	11
1	" "	16
2	" "	22
2	" "	35
16	" "	37
2	" "	48A
2	" "	126

Model No. 0.91 Rowing Boat

Parts required :


4	of No.	2	4	of No.	111c
6	" "	5	2	" "	125
2	" "	10			
1	" "	11			
16	" "	37			
4	" "	37A			
1	" "	44			
2	" "	48A			
4	" "	90A			

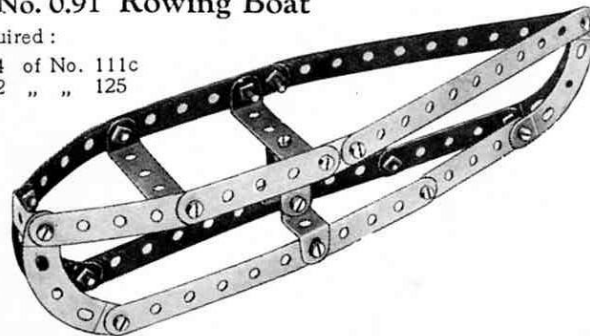

Model No. 0.92 Dinosaur

Parts required :


3	of No.	2	5	of No.	12	1	of No.	52
1	" "	5	1	" "	23	2	" "	90A
4	" "	10	16	" "	37	6	" "	111c
2	" "	11	6	" "	37A			

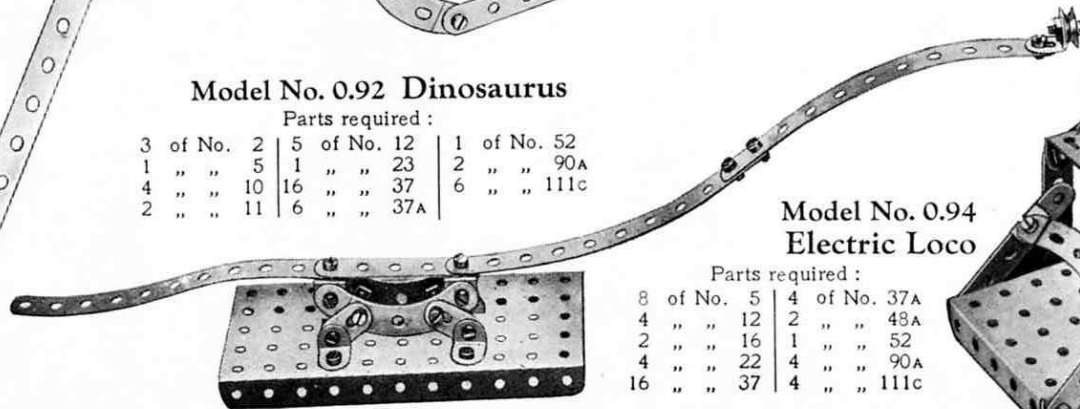

Model No. 0.94
Electric Loco


Parts required :

8	of No.	5	4	of No.	37A
4	" "	12	2	" "	48A
2	" "	16	1	" "	52
4	" "	22	4	" "	90A
16	" "	37	4	" "	111c

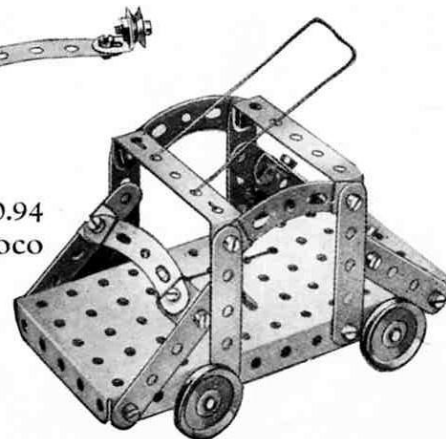

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)

Model No. 0.95 Trolley

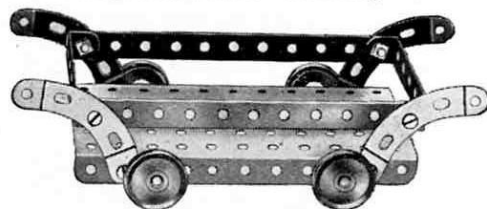

Parts required :

2 of No. 2	8 of No. 37
2 " " 16	2 " " 48A
4 " " 22	1 " " 52
4 of No. 90A	

Model No. 0.96 Pen Rack

Parts required :

2 of No. 5
4 " " 37
1 " " 52
4 " " 90A



Model No. 0.97 Walking Man


Parts required :

5 of No. 5
3 " " 10
2 " " 12
1 " " 22
7 " " 37
3 " " 90A

Model No. 0.98 Pump


Parts required :

1 of No. 2	16 of No. 37
6 " " 5	6 " " 37A
2 " " 11	1 " " 40
3 " " 12	1 " " 52
1 " " 16	6 " " 111c
1 " " 17	2 " " 126
1 " " 19s	1 " " 126A
3 " " 22	
1 " " 24	
2 " " 35	

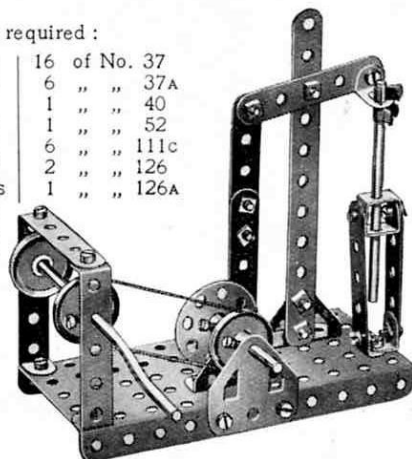

The connecting Strip is pivoted by Bolts and Nuts at one end to the Bush Wheel and at the other end to the cross beam. The latter is pivoted by the same means to the upright.

Model No. 0.99 Aerial Ropeway

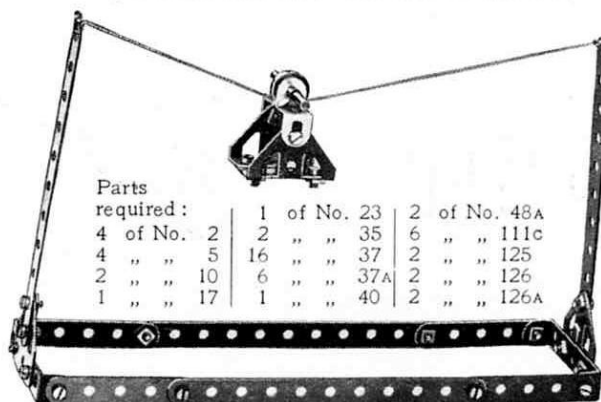


Parts required :

4 of No. 2	1 of No. 23	2 of No. 48A
4 " " 5	2 " " 35	6 " " 111c
2 " " 10	16 " " 37	2 " " 125
1 " " 17	6 " " 37A	2 " " 126
	1 " " 40	2 " " 126A


Model No. 0.100 Luggage Truck

Parts required :

4 of No. 2
4 " " 5
2 " " 16
4 " " 22
16 " " 37
1 " " 52
4 " " 90A

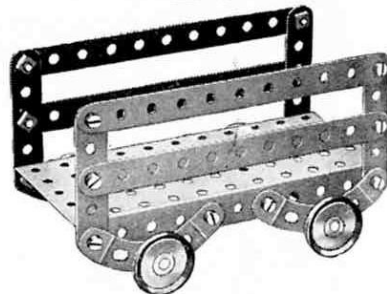

Model No. 0.101 Drafting Table

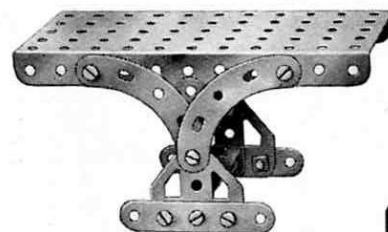


Parts required :

4 of No. 5
12 " " 37
1 " " 48A
1 " " 52
4 " " 90A
2 " " 126A


Model No. 0.102 Arm Chair

Parts required :

2 of No. 2
4 " " 5
12 " " 37
1 " " 48A
1 " " 52
3 " " 90A

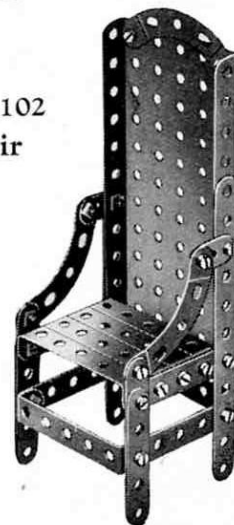


Model No. 0.103 Rattle

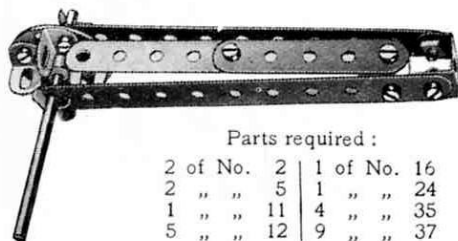

Parts required :

2 of No. 2	1 of No. 16
2 " " 5	1 " " 24
1 " " 11	4 " " 35
5 " " 12	9 " " 37


Model No. 0.104 Shearing Machine

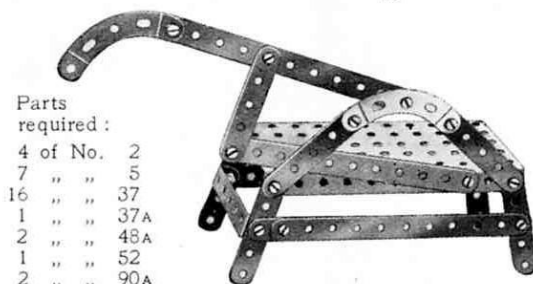

Parts required :

4 of No. 2	
7 " " 5	
16 " " 37	
1 " " 37A	
2 " " 48A	
1 " " 52	
2 " " 90A	
1 " " 111c	

Model No. 0.105 Anchor

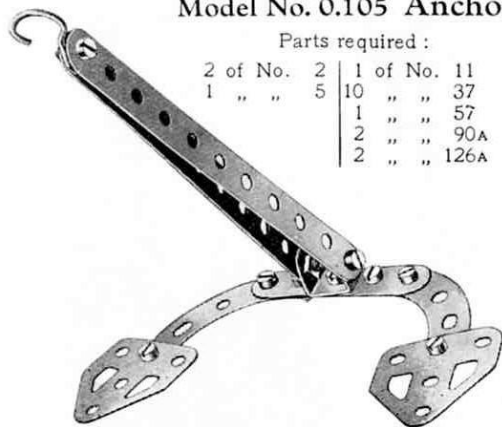

Parts required :

2 of No. 2	1 of No. 11
1 " " 5	10 " " 37
	1 " " 57
	2 " " 90A
	2 " " 126A

Model No. 0.106 Portal

Parts required :


4 of No. 2	
2 " " 11	
8 " " 12	
1 " " 22	
16 " " 37	
6 " " 37A	
2 " " 48A	
1 " " 52	
4 " " 90A	
6 " " 111c	




Model No. 0.107 The Fencers

Parts required :

8 of No. 5	16 of No. 37
2 " " 10	4 " " 37A
6 " " 12	1 " " 52
2 " " 16	4 " " 111c
2 " " 22	2 " " 125
4 " " 35	2 " " 126A

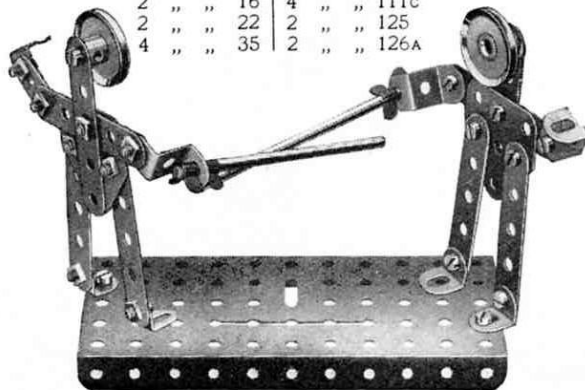

Model No. 0.108 Machine Gun

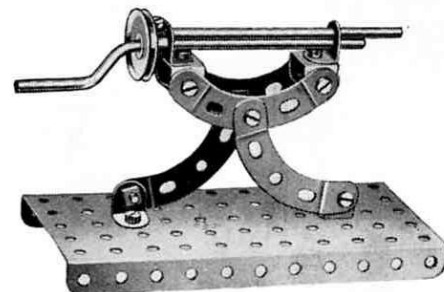

Parts required :

2 of No. 11	1 of No. 22
4 " " 12	12 " " 37
1 " " 16	1 " " 52
1 " " 19s	4 " " 90A


Model No. 0.109 Single Sheave Pulley Block



Parts required :

2 of No. 5	7 of No. 37A
1 " " 23	1 " " 57
	3 of No. 111c


Model No. 0.110 Tea Wagon

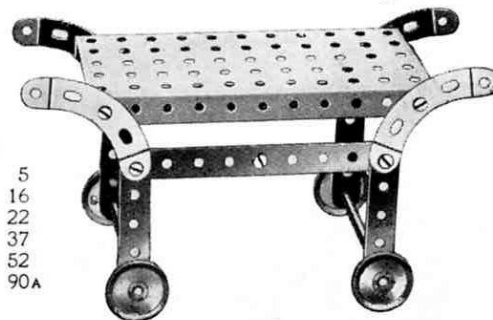

Parts required :

8 of No. 5	
2 " " 16	
4 " " 22	
10 " " 37	
1 " " 52	
4 " " 90A	

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)

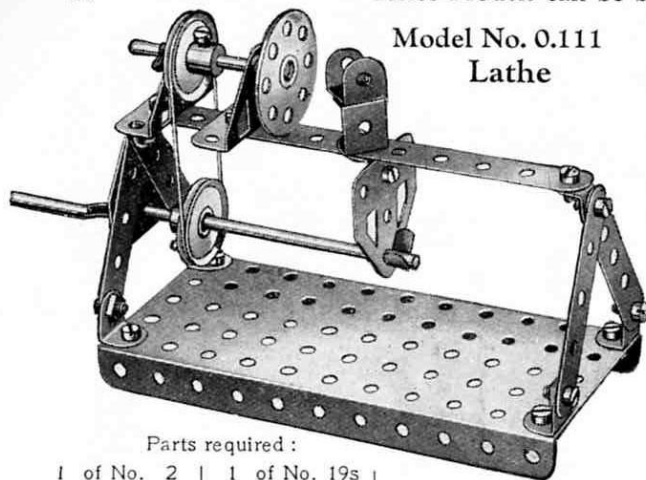


Model No. 0.111
Lathe

Parts required :

1 of No. 2	1 of No. 19s	1 of No. 40
4 " " 5	2 " " 22	1 " " 52
2 " " 11	1 " " 24	2 " " 126
7 " " 12	3 " " 35	2 " " 126A
1 " " 17	16 " " 37	


Model No. 0.112
Weather Vane

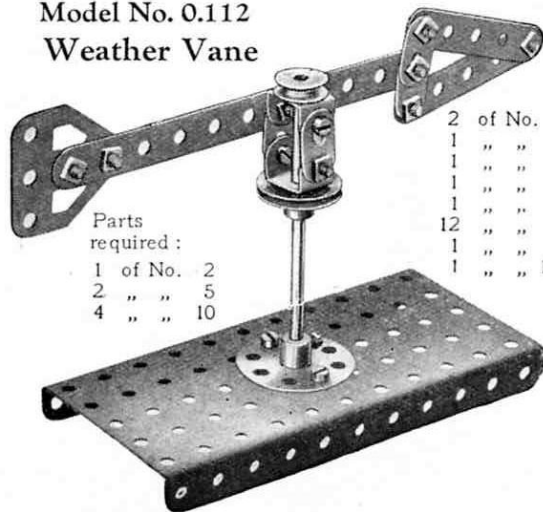

Parts required :

1 of No. 2
2 " " 5
4 " " 10

2 of No. 11
1 " " 16
1 " " 22
1 " " 23
1 " " 24
12 " " 37
1 " " 52
1 " " 126A

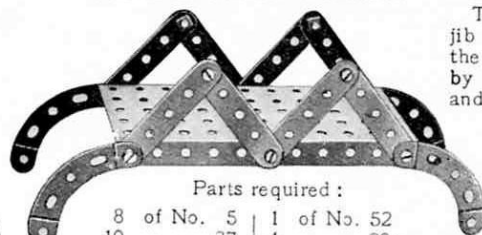

Model No. 0.113 Viaduct


Parts required :

8 of No. 5	1 of No. 52
10 " " 37	4 " " 90A

Model No. 0.114 Pulley Block


Parts required :

4 of No. 2
2 " " 5
2 " " 11
1 " " 17
1 " " 19s
1 " " 22
1 " " 23
1 " " 24
5 " " 35
16 " " 37
4 " " 37A
1 " " 40
1 " " 52
1 " " 57
2 " " 90A
4 " " 111c
4 " " 126
2 " " 126A

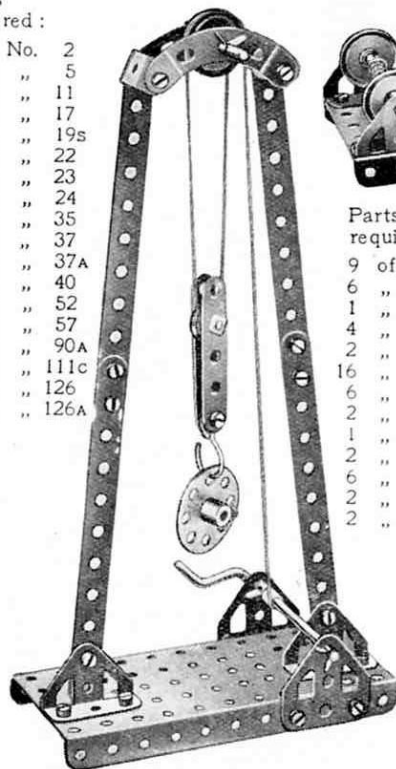

The base of the jib is pivoted to the Flanged Plate by means of a bolt and lock-nuts.

Model No. 0.115 Derricking Crane

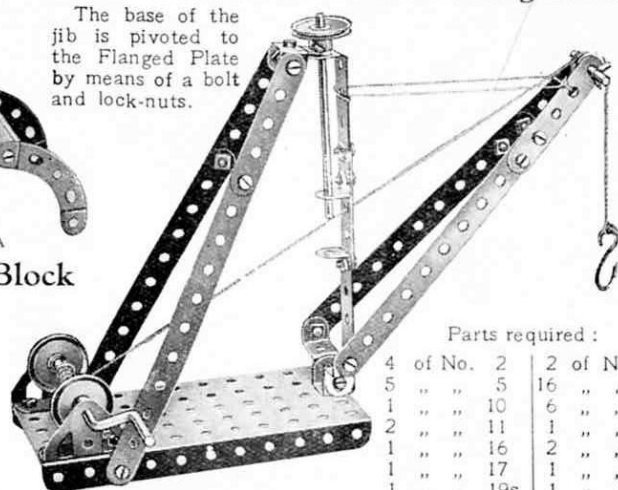


Parts required :

4 of No. 2	2 of No. 35
5 " " 5	16 " " 37
1 " " 10	6 " " 37A
2 " " 11	1 " " 40
1 " " 16	2 " " 48A
1 " " 17	1 " " 52
1 " " 19s	1 " " 57
3 " " 22	6 " " 111c
1 " " 23	2 " " 125
2 of No. 126	

Parts required :


9 of No. 5
6 " " 12
1 " " 19s
4 " " 22
2 " " 35
16 " " 37
6 " " 37A
2 " " 48A
1 " " 52
2 " " 90A
6 " " 111c
2 " " 126
2 " " 126A

Model No. 0.116 Dump Car

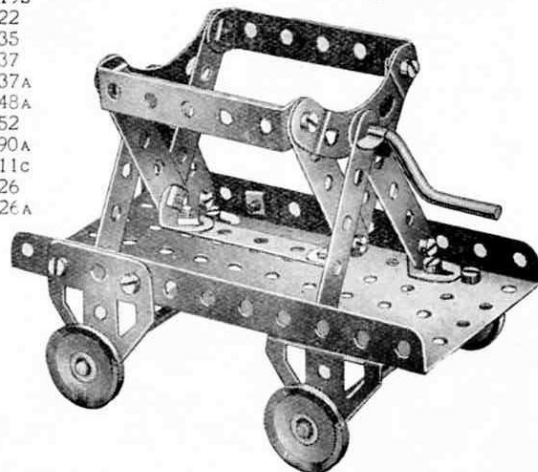

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)


Model No. 0.117 Swing

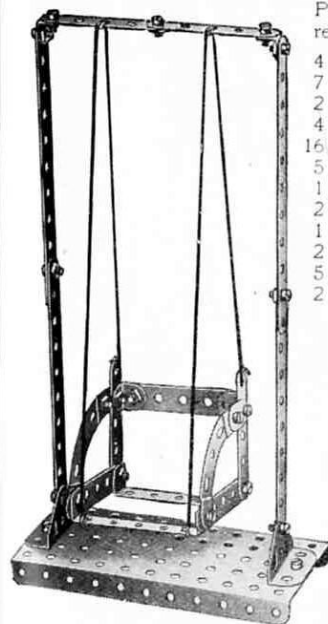

Parts required:

4	of No.	2
7	" "	5
2	" "	10
4	" "	12
16	" "	37
5	" "	37A
1	" "	40
2	" "	48A
1	" "	52
2	" "	90A
5	" "	111c
2	" "	126

Model No. 0.119
Aeroplane

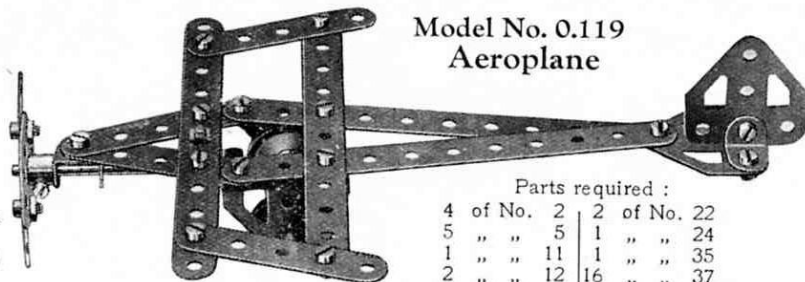


Parts required:

4	of No.	2	2	of No.	22
5	" "	5	1	" "	24
1	" "	11	1	" "	35
2	" "	12	16	" "	37
1	" "	16	2	" "	37A
1	" "	17	2	" "	111c
			2	" "	126
			1	" "	126A

Model No. 0.123 Arch

Parts required:

4	of No.	2
2	" "	11
6	" "	12
16	" "	37
3	" "	37A
1	" "	52
4	" "	90A
3	" "	111c

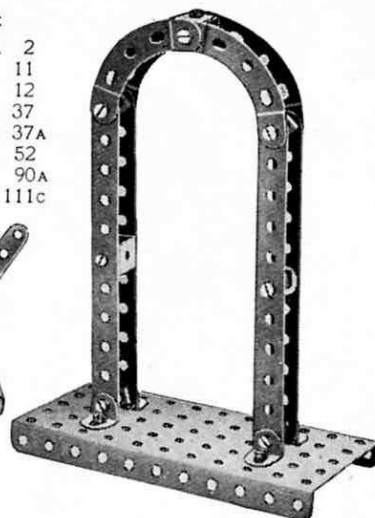


Model No. 0.121
Notice Board

Model No. 0.120
Hat Rack

Parts required:


2	of No.	2
4	" "	5
2	" "	11
5	" "	12
1	" "	17
1	" "	22
16	" "	37
4	" "	37A
2	" "	48A
4	" "	90A
4	" "	111c
2	" "	126A

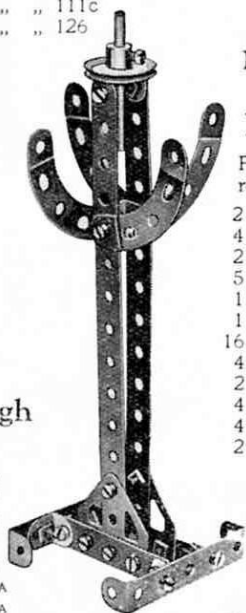

Model No. 0.118 Plough

Parts required:


2	of No.	2	3	of No.	12
1	" "	5	1	" "	17
2	" "	10	1	" "	22
2	" "	11	15	" "	37
			1	" "	44
			1	" "	48A
			4	" "	90A

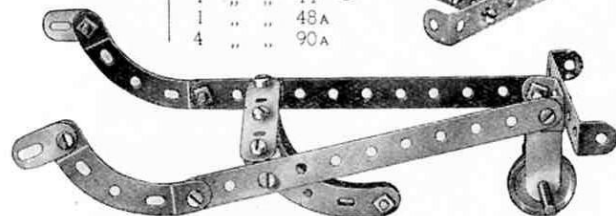

Model No. 0.122
Music Stand

Parts required:


1	of No.	2
9	" "	5
3	" "	12
12	" "	37
2	" "	48A
1	" "	126

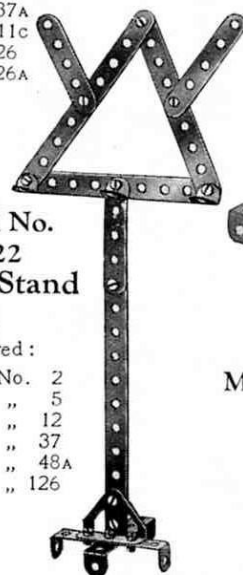

Model No. 0.124 See-Saw


Parts required:

4	of No.	2	1	of No.	52
1	" "	16	4	" "	90A
2	" "	22	2	" "	126
12	" "	37			
1	" "	48A			

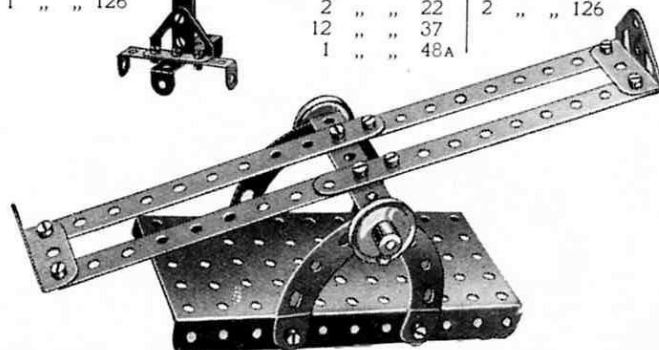


Parts required:

10	of No.	37
1	" "	52
3	" "	90A
2	" "	126A

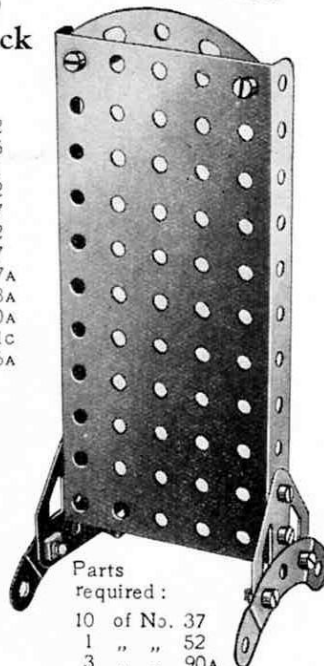

These models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)


Model No. 0.125 Drilling Machine

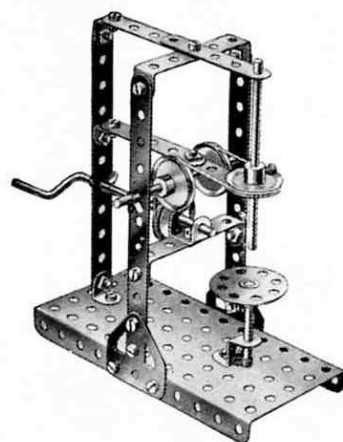

Parts required :

3 of No.	2
4 "	5
2 "	11
3 "	12
1 "	16
1 "	17
1 "	19s
4 "	22
1 "	24
6 "	35
16 "	37
6 "	37A
1 "	40
2 "	48A
1 "	52
6 "	111c
1 "	125
2 "	126A


Model No. 0.127 Scales

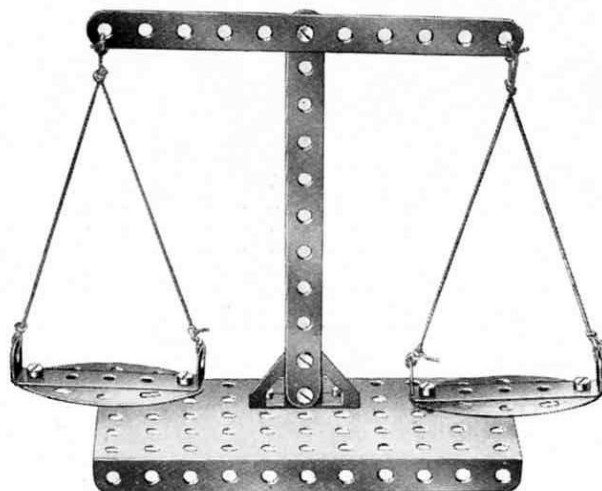

Model No. 0.129 Cot

Parts required :


4 of No.	2	14 of No.	37
7 "	5	1 "	40
3 "	12	2 "	48A
4 "	22	1 "	52
	4 of No.	111c	

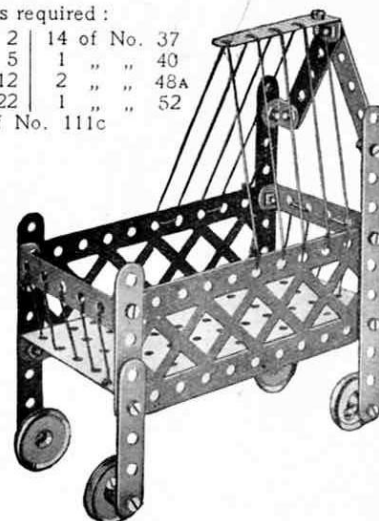

Model No. 0.126 Counter Scales

Parts required :

1 of No.	2	7 of No.	37
2 "	10	1 "	44
2 "	12	1 "	52
1 "	17	2 "	126

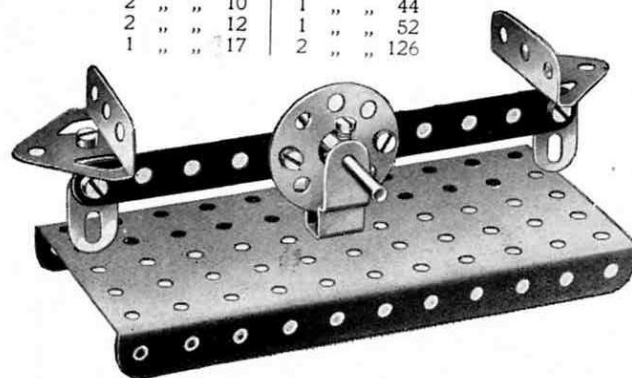

Parts required :

2 of No.	2	2 of No.	48A
9 "	37	1 "	52
1 "	37A	4 "	90A
1 "	40	1 "	126

Model No. 0.128 Single Sheave Pulley Block




Parts required

1 of No.	23
12 "	37A
1 "	57
4 "	111c
2 "	126A

Model No. 0.130 Couch

Parts required :


1 of No.	2	16 of No.	37	1 of No.	52
3 "	5	4 "	37A	4 "	90A
4 "	12	2 "	48A	4 "	111c

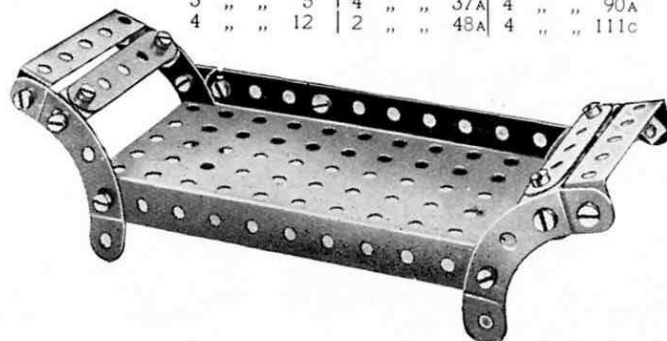

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)

31

Model No. 0.131 Rock Drill

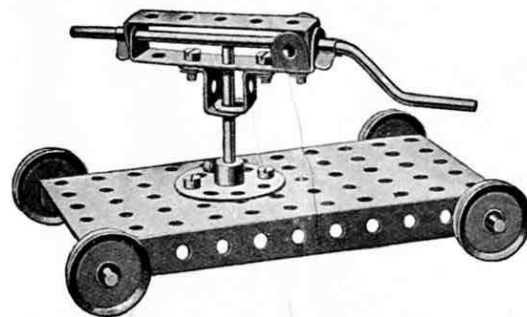

Parts required :

1 of No. 11	4 of No. 22	2 of No. 48A
2 " " 16	1 " " 24	1 " " 52
1 " " 17	2 " " 35	2 " " 125
1 " " 19s	5 " " 37	

Model No. 0.133 Prancing Horse

Parts required :

6 of No. 5	
4 " " 12	
1 " " 17	
1 " " 19s	
4 " " 22	
1 " " 24	
16 " " 37	
4 " " 37A	
1 " " 40	
1 " " 44	
1 " " 52	
1 " " 90A	
4 " " 111c	
2 " " 125	
1 " " 126	
1 " " 126A	


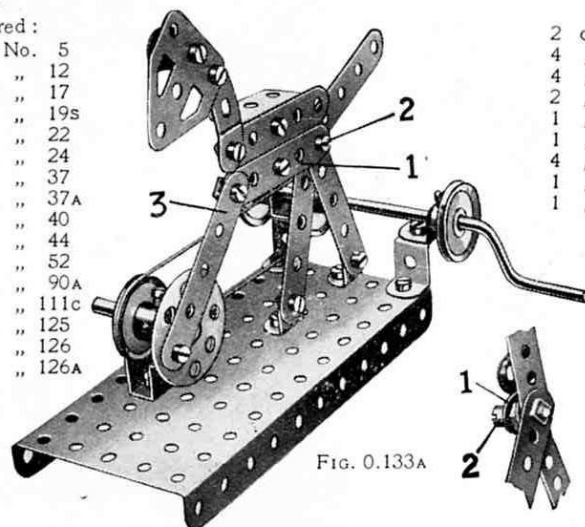


FIG. 0.133A

Model No. 0.135 Swivelling Crane

Parts required :

2 of No. 2	4 of No. 35
4 " " 5	16 " " 37
4 " " 12	2 " " 37A
2 " " 16	1 " " 40
1 " " 17	1 " " 44
1 " " 19s	2 " " 48A
4 " " 22	1 " " 52
1 " " 23	1 " " 57
1 " " 24	2 " " 111c
2 of No. 125	

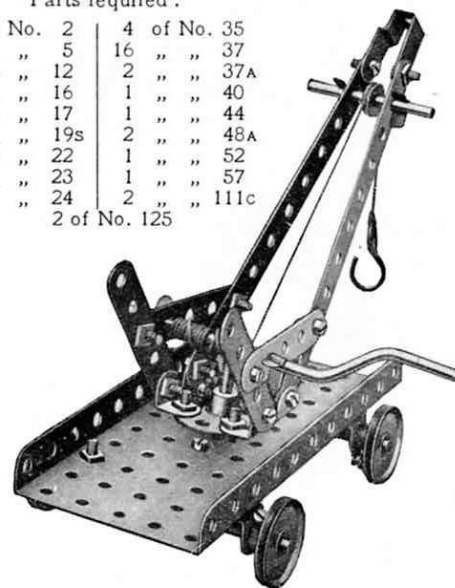

Model No. 0.132 Well Windlass




Parts required :

6 of No. 5	2 of No. 22	1 of No. 40
4 " " 12	1 " " 24	1 " " 57
1 " " 19s	12 " " 37	4 " " 90A

The Strip 1 forming part of the body is free to move about the Bolt 2, but two Nuts on the latter secure the rear legs and tail rigidly together. The arrangement of the various Strips about this Bolt 2 is shown more clearly in Fig. 0.133A. The Strip 3 is free to move at each end about pivots formed from Bolts and Nuts.

Model No. 0.134 Hammock

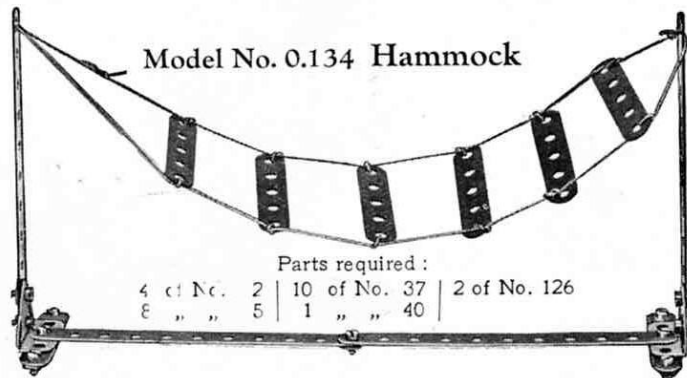


Parts required :

4 of No. 2	10 of No. 37	2 of No. 126
8 " " 5	1 " " 40	


Model No. 0.136 Go Chair

Parts required :

2 of No. 2	
7 " " 5	
2 " " 16	
4 " " 22	
11 " " 37	
1 " " 40	
2 " " 48A	

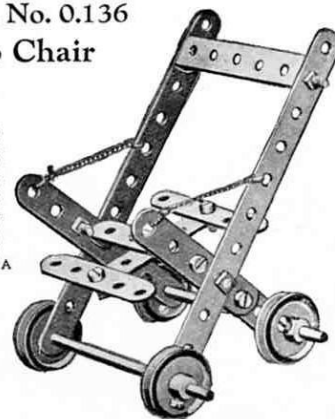


These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)

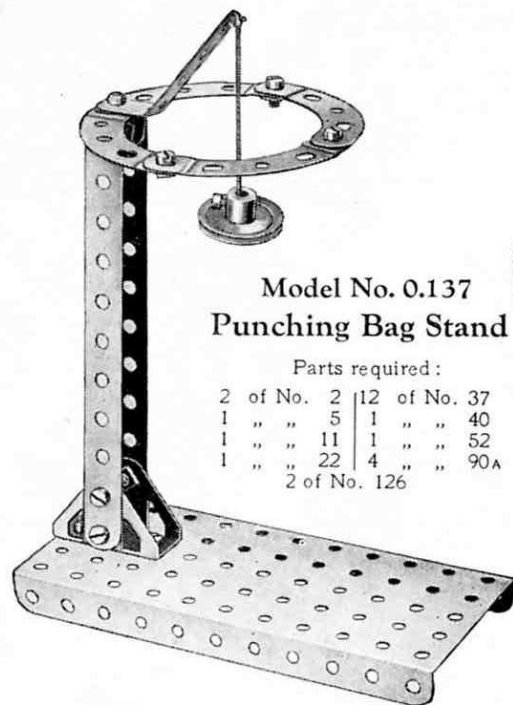

Model No. 0.137
Punching Bag Stand

Parts required :

2 of No. 2	12 of No. 37
1 " " 5	1 " " 40
1 " " 11	1 " " 52
1 " " 22	4 " " 90A
2 of No. 126	

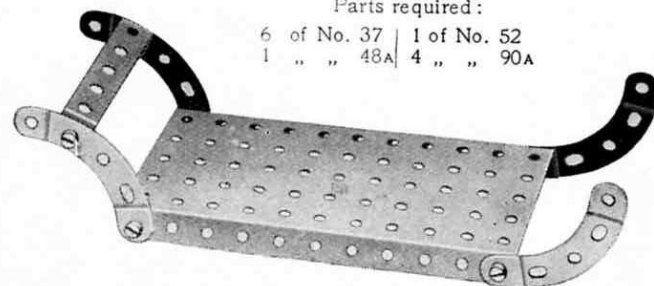


Model No. 0.138 Sled

Parts required :

6 of No. 37	1 of No. 52
1 " " 48A	4 " " 90A


Model No. 0.139
Power Hack Saw

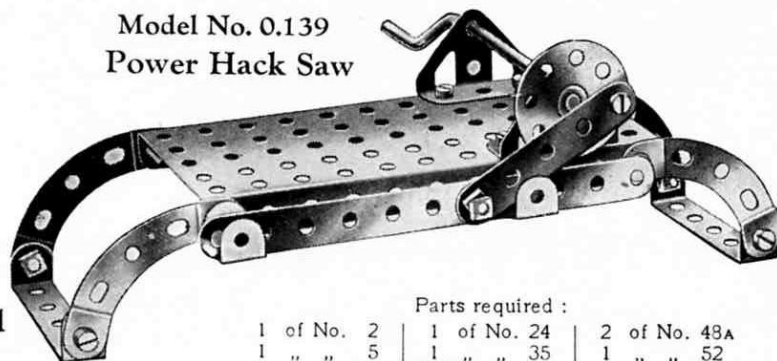

Parts required :

1 of No. 2	1 of No. 24	2 of No. 48A
1 " " 5	1 " " 35	1 " " 52
2 " " 11	16 " " 37	4 " " 90A
1 " " 19s	2 " " 37A	2 " " 126

Model No. 0.140 Old Siege Gun

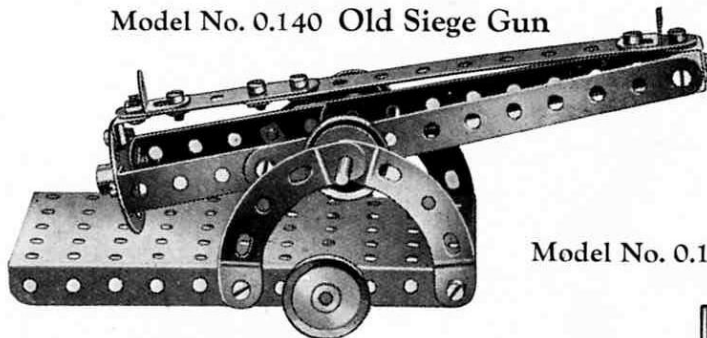


Parts required :

3 of No. 2	1 of No. 24
1 " " 11	16 " " 37
4 " " 12	2 " " 37A
1 " " 15	2 " " 48A
2 " " 16	1 " " 52
4 " " 22	4 " " 90A
2 of No. 111c	

Model No. 0.141
Junction Signal

Parts required :


3 of No. 2
7 " " 5
2 " " 10
2 " " 11
2 " " 12
2 " " 17
2 " " 22
1 " " 23
4 " " 35
16 " " 37
5 " " 37A
1 " " 40
1 " " 52
5 " " 111c
1 " " 126A

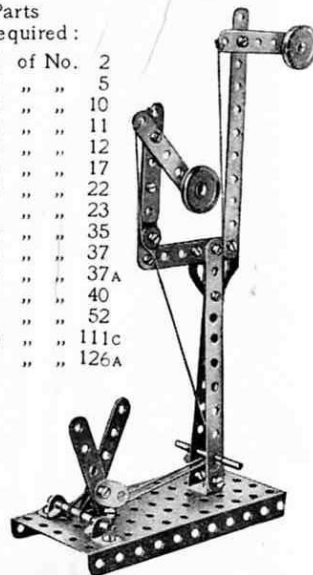


Model No. 0.142 Battleship


Parts required :

4 of No. 2	1 of No. 35
2 " " 5	16 " " 37
4 " " 10	6 " " 37A
1 " " 11	2 " " 48A
1 " " 16	1 " " 52
1 " " 17	2 " " 90A
3 " " 22	6 " " 111c
1 " " 24	1 " " 125
2 of No. 126	

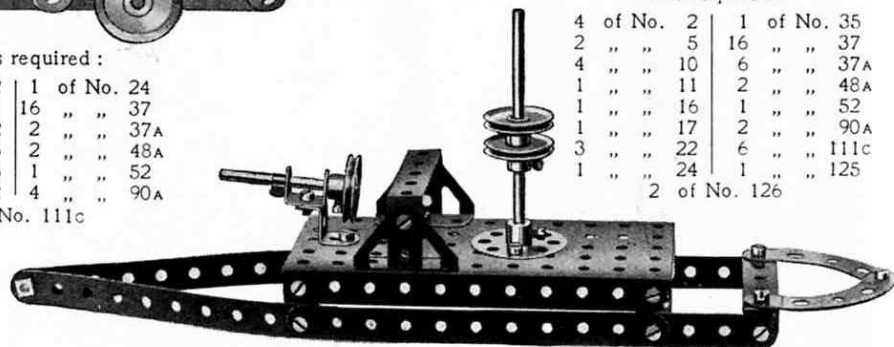

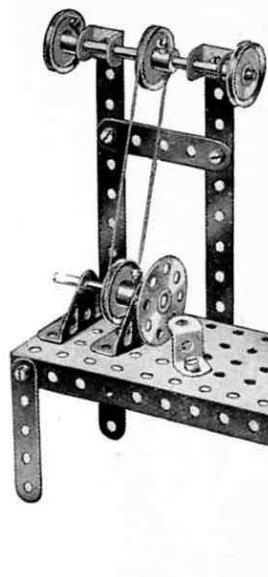
Model No. 0.143 Bench LatheParts
required :

3	of No.	2
5	" "	5
2	" "	11
1	" "	16
1	" "	17
4	" "	22
1	" "	24
15	" "	37
1	" "	40
1	" "	52
1	" "	125
2	" "	126

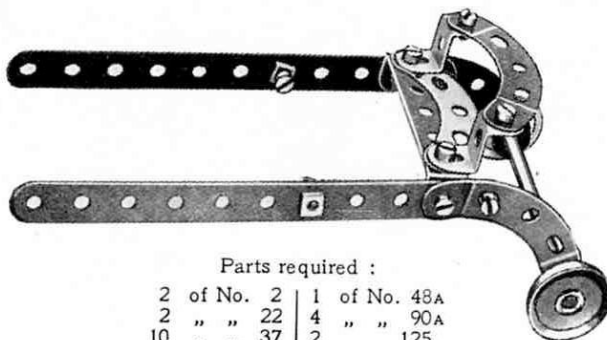Model No. 0.145 Sulkey

Parts required :


2	of No.	2	1	of No.	48A
2	" "	22	4	" "	90A
10	" "	37	2	" "	125

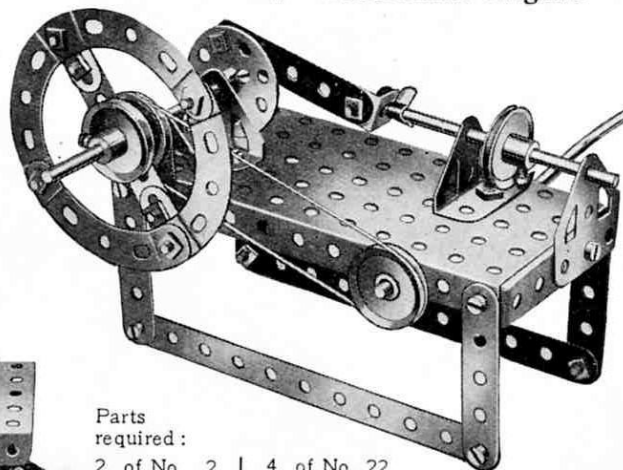Model No. 0.146 Horizontal EngineParts
required :

2	of No.	2	4	of No.	22	1	of No.	52
6	" "	5	1	" "	24	4	" "	90A
2	" "	10	3	" "	35	5	" "	111c
1	" "	12	16	" "	37	2	" "	126
2	" "	16	5	" "	37A	2	" "	126
1	" "	19s	1	" "	40	2	" "	126A


**Model No. 0.147
Punching Machine**Parts
required :

3	of No.	2
4	" "	5
2	" "	10
2	" "	11
6	" "	12
1	" "	16
1	" "	17
2	" "	22
2	" "	35
16	" "	37
6	" "	37A
1	" "	48A
1	" "	52
6	" "	111c
2	" "	126

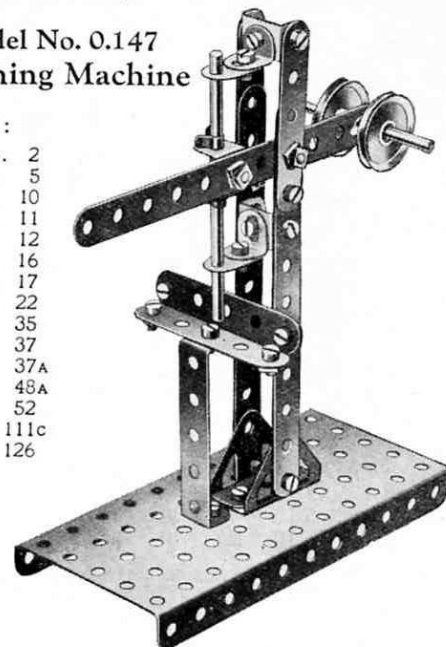**Model No. 0.144 Bench**


Parts required :

2	of No.	2	1	of No.	52
8	" "	37	4	" "	90A

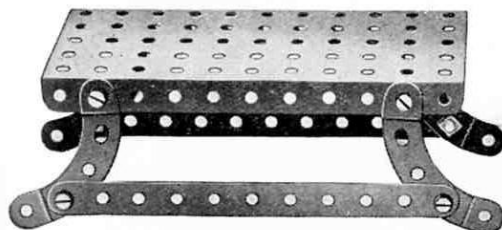**Model No. 0.148 Bath Chair**


Parts required :

4	of No.	5	16	of No.	37
2	" "	12	2	" "	48A
2	" "	16	1	" "	52
4	" "	22	3	" "	90A
			2	of No.	126

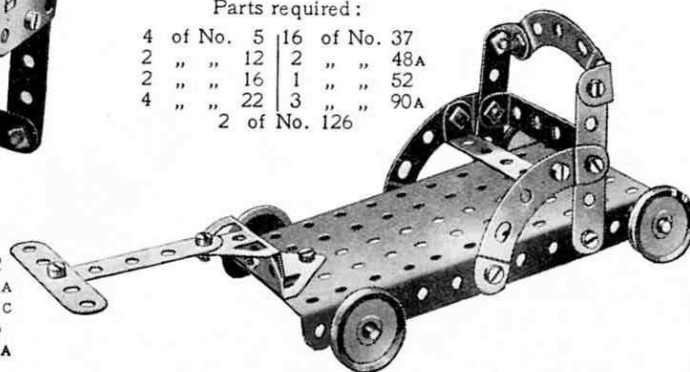

These Models can be built with MECCANO Outfit No. 0 (or No. 00 and No. 00A)

Model No. 0.149
Parallel Bars

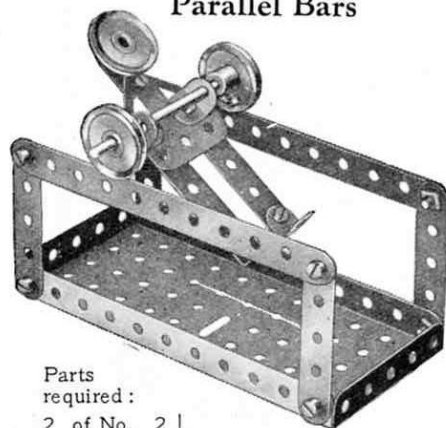

Parts
required :

2 of No. 2	2 of No. 35
6 " " 5	13 " " 37
1 " " 10	1 " " 52
4 " " 12	1 " " 111c
1 " " 16	1 " " 126A
3 " " 22	

Model No. 0.151 Candle Shade

Parts
required :

4 of No. 5
8 " " 12
1 " " 24
16 " " 37
4 " " 90A



Model No. 0.152
Prehistoric Animal



Parts
required :

4 of No. 2
2 " " 5
5 " " 10
2 " " 11
6 " " 12
14 " " 37
4 " " 90A


Model No. 0.153 Revolving Office Chair

Parts required :

3 of No. 5	2 of No. 37A
1 " " 12	2 " " 48A
1 " " 17	4 " " 90A
2 " " 22	2 " " 111c
1 " " 24	2 " " 126
16 " " 37	1 " " 126A




Model No. 0.154 Bridge

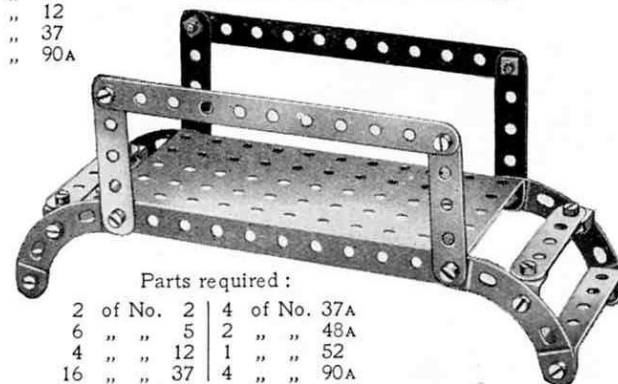

Parts required :

2 of No. 2	4 of No. 37A
6 " " 5	2 " " 48A
4 " " 12	1 " " 52
16 " " 37	4 " " 90A
	4 of No. 111c

Model No. 0.150
Billiard Player

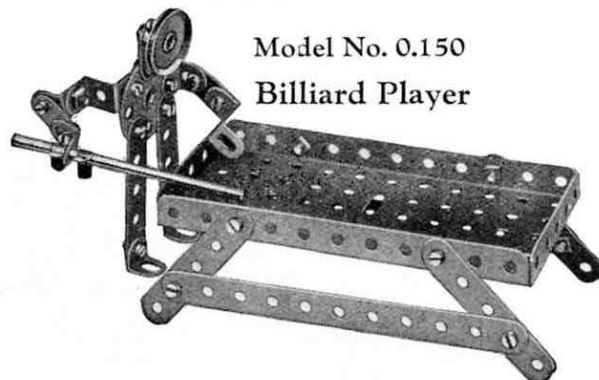


Parts
required :

2 of No. 2
6 " " 5
3 " " 10
5 " " 12
1 " " 16
1 " " 22
1 " " 24
2 " " 35
16 " " 37
5 " " 37A
5 " " 111c
2 " " 125

HOW TO CONTINUE


This completes our examples of models that may be made with MECCANO Outfit No. 0 (or No. 00 and No. 00A). The next models are a little more advanced, requiring extra parts to construct them. The necessary parts are all contained in a No. 0A Accessory Outfit, the price of which may be obtained from any Meccano dealer.

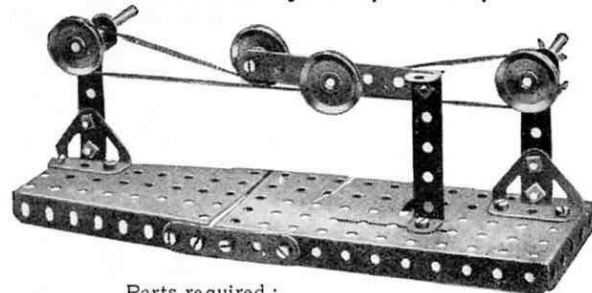Model No. 1.1 Jockey Pulley

Parts required :

1 of No. 3	2 of No. 35	1 of No. 52
4 " " 5	20 " " 37	1 " " 54
2 " " 17	1 " " 37A	2 " " 111c
4 " " 22	1 " " 40	2 " " 126
	1 " " 48A	

The weight of the pivoted $3\frac{1}{2}$ " Strip, augmented by the 1" fast Pulley Wheel, causes the jockey pulley to press on the belt. Hence the latter is kept always taut.

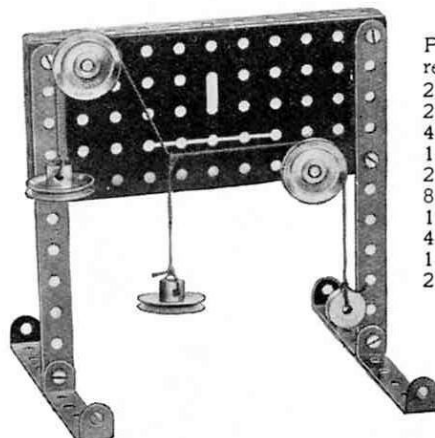Model No. 1.2 Triangle of Forces


Parts required :

2 of No. 2
2 " " 18A
4 " " 22
1 " " 23
2 " " 35
8 " " 37
1 " " 40
4 " " 48A
1 " " 52
2 " " 125

The suspended weights represent three forces acting on a central point. If a triangle is drawn with its sides respectively parallel to the three converging cords, i.e., parallel to the directions of the three forces, the lengths of the sides will be found to be proportional to the respective magnitudes of the forces.

Parts required :

2 of No. 2	3 of No. 22
1 " " 5	1 " " 35
1 " " 16	11 " " 37
1 " " 17	1 " " 40
1 " " 18A	1 " " 44
2 " " 19B	1 " " 48
1 " " 19s	5 " " 48A
1 of No. 52	

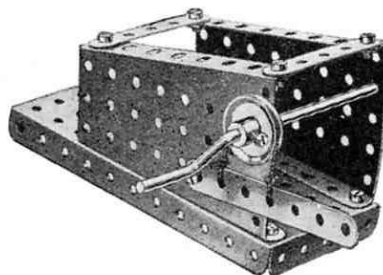Model No. 1.3 Band Brake


Parts required :

1 of No. 3
2 " " 5
1 " " 19s
1 " " 22
1 " " 35
9 " " 37
1 " " 37A
1 " " 40
1 " " 52
2 " " 54

Model No. 1.4 "H" Girder


Parts required :

6 of No. 2
2 " " 10
8 " " 12
12 " " 37

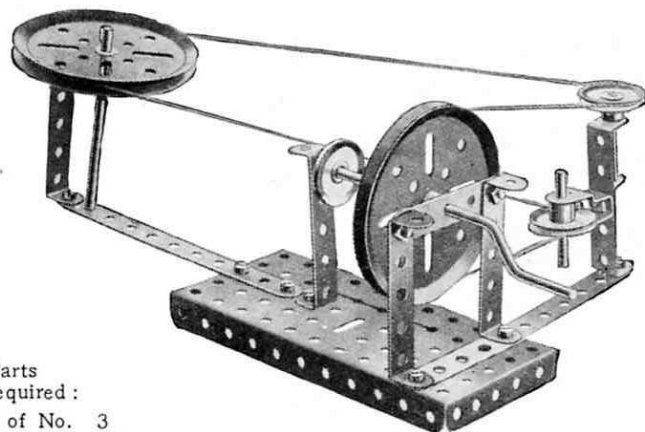**Model No. 1.5 Belt Gear Right-angle Drive Transmission****Model No. 1.6 Bacon Slicer**

Parts required :

6 of No. 5	2 of No. 22
2 " " 10	1 " " 35
1 " " 16	10 " " 37
1 " " 19B	1 " " 40
1 " " 19s	1 " " 52
2 of No. 125	

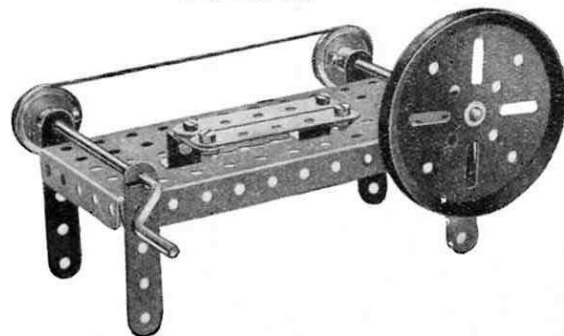


These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.7 Lever of the Second Order

(Demonstration Model)

Parts
required :
2 of No. 2
4 " " 5
1 " " 18A
1 " " 22
1 " " 35
11 " " 37
1 " " 40
1 " " 52
1 " " 57
1 " " 125
1 " " 126
1 " " 126A

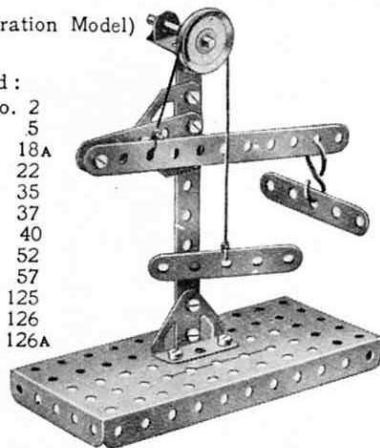


The fulcrum is at one end, the power at the other and the load lies between the two.

Model No. 1.8 Lever of the Third Order

(Demonstration Model)


Parts
required :
2 of No. 2
4 " " 5
1 " " 18A
1 " " 22
1 " " 35
10 " " 37
1 " " 40
1 " " 52
1 " " 57
1 " " 125
2 " " 126

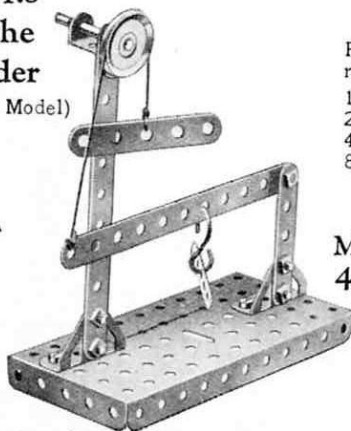

The fulcrum is at one end, the load at the other and the power lies between the two.


Model No. 1.9 Compound Triangulated Truss

Parts
required :
2 of No. 1
7 " " 2
7 " " 37

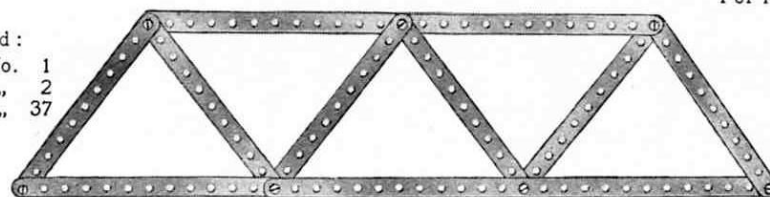


Model No. 1.10 Howe Truss

Parts
required :
1 of No. 1
8 " " 2
1 " " 3
7 " " 5
21 " " 37

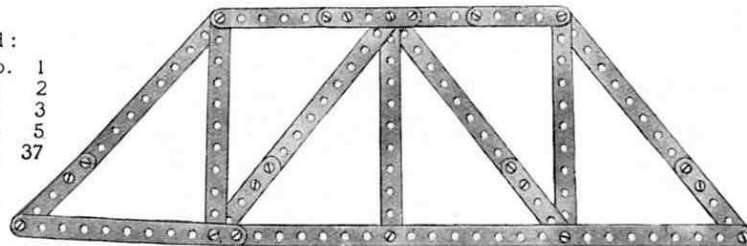


Model No. 1.11 Triangulated Truss

Parts
required :
1 of No. 1
2 " " 2
4 " " 5
8 " " 37

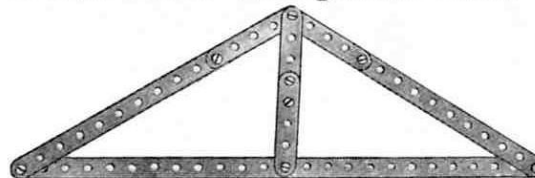


Model No. 1.12 45° Set-Square




Parts required :
3 of No. 2 | 1 of No. 3
5 of No. 37

Model No. 1.13 60° Set-Square



Parts
required :
2 of No. 2
1 " " 3
2 " " 10
5 " " 37


Model No. 1.14 Belt Gear For Reversing Motion of Driven Shaft

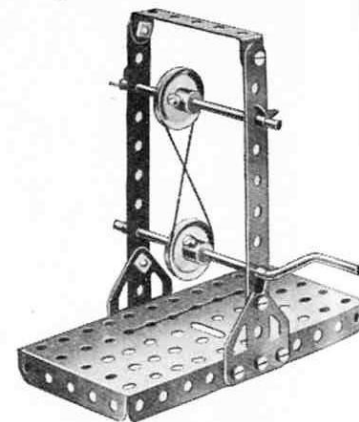

Parts required :
2 of No. 2 | 10 of No. 37
1 " " 16 | 1 " " 40
1 " " 19s | 1 " " 48A
2 " " 22 | 1 " " 52
4 " " 35 | 2 " " 126A

Model No. 1.15 Belt Gear For Driving Shafts at Right Angles

Parts
required :
2 of No. 2
1 " " 16
1 " " 19s
2 " " 22
3 " " 35
12 " " 37
1 " " 40
1 " " 52
2 " " 126
2 " " 126A

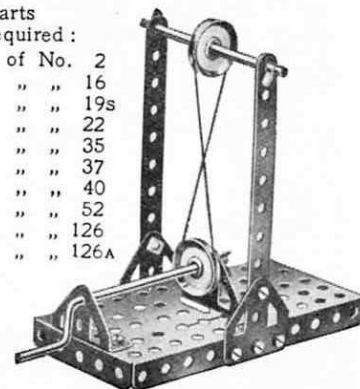


These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

37

Model No. 1.16 Pulley Block

Demonstration Model:
1 Fixed and 3 Movable Sheaves.
Theoretical Mechanical advantage: 8 to 1

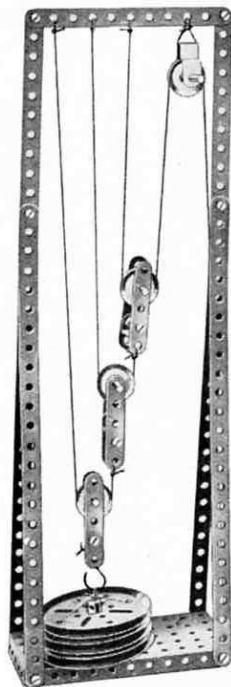

Parts required :


4 of No. 1	3 of No. 19B
3 " " 2	4 " " 22
6 " " 5	15 " " 37
2 " " 11	1 " " 40
2 " " 12	1 " " 44
2 " " 17	1 " " 52
2 " " 18A	1 " " 57

Model No. 1.17 Pulley Block

Demonstration Model:
3 Fixed and 2 Movable Sheaves.
Theoretical Mechanical advantage: 5 to 1

Parts required :

4 of No. 1	4 of No. 19B
7 " " 2	4 " " 22
6 " " 5	6 " " 35
2 " " 10	22 " " 37
2 " " 12	1 " " 40
2 " " 16	1 " " 44
2 " " 17	1 " " 52
2 " " 18A	1 " " 57
2 of No. 126A	

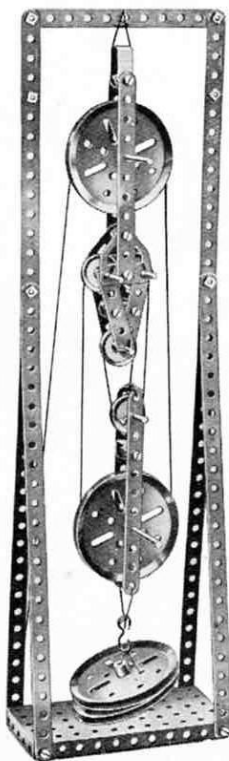

Model No. 1.18 Pulley Block

Demonstration Model:
1 Fixed Sheave and 2 Suspended Blocks.
Theoretical Mechanical advantage: 4 to 1



Parts required :


4 of No. 1	4 of No. 19B
1 " " 3	3 " " 22
4 " " 5	10 " " 37
2 " " 11	1 " " 40
1 " " 17	1 " " 44
2 " " 18A	1 " " 52
1 of No. 27	

Model No. 1.19 Belt Gear

Parts required :

2 of No. 2	5
1 " " 5	16
2 " " 16	19B
1 " " 19S	22
2 " " 22	35
8 " " 35	37
16 " " 37	40
1 " " 40	48A
2 " " 48A	52
1 " " 52	126
2 " " 126	126A

Drive Transmission
for shafts
not in
line

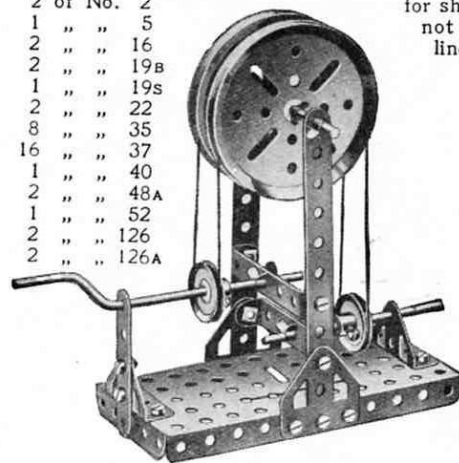



Model No. 1.20 Belt Gear

Parts required :


2 of No. 2	12
1 " " 12	16
2 " " 16	19B
1 " " 19S	22
2 " " 22	35
8 " " 35	37
15 " " 37	40
1 " " 40	48A
1 " " 48A	52
1 " " 52	54
1 " " 54	126
2 " " 126	126A

Obtuse-angle
Drive
Transmission

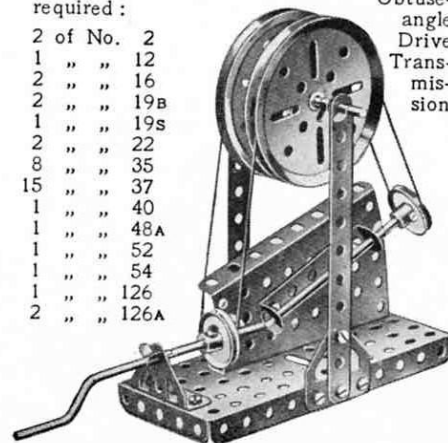


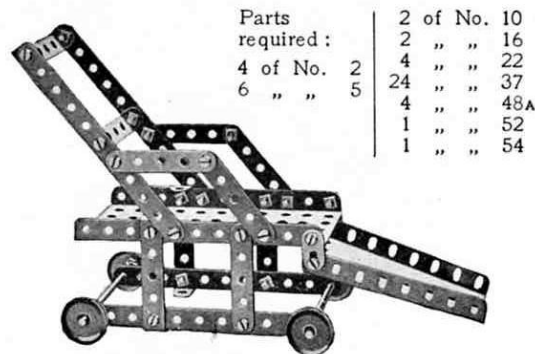Model No. 1.21 Invalid Chair**Model No. 1.22 Letter Balance**

Parts required:		
6 of No. 2	4 of No. 22	2 of No. 48A
3 " " 5	1 " " 24	1 " " 52
1 " " 10	26 " " 37	2 " " 111c
1 " " 12	4 " " 37A	2 " " 126
2 " " 18A	2 " " 38	2 " " 126A
1 " " 19B	1 " " 44	

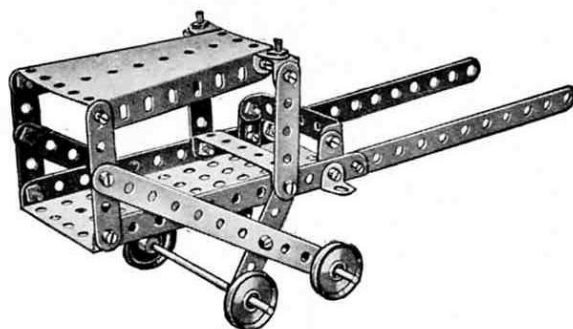**Model No. 1.23 Ticca Gharry**


Parts required:		
4 of No. 2	6 of No. 12	22 of No. 37
6 " " 5	2 " " 16	1 " " 52
2 " " 10	4 " " 22	1 " " 54

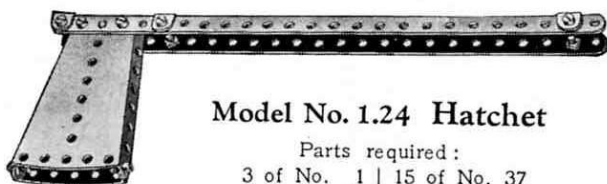**Model No. 1.24 Hatchet**


Parts required:	
3 of No. 1	15 of No. 37
6 " " 12	2 " " 54

Model No. 1.25 Truck with Sides

Parts required:	
4 of No. 2	2
4 " " 5	5
2 " " 16	16
4 " " 22	22
12 " " 37	37
4 " " 48A	48A
1 " " 52	52

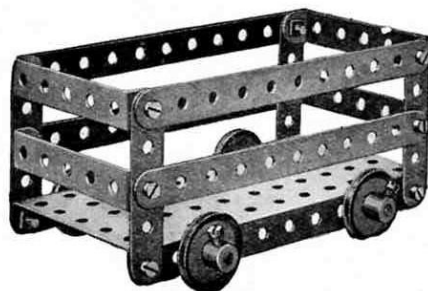**Model No. 1.26 Mechanical Saw**


Parts required:		
1 of No. 2	1 of No. 17	4 of No. 38
8 " " 5	1 " " 19s	1 " " 40
1 " " 10	3 " " 22	1 " " 44
1 " " 11	1 " " 24	4 " " 48A
4 " " 12	3 " " 35	1 " " 52
1 " " 16	22 " " 37	2 " " 125
		1 " " 126A

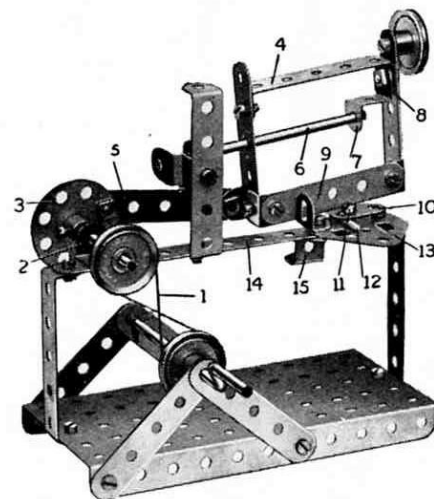

The Strip 9 represents the saw. The Crank Handle drives, through a belt 1, a short Rod journalled in a Double Bracket 2 and carrying a Bush Wheel 3. The latter imparts a reciprocating motion to the saw frame 4 through a 2½" Strip 5 loosely mounted on Bolts secured to the Bush Wheel and to an Angle Bracket bolted to the saw frame. This frame slides on a 3½" Rod 6, which acts as a guide, passing through the frame and supported in a Reversed Angle Bracket 7. A Washer is placed on the Bolt 8 behind the Bracket 7. A vice to secure the objects in position for cutting consists of a Flat Bracket 10 mounted on a Bolt 11, a few turns of which causes the Flat Bracket to grip the object 12. The Bolt 11 enters a Nut held between the Flat Trunnion 13 and 5½" Strip 14, which are spaced apart for the purpose by Washers placed on the two Bolts holding the Trunnion in position. The saw frame rests on the stop 15 when not in use. A 1" Pulley secured to the top of the frame acts as a weight and helps to steady the saw.

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.27 Dinner Wagon

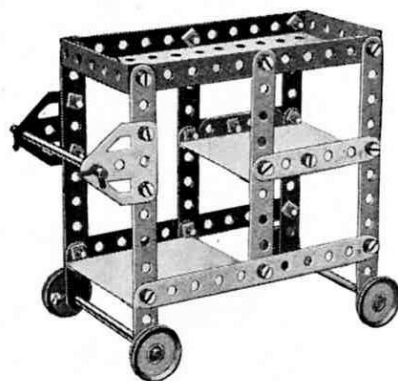


Parts required :

6 of No.	2
8 " "	5
4 " "	12
3 " "	16
4 " "	22
2 " "	35
2 " "	37
2 " "	48A
1 " "	52
2 " "	126A

The two lower platforms are constructed out of pieces of ordinary cardboard, their outer edges resting on 2½" Double Angle Strips and their inner edges on Angle Brackets.


Model No. 1.28 Tip Wagon

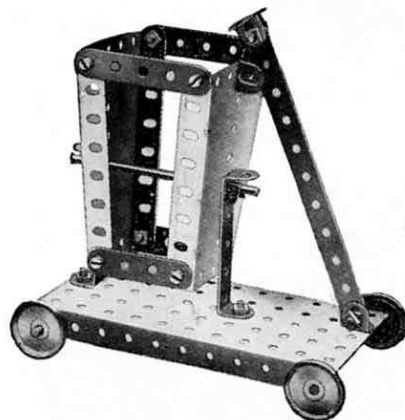

Parts required :

1 of No.	2
4 " "	5
5 " "	12
3 " "	16
4 " "	22
2 " "	35
14 " "	37
2 " "	48A
1 " "	52
2 " "	54

Model No. 1.29 Aeroplane

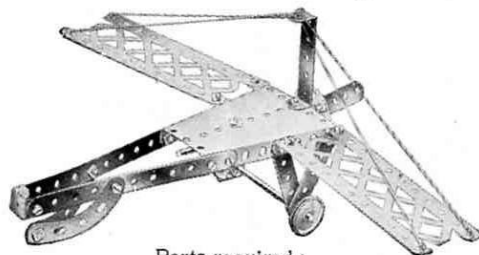

Parts required :

2 of No.	2	2 of No.	16	1 of No.	48A
5 " "	5	2 " "	22	1 " "	54
1 " "	11	1 " "	24	2 " "	90A
6 " "	12	21 " "	37	2 " "	100
		1 " "	40		


Model No. 1.30 Timber Drag



Parts required :

4 of No.	2	2 of No.	16	8 of No.	37
2 " "	11	4 " "	22	4 " "	48A


Model No. 1.31 Lawn Mower

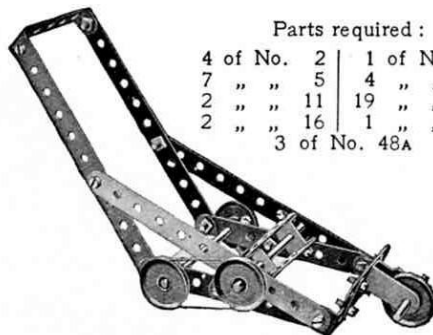

Parts required :

4 of No.	2	1 of No.	17
7 " "	5	4 " "	22
2 " "	11	19 " "	37
2 " "	16	1 " "	44
		3 of No.	48A


Model No. 1.32 Tandem Car

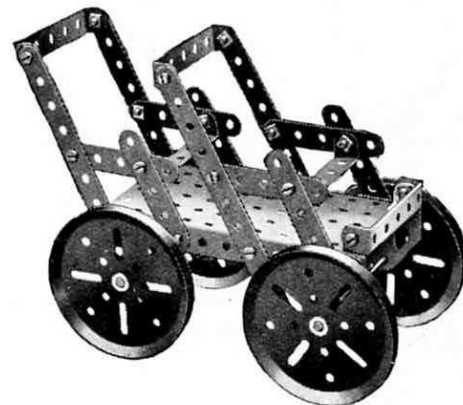

Parts required :

4 of No.	2	4 of No.	19B
8 " "	5	26 " "	37
2 " "	12	5 " "	48A
2 " "	16	1 " "	52
		2 of No.	126A

Model No. 1.33 Mechanical Hammer

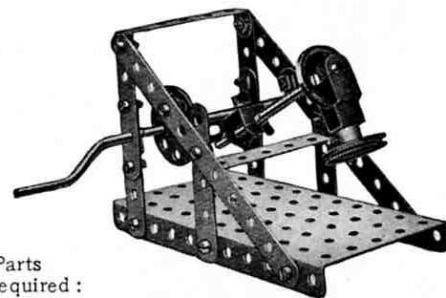


Parts required :

2 of No.	2	1 of No.	19s	18 of No.	37
6 " "	5	2 " "	22	1 " "	44
1 " "	11	1 " "	24	3 " "	48A
1 " "	12	4 " "	35	1 " "	52
1 " "	16				

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)


Model No. 1.34 Sawing Machine

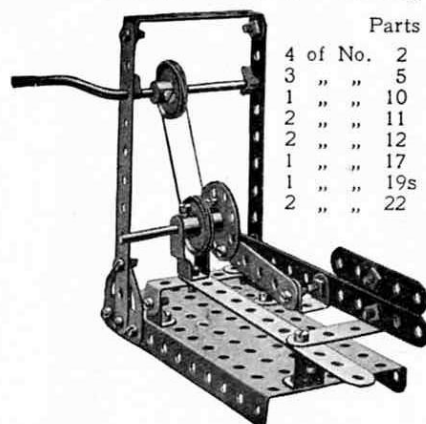

Parts required :

4 of No. 2	1 of No. 24
3 " " 5	2 " " 35
1 " " 10	22 " " 37
2 " " 11	1 " " 40
2 " " 12	1 " " 44
1 " " 17	2 " " 48A
1 " " 19s	1 " " 52
2 " " 22	2 " " 126A


Model No. 1.36 Steam Shovel

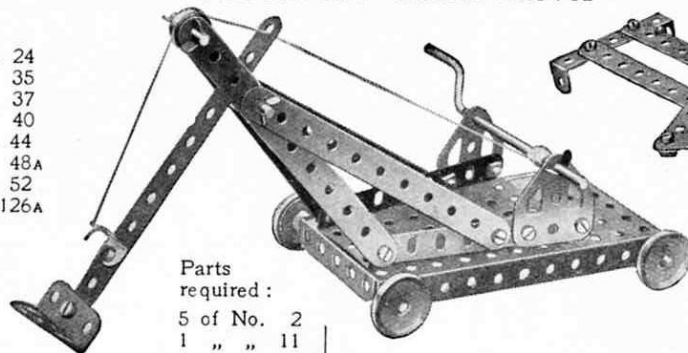

Parts required :

5 of No. 2	6 of No. 35	1 of No. 52
1 " " 11	12 " " 37	1 " " 54
1 " " 12	2 " " 37A	1 " " 111c
2 " " 16	2 " " 38	1 " " 126
2 " " 18A	1 " " 40	2 " " 126A
1 " " 19s		
4 " " 22		
1 " " 23		

Model No. 1.38 Lazy Tong

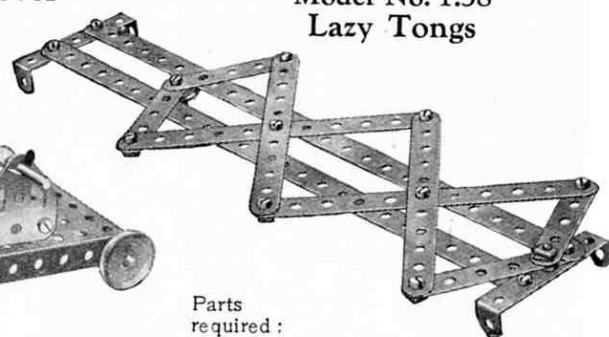


Parts required :

2 of No. 1	12 of No. 37
4 " " 2	10 " " 37A
4 " " 5	2 " " 48A
1 " " 23	2 " " 111c


Model No. 1.35 Manual Fire Engine

Parts required :

2 of No. 2	2 of No. 17	6 of No. 35
2 " " 5	1 " " 18A	12 " " 37
2 " " 11	4 " " 19B	2 " " 38
2 " " 16		1 " " 52
		2 " " 126

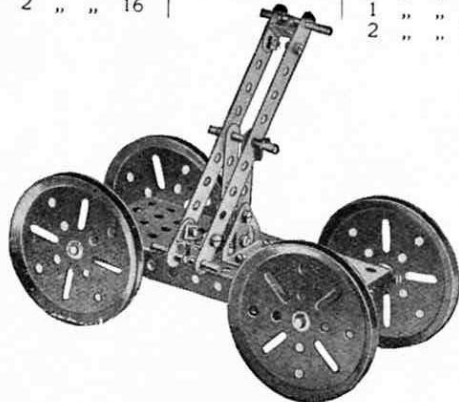


Model No. 1.37 Gangway

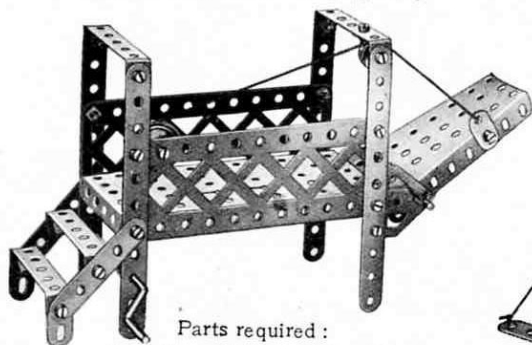

Parts required :

4 of No. 2	22 of No. 37
2 " " 5	1 " " 40
3 " " 10	4 " " 48A
1 " " 12	1 " " 52
1 " " 16	1 " " 54
1 " " 22	2 " " 100
1 " " 23	1 " " 111c
4 " " 35	2 " " 126A

Model No. 1.39 Sand Yacht

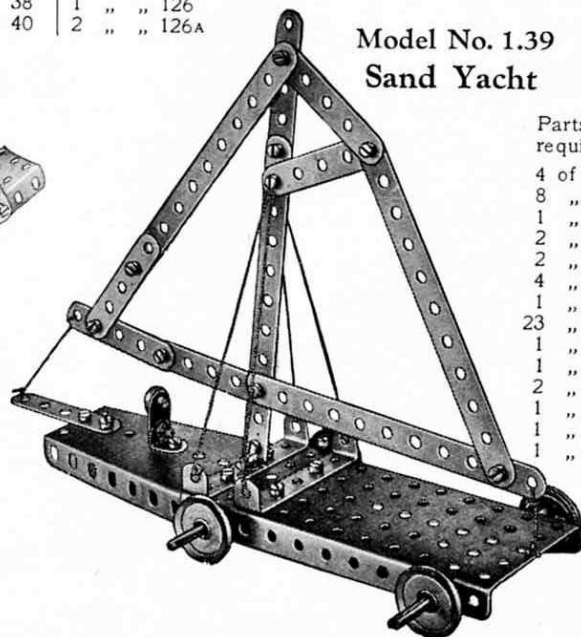


Parts required :

4 of No. 2	5
8 " " 5	
1 " " 10	
2 " " 12	
2 " " 16	
4 " " 22	
1 " " 23	
23 " " 37	
1 " " 37A	
1 " " 40	
2 " " 48A	
1 " " 52	
1 " " 54	
1 " " 111c	

Model No. 1.40

Horseman

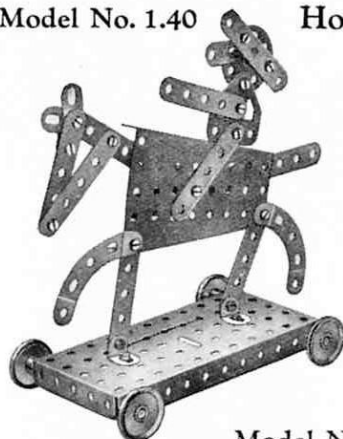
Parts
required :

2	of No.	2
7	" "	5
3	" "	10
2	" "	12
2	" "	16
4	" "	22
1	" "	24
17	" "	37
1	" "	52
1	" "	54
2	" "	90A
1	" "	126A


Model No. 1.41

Friction Grip Tongs

The hoisting cord is attached to the Double Bracket 1. The joints 2, 3 are lock-nutted, so that when the grip is raised the $\frac{1}{2}$ " loose Pulley Wheel 4 slides upward between the $2\frac{1}{4}$ " Strips 5, and the grip closes upon the block of wood or other material placed between its jaws.

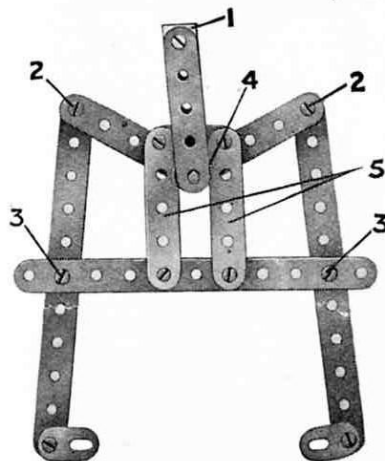
Parts
required :

3	of No.	2
8	" "	5
4	" "	10
1	" "	11
1	" "	23
2	" "	35
12	" "	37

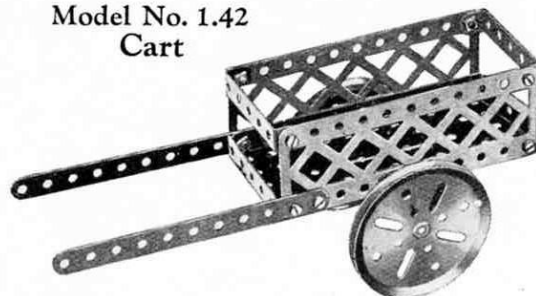Model No. 1.42
Cart


Parts required :

2	of No.	2	2	of No.	48A
1	" "	16	1	" "	52
2	" "	19B	2	" "	100
14	" "	37	2	" "	126A

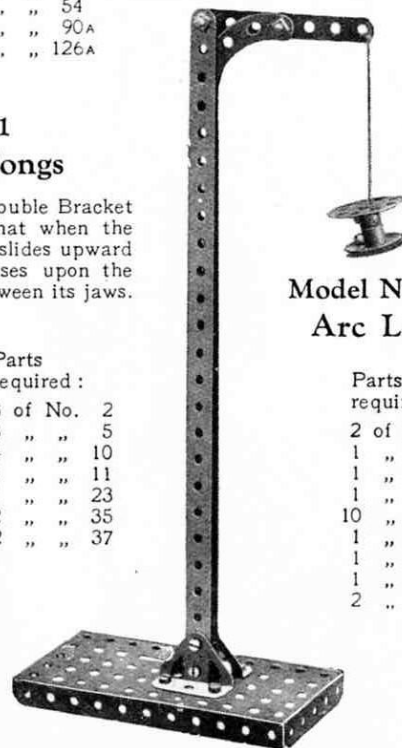Model No. 1.43
Arc LampParts
required :

2	of No.	1
1	" "	3
1	" "	22
1	" "	24
10	" "	37
1	" "	40
1	" "	52
1	" "	90A
2	" "	126

Model No. 1.44 Pen Rack

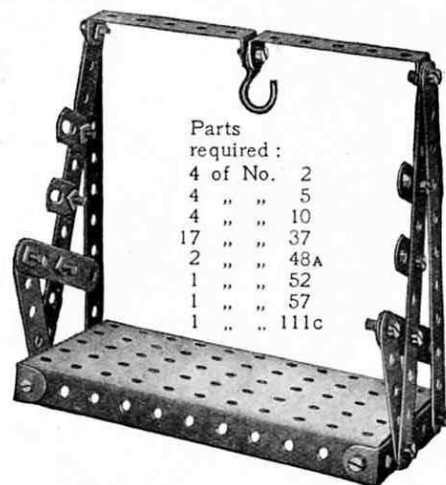
Parts
required :

4	of No.	2
4	" "	5
4	" "	10
17	" "	37
2	" "	48A
1	" "	52
1	" "	57
1	" "	111c

Model No. 1.45 Revolving See-Saw


Parts required :

4	of No.	2	1	of No.	19s	1	of No.	40
3	" "	5	2	" "	22	1	" "	44
2	" "	11	1	" "	24	4	" "	48A
4	" "	12	2	" "	35	1	" "	52
1	" "	16	25	" "	37	1	" "	54
1	" "	17	5	" "	38	2	" "	126

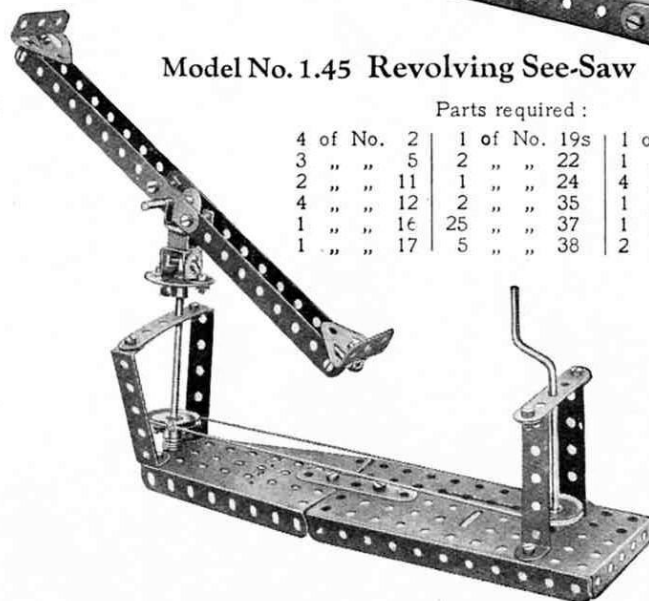

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)


Model No. 1.46 Deck Chair

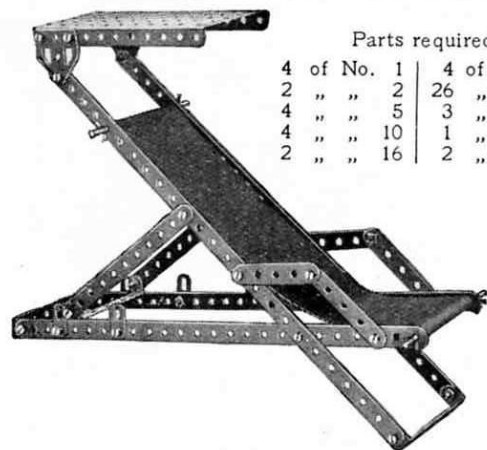

Parts required :

4 of No. 1	4 of No. 35
2 " " 2	26 " " 37
4 " " 5	3 " " 48A
4 " " 10	1 " " 52
2 " " 16	2 " " 126A

Model No. 1.48 Luggage Cart

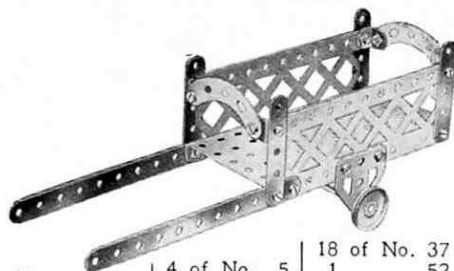


Parts required :	4 of No. 5	18 of No. 37
	4 " " 12	1 " " 52
	1 " " 16	2 " " 90A
2 of No. 2	2 " " 22	2 " " 100
		2 " " 126A

Model No. 1.50 Mechanical Stamp

Parts required :


5 of No. 2	
5 " " 5	
3 " " 16	
1 " " 17	
4 " " 22	
1 " " 24	
6 " " 35	
20 " " 37	
1 " " 40	
1 " " 44	
6 " " 48A	
1 " " 52	
4 " " 90A	
1 " " 100	
1 " " 126A	

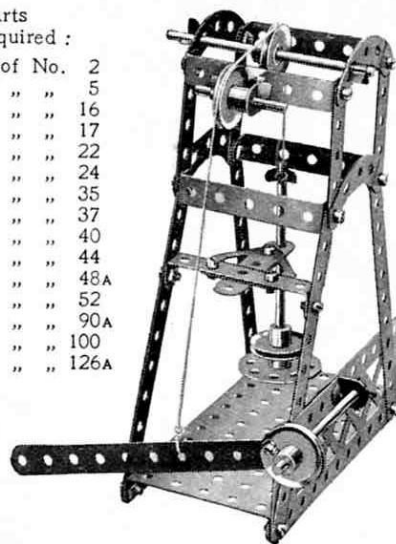


Model No. 1.47 Potter's Wheel

Parts required :

3 of No. 2	3 of No. 22
4 " " 5	1 " " 24
1 " " 16	1 " " 35
1 " " 18A	12 " " 37
1 " " 19B	1 " " 40
1 " " 19S	3 " " 48A
	1 of No. 52

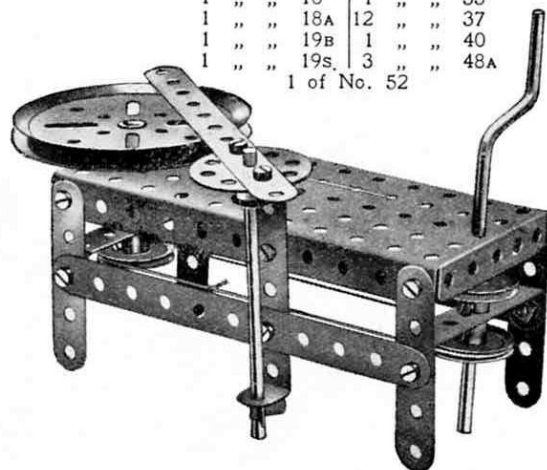

Model No. 1.49 Elevator

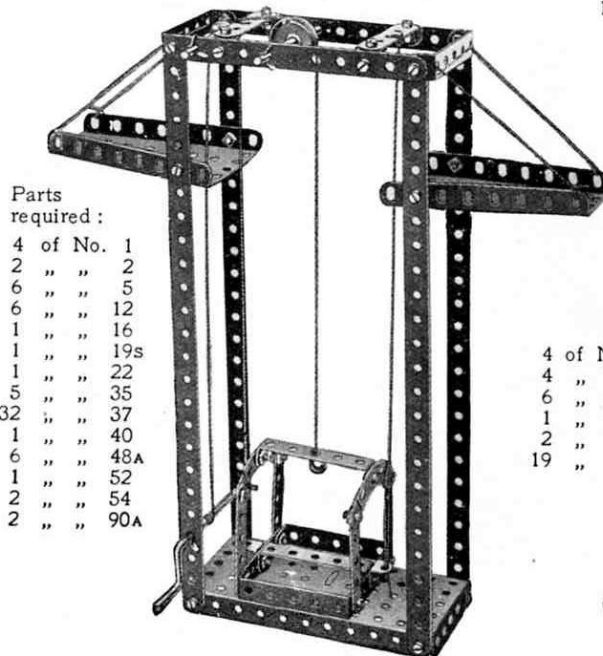


Parts required :

4 of No. 1	
2 " " 2	
6 " " 5	
6 " " 12	
1 " " 16	
1 " " 19s	
1 " " 22	
5 " " 35	
32 " " 37	
1 " " 40	
6 " " 48A	
1 " " 52	
2 " " 54	
2 " " 90A	

Model No. 1.51 See-Saw

Parts required :

4 of No. 2	1 of No. 44
4 " " 5	1 " " 52
6 " " 12	2 " " 90A
1 " " 17	
2 " " 35	
19 " " 37	

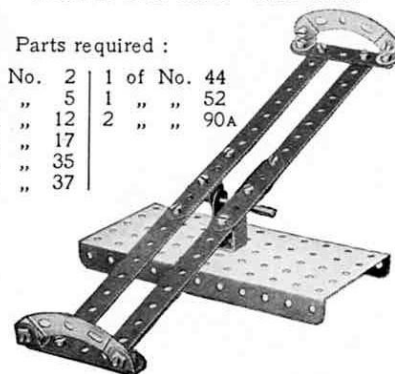




Model No. 1.52
Umpire's
Seat

Parts
required :

6 of No.	2
7 "	5
2 " "	10
4 " "	12
24 " "	37
3 " "	48A
2 " "	90A
2 " "	126

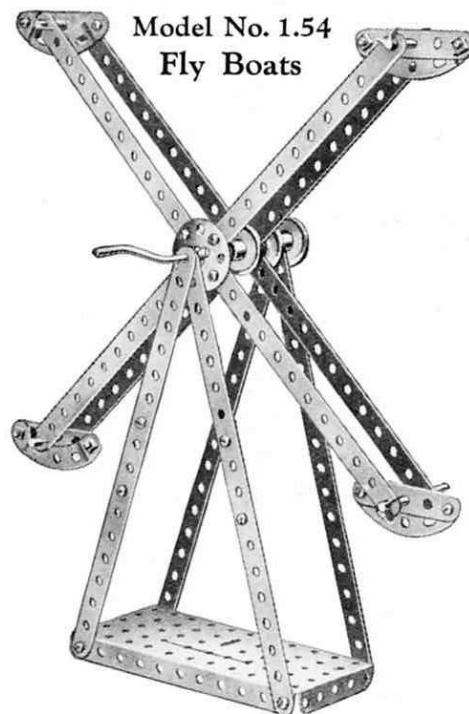

Model No. 1.54
Fly Boats


Parts required :

4 of No.	1	2 of No.	18A
8 " "	2	1 " "	19s
4 " "	5	4 " "	22
2 " "	17	1 " "	24
		8 " "	35
		24 " "	37
		1 " "	52
		4 " "	90A

Model No. 1.55 Bath Chair

Parts required :


4 of No.	2	6 of No.	48A
7 " "	5	1 " "	52
2 " "	16	1 " "	126
1 " "	18A	2 " "	126A
2 " "	19B		
3 " "	22		
24 " "	37		
1 " "	37A		
1 " "	44		

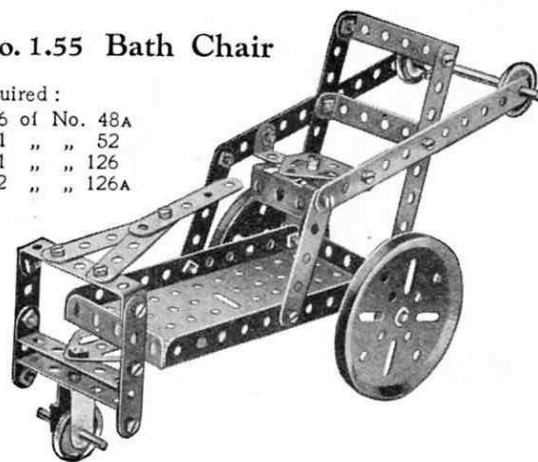

Model No. 1.53 Submarine

Parts required :

4 of No.	1	2 of No.	35
5 " "	10	28 " "	37
2 " "	11	3 " "	37A
8 " "	12	2 " "	38
2 " "	17	1 " "	48
3 " "	22	1 " "	48A
1 " "	24	2 " "	125
		2 " "	126

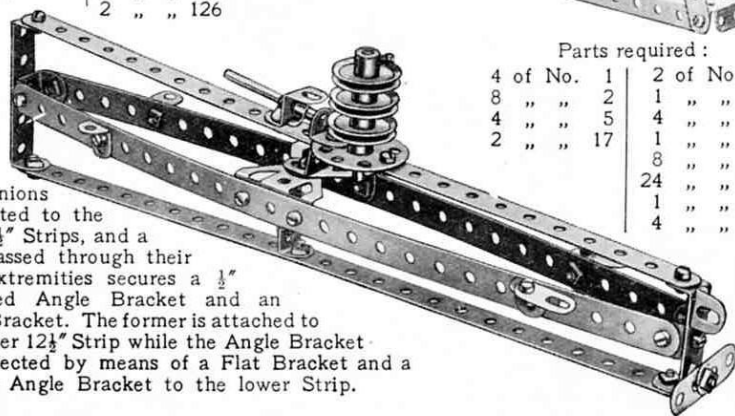

Trunnions are bolted to the side 12½" Strips, and a Bolt passed through their inner extremities secures a ½" Reversed Angle Bracket and an Angle Bracket. The former is attached to the upper 12½" Strip while the Angle Bracket is connected by means of a Flat Bracket and a further Angle Bracket to the lower Strip.


Model No. 1.56 Acrobat on See-Saw

The 1" Rod 1 is journalled in the end holes of two 5½" Strips 2 and in the Flat Trunnion 3 which joins them. It is held in position by two Spring Clips, placed on either side of the 5½" Strips 2.

Parts
required :


3 of No.	1
6 " "	2
4 " "	5
3 " "	10
2 " "	11
4 " "	12
2 " "	16

1 of No.	18A
1 " "	19B
3 " "	22
1 " "	24
5 " "	35
32 " "	37
1 " "	40
2 " "	48A
1 " "	52
1 " "	111c
1 " "	126A

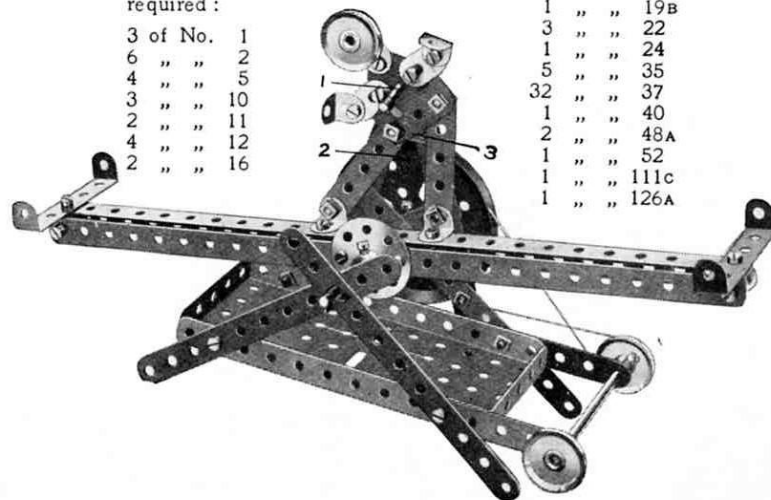

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.57 Motor Lorry

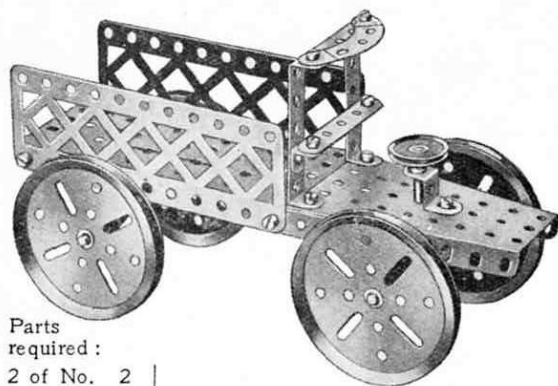

Parts
required :

2 of No. 2		
2 " " 5		
2 " " 12	25 of No. 37	
2 " " 16	2 " " 38	1 of No. 90A
1 " " 18A	3 " " 48A	2 " " 100
4 " " 19B	1 " " 52	2 " " 125
1 " " 24	1 " " 54	2 " " 126A

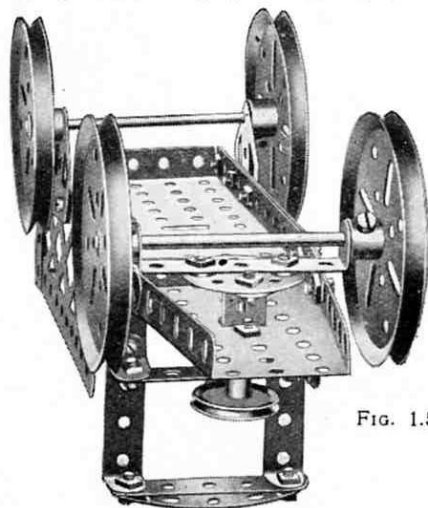



Fig. 1.57A

Model No. 1.58 Mechanical Shovel

Parts
required :

4 of No. 1	
6 " " 2	
5 " " 5	
2 " " 11	
3 " " 16	
1 " " 18A	
1 " " 19B	
1 " " 19S	
4 " " 22	
1 " " 23	
1 " " 24	
6 " " 35	
35 " " 37	
1 " " 37A	


1 of No. 38	
1 " " 40	
1 " " 48	
6 " " 48A	
1 " " 52	
2 " " 54	
1 " " 126A	

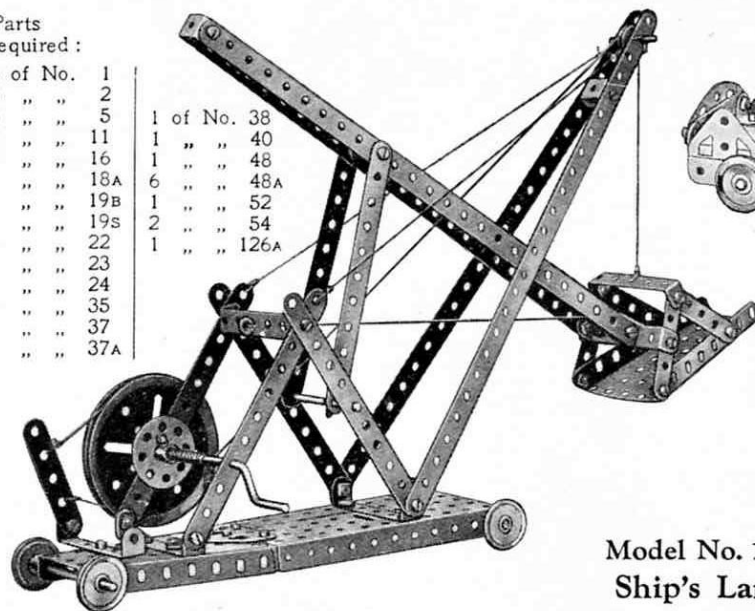


Model No. 1.59 Battleship

Parts required :

2 of No. 1	2 of No. 22	1 of No. 40
4 " " 2	26 " " 37	2 " " 48A
5 " " 10	6 " " 37A	6 " " 111c
2 " " 11		2 " " 125
8 " " 12		

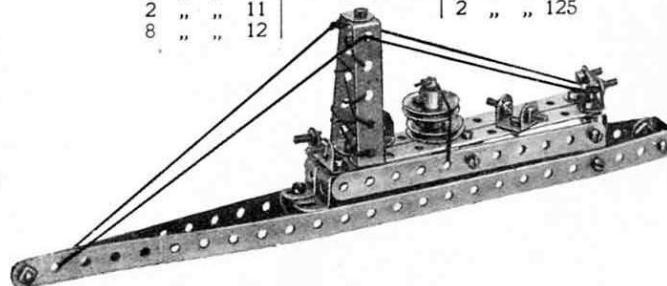

Model No. 1.60 Locomotive

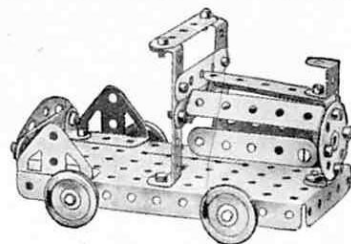


Parts
required :

7 of No. 5	
1 " " 11	
6 " " 12	
2 " " 16	
4 " " 22	
1 " " 24	
24 " " 37	
4 " " 48A	
1 " " 52	
1 " " 90A	
2 " " 126	

Model No. 1.61 Ship's Lamp

Parts
required :


2 of No. 2	
4 " " 12	
1 " " 17	
2 " " 22	
1 " " 24	
11 " " 37	
4 " " 37A	
1 " " 48A	
1 " " 52	
1 " " 54	
4 " " 90A	
2 " " 111c	

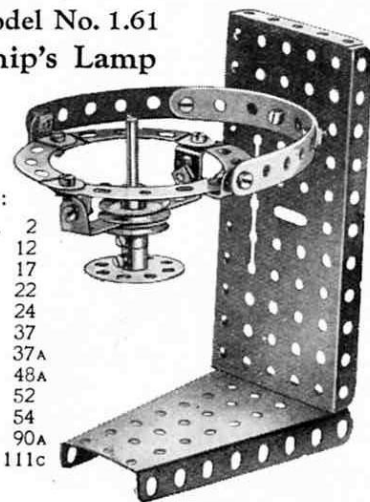


Model No. 1.62 Swivelling Jib Crane, Electric

Parts required :

4 of No. 1	1 of No. 24	Electric Motor (not included in Outfit)
6 " " 2	6 " " 35	
1 " " 3	30 " " 37	
1 " " 11	1 " " 40	
5 " " 12	2 " " 48A	
2 " " 16	1 " " 52	
2 " " 17	1 " " 54	
1 " " 18A	1 " " 57	
4 " " 19B		
4 " " 22		
1 " " 23		

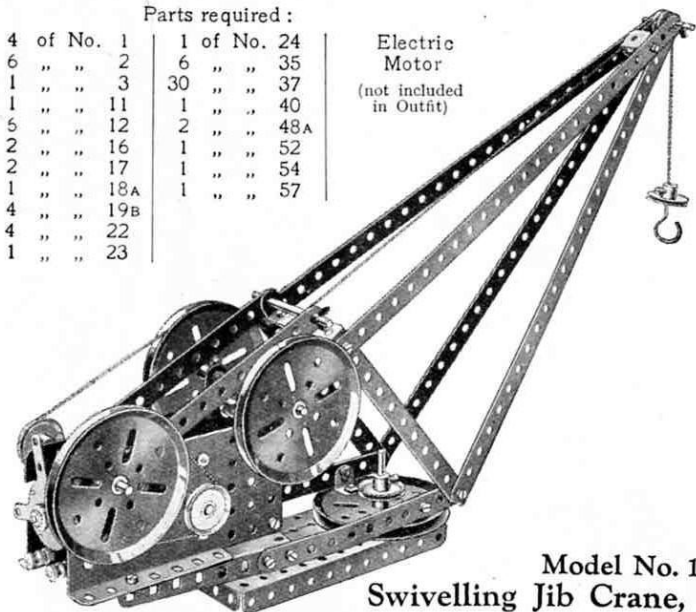

This illustrates an alternative construction of the base of Model No. 1.62, and is intended to show how the model may be operated by hand if an electric motor is not available.

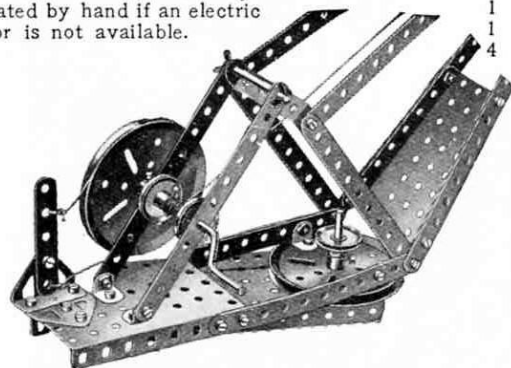**Model No. 1.63 Swivelling Jib Crane, Hand Operated**


Parts required :

4 of No. 1	2 of No. 17
6 " " 2	1 " " 18A
1 " " 5	2 " " 19B
1 " " 11	1 " " 19S
4 " " 12	4 " " 22
	1 " " 23
	1 " " 24
	4 " " 35
	32 " " 37
	4 " " 38
	1 " " 40
	1 " " 48
	1 " " 48A
	1 " " 52
	2 " " 54
	1 " " 57
	1 " " 126
	1 " " 126A

Model No. 1.64 Overhead Crane


Parts required :

4 of No. 2	
4 " " 5	
2 " " 10	
4 " " 12	
1 " " 16	
1 " " 18A	
1 " " 19S	
4 " " 22	
1 " " 23	
1 " " 24	
2 " " 35	
25 " " 37	
1 " " 38	
1 " " 40	
6 " " 48A	
1 " " 57	
4 " " 90A	
2 " " 100	

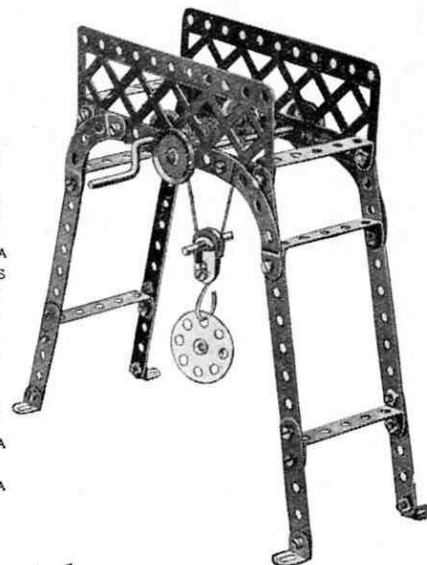**Model No. 1.66 Band Saw**


Parts required :

2 of No. 1	
2 " " 2	
2 " " 5	
2 " " 16	
1 " " 19B	
1 " " 19S	
2 " " 22	
6 " " 35	
18 " " 37	
1 " " 40	
3 " " 48A	
1 " " 52	
2 " " 90A	
2 " " 126A	

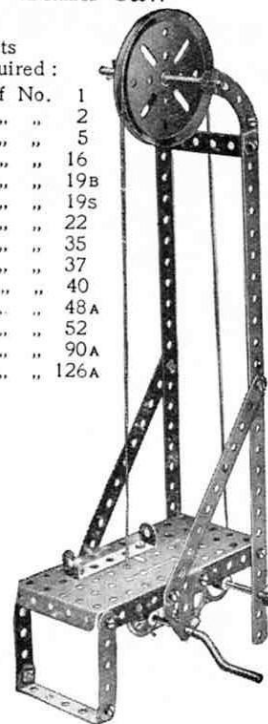**Model No. 1.65 Timber Drag**


Parts required :

1 of No. 1	2 of No. 11	4 of No. 48A
1 " " 2	2 " " 16	3 " " 111c
1 " " 3	4 " " 19B	2 " " 125
2 " " 5	19 " " 37	2 " " 126A
2 " " 10	3 " " 37A	

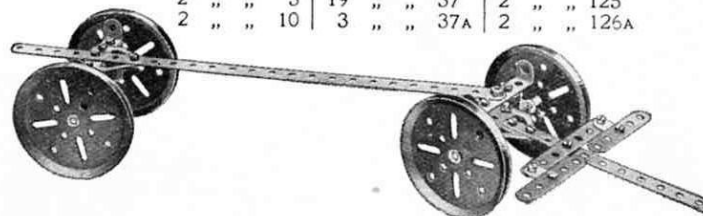

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)


Model No. 1.67 Butter Churn

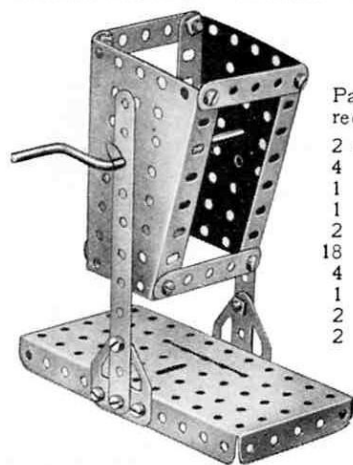

Parts
required :

2 of No.	2
4 " "	5
1 " "	19s
1 " "	24
2 " "	35
18 " "	37
4 " "	38
1 " "	52
2 " "	54
2 " "	126A


Model No. 1.69 Cable Railway

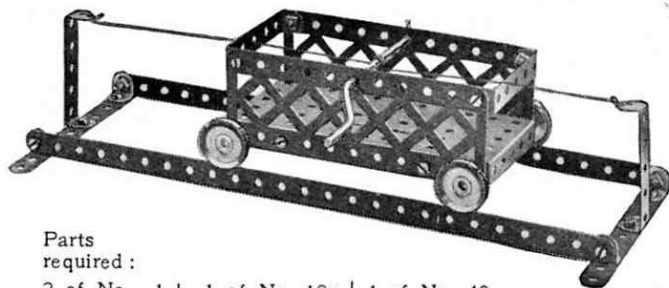

Parts
required :

2 of No.	1	1 of No.	19s	1 of No.	40
2 " "	2	4 " "	22	4 " "	48A
4 " "	12	2 " "	35	1 " "	52
2 " "	16	18 " "	37	2 " "	100

Model No. 1.72 Man and Boy

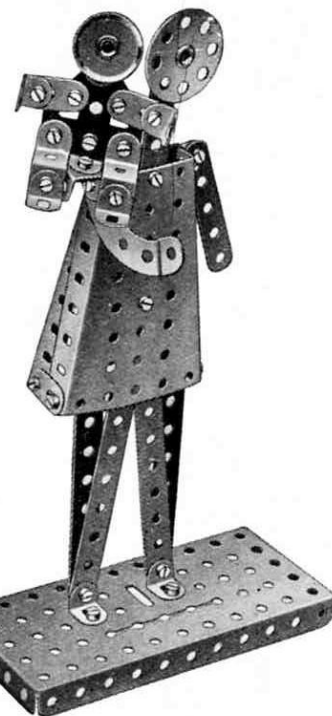


Parts
required :

4 of No.	2
1 " "	3
1 " "	5
5 " "	10
1 " "	11
8 " "	12
1 " "	22
1 " "	24
26 " "	37
1 " "	52
2 " "	54
1 " "	90A
2 " "	125
1 " "	126A

Model No. 1.68 Inverted Centrifugal Governor

Parts required :

4 of No.	2	4 of No.	22
5 " "	5	1 " "	23
1 " "	11	1 " "	24
8 " "	12	3 " "	35
1 " "	16	22 " "	37
1 " "	18A	6 " "	37A
2 " "	19B	4 " "	38
1 " "	19s	1 " "	40
		1 " "	48A
		1 " "	52
		1 " "	54
		3 " "	111c
		1 " "	125

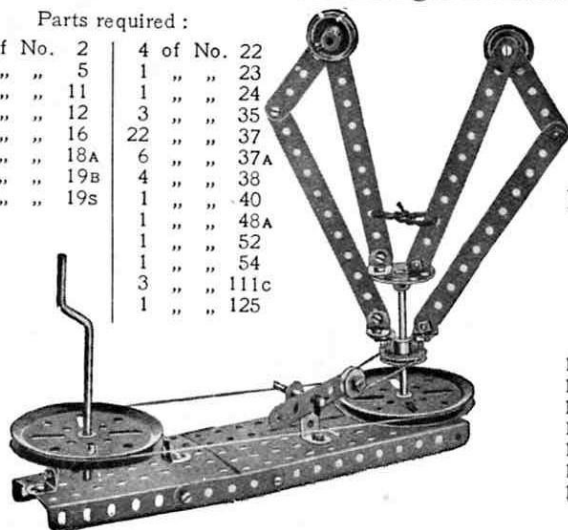

Model No. 1.70 Candle Stick

Parts
required :


2 of No.	11
4 " "	12
1 " "	19B
4 " "	37
1 " "	111c
1 " "	125



Model No. 1.71 Machine for Tracing a Locus

Parts required :

1 of No.	2	4 of No.	35
1 " "	5	4 " "	37
1 " "	11	3 " "	37A
1 " "	12	4 " "	38
1 " "	17	1 " "	54
1 " "	18A	2 " "	111c
1 " "	24	1 " "	125

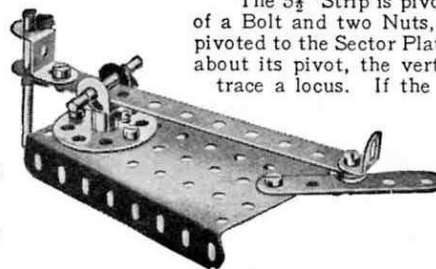


The $5\frac{1}{2}$ " Strip is pivoted to the $2\frac{1}{2}$ " Strip by means of a Bolt and two Nuts, and the $2\frac{1}{2}$ " Strip is similarly pivoted to the Sector Plate. By revolving the $2\frac{1}{2}$ " Strip about its pivot, the vertical $1\frac{1}{2}$ " Rod can be made to trace a locus. If the positions of the $1\frac{1}{2}$ " Rod and the $5\frac{1}{2}$ " Strip are altered, several different loci may be traced. Machines of this type are of advantage in assisting in the design of engine connecting rods.

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.73 Windlass


Parts
required:

6	of No.	5
3	" "	12
1	" "	19B
1	" "	19s
3	" "	22
15	" "	37
4	" "	37A
1	" "	40
2	" "	48A
1	" "	52
1	" "	57
3	" "	111c
1	" "	126A

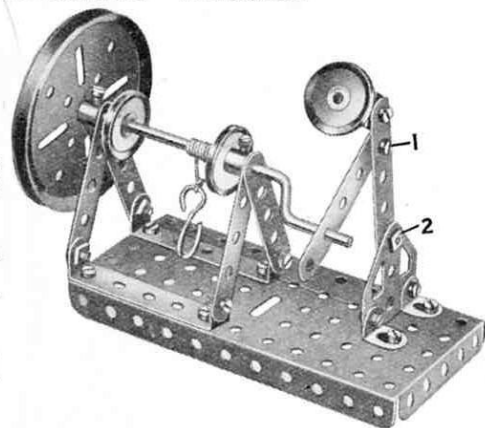

The figure at the right of the model is arranged to work to and fro when the Crank Handle is rotated. The Bolts 1 and 2 are both secured by two nuts as in Standard Mechanism No. 262.

Model No. 1.74 Lorry Crane

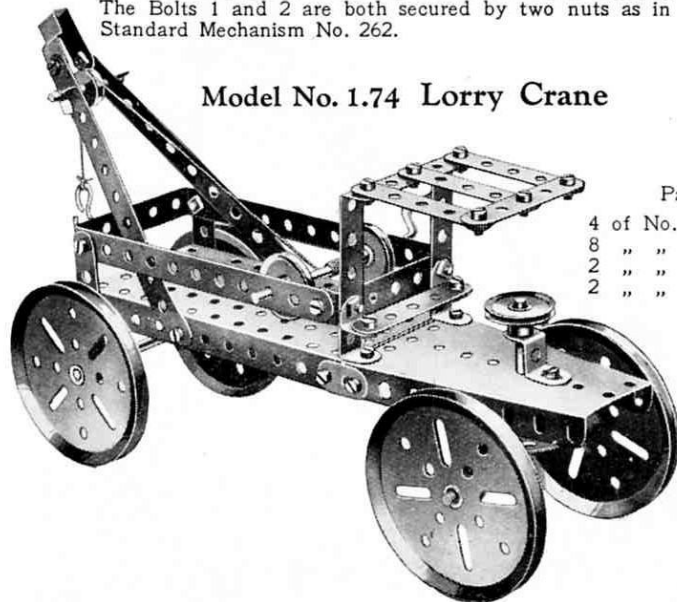


Parts required:

4	of No.	2	2	of No.	16
8	" "	5	1	" "	17
2	" "	10	1	" "	18A
2	" "	12	4	" "	19B
			1	" "	19s
			3	" "	22
			1	" "	23
			1	" "	24
			3	" "	35
			29	" "	37
			1	" "	40
			1	" "	44
			5	" "	48A
			1	" "	52
			1	" "	54
			1	" "	57
			2	" "	125

Model No. 1.75 Signal

Parts
required:


2	of No.	1
1	" "	3
1	" "	5
2	" "	22
11	" "	37
2	" "	37A
1	" "	40
1	" "	52
2	" "	111c

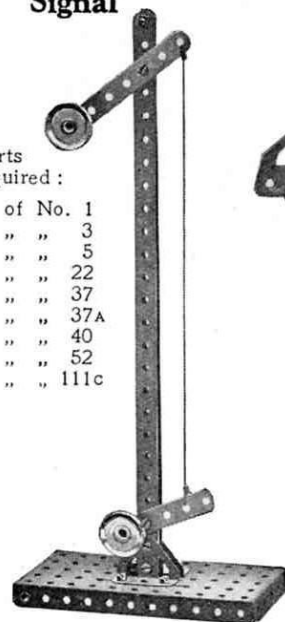

Model No. 1.76 Aeroplane

Parts
required:

4	of No.	2
6	" "	5
4	" "	10
2	" "	11

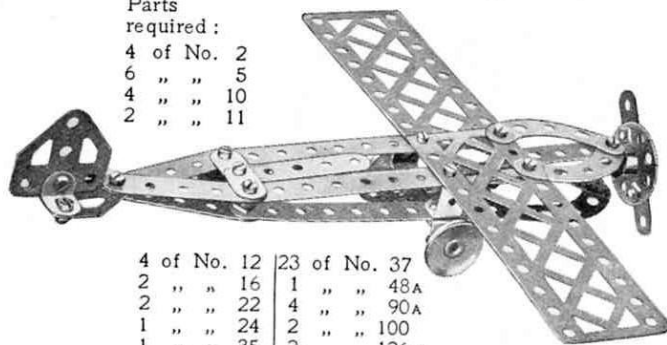


4	of No.	12	23	of No.	37
2	" "	16	1	" "	48A
2	" "	22	4	" "	90A
1	" "	24	2	" "	100
1	" "	35	2	" "	126A

Model No. 1.77 Truck

Parts
required:


2	of No.	16
4	" "	19B
8	" "	37
2	" "	48A
1	" "	52
2	" "	100

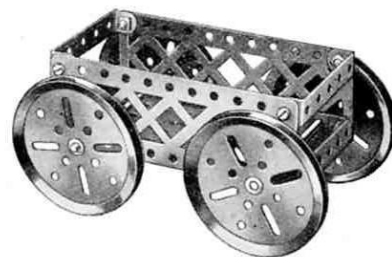

Model No. 1.78 Mountain Transport


Parts required:

2	of No.	1	2	of No.	11	1	of No.	40
2	" "	2	2	" "	16	3	" "	48A
3	" "	5	4	" "	22	1	" "	52
			18	" "	37	1	" "	54

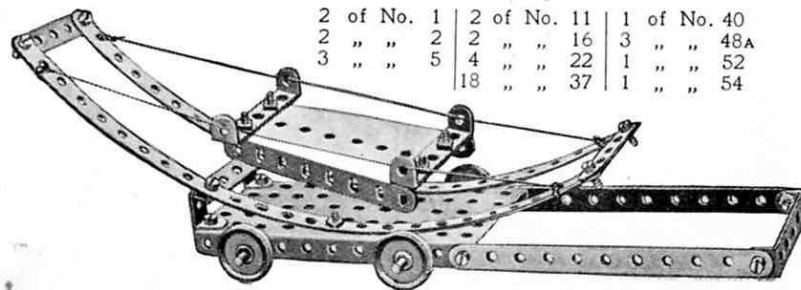

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.79

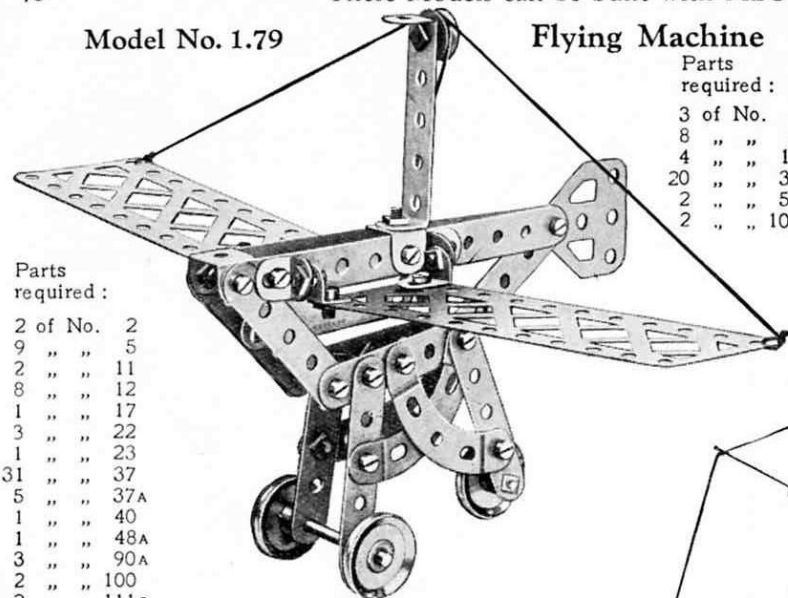

Parts
required :


2	of No.	2
9	" "	5
2	" "	11
8	" "	12
1	" "	17
3	" "	22
1	" "	23
31	" "	37
5	" "	37A
1	" "	40
1	" "	48A
3	" "	90A
2	" "	100
2	" "	111c
1	" "	126A

Flying Machine

Parts
required :

3	of No.	1
8	" "	2
4	" "	12
20	" "	37
2	" "	54
2	" "	100

Model No. 1.81 Inverted Truss

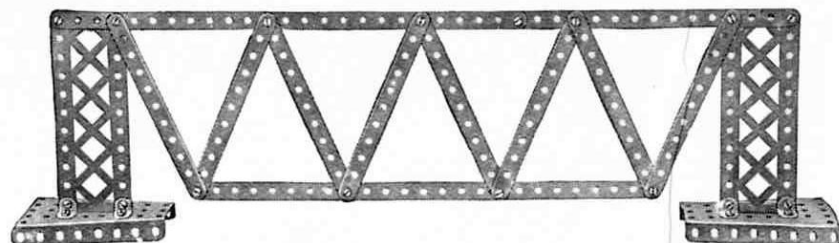


Model No. 1.82 Sand Yacht

Parts required :

1	of No.	1	4	of No.	35
1	" "	2	23	" "	37
1	" "	3	1	" "	40
2	" "	5	1	" "	48A
2	" "	12	1	" "	52
2	" "	16	1	" "	54
1	" "	18A	2	" "	90A
4	" "	19B	1	" "	125
1	" "	22	1	" "	126
1	" "	24	2	" "	126A


Model No. 1.83
Box Ball Alley

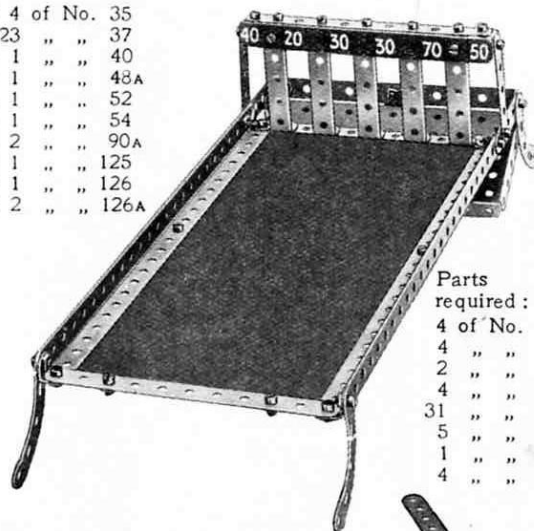

Parts
required :


4	of No.	1
4	" "	2
2	" "	5
4	" "	10
31	" "	37
5	" "	48A
1	" "	52
4	" "	90A

Model No. 1.80 Gate

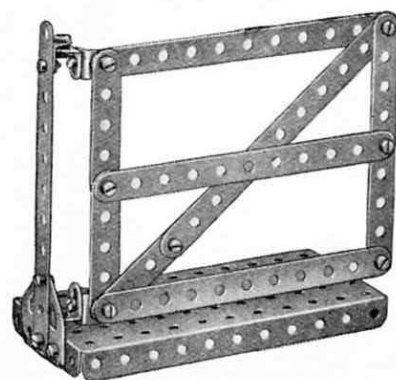

Parts
required :

6	of No.	2
4	" "	5
5	" "	12
13	" "	37
4	" "	37A
1	" "	52
2	" "	111c
1	" "	126A

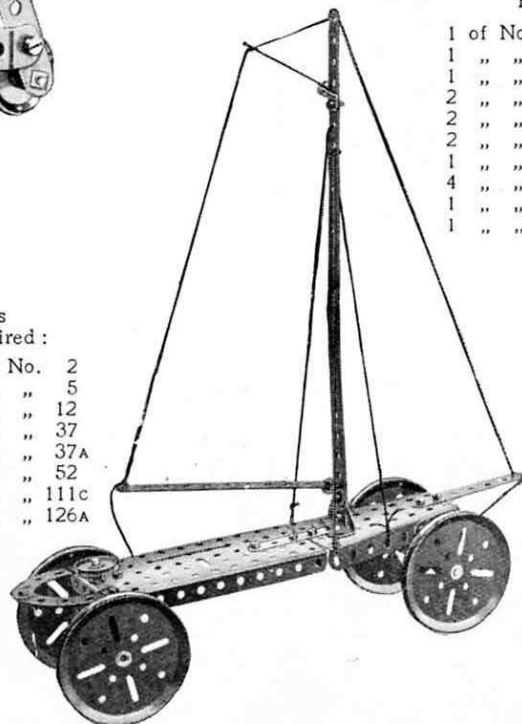


Model No. 1.84 Rake

Parts required :

1	of No.	2	4	of No.	10
1	" "	3	1	" "	12
6	of No.	37			

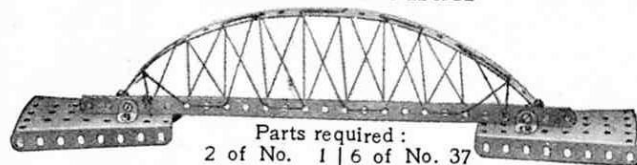


Model No. 1.85 Bow Girder

Parts required:
 2 of No. 1 | 6 of No. 37
 4 " " 12 | 1 " " 40
 2 of No. 54

Model No. 1.86 Double-Action Pump


The 5½" Strip 1 is attached to the 1" Pulley Wheel 2 by means of two Angle Brackets, through the lower of which passes the Set-Screw that secures the Pulley to its 2" Rod. Two Washers are placed beneath the head of the Bolt joining the Angle Brackets in order to prevent its shank from binding on the boss of the Pulley 2. The joints 3, 4, 5, 6, 7, are all lock-nutted, the remainder of the joints being quite rigid. When the Strip 1 descends, together with the first pump, the incidental distortion of the parallelogram 3, 4, 7, 4 causes the second pump to rise. Similarly, when the first pump rises, the second descends.

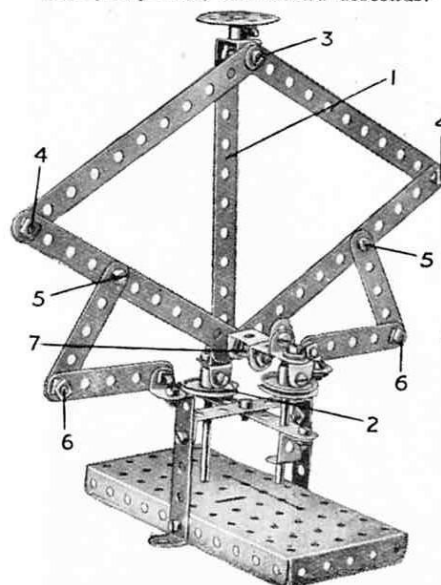


Parts required:
 5 of No. 2
 4 " " 3
 4 " " 5
 2 " " 11
 6 " " 12
 2 " " 17
 2 " " 22
 1 " " 24
 21 " " 37
 6 " " 37A
 4 " " 38
 3 " " 48A
 1 " " 52
 6 " " 111c
 2 " " 125

Model No. 1.87 Cot on Wheels

Parts required:
 2 of No. 2
 5 " " 5
 4 " " 12
 2 " " 16
 4 " " 22
 19 " " 37
 2 " " 48A
 1 " " 52
 4 " " 90A
 2 " " 100

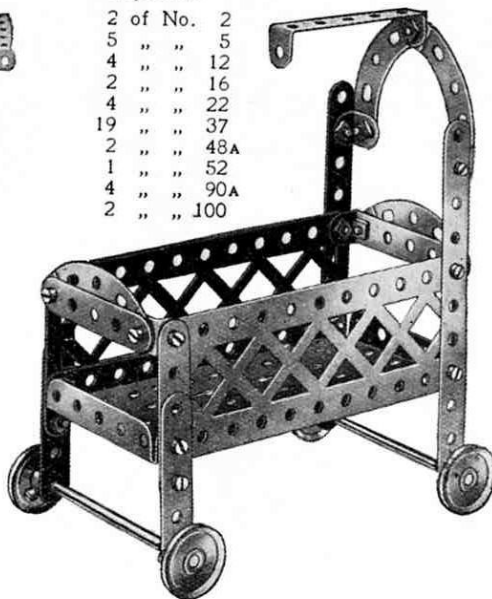
**Model No. 1.88 Tower Wagon**


Parts required:
 4 of No. 2
 8 " " 5
 2 " " 16
 1 " " 17
 1 " " 19s
 4 " " 22
 1 " " 23
 4 " " 35
 24 " " 37
 1 " " 40
 1 " " 52
 1 " " 54
 1 " " 57
 2 " " 126A

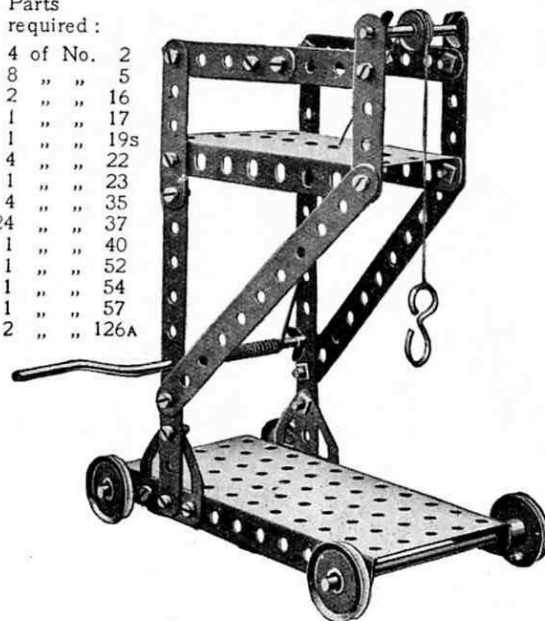**Model No. 1.89 Aerial Flight**

Parts required:

4 of No. 1	1 of No. 18A	2 of No. 38
4 " " 2	2 " " 19B	1 " " 40
8 " " 5	3 " " 22	2 " " 48A
1 " " 10	1 " " 23	1 " " 52
4 " " 12	6 " " 35	2 " " 54
3 " " 16	33 " " 37	2 " " 126
		1 " " 126A

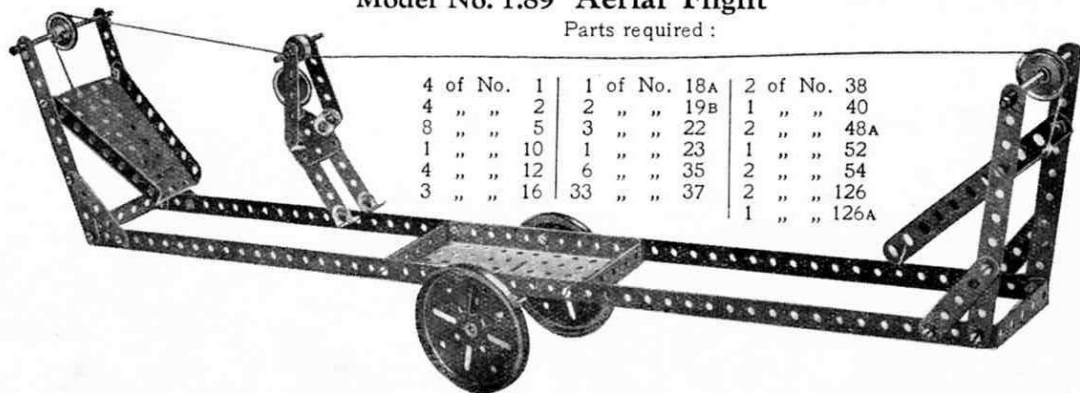


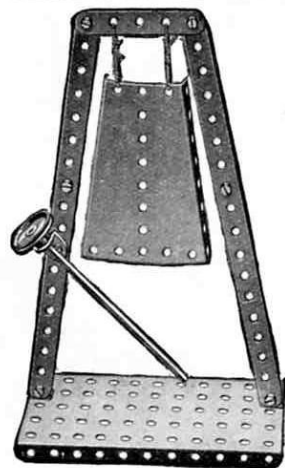Model No. 1.90 Gong**Parts required :**

4 of No. 2	1 of No. 22
1 " " 5	9 " " 37
3 " " 12	1 " " 40
1 " " 16	1 " " 52
1 of No. 54	

Model No. 1.91 Emery Wheel**Parts required :**

1 of No. 17	1 of No. 22	10 of No. 37
1 " " 18A	1 " " 24	1 " " 40
2 " " 19B	2 " " 35	1 " " 48A
		1 " " 52
		1 " " 111c
		2 " " 125
		2 " " 126A
Disc of emery paper 3" diameter		


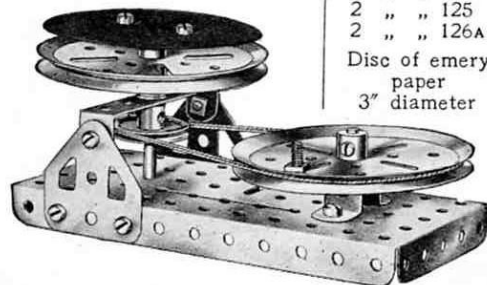


Begin to build this model by making the platform from a Flanged Plate and 12½" Strips. The drive from the Pulley on the Crank Handle is taken to a 1" Pulley, fast on the vertical 2" Rod, another similar Pulley being secured to this Rod beneath the Plate.

The arms are formed of four 5½" Strips bolted to a Bush Wheel fast on the 2" Rod.

Parts required :


4 of No. 1	3 of No. 22
4 " " 2	1 " " 24
6 " " 5	6 " " 35
4 " " 10	22 " " 37
2 " " 16	1 " " 40
1 " " 17	4 " " 48A
1 " " 19s	1 " " 52
2 of No. 54	

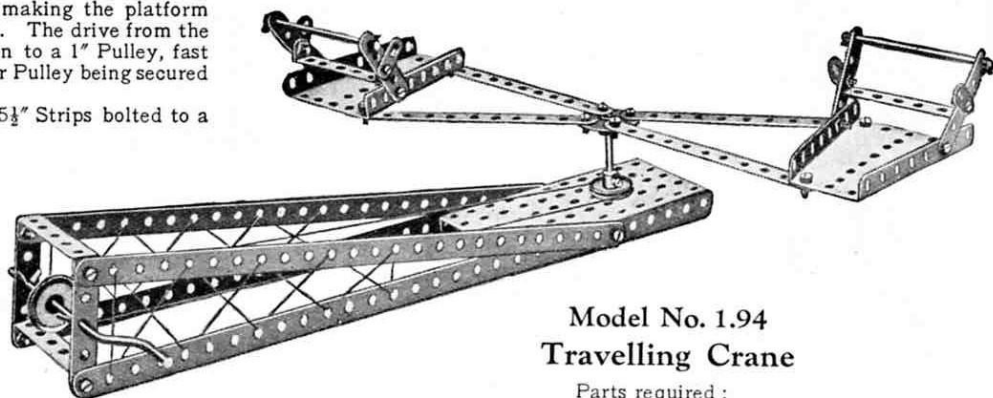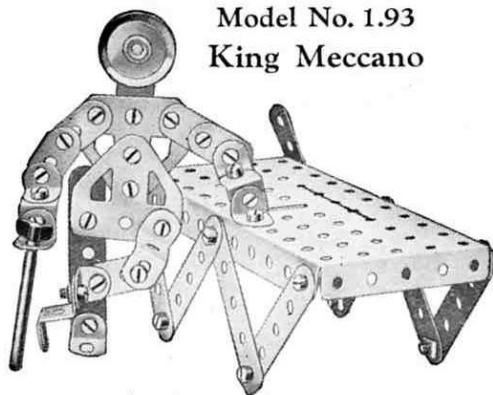Model No. 1.92 Roundabout**Model No. 1.93 King Meccano****Parts required :**

1 of No. 3	1 of No. 35
9 " " 5	30 " " 37
5 " " 10	1 " " 52
8 " " 12	1 " " 111c
1 " " 17	2 " " 125
1 " " 22	2 " " 126A

Model No. 1.94 Travelling Crane**Parts required :**

2 of No. 1	1 of No. 24	2 of No. 90A
6 " " 2	4 " " 35	2 " " 111c
1 " " 11	25 " " 37	1 " " 126
3 " " 16	6 " " 37A	2 " " 126
1 " " 18A	1 " " 40	2 " " 126A
2 " " 19B	1 " " 48	
1 " " 19s	4 " " 48A	
4 " " 22	1 " " 52	
1 " " 23	1 " " 57	

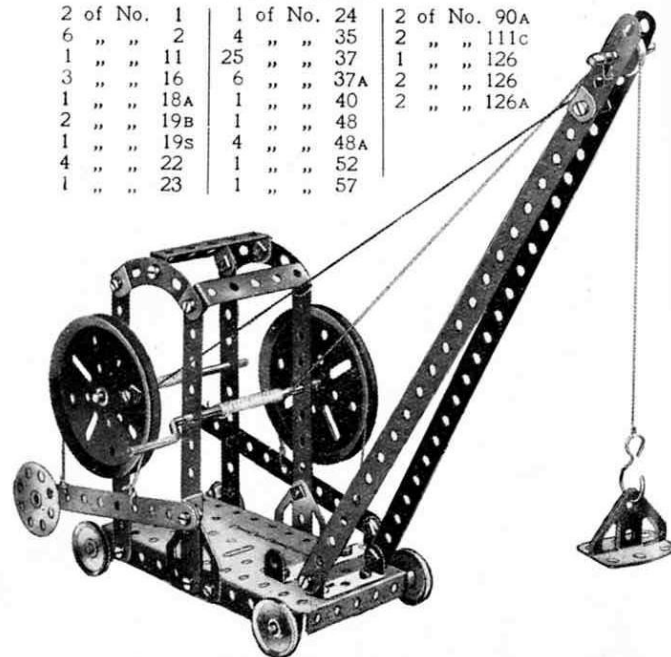


These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.95 Scooter


Parts required :

5 of No. 2	1 of No. 22
1 " " 10	1 " " 24
1 " " 11	14 " " 37
3 " " 12	2 " " 38
1 " " 17	1 " " 44
1 " " 18A	1 " " 48A
2 of No. 126A	

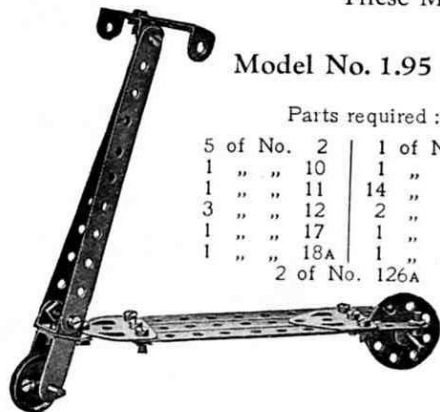

Model No. 1.96 Ballista

This is a model of an ancient engine of war, resembling the crossbow. The $3\frac{1}{2}$ " Strip 1 is bolted firmly to the Double Angle Strip 2, which is prevented from turning by the addition of Angle Brackets as shown. A Double Bracket 3 slides on the Strip 1 and is secured to a piece of cord. On rotation of the Crank Handle 4, the Strip 1 is pulled backward until the Double Bracket 3 slips off its end. The Strip then flies forward and strikes the missile, which consists of a 2" Rod placed ready in the Double Bracket 5.

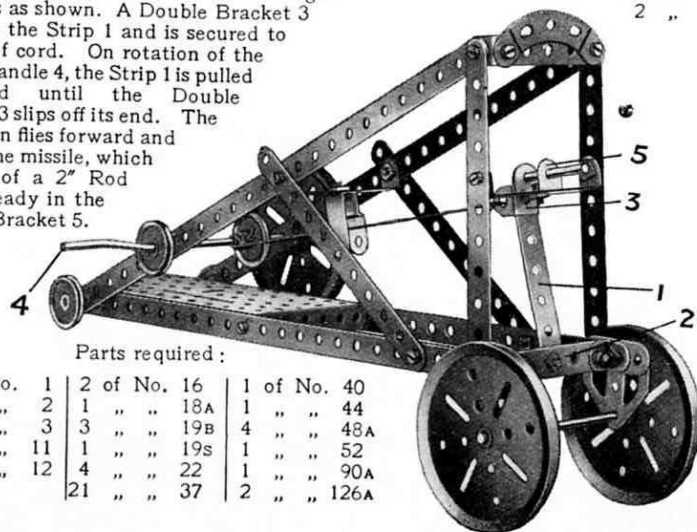


Parts required :

4 of No. 1	2 of No. 16	1 of No. 40
4 " " 2	1 " " 18A	1 " " 44
1 " " 3	3 " " 19B	4 " " 48A
2 " " 11	1 " " 19S	1 " " 52
2 " " 12	4 " " 22	1 " " 90A
	21 " " 37	2 " " 126A

Model No. 1.97 Tight-Rope Walker

The cord on which the "Meccanitian" runs is endless and passes over the 1" fast Pulleys at each end of the model. One of the Pulleys is secured to a Crank Handle, by means of which the model may be operated. The Meccanitian runs on the upper half of the endless cord, the lower half being attached to one of his feet.

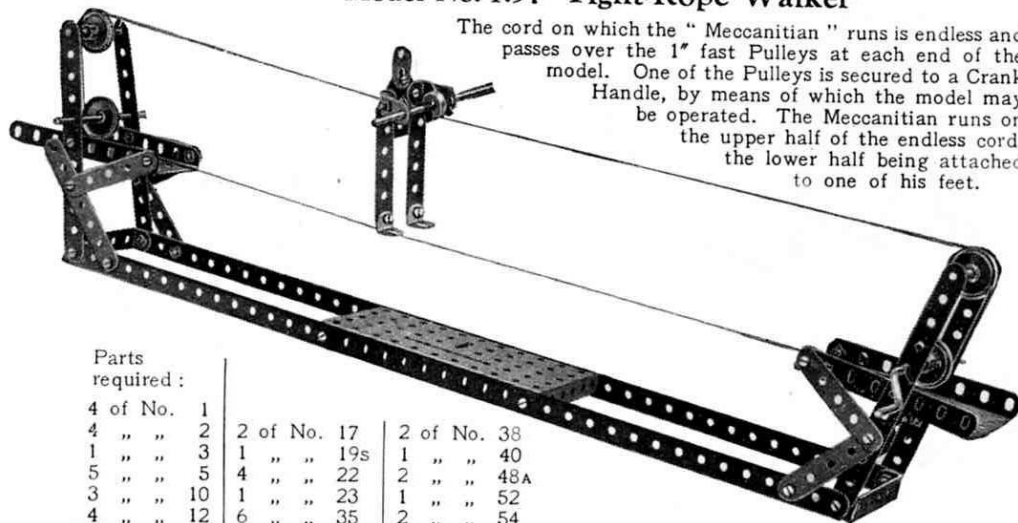


Parts required :


4 of No. 1	2 of No. 17	2 of No. 38
4 " " 2	1 " " 19S	1 " " 40
1 " " 3	4 " " 22	2 " " 48A
5 " " 5	1 " " 23	1 " " 52
3 " " 10	6 " " 35	2 " " 54
4 " " 12	34 " " 37	1 " " 126A
2 " " 16		

Model No. 1.98 Double-Action Piston Connection

Parts required :


2 of No. 1	1 of No. 23
6 " " 2	1 " " 35
1 " " 3	36 " " 37
5 " " 5	5 " " 37A
4 " " 10	4 " " 48A
2 " " 11	1 " " 52
3 " " 12	1 " " 90A
2 " " 19B	3 " " 111c
1 " " 19S	2 " " 126A

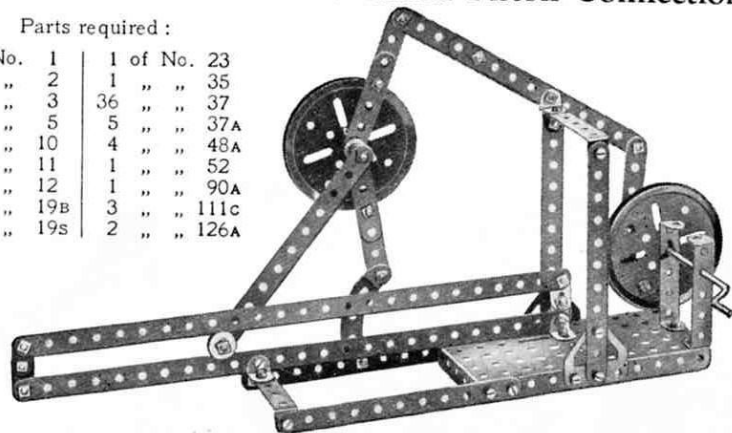

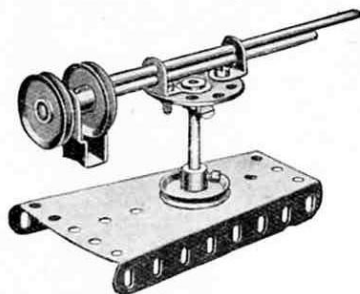Model No. 1.99 Quick-Firing Gun

Parts required :

2 of No. 12	1 of No. 24
2 " " 16	2 " " 37
1 " " 17	1 " " 44
4 " " 22	1 " " 54

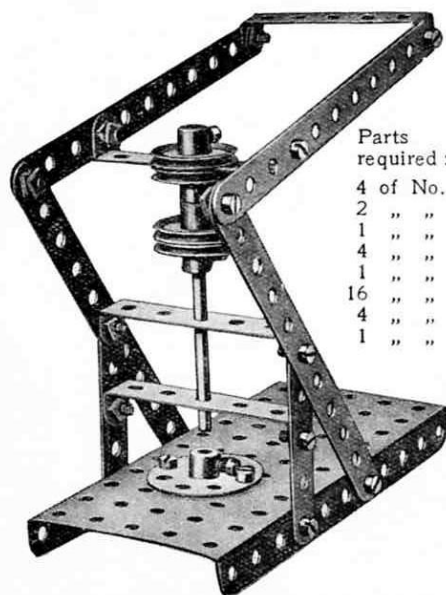
Model No. 1.100 Punching Machine

Parts required :

4 of No. 2
2 " " 5
1 " " 16
4 " " 22
1 " " 24
16 " " 37
4 " " 48A
1 " " 52


Parts required :

2 of No. 2
2 " " 11
1 " " 18A
2 " " 35
8 " " 37
1 " " 52
2 " " 54
2 " " 126

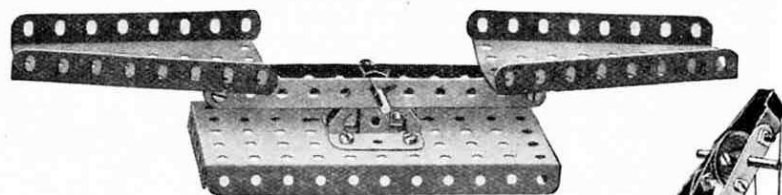Model No. 1.101 Scales**Model No. 1.103 Swivelling Crane**

Parts required :

4 of No. 2	1 of No. 52
7 " " 5	1 " " 54
2 " " 12	1 " " 57
2 " " 17	2 " " 126A
1 " " 19s	
4 " " 22	
1 " " 23	
2 " " 35	
21 " " 37	
3 " " 38	
1 " " 40	
1 " " 44	
1 " " 48A	

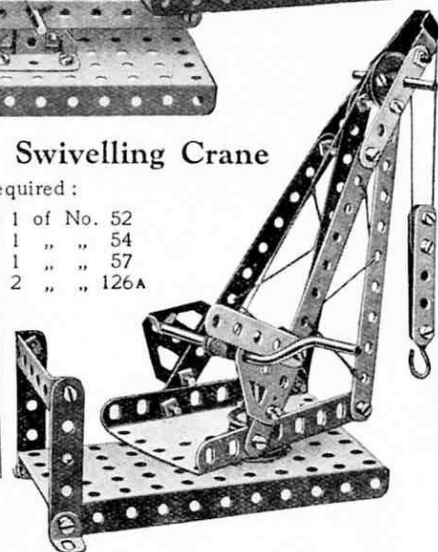


The Sector Plate of the crane in the above model is pivoted to the base with a fast Pulley above and below.

Model No. 1.102 Extended Ash Tip

Parts required :

4 of No. 1	2 of No. 18A	2 of No. 48A
5 " " 2	1 " " 19s	1 " " 52
7 " " 5	4 " " 22	6 " " 111c
2 " " 11	1 " " 24	2 " " 125
8 " " 12	5 " " 35	2 " " 126
1 " " 16	36 " " 37	2 " " 126A
2 " " 17	1 " " 40	


The trolley is operated by means of a cord that is wound round the $1\frac{1}{2}$ " Axle Rod carrying the Bush Wheel, both ends of the cord being secured to the trolley. The bucket is suspended from a cord that winds on to the Crank Handle, and it is tipped by lowering it until a short cord that is attached to the bottom of the bucket and to the trolley, becomes taut. Further lowering causes the bucket to swing over.

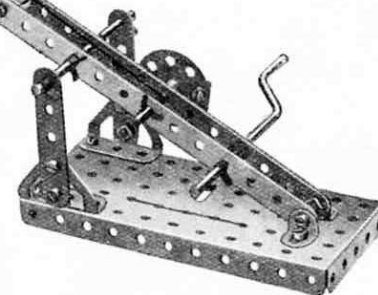

Model No. 1.104 Boy on Swing

Parts required :


4 of No. 1	1 of No. 24
6 " " 2	7 " " 35
2 " " 5	35 " " 37
5 " " 10	1 " " 40
8 " " 12	1 " " 48A
2 " " 16	1 " " 52
1 " " 17	1 " " 54
4 " " 22	2 " " 125
2 of No. 126A	

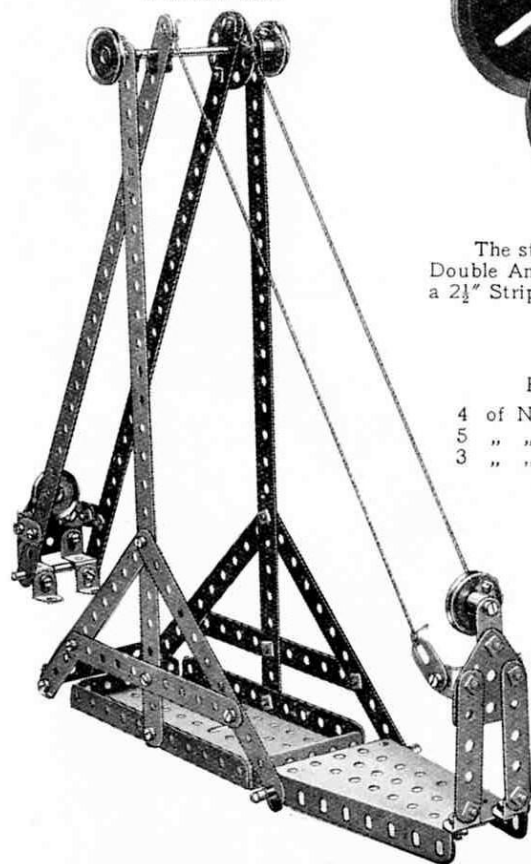

Model No. 1.105 Motor Tractor

Parts required :

3 of No. 5	
1 " " 10	
2 " " 12	
2 " " 16	
1 " " 18A	
4 " " 19B	
1 " " 22	
1 " " 24	
15 " " 37	
2 " " 37A	
6 " " 38	
1 " " 40	
4 " " 48A	
1 " " 52	
1 " " 54	
1 " " 111c	
2 " " 126	
1 " " 126A	

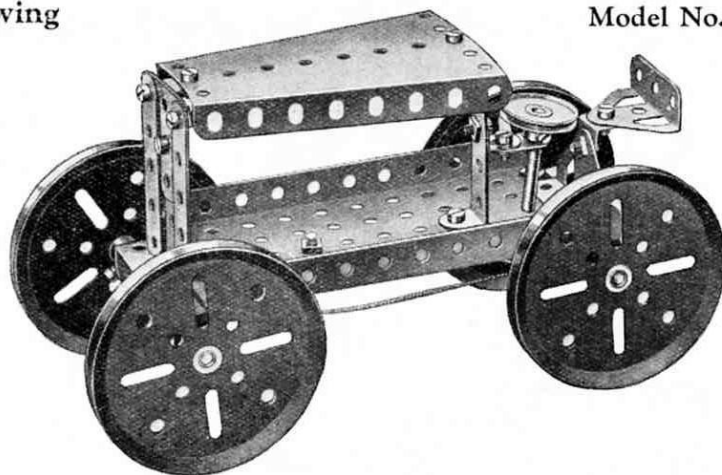

The steering gear is shown in Fig. 1.105A. The front wheels are carried in a $2\frac{1}{2}'' \times \frac{1}{2}''$ Double Angle Strip 1, which is mounted pivotally by a Bolt and two Nuts (S.M. 262) to a $2\frac{1}{2}''$ Strip 2 secured to the $5\frac{1}{2}'' \times 2\frac{1}{2}''$ Flanged Plate.


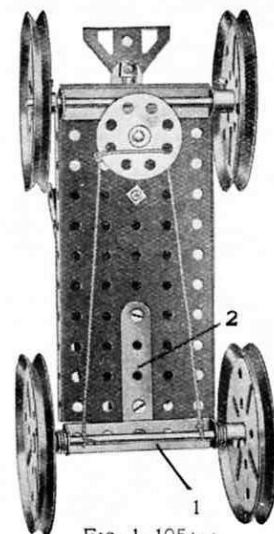


Fig. 1.105A

Model No. 1.106 Bagatelle Table

Parts required :


4 of No. 1	8 of No. 12
5 " " 2	25 " " 37
3 " " 10	4 " " 48A
1 of No. 52	

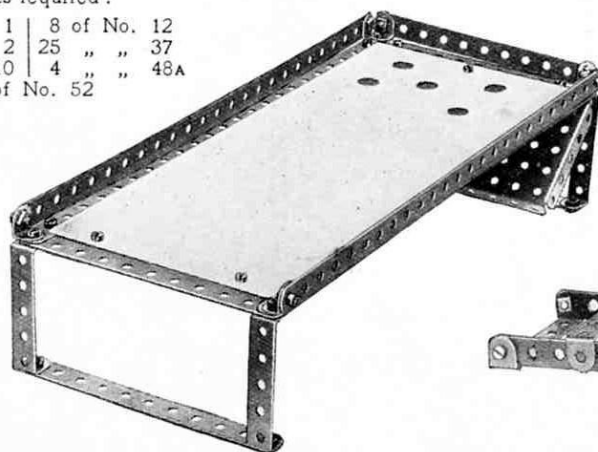

Model No. 1.107 Quick Return Device


Parts required :

2 of No. 2	1 of No. 24
1 " " 3	6 " " 35
2 " " 5	15 " " 37
2 " " 11	2 " " 37A
2 " " 12	3 " " 48A
1 " " 17	1 " " 52
2 " " 18A	2 " " 125

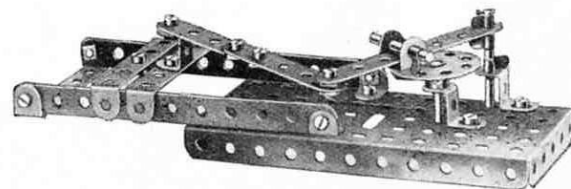

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)


Model No. 1.108 Rowing Boat

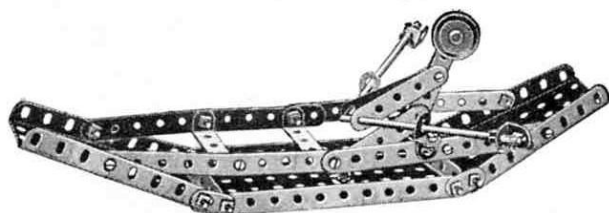

Parts required :

4 of No. 2	4 of No. 35
4 " " 5	24 " " 37
4 " " 10	3 " " 48A
7 " " 12	1 " " 52
2 " " 16	2 " " 54
1 " " 22	1 " " 111c

Model No. 1.109 The Wrestlers

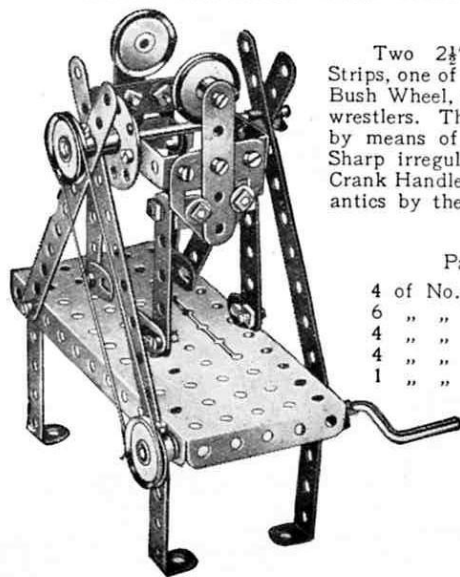

Two $2\frac{1}{2} \times \frac{1}{2}$ " Double Angle Strips, one of which is bolted to the Bush Wheel, form the arms of the wrestlers. The legs are all pivoted by means of Bolts and lock-nuts. Sharp irregular movements of the Crank Handle will result in amusing antics by the wrestlers.


Parts required :

4 of No. 2	1 of No. 19s
6 " " 5	4 " " 22
4 " " 10	1 " " 24
4 " " 12	3 " " 35
1 " " 16	24 " " 37
	5 " " 38
	1 " " 40
	6 " " 48A
	1 " " 52
	2 " " 111c
	2 " " 126A


Model No. 1.110 Weather Vane

Parts required :

3 of No. 1	14 of No. 37
2 " " 2	1 " " 52
1 " " 11	1 " " 54
2 " " 12	1 " " 111c
1 " " 24	2 " " 126

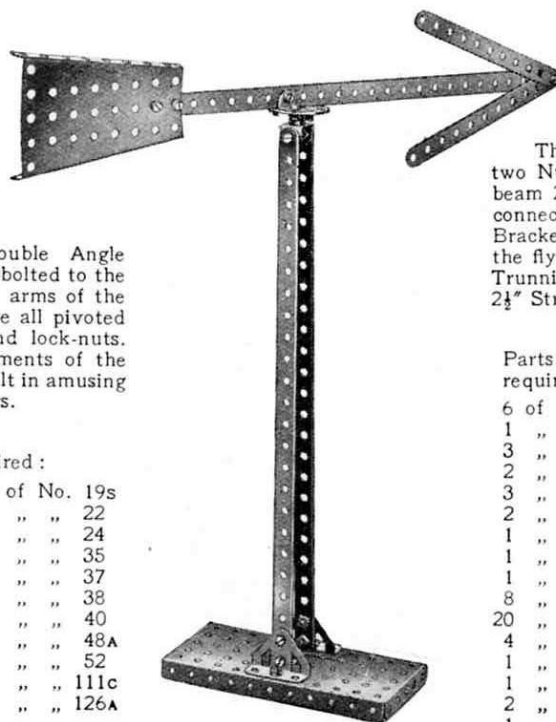

Model No. 1.111 Violin and Bow

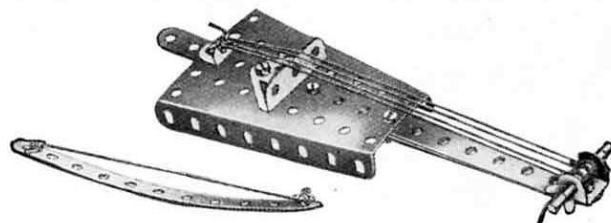

Parts required :


4 of No. 2	1 of No. 12	1 of No. 40
1 " " 5	1 " " 18A	1 " " 54
1 " " 11	2 " " 35	1 " " 126
	5 " " 37	


Model No. 1.112 Beam Engine

The connecting Strip 1 is attached pivotally by a Bolt and two Nuts (Standard Mechanism No. 262) to one end of the beam 2 and to the Bush Wheel 3. The Strip 4 is similarly connected to the other end of the beam 2 and to the Double Bracket 5 attached to the piston rod. The short rod carrying the flywheel 6 is journaled in a $2\frac{1}{2}$ " Strip supported by the Trunnion 7 and in a Reversed Angle Bracket bolted to the $2\frac{1}{2}$ " Strip.

Parts required :

6 of No. 2	2
1 " " 3	3
3 " " 5	5
2 " " 11	11
3 " " 12	12
2 " " 16	16
1 " " 17	17
1 " " 19B	19B
1 " " 24	24
8 " " 35	35
20 " " 37	37
4 " " 37A	37A
1 " " 48	48
1 " " 52	52
2 " " 125	125
1 " " 126	126
2 " " 126A	126A

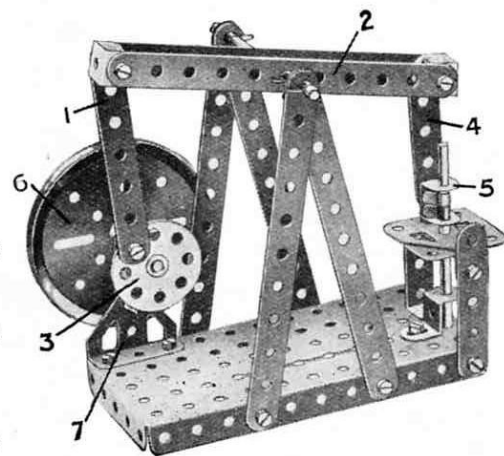


Model No. 1.113 Cum BakParts
required :

1	of No.	18A
2	" "	19B
2	" "	22
1	" "	23
1	" "	35
8	" "	37
4	" "	48A

A short length of elastic is doubled and stretched between the centres of the 3" Pulley Wheels. A weight, consisting of two 1" fast Pulley Wheels and a 1½" Rod, is suspended from it in the middle of the drum. When the Cum Bak is rolled along any smooth level surface, the elastic becomes twisted and stores up sufficient energy to return the drum to its starting point. If the mechanism is concealed by a thin cardboard covering, the model will cause much amusement by its mystifying behaviour.

Model No. 1.114 Tower WagonParts
required :


4	of No.	1
8	" "	2
6	" "	25
2	" "	10
3	" "	16

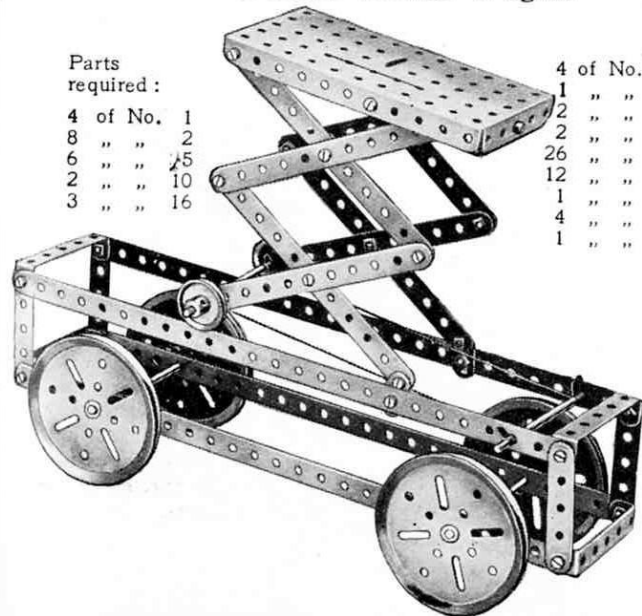


4	of No.	19B
1	" "	19S
2	" "	22
2	" "	35
26	" "	37
12	" "	37A
1	" "	40
4	" "	48A
1	" "	52

Model No. 1.115**Flip Flap**Parts
required :

4	of No.	1
4	" "	2
2	" "	5
2	" "	11
1	" "	16
2	" "	19B
1	" "	19S
4	" "	22
6	" "	35
8	" "	37
6	" "	37A
8	" "	38
1	" "	40
1	" "	52
4	" "	90A
6	" "	111c

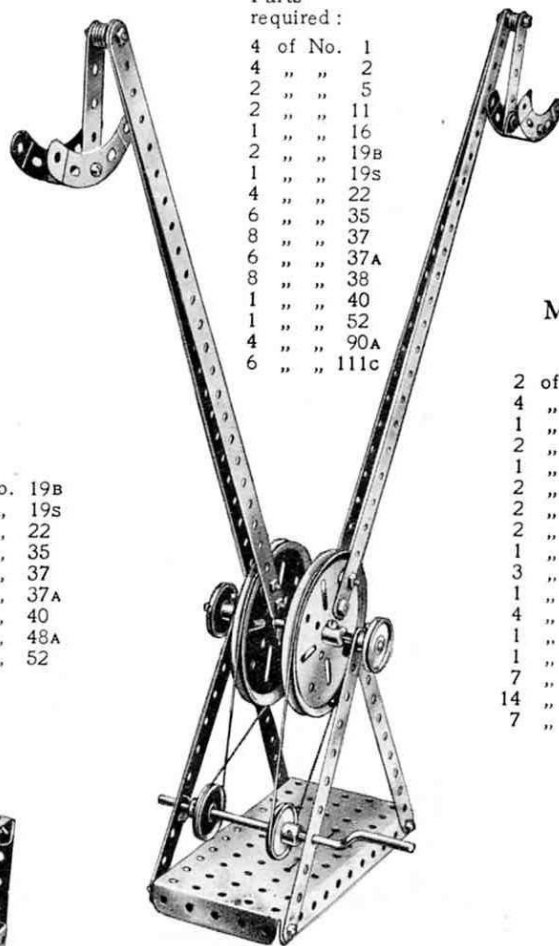
**Model No. 1.116 Bellows**Parts
required :

2	of No.	2
1	" "	17
9	" "	37
4	" "	48A
2	" "	54

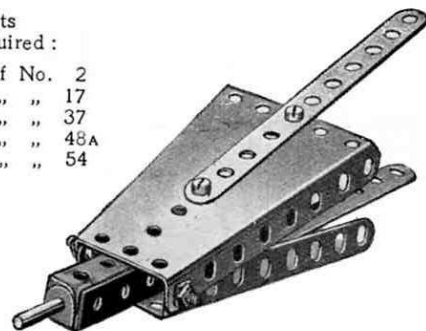**Model No. 1.117 Mobile Crane**

Parts required :

2	of No.	1	2	of No.	38
4	" "	2	1	" "	40
1	" "	3	1	" "	44
2	" "	5	1	" "	48
1	" "	10	1	" "	48A
2	" "	12	1	" "	52
2	" "	16	1	" "	57
2	" "	17	3	" "	111c
1	" "	18A	2	" "	125
3	" "	19B			
1	" "	19S			
4	" "	22			
1	" "	23			
1	" "	24			
7	" "	35			
14	" "	37			
7	" "	37A			

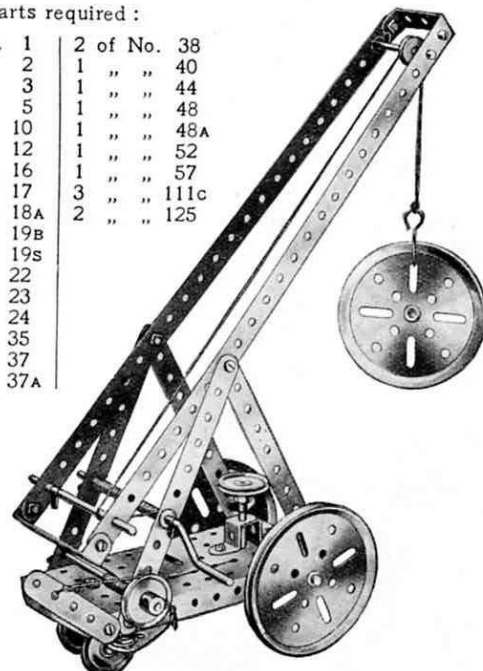


These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.118 Anti-Aircraft Gun

Parts required:


4 of No. 2	1 of No. 48A
4 " " 5	1 " " 54
9 " " 12	3 " " 111c
1 " " 16	1 " " 125
1 " " 17	2 " " 126
2 " " 18A	
2 " " 19B	
3 " " 22	
1 " " 24	
4 " " 35	
18 " " 37	
2 " " 38	
1 " " 40	

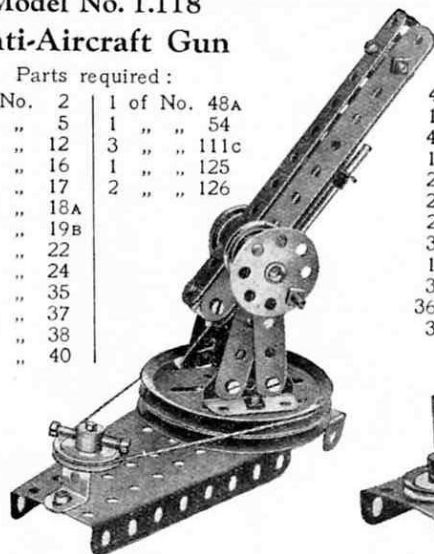

Model No. 1.120 Paddle Steamer

Parts required:


4 of No. 2	1 of No. 52	1 of No. 125
1 " " 3	2 " " 54	2 " " 126
4 " " 5	4 " " 90A	
1 " " 10		
2 " " 12		
2 " " 16		
2 " " 18A		
3 " " 22		
1 " " 24		
3 " " 35		
36 " " 37		
3 " " 48A		

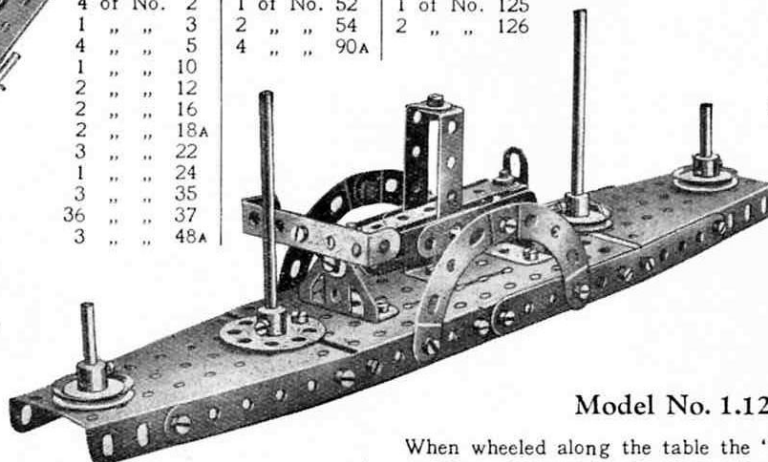

Model No. 1.121 Ladder on Wheels

Parts required:


6 of No. 2
4 " " 5
2 " " 16
4 " " 19B
16 " " 37
8 " " 38
4 " " 48A
1 " " 52

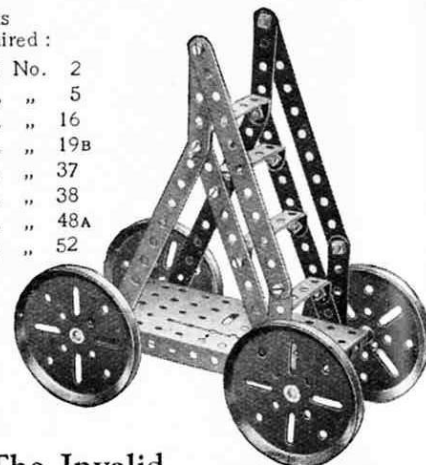

Model No. 1.119 Meccanograph

Parts required:

1 of No. 3	2 of No. 17	5 of No. 35	2 of No. 48A
4 " " 5	1 " " 19B	21 " " 37	1 " " 52
2 " " 11	2 " " 22	2 " " 37A	2 " " 100
6 " " 12	1 " " 24	2 " " 38	3 " " 111c
2 " " 16		1 " " 40	2 " " 126

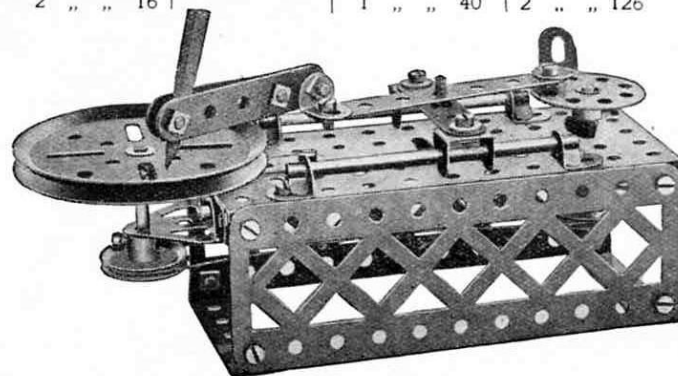


Parts required:

4 of No. 2
6 " " 5
1 " " 10
4 " " 12
3 " " 16
1 " " 17
4 " " 22
1 " " 23
1 " " 24
4 " " 35
24 " " 37
4 " " 37A
3 " " 38
2 " " 48A
2 " " 54
1 " " 125
1 " " 126A

Model No. 1.122 The Invalid

When wheeled along the table the "invalid" appears to push himself energetically along. His neck is a Flat Bracket: his right (or propelling) arm consists of one Angle Bracket and one $\frac{1}{2}$ " Reversed Angle Bracket, and

his left arm—the hand of which is bolted loosely to the chair—is formed by three Angle Brackets. The chair is composed principally of two Sector Plates and four $5\frac{1}{2}$ " Strips, and it runs on three 1" Pulley Wheels—one in front and two at the back. One of these (not visible in the illustration) drives by cord another 1" Pulley Wheel, the shaft of which also carries a Bush Wheel 1. As will be seen, a $2\frac{1}{2}$ " Strip is pivoted at one end to this Bush Wheel and at the other end to a second $2\frac{1}{2}$ " Strip 2, which, rocking about an axle journaled through its centre hole, is again pivoted to the invalid's hands.

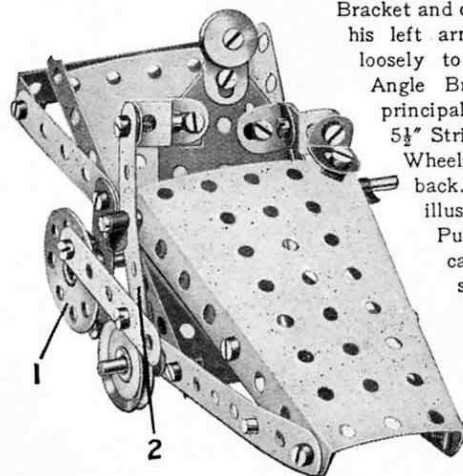

Model No. 1.123 Bow and Arrow

Parts required :



1 of No. 1 | 1 of No. 16
1 of No. 40

**Model No. 1.124 Rotating Crane**

The running wheels of this crane are journaled in Double Angle Strips bolted to the base plate and secured at an angle by means of Flat Brackets. The rear of the Base Plate is supported on a Double Bracket. The jib is bolted loosely to the supporting 5 1/2" Strips and is connected by 2 1/2" Strips to the Sector Plate which pivots about its supporting bolts. By moving this Sector Plate the elevation of the jib may be altered as desired. The movement is controlled by a Double Angle Strip mounted on the Crank Handle and connected pivotally to the plate by means of a 2 1/2" Strip. A Reversed Angle Bracket bolted to an upright Double Angle Strip in the rear of the model serves to restrict the movement of the Sector Plate.

Parts required :

4 of No. 2	1 of No. 24
9 " " 5	5 " " 35
2 " " 10	25 " " 37
1 " " 11	1 " " 40
2 " " 16	4 " " 48A
1 " " 17	1 " " 52
1 " " 19s	1 " " 54
4 " " 22	1 " " 57
	1 " " 125

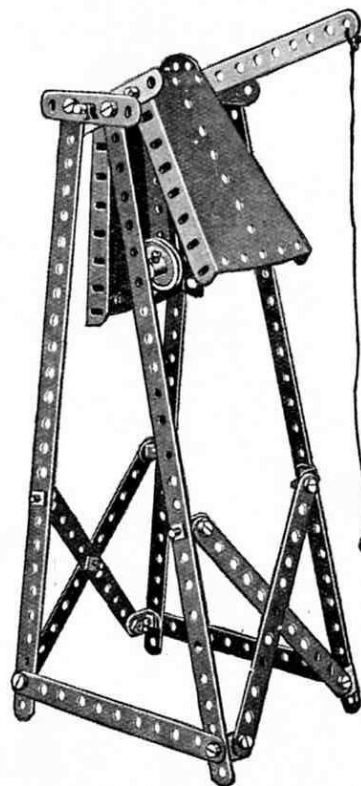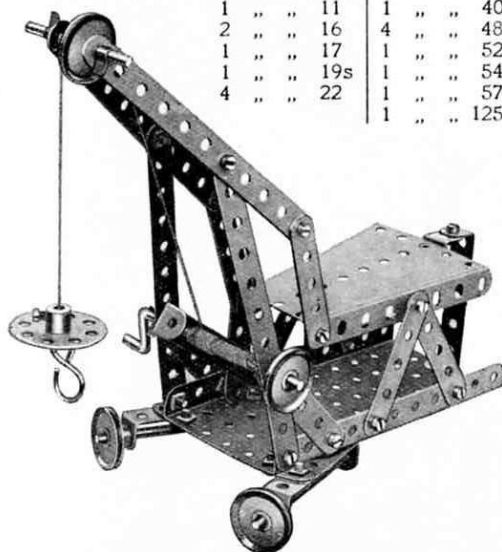**Model No. 1.125 Fire Alarm**


Parts required :

4 of No. 1
7 " " 2
1 " " 3
3 " " 5
8 " " 12
1 " " 16
1 " " 22
1 " " 24
4 " " 35
27 " " 37
2 " " 54

Model No. 1.127 Band Brake


Parts required :

1 of No. 2	1 of No. 19s	1 of No. 40
2 " " 5	2 " " 22	1 " " 52
1 " " 12	1 " " 35	2 " " 54
	10 " " 37	1 " " 111c

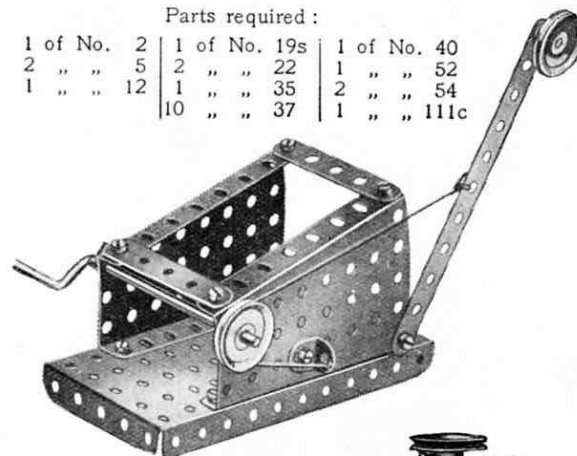**Model No. 1.128 Stamping Machine**


Parts required :

4 of No. 2
5 " " 5
2 " " 10
2 " " 16
1 " " 19s

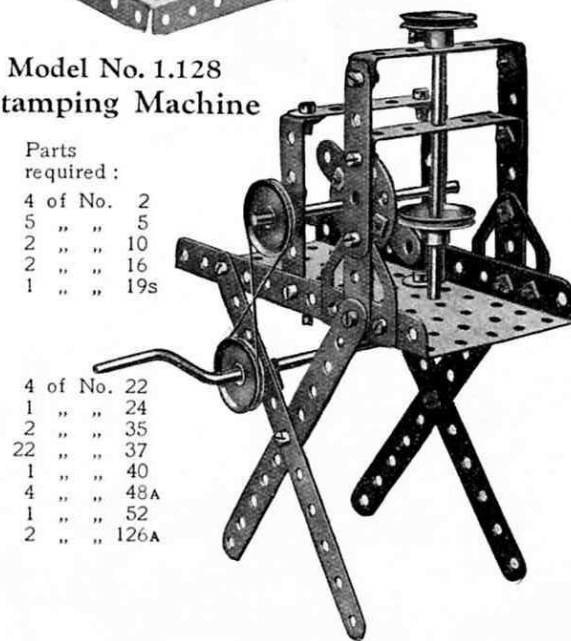**Model No. 1.126 Gramophone**

Parts required :

2 of No. 10	2 of No. 90A
1 " " 12	2 " " 111c
1 " " 19B	
1 " " 23	
1 " " 24	
6 " " 37	
1 " " 38	
1 " " 52	



These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)


Model No. 1.129 Electric Elevator

Two pairs of cords 1 are stretched tightly on each side of the lift shaft to guide the cage 2 and two other cords 3 are secured at the top and bottom of the shaft and passed behind $2\frac{1}{2}$ " Strips 4 bolted to the cage. The drive from the motor is transmitted to the 3" Pulley Wheel 5 by means of a cord passed round a 1" Pulley on the motor armature.

Parts required :

4 of No. 1	34 of No. 37
6 " " 2	1 " " 38
4 " " 5	1 " " 40
2 " " 12	1 " " 48
3 " " 16	6 " " 48A
3 " " 19B	1 " " 52
4 " " 22	2 " " 54
1 " " 24	2 " " 100
3 " " 35	2 " " 125


Electric Motor
(not included in Outfit)

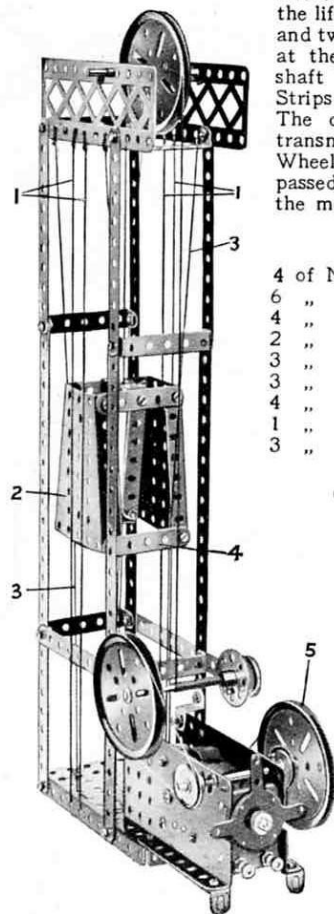

Model No. 1.130 Mounted Cowboy

Parts required :

1 of No. 3	
7 " " 5	
2 " " 10	
2 " " 11	
8 " " 12	
1 " " 22	
24 " " 37	
1 " " 52	
4 " " 90A	
1 " " 111c	
1 " " 125	

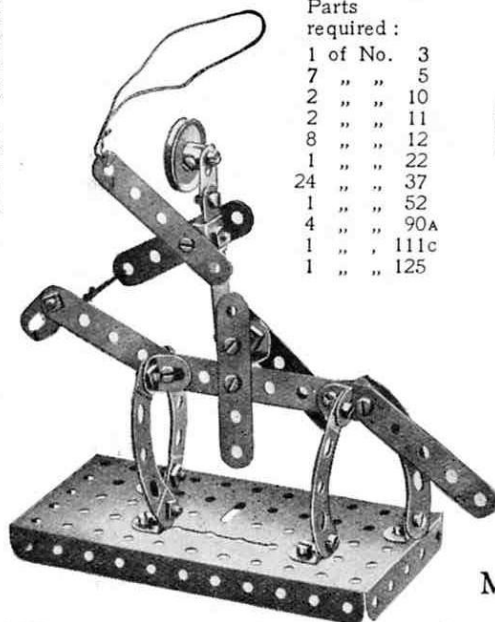

Model No. 1.132 Coaster

Parts required :


2 of No. 2	
2 " " 5	
4 " " 10	
2 " " 16	
1 " " 18A	
4 " " 19B	
1 " " 22	
1 " " 24	

22 of No. 37	1 of No. 40
2 " " 37A	4 " " 48A
6 " " 38	1 " " 52
	2 " " 126A

Model No. 1.133 Master and Student

Parts required :

9 of No. 5	
1 " " 10	
2 " " 11	
8 " " 12	
2 " " 22	
20 " " 37	
3 " " 37A	
1 " " 52	
1 " " 90A	
4 " " 111c	
1 " " 125	

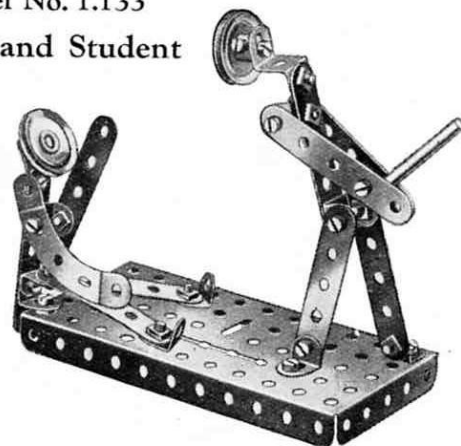


Model No. 1.131

Howitzer

Parts required :

2 of No. 2	
6 " " 5	
4 " " 10	
2 " " 11	
4 " " 12	
1 " " 16	
2 " " 19B	
2 " " 22	
2 " " 35	
14 " " 37	
2 " " 38	
2 " " 111c	
2 " " 125	

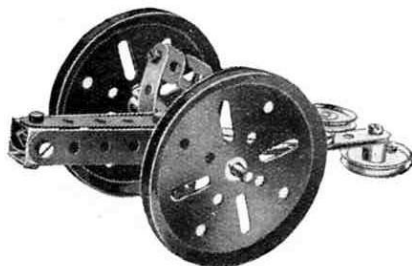


These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

59

Model No. 1.134 Travelling Crane


The jib 1 is pivoted to the Flat Trunnions 2, which are bolted at 3 to Angle Brackets secured to a Bush Wheel. The latter is nipped to a 2" Rod 4 passing through the Plate 5 and further supported in a Double Angle Strip 6. A Washer and Spring Clip mounted on the Rod 4 below the Strip 6 secure the crane to the carriage. The jib is supported by means of cords 7 tied to 2½" Strips 8, the holes of which engage the shank of a bolt passed through the Sector Plate 9, and its elevation may be altered by inserting this bolt in different holes in the Strips 8. The cord 10 of the brake lever is wound once round the Crank Handle, between two Washers.

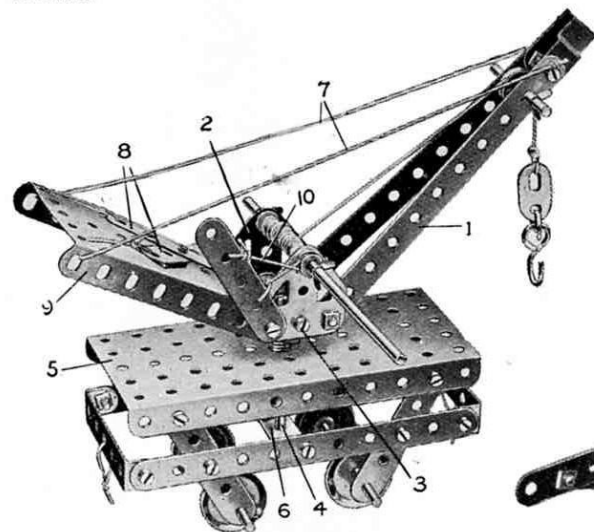

Parts required :

4 of No. 2	1 of No. 19s	1 of No. 40
7 " " 5	4 " " 22	1 " " 44
1 " " 10	1 " " 23	3 " " 48A
2 " " 12	5 " " 24	1 " " 52
2 " " 16	27 " " 35	1 " " 54
2 " " 17	6 " " 37	1 " " 57
	6 " " 38	2 " " 126A

Model No. 1.135 Bicycle

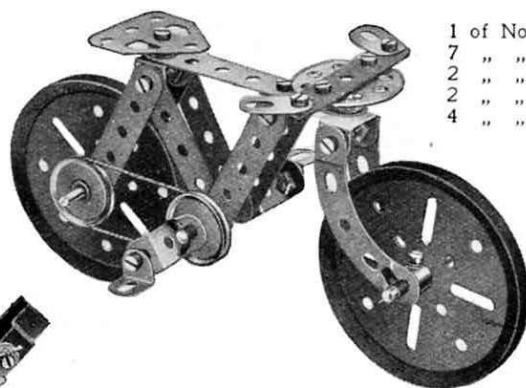


Parts required :

1 of No. 3	2 of No. 17
7 " " 5	1 " " 18A
2 " " 10	2 " " 19B
2 " " 11	2 " " 22
4 " " 12	1 " " 24
	4 " " 35
	13 " " 37
	4 " " 37A
	3 " " 38
	1 " " 40
	2 " " 90A
	4 " " 111c
	2 " " 125
	1 " " 126A

Model No. 1.136 Luggage Truck

Parts required :

2 of No. 2	18 of No. 37
8 " " 5	2 " " 48A
1 " " 16	1 " " 52
2 " " 19B	4 " " 90A

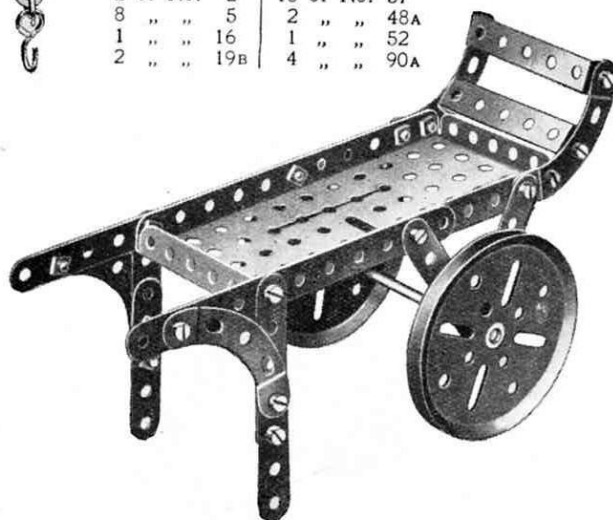


Parts required :

4 of No. 1	3 of No. 35
3 " " 5	25 " " 37
3 " " 10	2 " " 37A
4 " " 12	1 " " 38
1 " " 16	1 " " 40
1 " " 19s	2 " " 48A
3 " " 22	1 " " 52
1 " " 24	2 " " 54
	1 " " 126A

One of the 2½" Strips representing the arms of the gymnast is bolted to a Bush Wheel secured on a 3½" Rod. When the Crank Handle is rotated the gymnast turns complete somersaults in a very amusing manner. The gymnast's "arms" must be pivoted to the Angle Brackets forming his shoulders by means of Bolts and Lock-Nuts.

Model No. 1.137 Gymnast

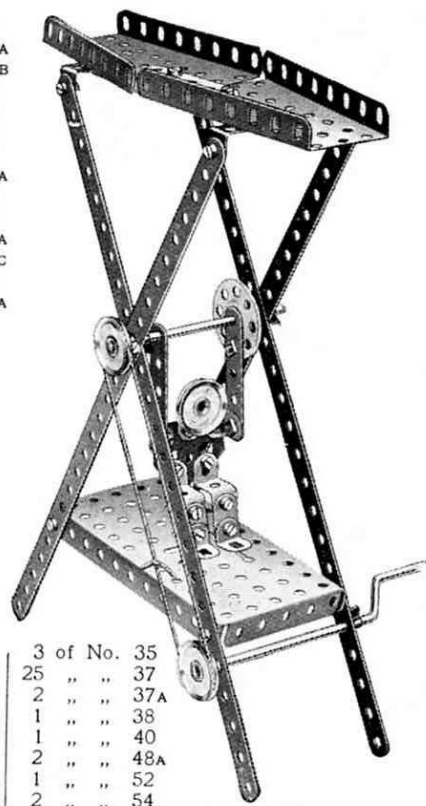


These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.138 Locomotive

Parts required:

3 of No. 2	5 of No. 10
1 " " 3	2 " " 11
9 " " 5	6 " " 12
	3 " " 16
	1 " " 18A
	2 " " 19B
	4 " " 22
	1 " " 24
	8 " " 35
	36 " " 37
	6 " " 37A
	6 " " 38
	1 " " 48
	6 " " 48A
	4 " " 90A
	6 " " 111c
	2 " " 125

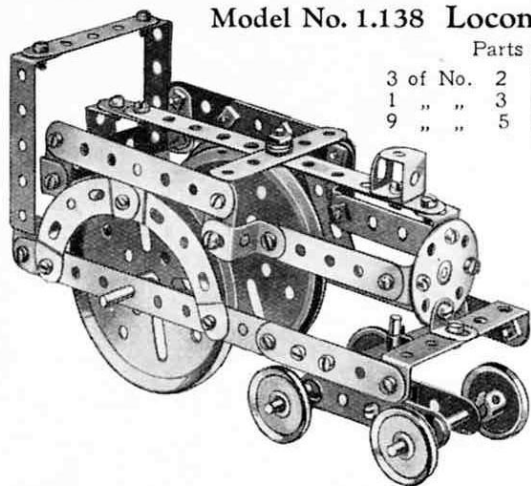


The bogie is connected pivotally to the locomotive body by means of a $1\frac{1}{2}$ " Rod journaled in a Double Bracket, which is secured in the centre of the bogie, and in a $2\frac{1}{4}$ " x $\frac{1}{2}$ " Double Angle Strip that is secured between the main side frames. Two Spring Clips between the Double Angle Strip and Double Bracket space the bogie at the correct distance.

Model No. 1.141 Quick-Delivery Chute

Parts required:

2 of No. 1
2 " " 2
6 " " 5
2 " " 16
1 " " 19s
4 " " 22
8 " " 35
12 " " 37
4 " " 38
1 " " 40
4 " " 48A

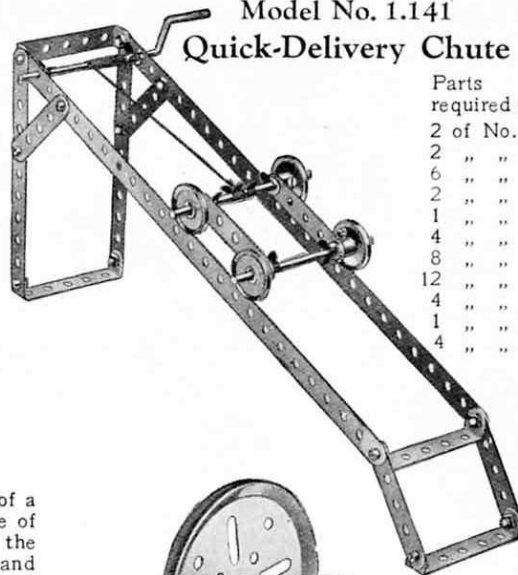


Model No. 1.142 Mechanical Gong

A Flat Bracket is connected pivotally to the base at 2 and is clamped rigidly to a 1" Pulley Wheel secured to the Rod 4. The latter passes through the $1\frac{1}{2}$ " Double Angle Strip 3 and carries at its upper end another Pulley to which is rigidly secured the striking arm 5. The Double Angle Strip 3 is pivoted to the Bush Wheel 1.


Parts required:

2 of No. 1	1
4 " " 2	2
1 " " 3	3
4 " " 5	5
2 " " 10	10
1 " " 12	12
1 " " 16	16
1 " " 19s	19s
2 " " 22	22
1 " " 24	24
2 " " 35	35
26 " " 37	37
1 " " 37A	37A
2 " " 38	38
1 " " 40	40
1 " " 48	48
2 " " 48A	48A
1 " " 52	52
2 " " 54	54
1 " " 126	126
1 " " 126A	126A

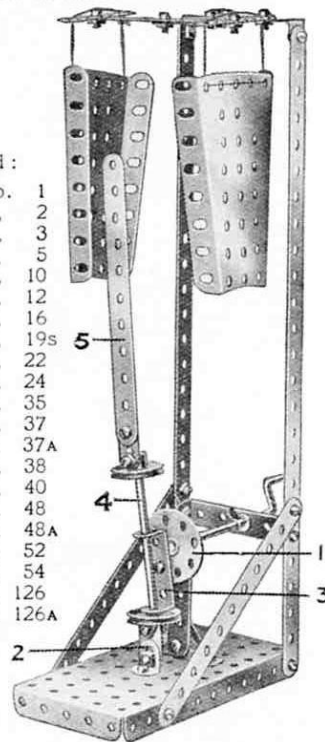

Model No. 1.139

Circular Saw

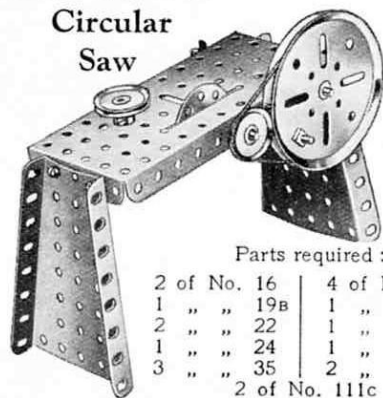


Parts required:

2 of No. 16	4 of No. 37
1 " " 19B	1 " " 37A
2 " " 22	1 " " 40
1 " " 24	1 " " 52
3 " " 35	2 " " 54
2 of No. 111c	

Model No. 1.140 Treadle Grindstone

Parts required:

4 of No. 2
1 " " 3
1 " " 5
1 " " 12
3 " " 16
2 " " 19B
4 " " 22
1 " " 24
2 " " 35
9 " " 37
2 " " 37A
1 " " 40
1 " " 48A
1 " " 52

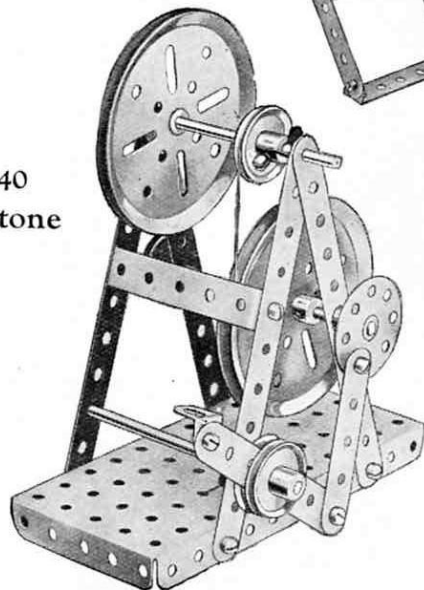


Model No. 1.143


Telescope

Parts
required :


6 of No.	5
4 "	10
4 "	12
1 "	17
1 "	18A
2 "	19B
3 "	22
1 "	35
31 "	37
4 "	48A
1 "	52
2 "	54
1 "	111c
2 "	126

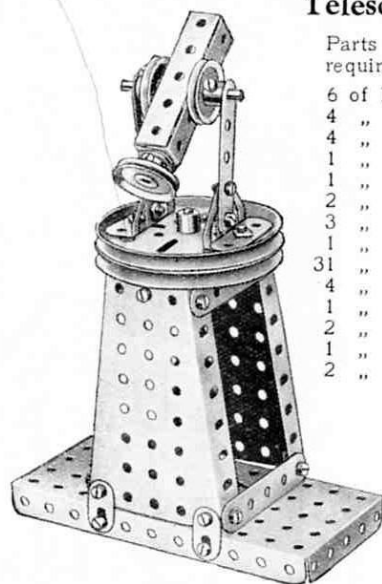


Model No. 1.145 Flying Boats

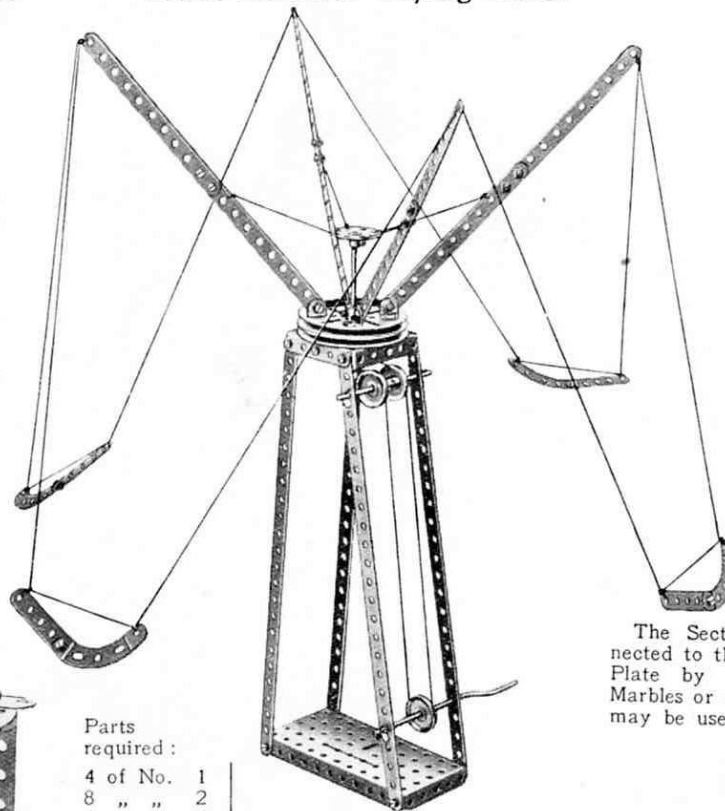

Model No. 1.146 Aeroplane

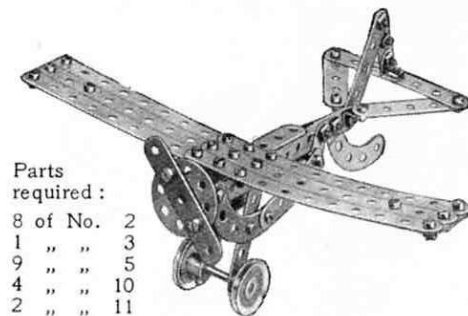Parts
required :

8 of No.	2
1 "	3
9 "	5
4 "	10
2 "	11
5 "	12
1 "	16
1 "	18A
2 "	22
1 "	24
1 "	35
36 "	37
3 "	90A
6 "	111c
2 "	126A

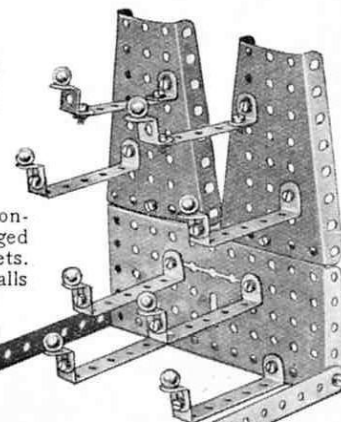
Model No. 1.147
Coco-nut Shy

The Sector Plates are connected to the $5\frac{1}{2}'' \times 2\frac{1}{2}''$ Flanged Plate by two Flat Brackets. Marbles or Meccano Steel Balls may be used for coco-nuts.

Model No. 1.144 Sedan Chair

Parts
required :


2 of No.	1
9 "	5
30 "	37

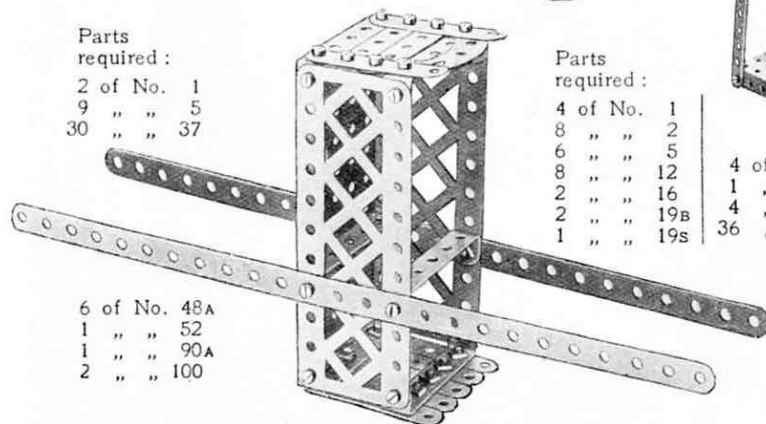Parts
required :

4 of No.	1
8 "	2
6 "	5
8 "	12
2 "	16
2 "	19B
1 "	19s
4 of No.	22
1 "	24
4 "	35
36 "	37
1 of No.	40
3 "	48A
4 "	90A

Parts required :

2 of No.	1	8 of No.	12
1 "	2	26 "	37
3 "	5	6 "	48A
2 "	10	1 "	52
2 "	11	2 "	54

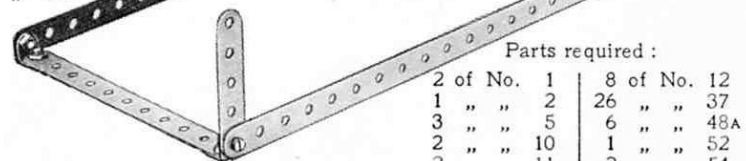

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.148 Double Draw Bridge

Parts required :

4 of No. 1	1 of No. 19s	2 of No. 38
6 " " 2	2 " " 22	1 " " 40
1 " " 16	8 " " 35	6 " " 48A
	16 " " 37	2 " " 126A

Model No. 1.149 Coaster

The figure 1 is loosely attached by lock-nutted Bolts 2 to the Sector Plate 3 and is connected to the Bush Wheel 4 by the pivotally-attached 2½" Strip 5. The 1½" Rod carrying the Bush Wheel 4 is journaled in the Cranked Bent Strip 6, the 1" fast Pulley 7 being connected to the road wheel by a cord as shown.

Parts required :

2 of No. 2	2 of No. 11	1 of No. 24
9 " " 5	7 " " 12	8 " " 35
5 " " 10	1 " " 16	37 " " 37
	2 " " 17	6 " " 37A
	2 " " 18A	1 " " 40
	4 " " 22	1 " " 48
	1 " " 23	2 " " 48A
		2 " " 54
		2 " " 111c
		2 " " 125
		2 " " 126A

Model No. 1.151 Motor Cyclist and Pillion Rider


Parts required :

4 of No. 2	2 of No. 17	2 of No. 48A
9 " " 5	4 " " 22	2 " " 90A
4 " " 10	1 " " 24	2 " " 125
2 " " 11	2 " " 35	2 " " 126A
8 " " 12	30 " " 37	
1 " " 16		


Model No. 1.150 Tappet Valve Demonstration Model

Parts required :

1 of No. 3
1 " " 5
1 " " 10
1 " " 11
3 " " 12
2 " " 16
1 " " 17
1 " " 18A
4 " " 22
1 " " 24
5 " " 35
15 " " 37
5 " " 37A
4 " " 38
1 " " 48A
1 " " 52
1 " " 54
2 " " 111c
2 " " 126A

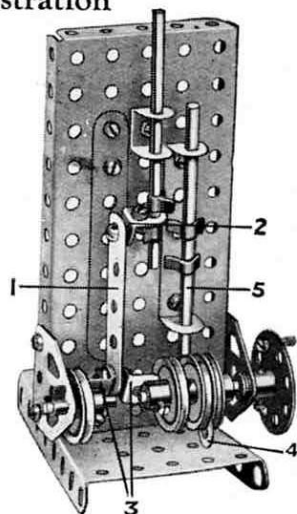

The upper end of the Strip 1 is connected pivotally by a Bolt and two Nuts to the crosshead bracket 2. The crankshaft is built up as follows: Two Angle Brackets 3 are each secured rigidly to the boss of a Pulley Wheel and are connected to each other by a ½" Bolt carrying three Nuts. The Nuts are screwed tightly against the Brackets, sufficient space being left between the inner pair to enable the connecting Strip 1 to turn freely. The valve Rod 5 is operated by the Flat Bracket 4 that is clamped between two further 1" Pulleys on the crankshaft in such a way that its protruding end serves as a cam.

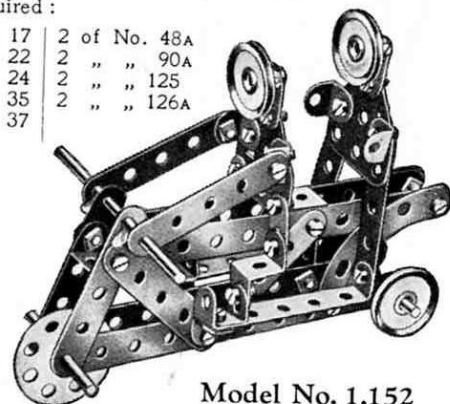


Model No. 1.152 Chinese Windlass

Parts required :

4 of No. 1
1 " " 3
1 " " 18A
3 " " 19B
1 " " 19s
3 " " 22
1 " " 23
1 " " 24
8 " " 37
1 " " 40
1 " " 44
2 " " 48A
1 " " 52
1 " " 57



Model No. 1.153 Pile Driver

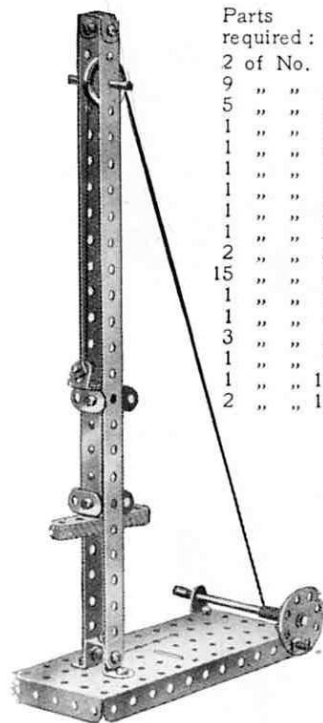

Parts required:		
2 of No.	1	
9 "	5	
5 "	10	
1 "	11	
1 "	12	
1 "	16	
1 "	17	
1 "	22	
1 "	24	
2 "	35	
15 "	37	
1 "	37A	
1 "	40	
3 "	48A	
1 "	52	
1 "	111c	
2 "	125	

The winding cord is passed round the Pulley at the top of the model and is fastened to an Angle Bracket that is hooked under the protruding portion of a Flat Bracket bolted to the top of the driving head. When the Angle Bracket reaches the Pulley at the top it is pushed out a little, thus releasing the driving head.

Model No. 1.154 Foot Hammer


Parts required:		
6 of No.	2	
1 "	3	
9 "	5	
1 "	12	
2 "	16	
4 "	22	
1 "	24	
2 "	35	
15 "	37	
4 "	37A	
2 "	38	
2 "	48A	
1 "	52	
4 "	90A	
2 "	111c	



The treadle lever is connected pivotally to a $3\frac{1}{2}$ " Strip by a Bolt and two Nuts. The upper end of this Strip is similarly connected to a $2\frac{1}{2}$ " Strip that is clamped tightly between two Pulleys on the hammer Rod. Pressure on the treadle causes the hammer to descend on the work. When the treadle is released a weight pulls the hammer back to its original position.

Model No. 1.155 Heavy Duty Scales


The five Bolts 1 act as pivots and are secured each by two Nuts (see Standard Mechanism No. 262).

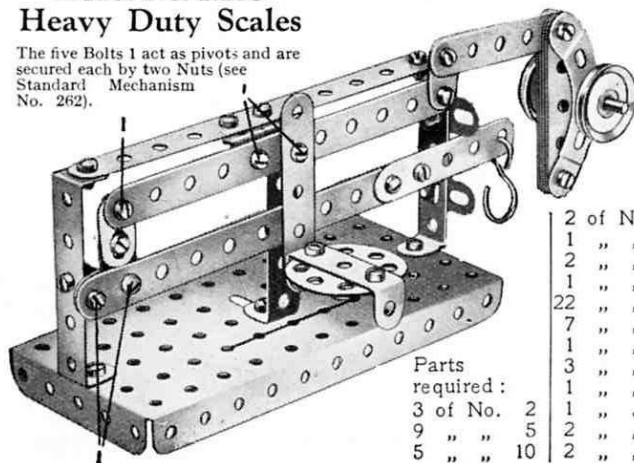

Parts required:		
3 of No.	2	
9 "	5	
5 "	10	
2 of No.	12	
1 "	18A	
2 "	22	
1 "	24	
22 "	37	
7 "	37A	
1 "	48	
3 "	48A	
1 "	52	
1 "	57	
2 "	90A	
2 "	111c	


Model No. 1.156 Horse Rake

Parts required:		
2 of No.	2	
2 "	5	

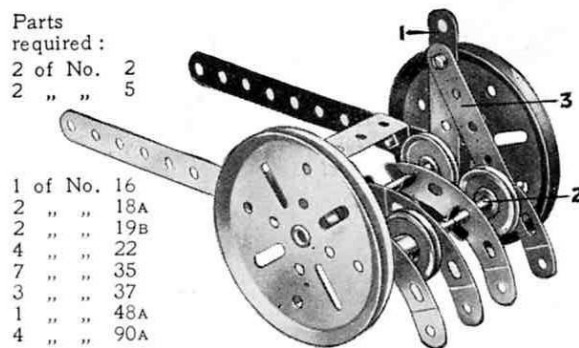

1 of No.	16
2 "	18A
2 "	19B
4 "	22
7 "	35
3 "	37
1 "	48A
4 "	90A

The $2\frac{1}{2}$ " Strip 1 pivots about the wheel axle. A $2\frac{1}{2}$ " Strip 3 is connected by a Bolt and two Nuts to the Strip 1 and the Shaft 2, which consists of two $1\frac{1}{2}$ " Rods, passes through its other end. On pulling the lever 1 towards the shafts the rake is lifted from the ground.

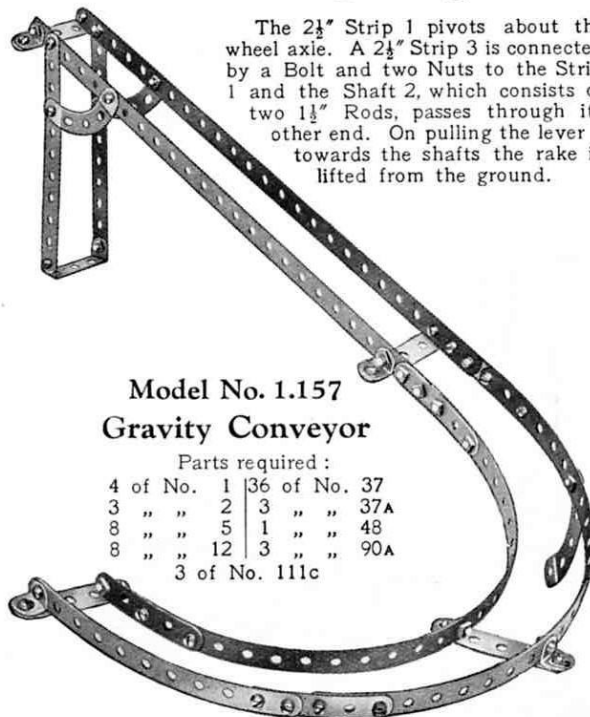


Model No. 1.157 Gravity Conveyor

Parts required :			
4 of No.	1	36 of No.	37
3 " "	2	3 " "	37A
8 " "	5	1 " "	48
8 " "	12	3 " "	90A
3 of No. 111c			

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)


Model No. 1.158 Bed Table

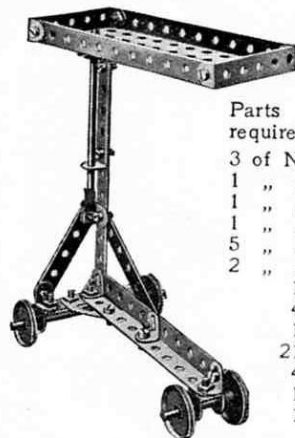

Parts required :

3 of No.	2
1 " "	3
1 " "	5
1 " "	11
5 " "	12
2 " "	16
1 of No.	17
4 " "	22
1 " "	24
21 " "	37
4 " "	48A
1 " "	52
1 " "	126A


Model No. 1.159 Inclined Plane

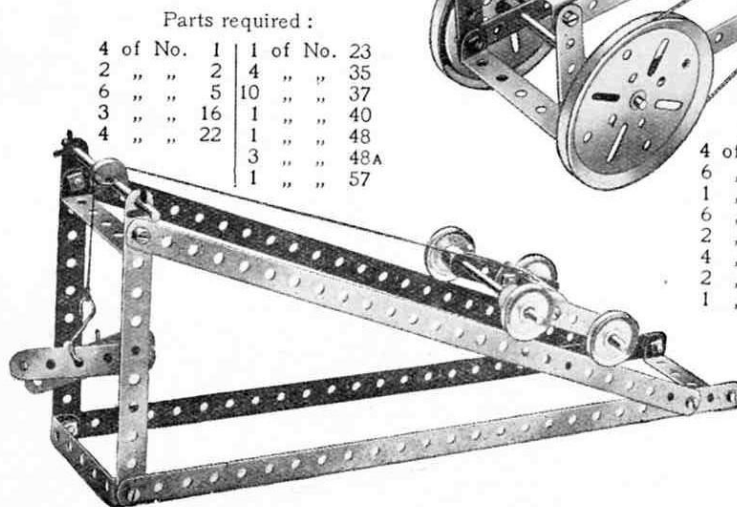

Parts required :

4 of No.	1	1 of No.	23
2 " "	2	4 " "	35
6 " "	5	10 " "	37
3 " "	16	1 " "	40
4 " "	22	1 " "	48
		3 " "	48A
		1 " "	57


Model No. 1.161 Shepherd's Crook

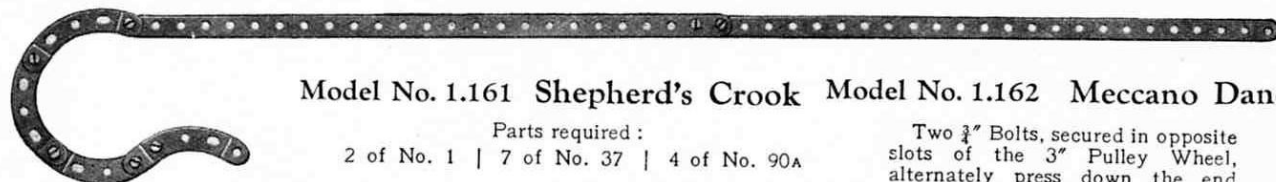

Parts required :

2 of No. 1 | 7 of No. 37 | 4 of No. 90A

Model No. 1.160 Coal Cutter

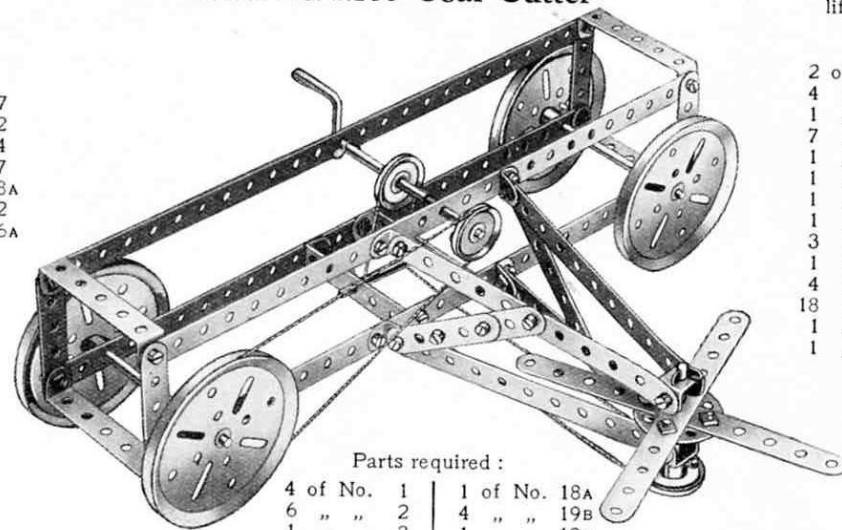

Parts required :


4 of No.	1	1 of No.	18A
6 " "	2	4 " "	19B
1 " "	3	1 " "	19S
6 " "	5	3 " "	22
2 " "	11	1 " "	24
4 " "	12	5 " "	35
2 " "	16	32 " "	37
1 " "	17	1 " "	40
		6 of No.	48A

Model No. 1.162 Meccano Dancer

Two $\frac{3}{4}$ " Bolts, secured in opposite slots of the 3" Pulley Wheel, alternately press down the end of the $5\frac{1}{2}$ " Strip 1 and cause the figure to dance in a surprisingly lifelike manner.

Parts required :

2 of No.	1	1 of No.	90A
4 " "	2	3 " "	111c
1 " "	3	2 " "	126A
7 " "	5		
1 " "	16		
1 " "	18A		
1 " "	19B		
1 " "	19S		
3 " "	22		
1 " "	24		
4 " "	35		
18 " "	37		
1 " "	40		
1 " "	52		

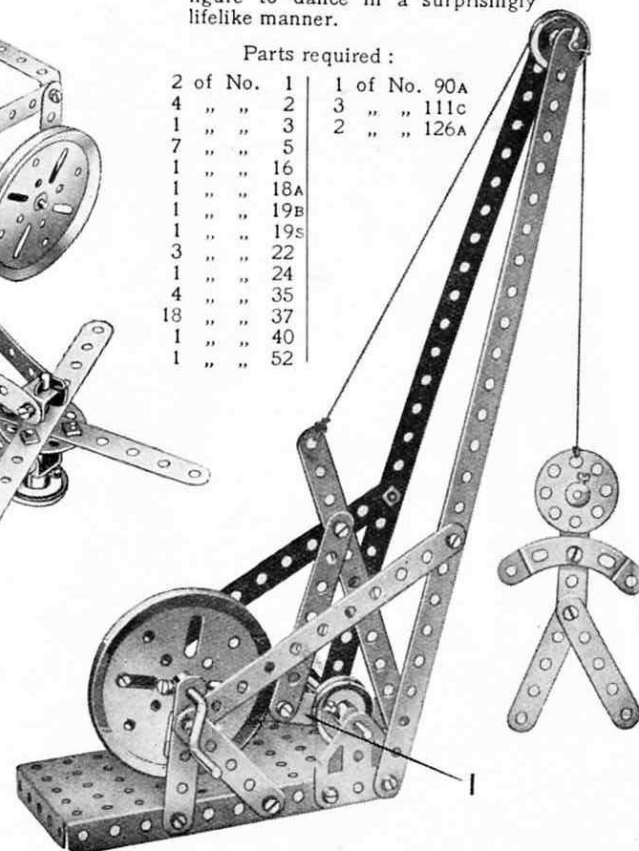


These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.163 Eccentric Dancers

Parts
required :

6 of No.	5
4 " "	10
6 " "	12
1 " "	17
4 " "	22
1 " "	23
1 " "	24
20 " "	37

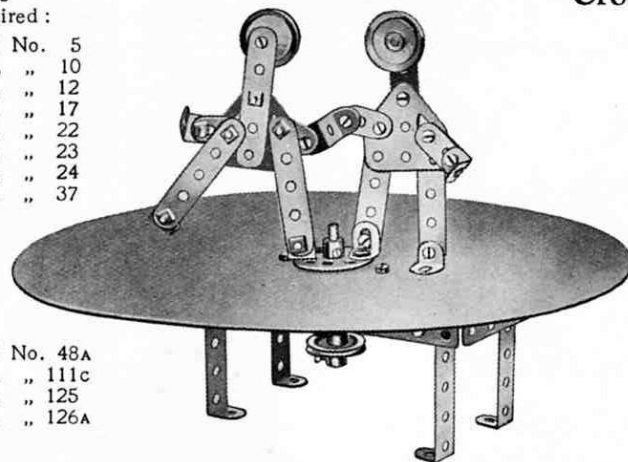


4 of No.	48A
2 " "	111c
1 " "	125
2 " "	126A

Model No. 1.164 Bellows

Parts required :

4 of No.	2	1 of No.	24
1 " "	3	8 " "	35
3 " "	5	25 " "	37
2 " "	10	6 " "	37A
2 " "	11	1 " "	44
4 " "	12	1 " "	52
1 " "	16	2 " "	54
2 " "	17	1 " "	111c
	2 of No.		126

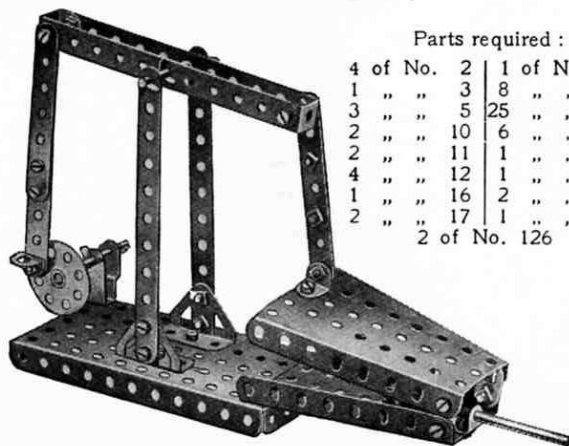


Model No. 1.165

Crosshead Demonstration Model

Parts required :

2 of No.	1	3 of No.	35
4 " "	2	20 " "	37
9 " "	5	1 " "	40
2 " "	16	2 " "	48A
1 " "	23	1 " "	52
1 " "	24	2 " "	126A

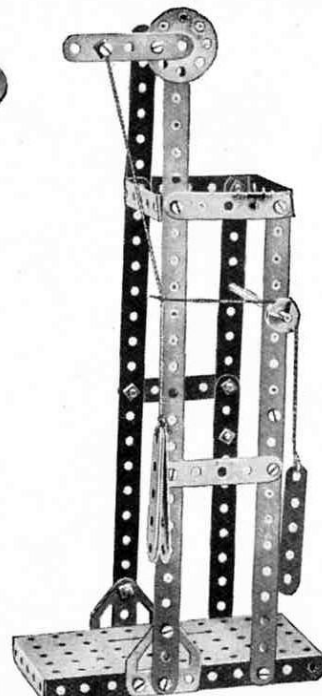


This is an apparatus for determining the forces that act at the crosshead of a reciprocating engine. The upper inclined length of cord represents the connecting rod and the lower, or vertical portion, the piston rod. The pull on the third cord indicates the pressure exerted on the slide bars of the engine due to the angularity of the connecting rod.

Model No. 1.166 Drop Stamp

Parts
required :


4 of No.	2
6 " "	5
3 " "	10
2 " "	16
1 " "	19s
4 " "	22
1 " "	24
2 " "	35
27 " "	37
1 " "	40
3 " "	48A
1 " "	52
1 " "	54
2 " "	126A

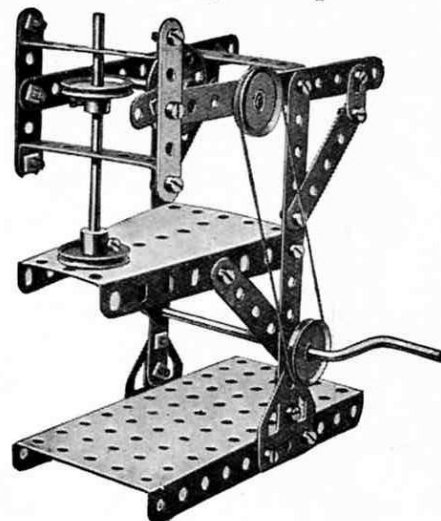

Model No. 1.167 Blacksmith

Parts required :


1 of No.	3	1 of No.	35
8 " "	5	26 " "	37
2 " "	10	4 " "	37A
2 " "	11	1 " "	44
5 " "	12	1 " "	52
1 " "	19s	1 " "	54
1 " "	22	1 " "	111c
1 " "	24	2 " "	125
	2 of No.		126

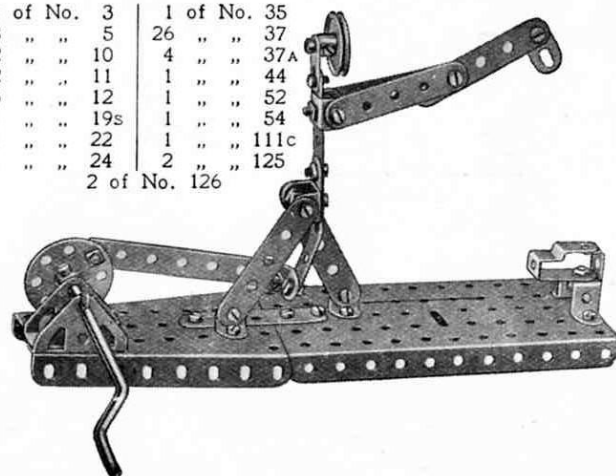

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)



Model No. 1.168 Try-Your-Strength Machine

Parts required:		
4 of No.	1	
1 " "	2	
6 " "	12	
1 " "	17	
3 " "	22	
1 " "	23	
2 " "	35	
17 " "	37	
1 " "	52	
1 " "	111c	
2 " "	126	
1 " "	126A	

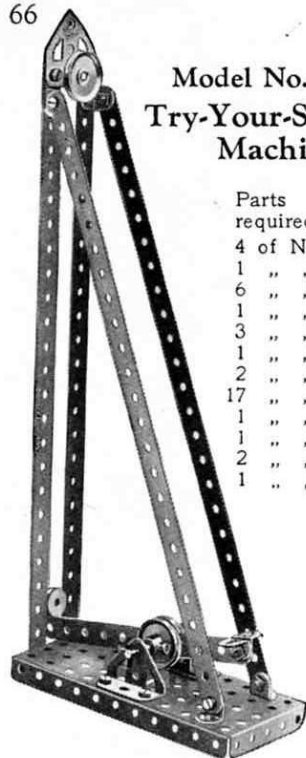


Model No. 1.169 Double Cable Key

Parts required:		
2 of No.	2	1 of No. 52
2 " "	22	2 " " 111c
4 " "	37	

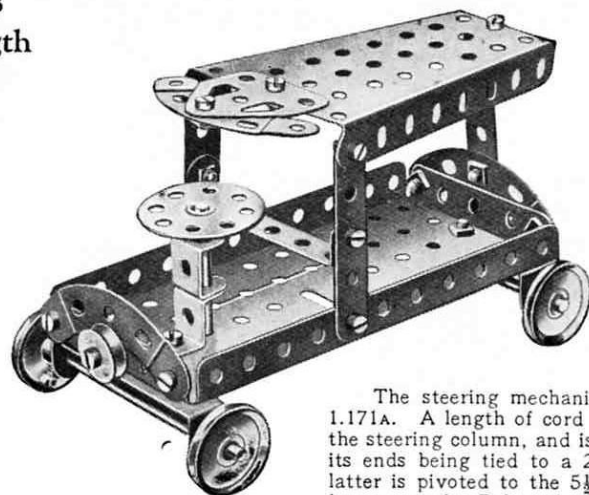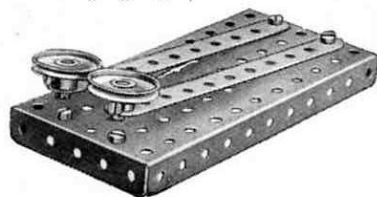

Model No. 1.170 Boat

Parts required:		
4 of No.	1	
2 " "	2	
1 " "	5	
2 " "	11	
21 " "	37	
1 " "	40	
1 " "	48A	
1 " "	52	
2 " "	90A	
2 " "	125	

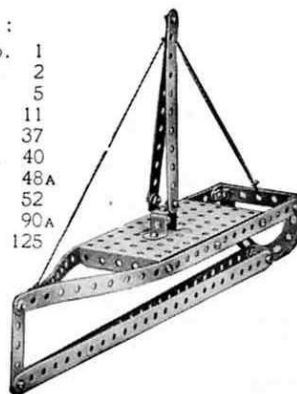

Model No. 1.171 Motor Van

Parts required:

3 of No.	5	17 of No.	37
1 " "	11	1 " "	40
1 " "	12	3 " "	48A
2 " "	16	1 " "	52
1 " "	17	1 " "	54
4 " "	22	3 " "	90A
1 " "	23	1 " "	111c
1 " "	24	1 " "	125
1 " "	35	1 " "	126A

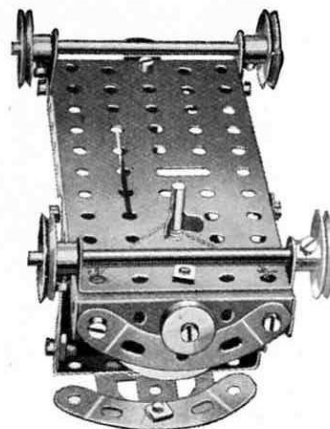



FIG. 1.171A

The steering mechanism is shown more clearly in Fig. 1.171A. A length of cord is given two or three turns round the steering column, and is held in position by a Spring Clip, its ends being tied to a $2\frac{1}{2} \times \frac{1}{2}$ Double Angle Strip. The latter is pivoted to the $5\frac{1}{2} \times 2\frac{1}{2}$ Flanged Plate of the lorry by means of a Bolt and two Nuts (see Standard Mechanisms Manual, Detail No. 262).

Model No. 1.172 Revolving Hammerhead Crane

Parts required:

2 of No.	1
8 " "	2
4 " "	5
1 " "	11
2 " "	12
1 " "	16
1 " "	17
1 " "	18A
2 " "	19B
1 " "	19s
2 " "	22

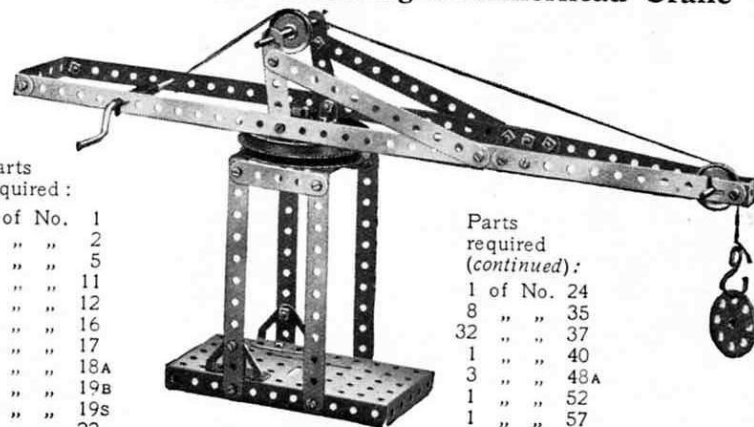


Parts required (continued):		
1 of No.	24	
8 " "	35	
32 " "	37	
1 " "	40	
3 " "	48A	
1 " "	52	
1 " "	57	
2 " "	126	

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

67


Model No. 1.173 Drilling Machine

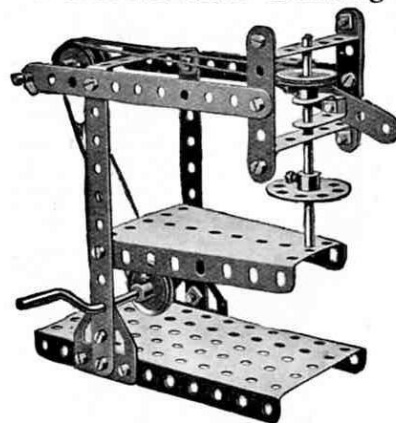

Parts required :

4	of No.	2
3	" "	5
1	" "	11
2	" "	16
1	" "	19s
4	" "	22
1	" "	24
4	" "	35
19	" "	37
1	" "	40
1	" "	44
3	" "	48A
1	" "	52
1	" "	54
2	" "	126A

Model No. 1.175 Motor Tractor

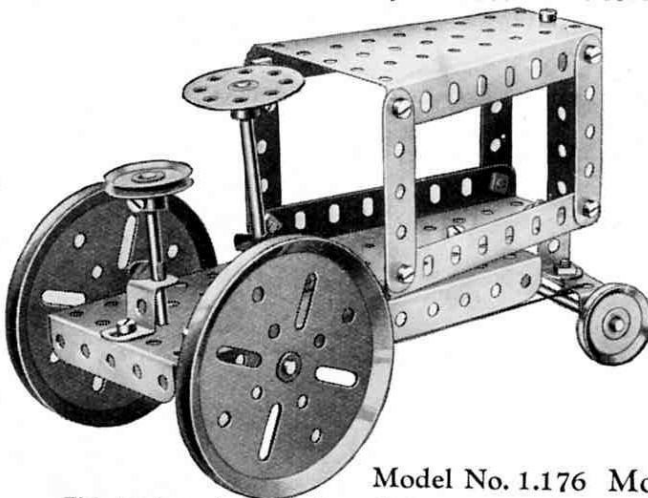


Parts required :

4	of No.	5
1	" "	11
3	" "	16
1	" "	17
2	" "	19B
4	" "	22
1	" "	24
3	" "	35
6	" "	37
11	" "	37A
1	" "	40
2	" "	48A
1	" "	52
2	" "	54
2	" "	125

Model No. 1.174 Racing Motor Car

Parts required :

3	of No.	2	25	of No.	37
4	" "	5	3	" "	38
4	" "	10	1	" "	44
2	" "	11	4	" "	48A
8	" "	12	1	" "	126A
2	" "	16			
1	" "	19s			
4	" "	22			
1	" "	23			
1	" "	24			
4	" "	35			

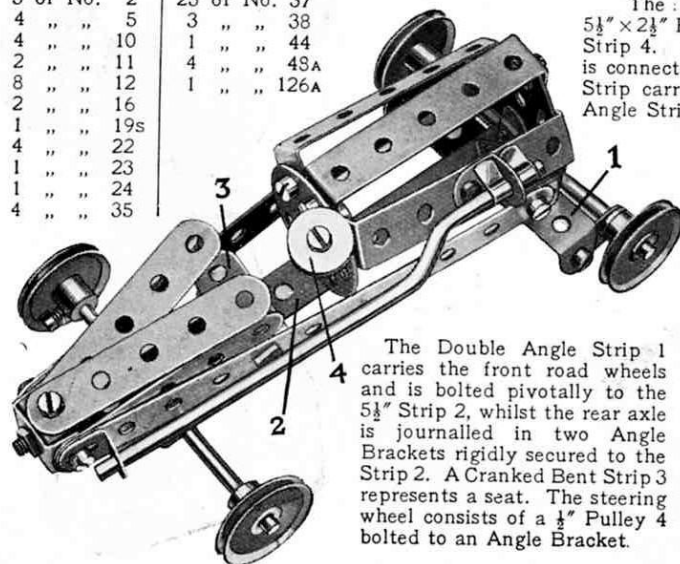


The Double Angle Strip 1 carries the front road wheels and is bolted pivotally to the $5\frac{1}{2}$ " Strip 2, whilst the rear axle is journaled in two Angle Brackets rigidly secured to the Strip 2. A Cranked Bent Strip 3 represents a seat. The steering wheel consists of a $\frac{1}{2}$ " Pulley 4 bolted to an Angle Bracket.

Model No. 1.176 Motor Car


The steering column 1 is journaled in an Angle Bracket 2 bolted to the $5\frac{1}{2}$ " x $2\frac{1}{2}$ " Flanged Plate 3, and in the second hole of the $2\frac{1}{2}$ " x $\frac{1}{2}$ " Double Angle Strip 4. A Bush Wheel 5, secured to the lower end of the steering column, is connected by two short lengths of cord to a second $2\frac{1}{2}$ " x $\frac{1}{2}$ " Double Angle Strip carrying the front axle. The Strip is pivoted to a similar Double Angle Strip 6 by means of a Bolt and Nuts (Standard Mechanism No. 262).

Parts required :

4	of No.	2	3	of No.	16	25	of No.	37	4	of No.	48A
7	" "	5	4	" "	19B	2	" "	37A	1	" "	52
1	" "	10	1	" "	22	4	" "	38	2	" "	54
1	" "	11	1	" "	24	1	" "	40	1	" "	111c
									1	" "	125
									1	" "	126

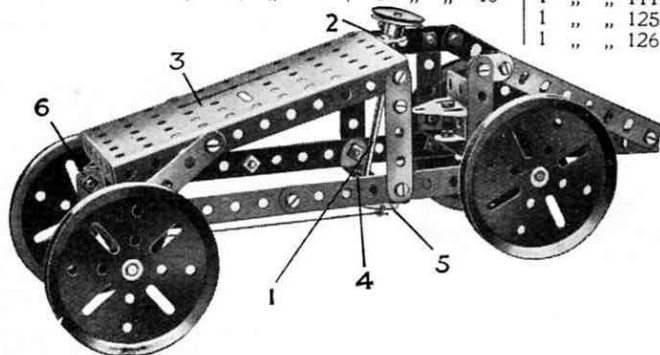

Model No. 1.177 Windmill Pump

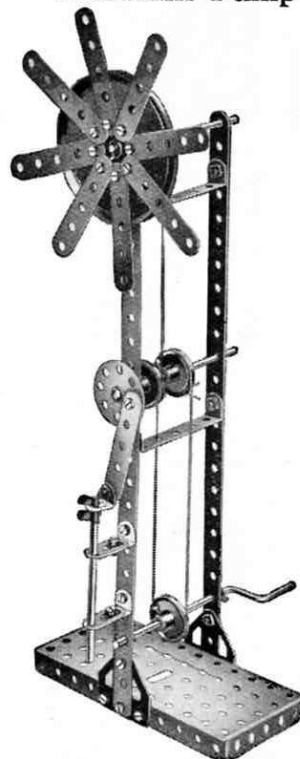


Parts required :

2	of No.	1	4	of No.	35
9	" "	5	24	" "	37
2	" "	10	4	" "	37A
3	" "	12	3	" "	38
3	" "	16	1	" "	40
1	" "	19B	2	" "	48A
1	" "	19s	1	" "	52
4	" "	22	2	" "	111c
1	" "	24	2	" "	126A

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.178 Giant Foundry Ladle

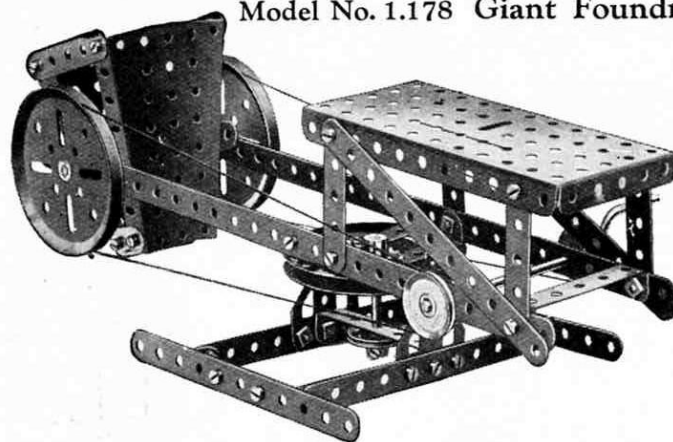

The ladle pivots about a $3\frac{1}{2}$ " Axle Rod carrying a 3" Pulley at each end in addition to a Bush Wheel and a $2\frac{1}{2}$ " Strip. The two latter parts are bolted to the side flanges of the Sector Plates and the Bush Wheel is nipped in position on the Rod. The pivot about which the superstructure turns is shown in Fig. 1.178A.

Parts required :

2 of No. 1	3 of No. 22
6 " " 2	1 " " 24
1 " " 3	36 " " 37
7 " " 5	6 " " 37A
2 " " 10	1 " " 40
2 " " 12	6 " " 48A
1 " " 16	1 " " 52
1 " " 17	2 " " 54
3 " " 19B	6 " " 111c
1 " " 19S	2 " " 126A

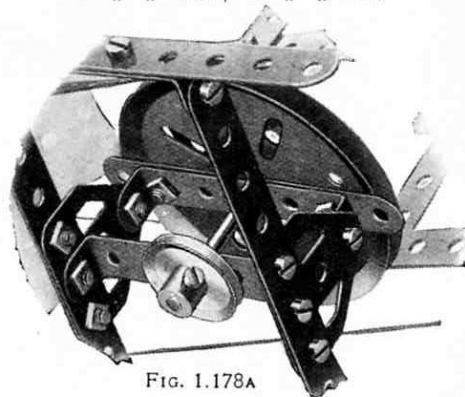



FIG. 1.178A

Model No. 1.179 Boat Steering Gear

Parts required :

4 of No. 2	1 of No. 24
1 " " 3	14 " " 37
2 " " 11	4 " " 37A
1 " " 12	1 " " 40
1 " " 16	1 " " 48A
1 " " 18A	1 " " 52
1 " " 19B	6 " " 111c
3 " " 22	1 " " 125

1 of No. 126

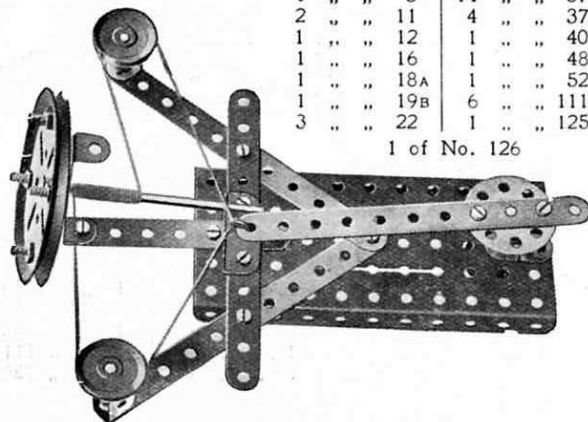


Model No. 1.180 Gyroscope

The $5/32$ " Bolt 1 is gripped by the Set-Screw of the Bush Wheel. The lower end of the Rod 2 of the gyroscope enters the boss of the Bush Wheel and rests on the shank of the Bolt 1.

Parts required :


4 of No. 12
1 " " 16
4 " " 19B
1 " " 24
10 " " 37
1 " " 40
4 " " 48A



Model No. 1.181

Elevated Jib Crane

A 1" fast Pulley Wheel secured to the armature spindle of the Electric Motor is connected by an endless cord to the 3" Pulley Wheel 1. A 1" fast Pulley 2 on the same Rod as the latter is similarly connected with a second 3" Pulley Wheel 3. A cord wound on the Rod to which the latter is secured carries the load hook. The jib is supported by two cords 4, and the whole superstructure, which is secured to the 3" Pulley Wheel 6 is capable of revolving with the Rod 5. The latter is journalled in two $2\frac{1}{2} \times \frac{1}{4}$ " Double Angle Strips secured between the Sector Plates in the base of the model.

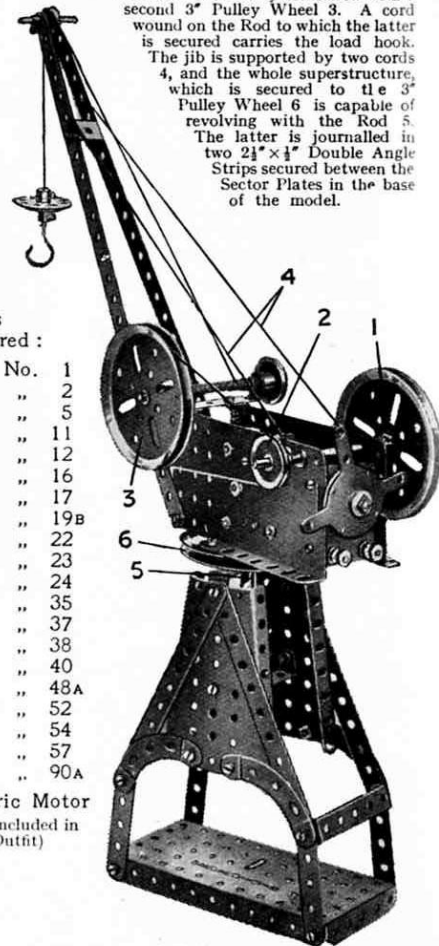

Parts required :

2 of No. 1
4 " " 2
4 " " 5
1 " " 11
2 " " 12
3 " " 16
1 " " 17
3 " " 19B
4 " " 22
1 " " 23
1 " " 24
5 " " 35
26 " " 37
2 " " 38
1 " " 40
5 " " 48A
1 " " 52
2 " " 54
1 " " 57
4 " " 90A

Electric Motor
(not included in Outfit)

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.182 Telpher Span


Parts required :

2 of No. 1	1 of No. 10	1 of No. 23
2 " " 2	1 " " 11	8 " " 35
4 " " 5	2 " " 12	22 " " 37
	3 " " 16	1 " " 40
	1 " " 18A	1 " " 44
	1 " " 19s	2 " " 48A
	4 " " 22	1 " " 52
		2 " " 54
		1 " " 57
		2 " " 126A


Model No. 1.183 Ladder on Wheels

Parts required :


4 of No. 1	16 of No. 37
2 " " 16	6 " " 48A
4 " " 22	1 " " 52



This model will provide many hours of enjoyment. The cords may be made to any length to allow the load to be carried from one side of the room to the other, and, if necessary, a better grip may be obtained by winding the operating cord twice round the Pulley on the Crank Handle. The open sides of the bucket may be closed with cardboard so that it may be loaded with marbles, beads, etc. The bed of the telpher may be screwed on to a solid base with ordinary wood screws to give better support. The pulley bracket, and that securing the cord on which the bucket travels should be screwed in a suitable position on the opposite side of the room.

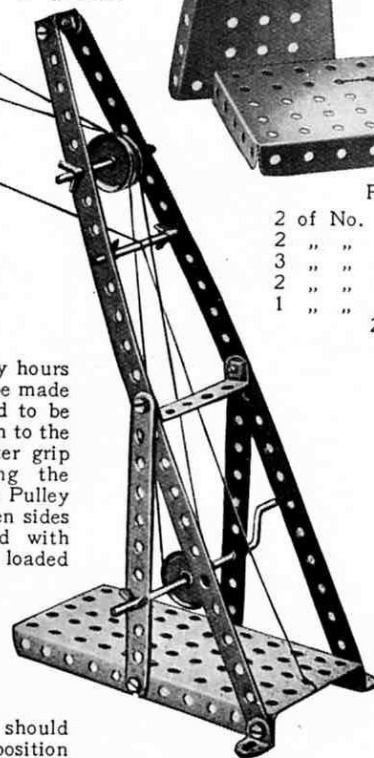

Model No. 1.184 Hooke's Coupling

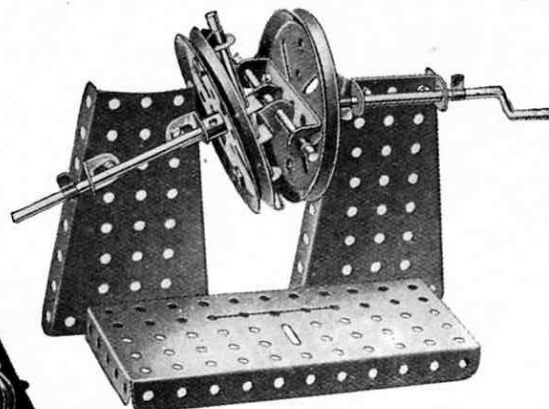


Parts required :

2 of No. 11	7 of No. 35
2 " " 12	12 " " 37
3 " " 16	1 " " 48
2 " " 19B	2 " " 48A
1 " " 19s	1 " " 52
	2 of No. 54

Parts required :


2 of No. 2
8 " " 5
2 " " 10
22 " " 37
6 " " 48A
1 " " 52
3 " " 90A

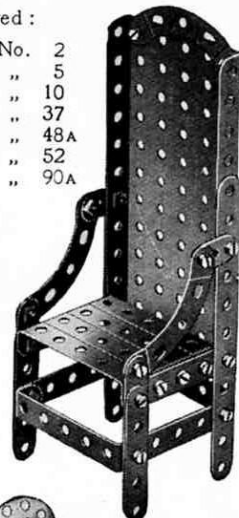


Model No. 1.186 Lancer

Parts required :

1 of No. 2
1 " " 3
9 " " 5
2 " " 10
2 " " 11
5 " " 12
2 " " 16
1 " " 19s
4 " " 22
1 " " 24
1 " " 35
27 " " 37
1 " " 48A
1 " " 52
1 " " 54
4 " " 90A
1 " " 126A

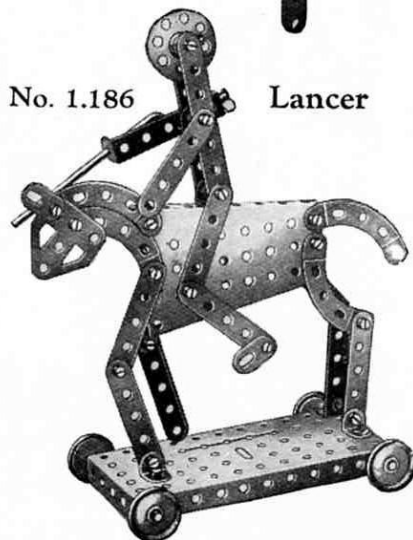

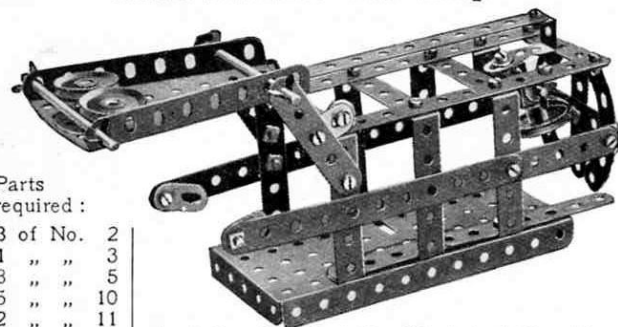Model No. 1.187 Rat TrapParts
required :


8 of No. 2			
1 " " 3			
8 " " 5			
5 " " 10			
2 " " 11			
6 " " 12	1 of No. 23	1 of No. 38	1 of No. 54
2 " " 16	1 " " 24	1 " " 48	2 " " 90A
1 " " 17	8 " " 35	6 " " 48A	3 " " 111c
3 " " 22	31 " " 37	1 " " 52	

The "bait" consists of a 1" fast Pulley and a 1/2" loose Pulley suspended by means of a cord from a Double Bracket. The latter is bolted to a 1 1/2" x 1/2" Double Angle Strip that is free to turn on a 2" Rod journalled in a pair of Angle Brackets. A Flat Bracket bolted to the Double Bracket engages a second Double Bracket on the end of a 5 1/2" Strip that is bolted to the door of the cage. If the "bait" is touched, the heavily-weighted door falls into place, and is prevented from re-opening by catches formed from Flat Brackets secured to 5 1/2" Strips that are bolted to the trap by their extreme ends and act as springs.


Model No. 1.188 Toast Rack

Parts required :


6 of No. 5	21 of No. 37
6 " " 12	1 " " 52
4 of No. 90A	

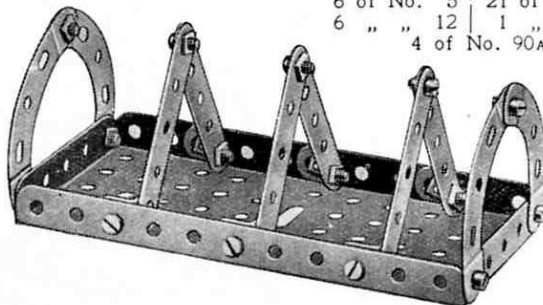Parts
required :

4 of No. 1	
2 " " 11	
1 " " 18A	
1 " " 22	
1 " " 35	
7 " " 37	
3 " " 37A	
2 " " 125	

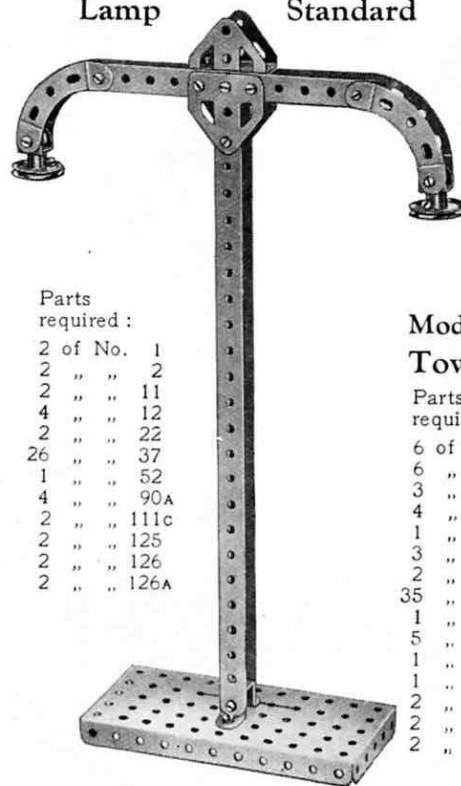**Model No. 1.189
Lamp Standard**Parts
required :

2 of No. 1	
2 " " 2	
2 " " 11	
4 " " 12	
2 " " 22	
26 " " 37	
1 " " 52	
4 " " 90A	
2 " " 111c	
2 " " 125	
2 " " 126	
2 " " 126A	

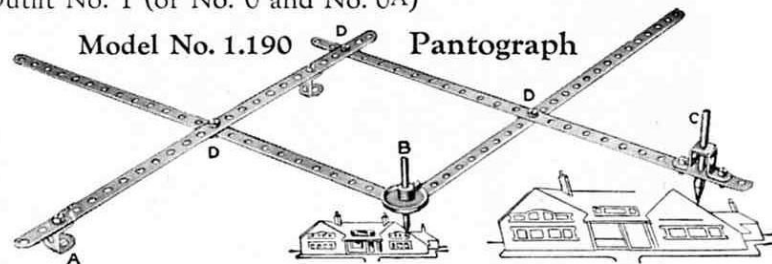Model No. 1.190 Pantograph


Most boys have heard of the Pantograph but not many have had an opportunity of seeing its principles demonstrated. It is an instrument for copying plans, etc., on the same or on a reduced or enlarged scale.

The apparatus is fixed at the point A. If an enlarged sketch is to be made, the point B is traced round the outlines, the writing point C reproducing the sketch on a larger scale. When a reduced drawing is to be made, the point C traces the outline, whilst the point B reproduces the sketch on a smaller scale. The degree of enlargement or reduction varies according to the position in which point C is fixed on the perforated arm.


The bolts at D are fitted with lock-nuts to allow free movement of the 12 1/2" Strips.

**Model No. 1.191
Tower Wagon**Parts
required :

6 of No. 2	
6 " " 5	
3 " " 16	
4 " " 19B	
1 " " 19s	
3 " " 22	
2 " " 35	
35 " " 37	
1 " " 40	
5 " " 48A	
1 " " 52	
1 " " 57	
2 " " 90A	
2 " " 126	
2 " " 126A	

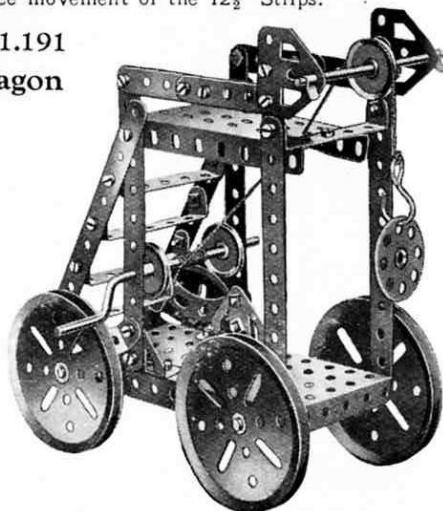


Model No. 1.192 A Sudden Appearance

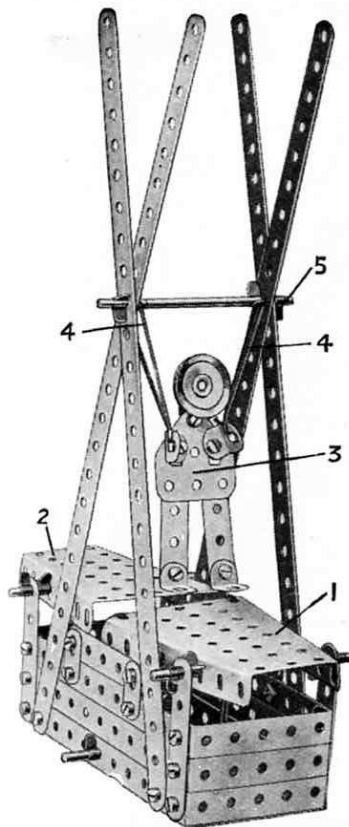

The Sector Plate 1, forming the lid, is carried pivotally on an axle rod that passes through its sides three holes from the end, and the rear Sector Plate 2 is pivoted in a similar manner, excepting that the rod in this case passes through the fourth hole from the end. Pieces of thin elastic are tied to the end holes in each side of the front Sector Plate at its widest end, and are connected to a Rod journalled in the sides of the box. The "Meccanitian" 3 is placed face downward inside the box with his feet towards the far end of the model. The tension of the elastic holding the lid 1 should be sufficient to keep him in this position. On tilting the Plate 1 slightly, however, he will suddenly shoot out of the box, drawn by the elastic bands 4 connected to the $3\frac{1}{2}$ " Axle Rod 5.

Parts required :

4 of No. 1	8 of No. 35
4 " " 2	29 " " 37
8 " " 5	4 " " 48A
5 " " 10	1 " " 52
4 " " 12	2 " " 54
4 " " 16	1 " " 111c
1 " " 22	1 " " 126A
A short length of elastic	

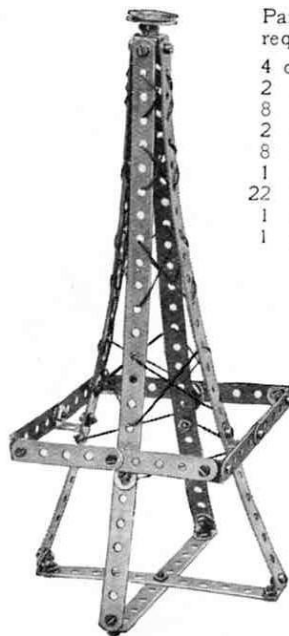
Model No. 1.193
Eiffel Tower

Parts required :

4 of No. 1	2
2 " " 2	5
8 " " 5	11
2 " " 11	12
8 " " 12	22
1 " " 22	37
22 " " 37	40
1 " " 40	111c

Model No. 1.194 Top


To spin the top wind a length of cord round the rod, as shown, place on a smooth surface and give the cord a sharp pull. When the cord is clear of the rod remove the $5\frac{1}{2}$ " Strip and the top will continue to spin for a considerable period.

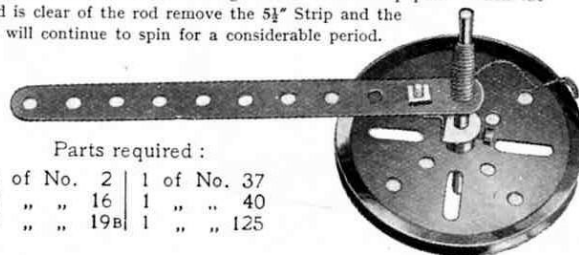

Parts required :

1 of No. 2	1 of No. 37
1 " " 16	1 " " 40
1 " " 19B	1 " " 125


Model No. 1.195 Drill

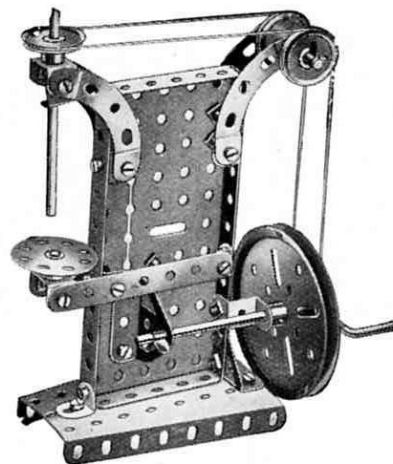

Parts required :

1 of No. 3	11
2 " " 11	12
6 " " 12	16
1 " " 16	18A
1 " " 18A	19B
1 " " 19B	19S
1 " " 19S	22
4 " " 22	24
1 " " 24	35
2 " " 35	37
27 " " 37	40
1 " " 40	52
1 " " 52	54
1 " " 54	90A
4 " " 90A	125
1 " " 125	126
2 " " 126	

Model No. 1.196 Revolving Tricyclist

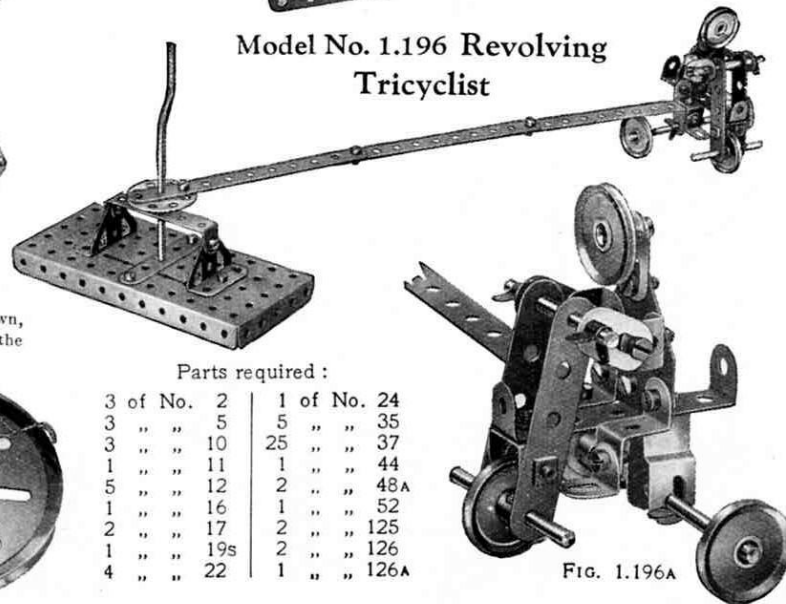

Parts required :

3 of No. 2	1 of No. 24
3 " " 5	5 " " 35
3 " " 10	25 " " 37
1 " " 11	1 " " 44
5 " " 12	2 " " 48A
1 " " 16	1 " " 52
2 " " 17	2 " " 125
1 " " 19S	2 " " 126
4 " " 22	1 " " 126A


FIG. 1.196A

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)


Model No. 1.197 Guillotine

Parts required :

2 of No. 1	1 of No. 22
1 " " 3	2 " " 35
9 " " 5	24 " " 37
2 " " 10	1 " " 40
2 " " 11	3 " " 48A
1 " " 16	1 " " 52

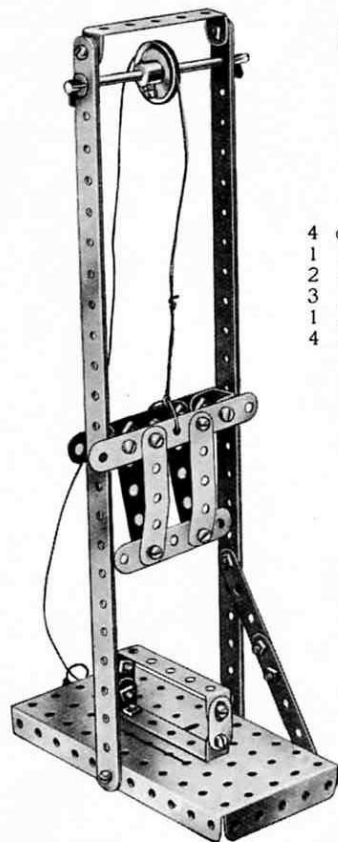

Model No. 1.198 Actuating See-saw

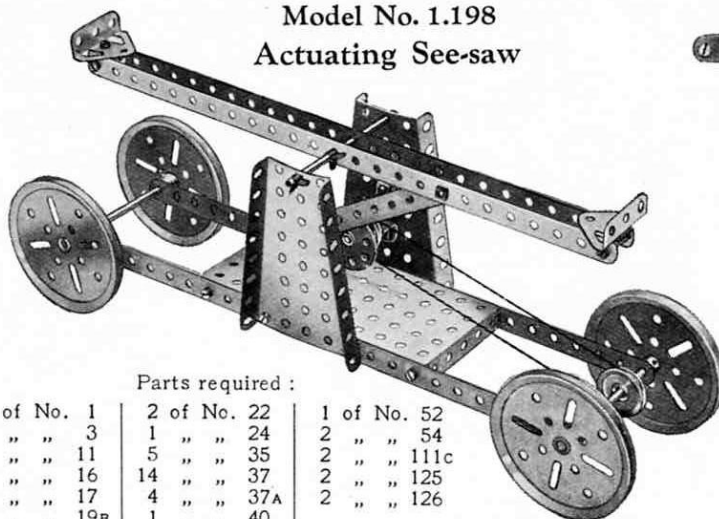


Parts required :

4 of No. 1	2 of No. 22	1 of No. 52
1 " " 3	1 " " 24	2 " " 54
2 " " 11	5 " " 35	2 " " 111c
3 " " 16	14 " " 37	2 " " 125
1 " " 17	4 " " 37A	2 " " 126
4 " " 19B	1 " " 40	

Parts
required :

3 of No. 2
1 " " 3
3 " " 5
1 " " 10
2 " " 11
2 " " 16
2 " " 18A
1 " " 19B
3 " " 22
1 " " 24
6 " " 35
16 " " 37
2 " " 37A
1 " " 52
1 " " 111c
2 " " 125
1 " " 126
1 " " 126A

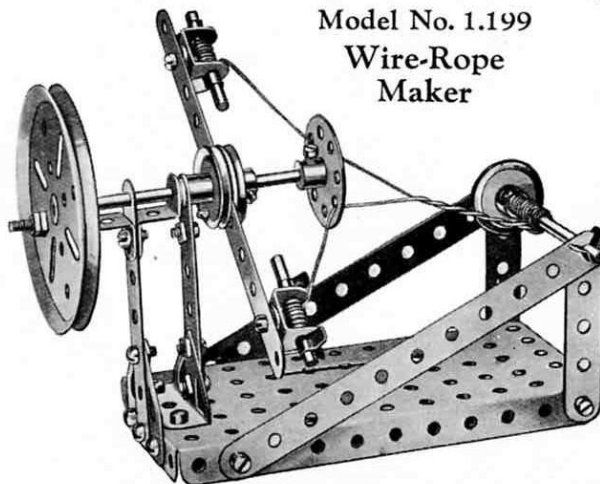

Model No. 1.199 Wire-Rope Maker

Model No. 1.200 Coat Hanger



Parts required :


1 of No. 1	2 of No. 5	1 of No. 57
2 " " 2	6 " " 37	

Model No. 1.201 Automatic Drill

Cord is passed round the Pulley on the drill spindle 4 and thence over the Pulleys 3 and round the shaft of the Pulley 1. The lever 2 (a $3\frac{1}{2}$ " Strip) is pivoted by a Bolt and two Nuts at its inner end to an Angle Bracket, and the latter is bolted to a $1\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strip which, in turn, is bolted between the vertical $2\frac{1}{2}$ " Double Angle Strips. The arm of the lever engages between two Washers on the drill spindle, and on pressing the lever, the drill spindle with its 1" Pulley is forced downwards, thus tightening the Cord, which then transmits the drive to the drill spindle. Immediately pressure on the lever is released, the drill comes to rest.

Parts
required :

1 of No. 3
2 " " 5
1 " " 11
2 " " 12
2 " " 16
2 " " 18A
2 " " 19B
4 " " 22
1 " " 24
4 " " 35
16 " " 37
1 " " 37A
1 " " 40
1 " " 44
1 " " 48
2 " " 48A
1 " " 111c
2 " " 126A

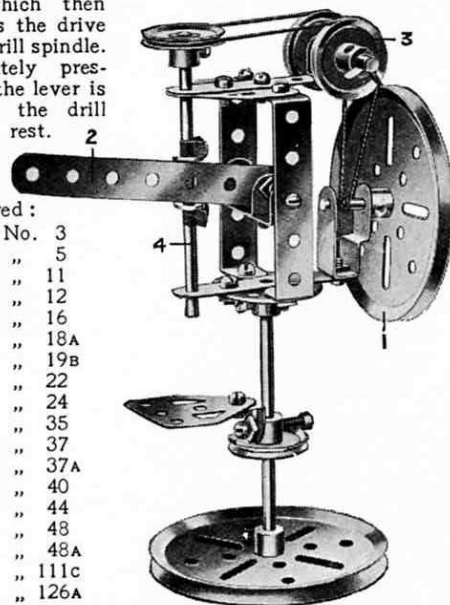


These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

73

Model No. 1.202 Automatic Signal


Parts required:

2 of No.	1
1 " "	2
1 " "	5
1 " "	11
1 " "	12
1 " "	17
1 " "	18A
4 " "	22
1 " "	24
22 " "	37
2 " "	37A
1 " "	38
1 " "	40
1 " "	48A
1 " "	52
1 " "	90A
3 " "	111c
2 " "	126
2 " "	126A

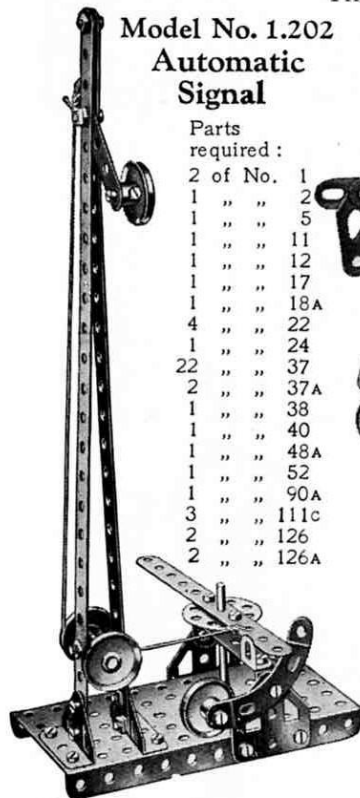

The weighted Curved Strip normally holds the end of the $5\frac{1}{2}$ " Strip against an Angle Bracket, allowing the signal arm to fall to the "all clear" position. Any train passing the signal however, strikes the opposite end of the $5\frac{1}{2}$ " Strip, and by means of the cord shown, raises the arm to indicate "danger." The Curved Strip moves to allow the end of the $5\frac{1}{2}$ " Strip to pass over it, and is returned to its original position by reason of its weighted end. The signal then remains at "danger" until the mechanism is re-set.


Model No. 1.203 Horse and Cart

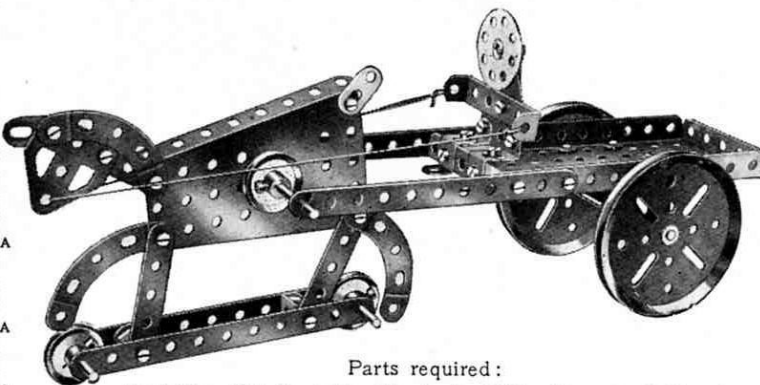

Parts required:

4 of No.	2	2 of No.	16	2 of No.	35	1 of No.	54
3 " "	5	2 " "	18A	26 " "	37	3 " "	90A
3 " "	10	2 " "	19B	1 " "	40	1 " "	111c
2 " "	11	4 " "	22	1 " "	48A	2 " "	125
2 " "	12	1 " "	24	1 " "	52	2 " "	126
						2 " "	126A

Model No. 1.204 Revolving Crane

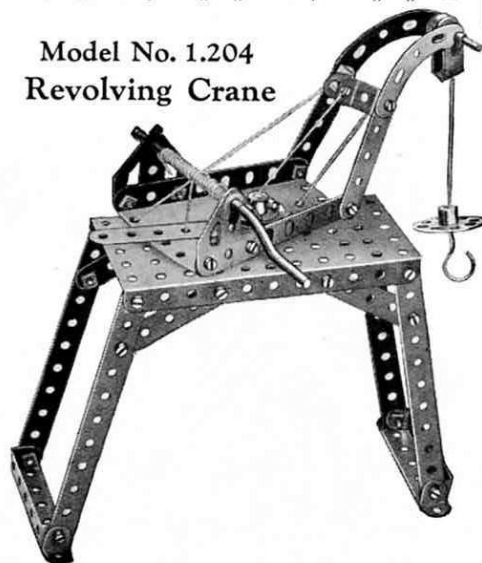


Parts required:

4 of No.	2
7 " "	5
4 " "	12
1 " "	17
1 " "	18A
1 " "	19s
2 " "	22
1 " "	23
1 " "	24
4 " "	35
25 " "	37
1 " "	37A
1 " "	40
1 " "	44
4 " "	48A
1 " "	52
1 " "	54
1 " "	57
2 " "	90A
2 " "	125
2 " "	126

Model No. 1.205 Patent Luffing Crane

The hoisting cord 1 is operated by the Crank Handle 2. It passes over the 1" Pulley 3, round the 1" Pulley 4 at the jib head, back and round a third 1" Pulley 5, and then over the $\frac{1}{2}$ " loose Pulley 6 at the jib head and down to the hook. With this arrangement it will be found that the load remains at a constant height when the jib is luffed. The luffing cords 7 are attached to the jib head, passed over the 2" Rod carrying the Pulleys 3 and 5, and wound on to the luffing winch 8.

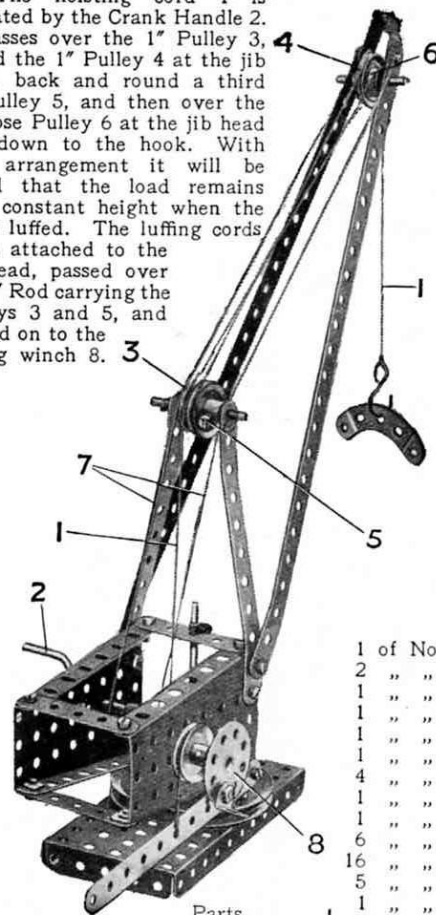


Parts required:

2 of No.	1
3 " "	2
4 " "	5
1 of No.	12
2 " "	16
1 " "	17
1 " "	18A
1 " "	19B
1 " "	19s
4 " "	22
1 " "	23
1 " "	24
6 " "	35
16 " "	37
5 " "	38
1 " "	40
1 " "	44
1 " "	52
2 " "	54
1 " "	57
2 " "	111c

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.206 Hoisting Block

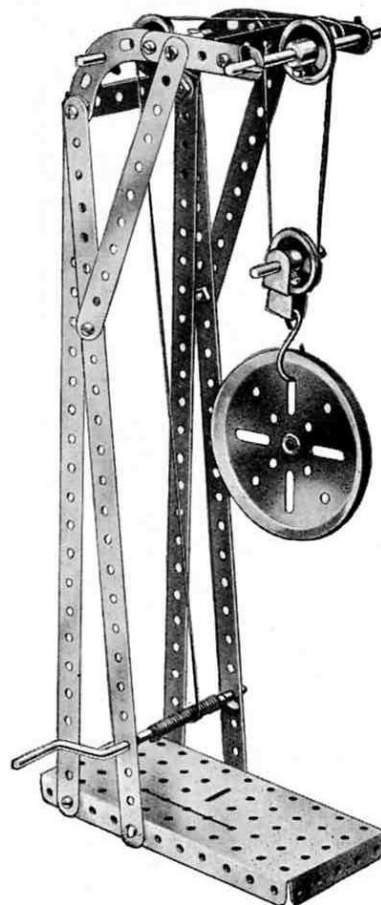


Parts required:		1 of No.	18A	1 of No.	40
4 of No.	1	1	" "	19B	1
2 "	"	2	" "	19S	2
2 "	"	2	" "	22	1
2 "	"	5	" "	35	1
2 "	"	16	" "	37	2

Model No. 1.208 Helve Hammer

Parts required:


4 of No.		1	23 of No.	37
6 "	"	5	1 "	" 44
2 "	"	11	3 "	" 48A
2 "	"	12	1 "	" 52
1 "	"	16	2 "	" 125
1 "	"	17	2 "	" 126A
1 "	"	19s		
4 "	"	22		
1 "	"	24		
4 "	"	35		

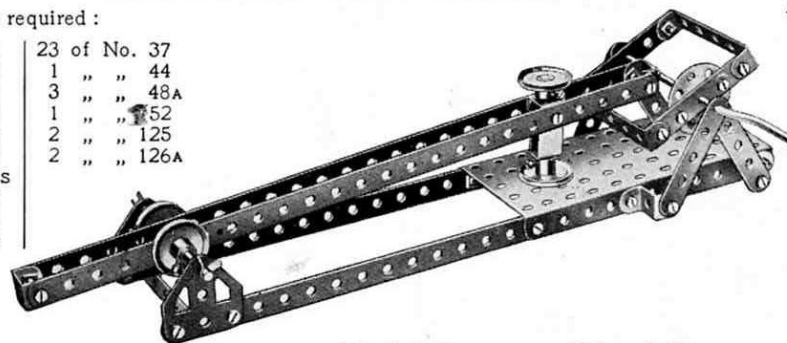

Model No. 1.210 Telescopic Mast

Parts required:


4 of No.		1
5 "	"	5
2 "	"	11
6 "	"	12
1 "	"	18A
1 "	"	22
4 "	"	35
16 "	"	37
1 "	"	40
1 "	"	52
2 "	"	126A

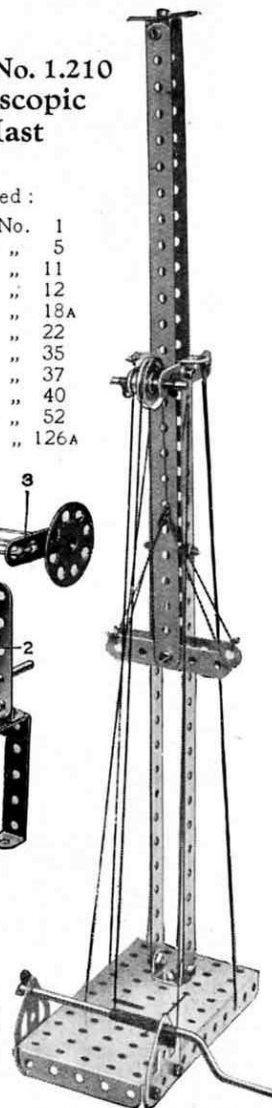

Model No. 1.209 Hand Loom

Parts required:

4 of No.		2
6 "	"	5
7 "	"	12
2 "	"	16
1 "	"	24
21 "	"	37
4 "	"	48A
1 "	"	52

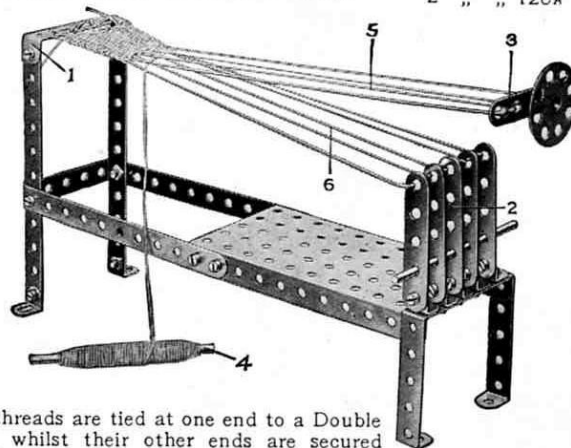


The warp threads are tied at one end to a Double Angle Strip 1, whilst their other ends are secured alternately to the tops of the upright Strips 2, and the 2½" Strip 3. The "shedding" movement of the warp

is obtained by moving the Strip 3 up or down each time the shuttle—a 3½" Rod 4—is passed between the two layers of warp 5 and 6. Wool or similar material is particularly suited to this apparatus. The strands 6 should be kept very taut, and the weft threads may be closed up with the woven portion by means of an ordinary comb each time the shuttle passes.


Model No. 1.207 Catamaran

Parts required:

4 of No.		1
6 "	"	2
2 "	"	10
1 "	"	11
17 "	"	37
1 "	"	40
2 "	"	48A

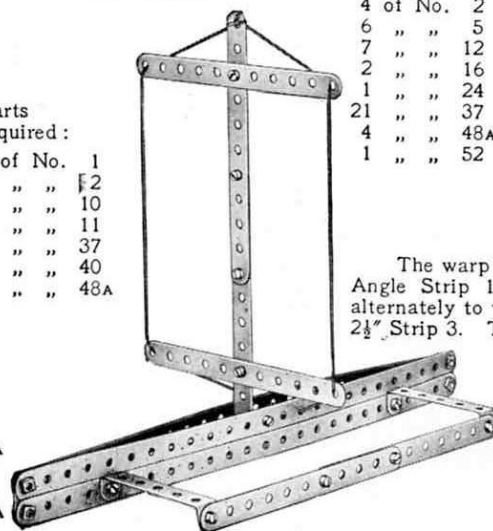

Model No. 1.211 Motor Lorry

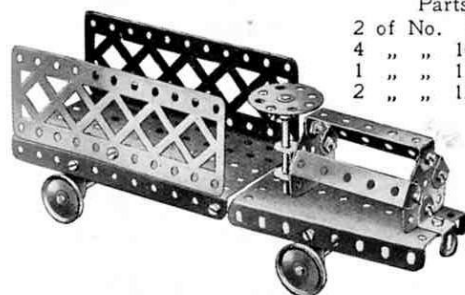


Parts required :

2 of No. 5	2 of No. 16
4 " " 10	1 " " 17
1 " " 11	4 " " 22
2 " " 12	1 " " 24
	1 " " 35
	23 " " 37
	4 " " 48A
	1 " " 52
	1 " " 54
	2 " " 100
	1 " " 125
	2 " " 126A

Model No. 1.212 Disappearing Meccanitian

The bottom of the box-like portion of the model consists of a $5\frac{1}{2}'' \times 2\frac{1}{2}''$ Flanged Plate ; three $5\frac{1}{2}''$ Strips bolted to upright $2\frac{1}{2}''$ Strips form each side and each end consists of three $2\frac{1}{2}'' \times \frac{1}{2}''$ Double Angle Strips. The lid 1, which is mounted pivotally on an Axle Rod 2, consists of two Sector Plates bolted together. Elastic bands are tied to the sides of these Plates and connected to Rod 3 passed through the bottom of the box. The "Meccanitian" 4 also is connected to this Rod by pieces of elastic. On pressing the end of the rear Sector Plate the lid opens sufficiently to allow the figure to be drawn inside and then snaps back into place. A Cranked Bent Strip 5 is bolted at the back of the figure and rests against the edge of the Sector Plate.

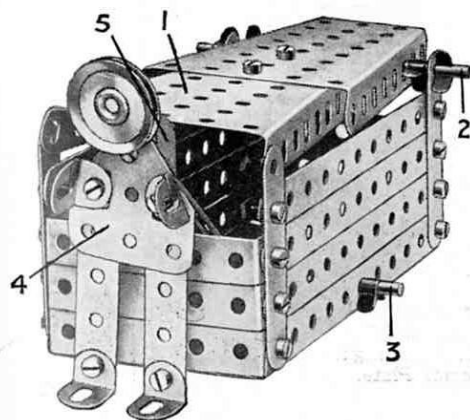


Parts required :

6 of No. 2	2
6 " " 5	
1 " " 10	
4 " " 12	
2 " " 16	
1 " " 22	
6 " " 35	
23 " " 37	
1 " " 44	
4 " " 48A	
1 " " 52	
2 " " 54	
1 " " 111c	
1 " " 126A	

A short length of elastic


Model No. 1.213 Dignity and Impudence

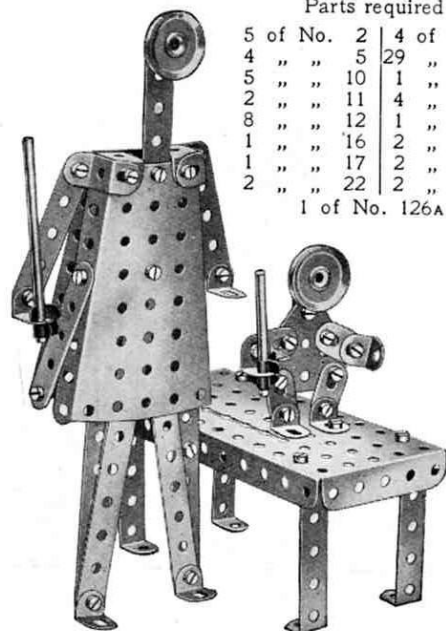

Parts required :

5 of No. 2	4 of No. 35
4 " " 5	29 " " 37
5 " " 10	1 " " 48
2 " " 11	4 " " 48A
8 " " 12	1 " " 52
1 " " 16	2 " " 54
1 " " 17	2 " " 111c
2 " " 22	2 " " 125
1 of No. 126A	

Model No. 1.214 Field Roller

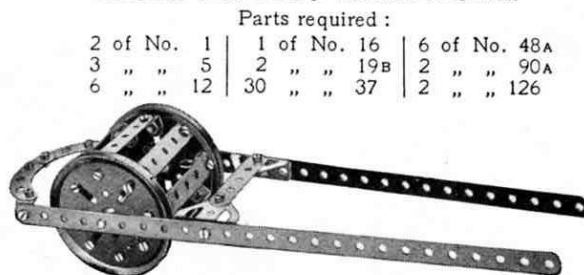


Parts required :

2 of No. 1	1 of No. 16	6 of No. 48A
3 " " 5	2 " " 19B	2 " " 90A
6 " " 12	30 " " 37	2 " " 126

Model No. 1.215 Elevator

Parts required :


4 of No. 1	
7 " " 2	
1 " " 3	
4 " " 5	
1 " " 12	
1 " " 16	
2 " " 19B	
1 " " 19S	
4 " " 22	
33 " " 37	
3 " " 38	
1 " " 40	
6 " " 48A	
1 " " 52	
2 " " 54	
2 " " 100	
2 " " 126	
2 " " 126A	

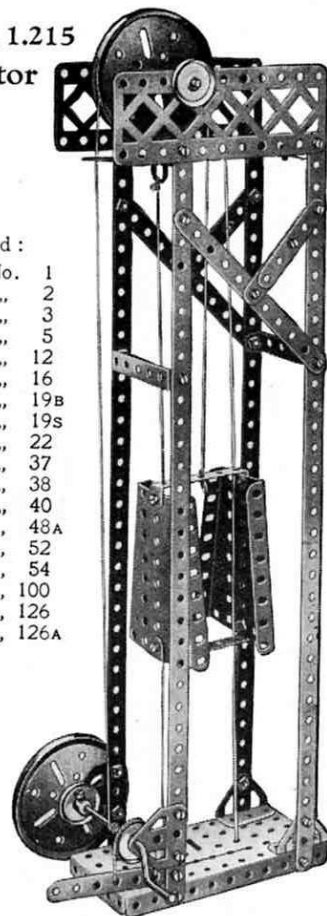

Two cords stretched between the base plate of the model and the upper structure are passed through holes in the Double Angle Strips of the cage to form guides. A further cord is tied to the upper Double Angle Strip, and after being led over the 3" Pulley at the head of the model is tied to the shaft of a Crank Handle.

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.216
Swivelling Crane

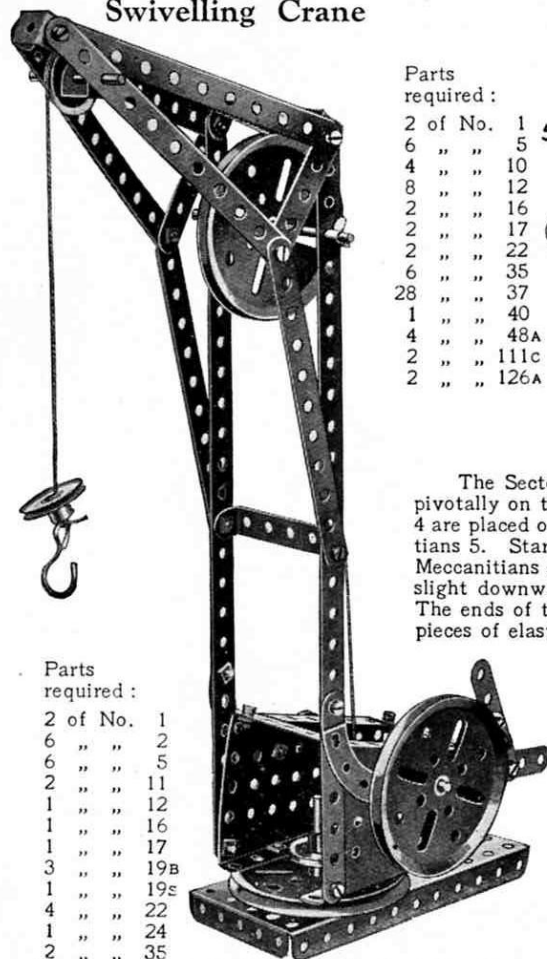


Parts
required :

2 of No.	1	
6 "	2	
6 "	5	
2 "	11	
1 "	12	
1 "	16	
1 "	17	
3 "	19B	
1 "	19S	
4 "	22	
1 "	24	
2 "	35	
25 "	37	
1 "	37A	
1 "	40	
2 of No.	48A	
1 "	52	
2 "	54	
1 of No.	57	
2 "	90A	
1 "	111c	

Model No. 1.217 Spinning Buttons

Parts
required :

2 of No.	1
6 "	5
4 "	10
8 "	12
2 "	16
2 "	17
2 "	22
6 "	35
28 "	37
1 "	40
4 "	48A
2 "	111c
2 "	126A

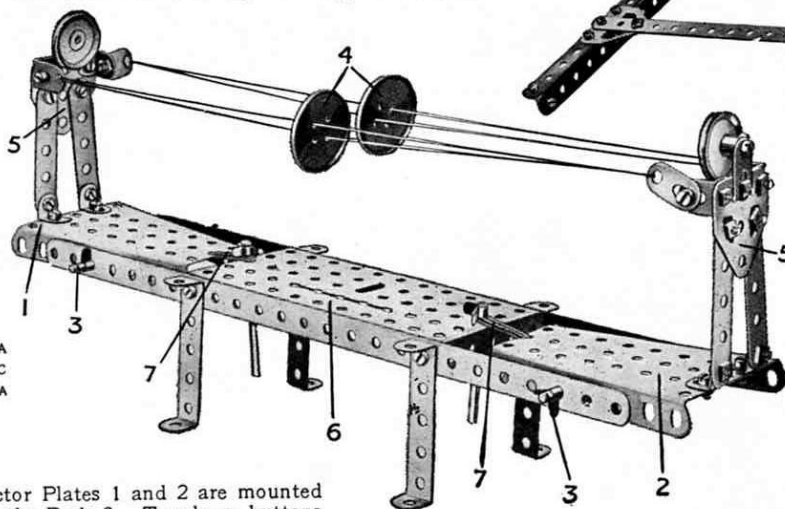


The Sector Plates 1 and 2 are mounted pivotally on the Rods 3. Two large buttons, 4 are placed on lengths of thread or thin elastic stretched between the arms of the Meccanians 5. Start the model as follows: twist the threads a little with your fingers, pull the Meccanians outward, then release them sharply. As soon as the buttons are spinning a slight downward touch on the feet of each Meccanition is sufficient to keep them going. The ends of the Sector Plates 1 and 2 are connected to the Flanged Plate 6 by means of pieces of elastic 7.

Model No. 1.218 Safety Catch for Winding Gear

Parts
required :

2 of No.	5
1 "	19s
1 "	24
1 "	35
8 "	37
1 "	37A
1 "	52
2 "	54
1 "	111c

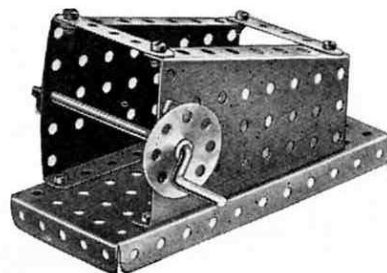

Model No. 1.219 Large Rake


Parts required :

1 of No.	1	2 of No.	12
2 "	2	8 "	37
1 of No.	126A		

Model No. 1.220
Man Climbing Pole

Parts
required :


2 of No.	1
5 "	10
1 "	11
6 "	12
1 "	18A
3 "	22
26 "	37
1 "	40
4 "	48A
1 "	52
2 "	125
2 "	126
1 "	126A

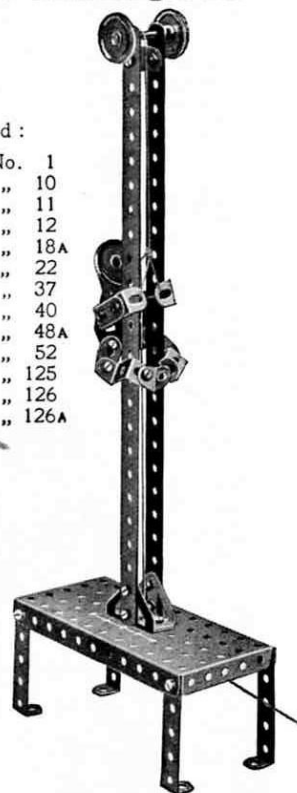

The hoisting cord of a crane, etc., may be wound on the shaft of the Crank Handle. To lock the handle in position, the Bush Wheel should be pushed inward so that one of its holes engages with the shank of a $\frac{3}{8}$ " Bolt projecting from the Sector Plate.

Model No. 1.221 Seismograph

Parts required :

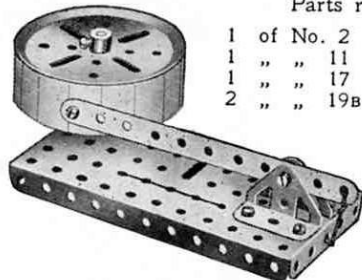


1 of No. 2	6 of No. 37
1 " " 11	1 " " 37A
1 " " 17	1 " " 52
2 " " 19B	1 " " 111c
	2 " " 126
	and a short length of elastic

Model No. 1.222 Jib Crane


Parts required :

4 of No. 1
6 " " 2
1 " " 3
1 " " 5
2 " " 11
3 " " 12
1 " " 16
2 " " 17
1 " " 19B
1 " " 19s
4 " " 22
1 " " 24
3 " " 37
1 " " 40
1 " " 48
1 " " 52
2 " " 54
1 " " 57

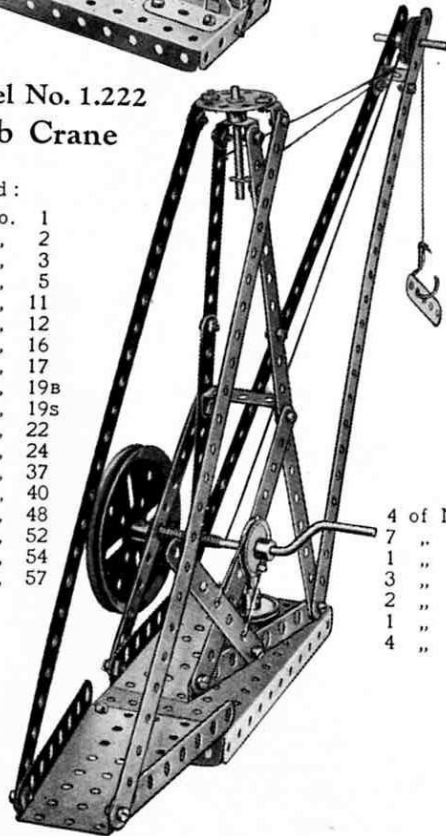**Model No. 1.223 Centrifugal Governor**

Parts required :

2 of No. 5
2 " " 10
2 " " 11
6 " " 12
1 " " 16
1 " " 19B
1 " " 19s
4 " " 22
1 " " 24
3 " " 35
18 " " 37
6 " " 37A
4 " " 38
1 " " 40
2 " " 111c
2 " " 126

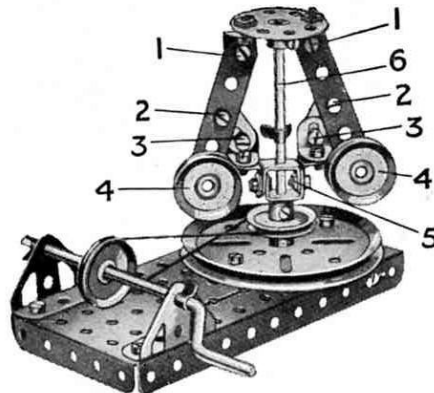


The 3" Pulley Wheel is bolted to the 5½" x 2½" Flanged Plate as shown, and the Rod 6 is free to rotate in its boss. The Bolts 1, 2, 3, are provided with lock-nuts. When the engine to which the governor is attached works at too great a speed, the 1" fast Pulley Wheels 4 fly outward and lift the two Double Brackets 5. In actual practice this movement is utilised to close the engine valves and so reduce speed.

Model No. 1.224 Stone-Sawing Machine


Parts required :

4 of No. 1	1 of No. 24
7 " " 2	6 " " 35
1 " " 3	28 " " 37
3 " " 5	4 " " 37A
2 " " 16	6 " " 48A
1 " " 19s	2 " " 126A
4 " " 22	

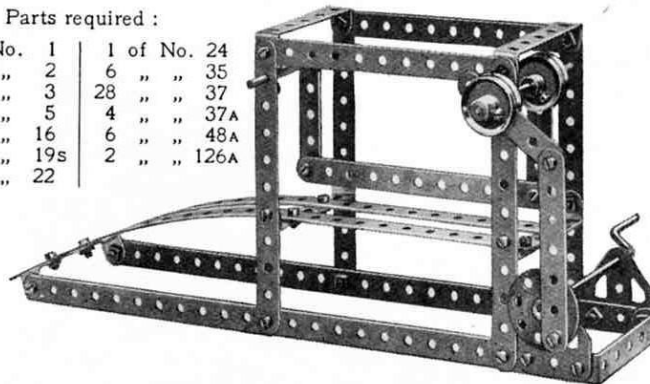**Model No. 1.225 Elevated Crane**

Parts required :


2 of No. 1	6 of No. 48A
8 " " 2	1 " " 52
8 " " 5	2 " " 54
1 " " 11	1 " " 57
2 " " 16	4 " " 90A
1 " " 18A	2 " " 126
3 " " 19B	2 " " 126A
1 " " 19s	
4 " " 22	
1 " " 23	
1 " " 24	
3 " " 35	
36 " " 37	
3 " " 38	
1 " " 40	

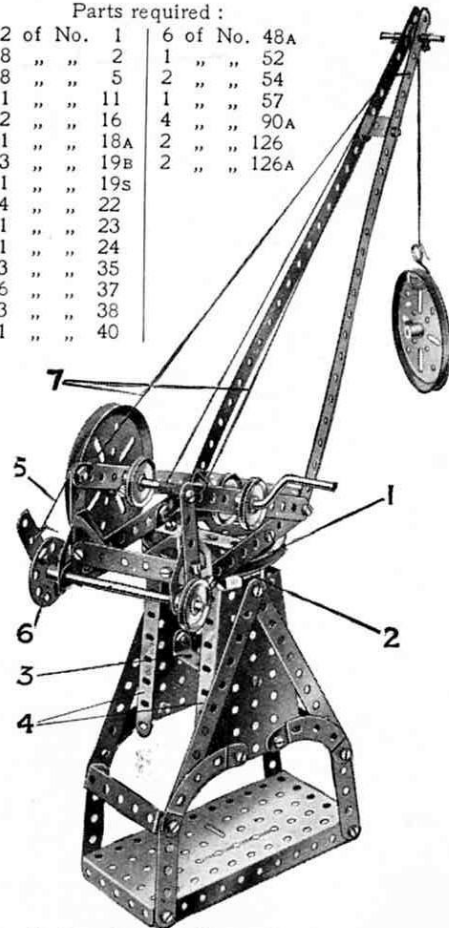

The base of the swivelling portion of the crane consists of a 3" Pulley Wheel 1, which has a 3½" Axle Rod nipped in its boss. The Rod is journalled in two 2½" Double Angle Strips 2 and 3 secured between the Sector Plates 4. The brake cord 5 passes round the 3" Pulley as shown, and is tied to one of the holes in the Bush Wheel 6. The cords 7 serve merely to support the weight of the jib.

These Models can be built with MECCANO Outfit No. 1 (or No. 0 and No. 0A)

Model No. 1.226 Aeroplane

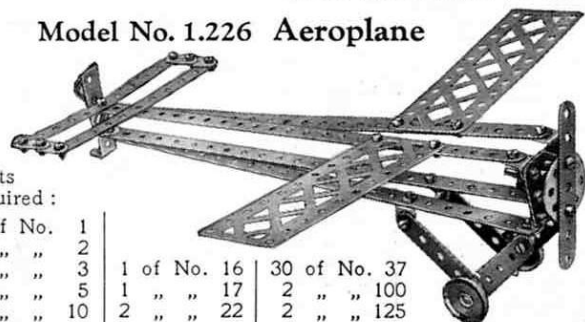


Parts required:

4 of No.	1	1 of No.	16	30 of No.	37
2 " "	2	1 " "	17	2 " "	100
1 " "	3	2 " "	22	2 " "	125
4 " "	5	1 " "	24	1 " "	126
4 " "	10	1 " "	35	2 " "	126A
1 " "	11				
8 " "	12				


Model No. 1.227 Motor Truck

Parts required:

4 of No.	2	1 of No.	22
9 " "	5	1 " "	24
2 " "	10	1 " "	35
3 " "	16	34 " "	37
4 " "	19B	2 " "	37A
		1 " "	40
		3 " "	48A
		1 " "	52
		2 " "	54
		1 " "	90A
		2 " "	125
		2 " "	126A

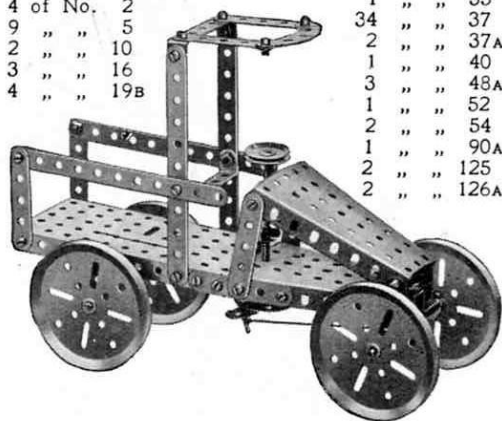

Model No. 1.228
Revolving Gymnasts

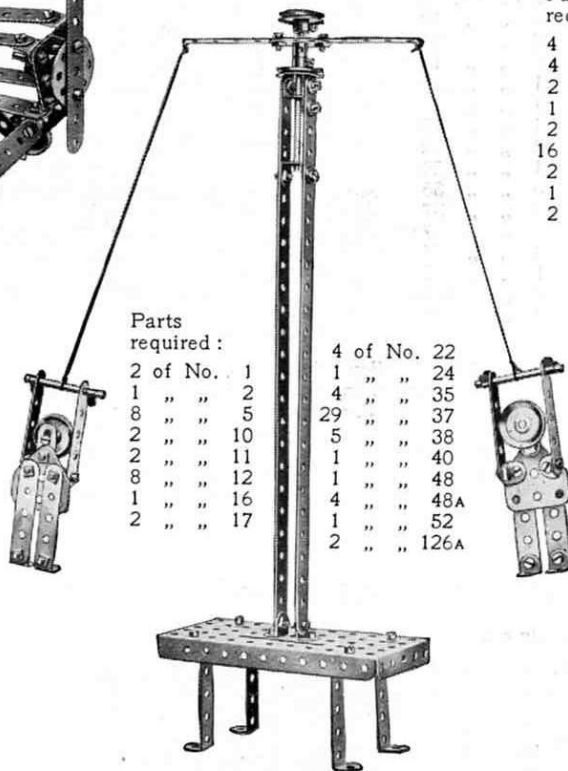


Parts required:

2 of No.	1	4 of No.	22
1 " "	2	1 " "	24
8 " "	5	4 " "	35
2 " "	10	29 " "	37
2 " "	11	5 " "	38
8 " "	12	1 " "	40
1 " "	16	1 " "	48
2 " "	17	4 " "	48A
		1 " "	52
		2 " "	126A

Model No. 1.229
Coster's Barrow

Parts required:

4 of No.	2
4 " "	5
2 " "	10
1 " "	16
2 " "	19B
16 " "	37
2 " "	48A
1 " "	52
2 " "	126A

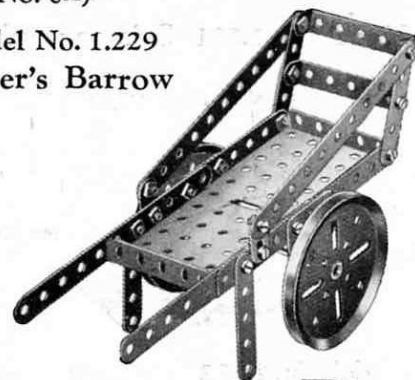


Model No. 1.230
Forge Bellows

Parts required:

4 of No.	2	1 of No.	52
1 " "	3	2 " "	54
2 " "	5	2 " "	126A
2 " "	10		
1 " "	11		

2 of No.	16
1 " "	17
1 " "	19s
2 " "	22
1 " "	24
5 " "	35
25 " "	37
1 " "	40
3 " "	48A

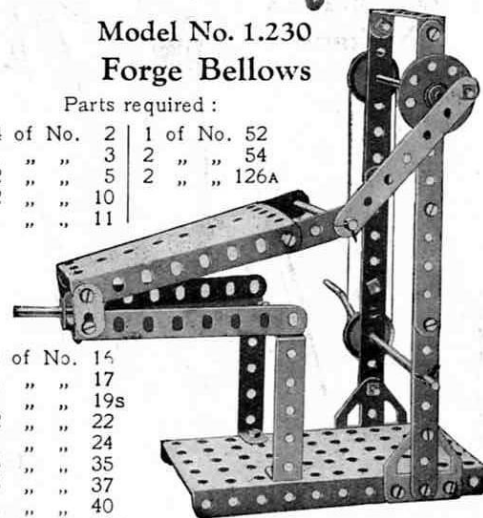


HOW TO CONTINUE

This completes our examples of models that may be made with MECCANO Outfit No. 1 (or No. 0 and No. 0A). The next models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 1A Accessory Outfit, the price of which may be obtained from any Meccano dealer.

These Models can be built with MECCANO Outfit No. 2 (or No. 1 and No. 1A)


Model No. 2.1 Acrobat

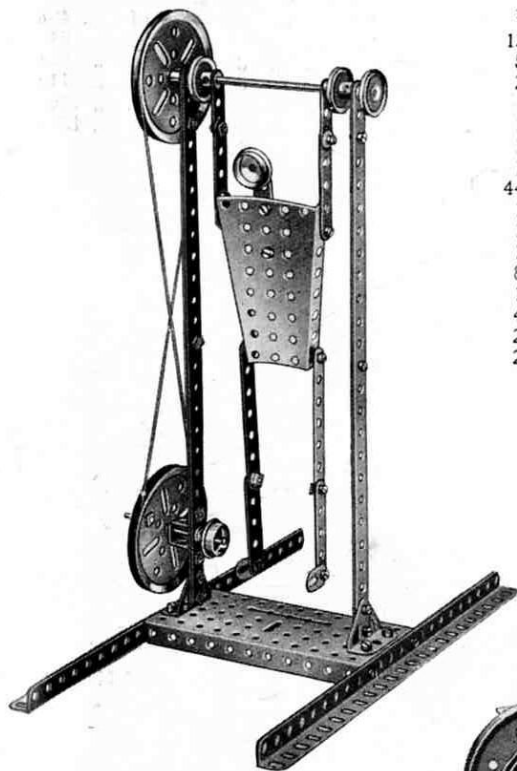

Parts
required :

12	of No.	2
5	" "	5
2	" "	8
1	" "	15A
1	" "	22
1	" "	24
1	" "	35
44	" "	37
1	" "	38
1	" "	40
1	" "	48
8	" "	48A
1	" "	52
4	" "	90A
2	" "	99
2	" "	126

Model No. 2.2 Turnstile

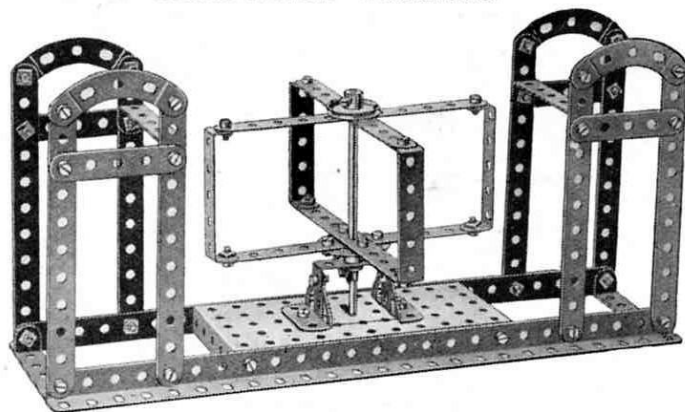


Model No. 2.4 Revolving Meccanicians

Parts required :

6	of No.	1	1	of No.	38
4	" "	5	1	" "	52
6	" "	10	2	" "	111c
8	" "	12	2	" "	126A
1	" "	16			
2	" "	17			
1	" "	19s			
4	" "	22			
1	" "	24			
8	" "	35			
20	" "	37			

Model No. 2.3 Coal Sifter

The 5½" Strip 1 is pivoted to the Angle Bracket 2 by a bolt and two Nuts. The Angle Bracket in turn is bolted to the Flanged Plate, which is suspended in such a way that it is free to swing to and fro. The other end of the 5½" Strip is pivoted to the Bush Wheel 3.

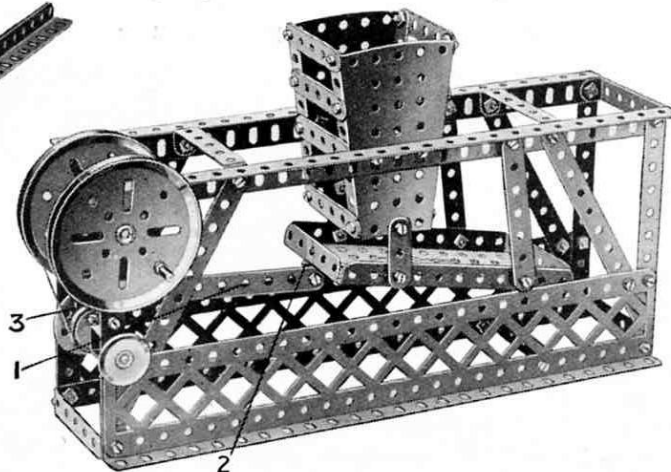


Parts required :

4	of No.	1	28	of No.	37
2	" "	3	6	" "	37A
5	" "	5	5	" "	38
2	" "	8	1	" "	40
2	" "	10	1	" "	45
1	" "	15	1	" "	52
2	" "	19B	1	" "	54
2	" "	20B	2	" "	62
3	" "	22	1	" "	115
		2	of No.	126	

Parts
required :

9	of No.	2
2	" "	3
8	" "	5
2	" "	6A
4	" "	8
1	" "	12
1	" "	16
1	" "	17
2	" "	19B
2	" "	22
1	" "	24
2	" "	35
54	" "	37
6	" "	37A
8	" "	38
1	" "	40
1	" "	45
6	" "	48A
1	" "	52
2	" "	54
2	" "	99
6	" "	111c
1	" "	115

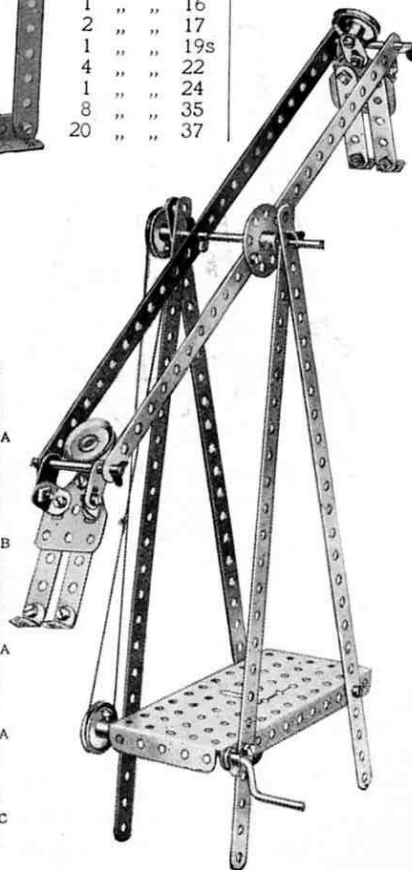

These Models can be built with MECCANO Outfit No. 2 (or No. 1 and No. 1A)

Model No. 2.5
Easel




Parts
required :

5 of No.	1
3 " "	2
2 " "	3
3 " "	5
4 " "	12
2 " "	12A
1 " "	15A
2 " "	22
19 " "	37
4 " "	38
1 " "	40

Model No. 2.6 Smoothing Iron


Parts required :

4 of No.	2	20 of No.	37
2 " "	3	2 " "	38
6 " "	10	1 " "	48A
4 " "	11	2 " "	54
2 " "	12	1 " "	126A

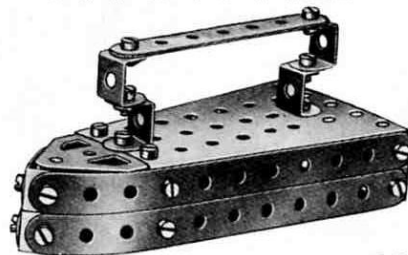

Model No. 2.7 Mat Frame


The Strips 1 are hinged to the frame in the following manner. Two Cranks 2 with their bosses facing inward are bolted to the Strips 1 and two Angle Brackets are secured to the frame. A Rod is then pushed through the holes in the Angle Brackets and secured in the bosses of the Cranks. A Double Bracket fastened to the ends of the Strips 1 carries a Threaded Pin, which fits in the holes in the Flat Trunnions 3. By removing this Pin, the frame may be folded flat.

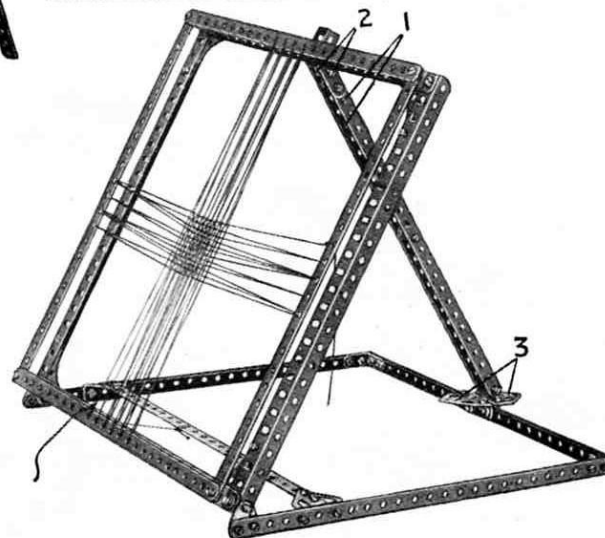

Model No. 2.8 Roundabout See-Saw

Parts required :


2 of No.	6A	2 of No.	19B	6 of No.	48A
4 " "	8	1 " "	24	2 " "	54
4 " "	10	2 " "	35	2 " "	90A
4 " "	12	34 " "	37	4 " "	111c
1 " "	16	4 " "	37A	2 " "	126
1 " "	18A	6 " "	38	2 " "	126A
		1 " "	48		

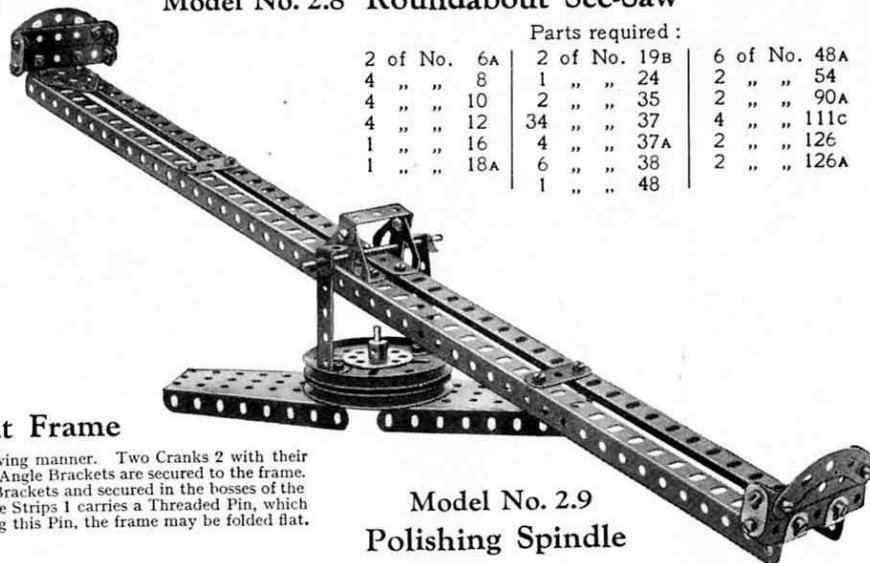

Model No. 2.9
Polishing Spindle

Parts
required :

10 of No.	1
4 " "	8
4 " "	10
3 " "	11
6 " "	12
2 " "	12A
1 " "	18A
54 " "	37
2 " "	37A
2 " "	38
1 " "	45
2 " "	62
4 " "	90A
2 " "	111c
1 " "	115
4 " "	125
2 " "	126
2 " "	126A

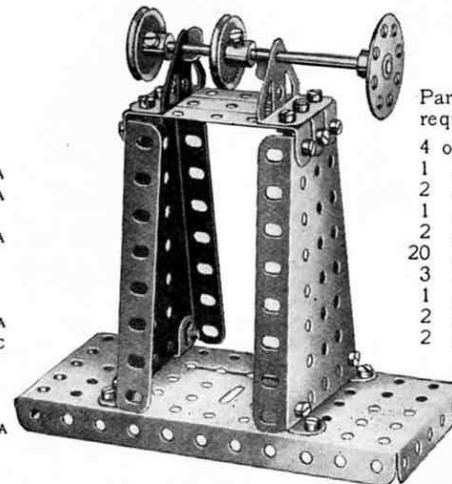


Parts
required :

4 of No.	12
1 " "	16
2 " "	22
1 " "	24
2 " "	35
20 " "	37
3 " "	48A
1 " "	52
2 " "	54
2 " "	126

Model No. 2.10

Scales

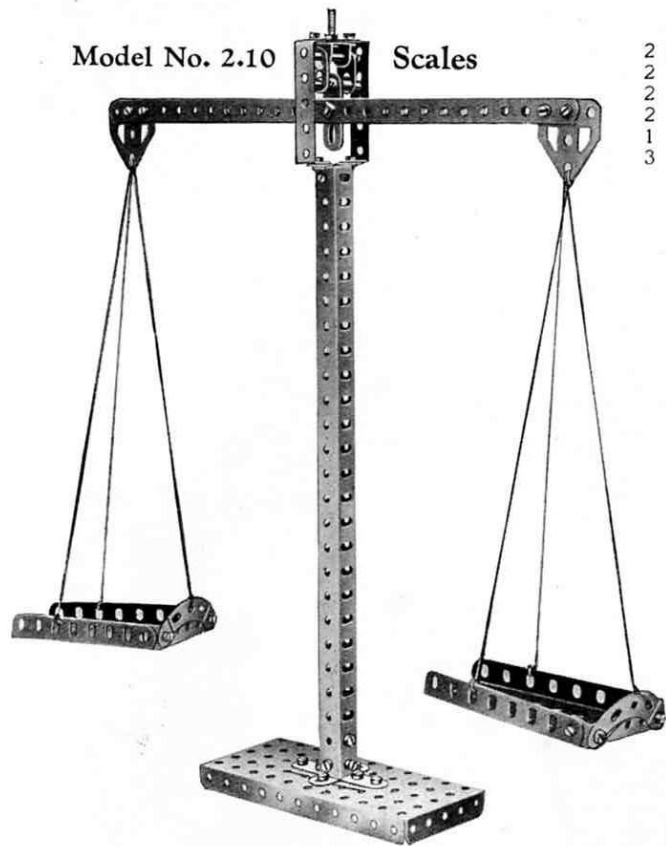


Parts required :		
2 of No. 1	2 of No. 18A	1 of No. 52
1 " " 6A	2 " " 35	2 " " 54
2 " " 8	31 " " 37	2 " " 62
2 " " 10	4 " " 38	2 " " 90A
1 " " 11	1 " " 40	1 " " 115
2 " " 12	1 " " 45	2 " " 126A
2 " " 12A	4 " " 48A	

Parts required :

2 of No. 2	4 of No. 19B	3 of No. 48A
2 " " 5	1 " " 22	1 " " 52
2 " " 6A	1 " " 24	2 " " 54
2 " " 10	1 " " 35	2 " " 100
1 " " 11	23 " " 37	1 " " 111c
3 " " 16	2 " " 37A	2 " " 126A
	1 " " 40	


A cord passed twice round a 1" fast Pulley Wheel on the lower end of the steering column is tied to the ends of a $2\frac{1}{2} \times \frac{1}{4}$ " Double Angle Strip, which is pivoted by means of a Bolt and Lock-Nuts to a Double Bracket bolted to the lower Sector Plate. The front axle is journalled in the end holes of the Double Angle Strip.

Model No. 2.11 Sand Yacht

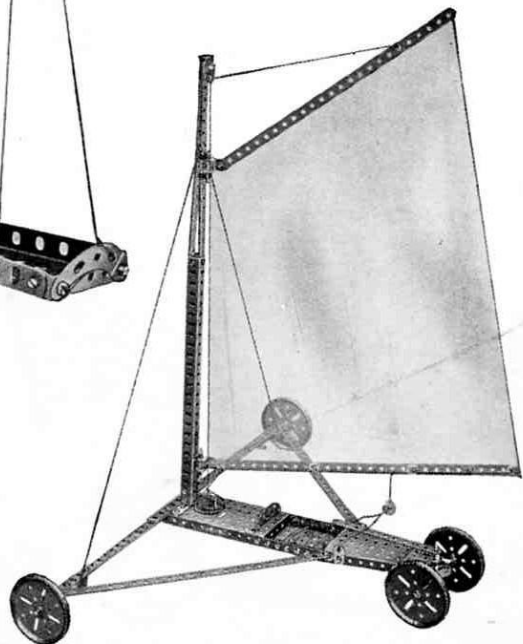

Parts required :

8 of No. 1	1
2 " " 2	2
1 " " 5	5
4 " " 8	8
4 " " 10	10
4 " " 11	11
12 " " 12	12
2 " " 12A	12A
3 " " 16	16
1 " " 17	17
2 " " 18A	18A
4 " " 19B	19B
1 " " 23	23
1 " " 24	24
12 " " 35	35
60 " " 37	37
9 " " 38	38
1 " " 40	40
8 " " 48A	48A
1 " " 52	52
1 " " 54	54
1 " " 62	62
1 " " 90A	90A
1 " " 115	115
4 " " 125	125
1 " " 126	126
2 " " 126A	126A

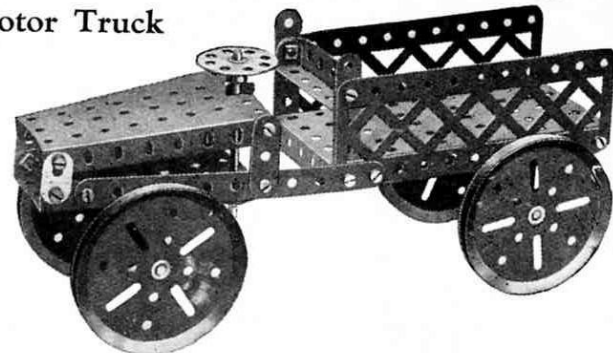

Model No. 2.13 Towel Horse

Parts required :		4 of No. 12
2 " " 22A	22A	
28 " " 37	37	
2 " " 37A	37A	
8 " " 38	38	
4 " " 90A	90A	
2 " " 111c	111c	



These Models can be built with MECCANO Outfit No. 2 (or No. 1 and No. 1A)

Model No. 2.14 Monoplane

The nose of the fuselage, which is formed by the two Sector Plates, is secured to the fuselage proper by means of two $2\frac{1}{2}$ " Strips bolted to the top rear corners of the

Sector Plates, and by two further $2\frac{1}{2}$ " Strips that are mounted on the axle of the running wheels and bolted to the ends of the lower Angle Girders of the fuselage.


Parts required :

6	of No.	1
9	" "	2
1	" "	3
12	" "	5
2	" "	6A
4	" "	8
5	" "	12
1	" "	15A
1	" "	17
2	" "	20B
2	" "	22
1	" "	24
60	" "	37
4	" "	37A

1	of No.	45	2	of No.	99
1	" "	48	2	" "	100
2	" "	48A	4	" "	111c
2	" "	54	2	" "	126
2	" "	62	2	" "	126A

Model No. 2.15 Turntable

The two sides of the revolving portion are joined in the middle by two pairs of $2\frac{1}{2}$ " Strips, each pair being overlapped three holes and bolted to the 3" Pulley Wheel 1. An Axle Rod secured in the latter is journaled in the bottom plate 2 and retained in position by a 1" fast Pulley Wheel beneath the plate.

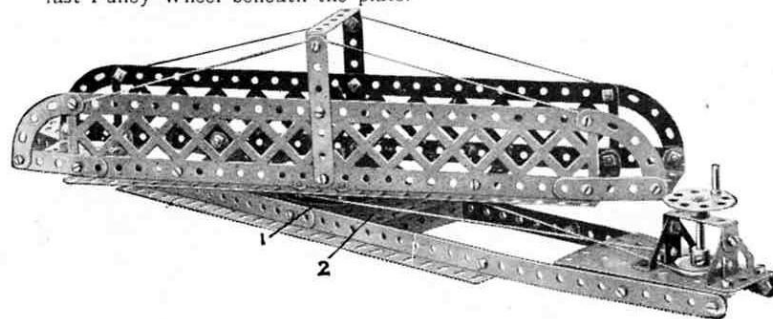

Parts required :


4	of No.	1
2	" "	3
8	" "	5
4	" "	8
1	" "	17
1	" "	18A
1	" "	19B
3	" "	22
1	" "	24
45	" "	37
4	" "	37A
4	" "	38
1	" "	48
7	" "	48A
1	" "	52
2	" "	54
4	" "	90A
2	" "	99
4	" "	111c

Model No. 2.16 Elevator

The construction of this model is fairly clear in the illustration, but it might be pointed out that one side of the framework consists of four $12\frac{1}{2}$ " Angle Girders 1 while the opposite side is composed of four $12\frac{1}{2}$ " Strips 2.


Parts required :

4	of No.	1
8	" "	2
2	" "	3
8	" "	5
4	" "	8
4	" "	10
1	" "	11
12	" "	12
1	" "	16
1	" "	18A
2	" "	19B
1	" "	19s
4	" "	22
1	" "	35
60	" "	37
6	" "	37A
2	" "	38
1	" "	40
7	" "	48A
1	" "	52
2	" "	54
1	" "	62
2	" "	90A
2	" "	99
2	" "	100
6	" "	111c

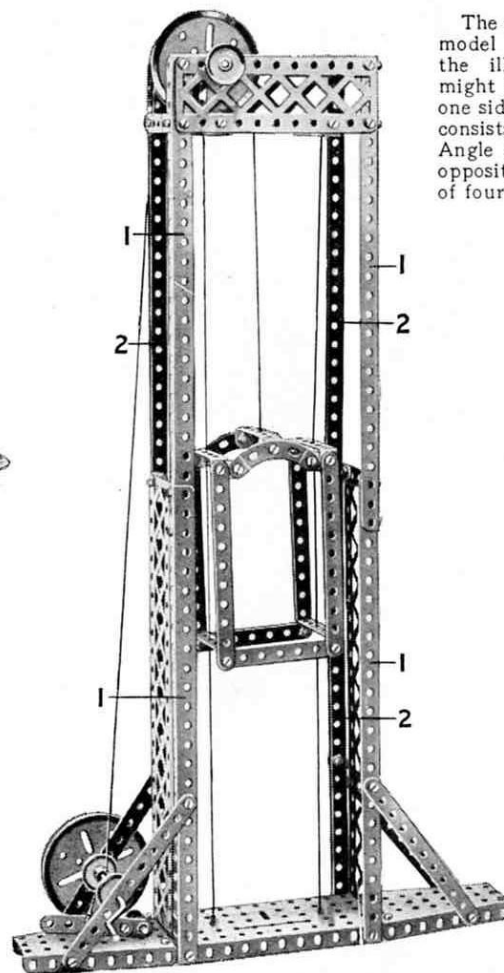

These Models can be built with MECCANO Outfit No. 2 (or No. 1 and No. 1A)

Model No. 2.17 Roundabout

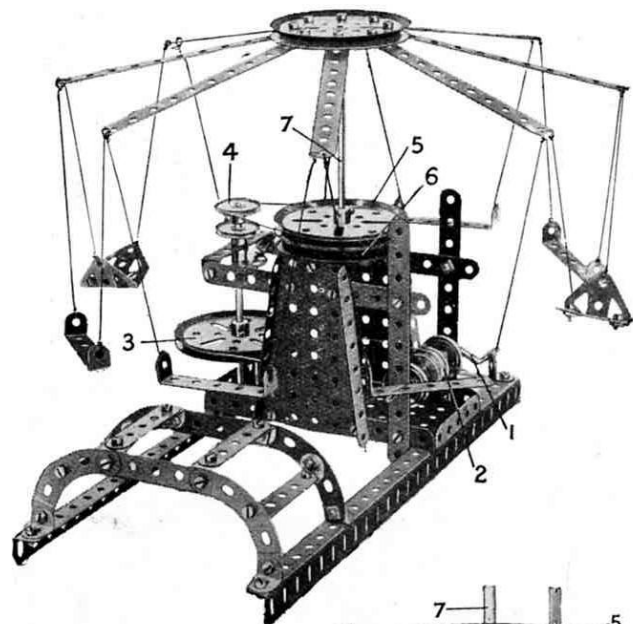

When the Crank Handle is turned, the drum 2 (formed by butting together two $\frac{3}{4}$ " Flanged Wheels) turns the 3" Pulley Wheel 3 by means of an endless cord. The 1" fast Pulley Wheel 4 similarly turns a second 3" Pulley Wheel 5 resting on another 3" Pulley Wheel 6 (see Fig. 2.17A). The end of the Axle Rod 7 is quite free to revolve in the boss of the lower 3" Pulley Wheel 6.

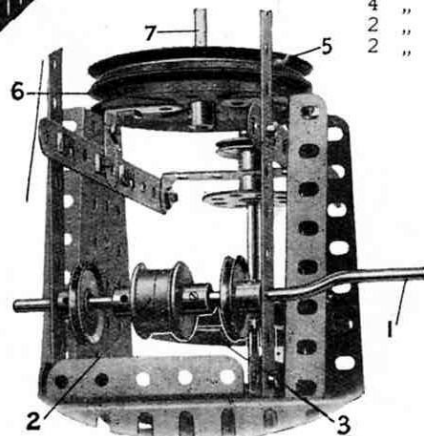


FIG. 2.17A

Parts required :


13 of No.	2
6 " "	5
2 " "	8
12 " "	12
2 " "	12A

2 of No.	15
1 " "	19
4 " "	19B
2 " "	20B
4 " "	22
1 " "	24
48 " "	37
2 " "	40
7 " "	48A
1 " "	52
2 " "	54
4 " "	90A
2 " "	126
2 " "	126A

Model No. 2.18 Gondola

Parts required :

6 of No.	1	5 of No.	12	2 of No.	48A
10 " "	2	1 " "	12A	1 " "	52
1 " "	3	2 " "	16	2 " "	54
12 " "	5	4 " "	20B	4 " "	90A
2 " "	6A	1 " "	24	1 " "	126
4 " "	10	57 " "	37	2 " "	126A
1 " "	11	1 " "	44		

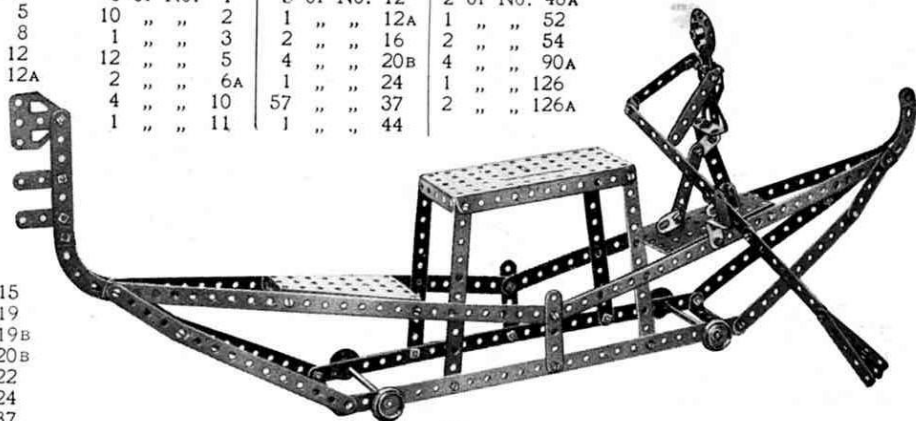


Model No. 2.19 Tipping Motor Wagon

The front Axle Rod is journalled in a $2\frac{1}{2}$ " \times 1" Double Angle Strip 1 which in turn is bolted to a Double Bent Strip 2. The Double Bent Strip is pivoted to the Sector Plate by a Bolt and two Nuts. Cord passing over a 1" Pulley Wheel attached to the Rod 3 is fastened to the ends of the Double Angle Strip 1, and by rotating another pulley, which represents the steering wheel, the road wheels are deflected.


Parts required :

2 of No.	1	2 of No.	54
4 " "	2	4 " "	90A
11 " "	5	2 " "	100
2 " "	6A	3 " "	111c
6 " "	12	1 " "	115
4 " "	16	2 " "	126
1 " "	17	1 " "	126A
1 " "	18A		
4 " "	19B		
4 " "	22		
1 " "	24		
6 " "	35		
59 " "	37		
4 " "	37A		
1 " "	40		
1 " "	45		
1 " "	48		
7 " "	48A		
1 " "	52		

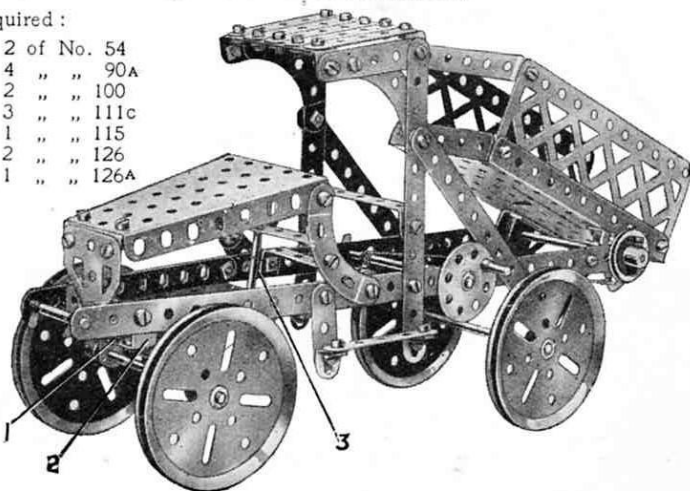

These Models can be built with MECCANO Outfit No. 2 (or No. 1 and No. 1A)

Model No. 2.20 Coaster

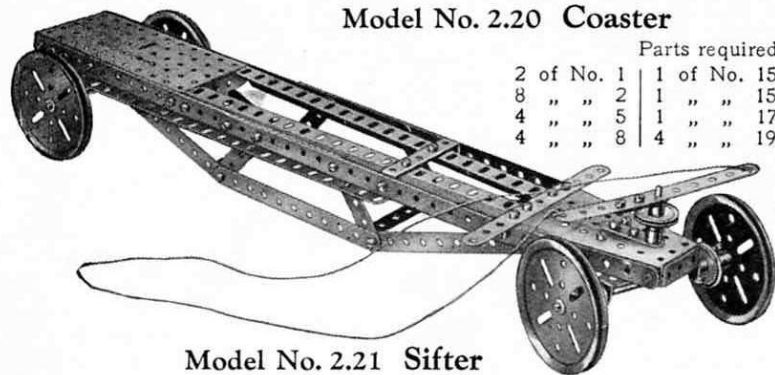


Parts required :

2 of No. 1	1 of No. 15	3 of No. 22
8 " " 2	1 " " 15A	1 " " 23
4 " " 5	1 " " 17	1 " " 24
4 " " 8	4 " " 19B	44 " " 37
		4 " " 38
		1 " " 48
		4 " " 48A
		1 " " 52
		1 " " 54
		2 " " 62
		2 " " 126

Model No. 2.21 Sifter

The 5½" Strip 1 is pivoted by a Bolt and two Nuts (S.M. 262) to the Bush Wheel and also to a Trunnion bolted to the under-surface of the Flanged Plate 2. The Rod carrying the Bush Wheel is journaled in one of the side girders and through a Double Bent Strip.

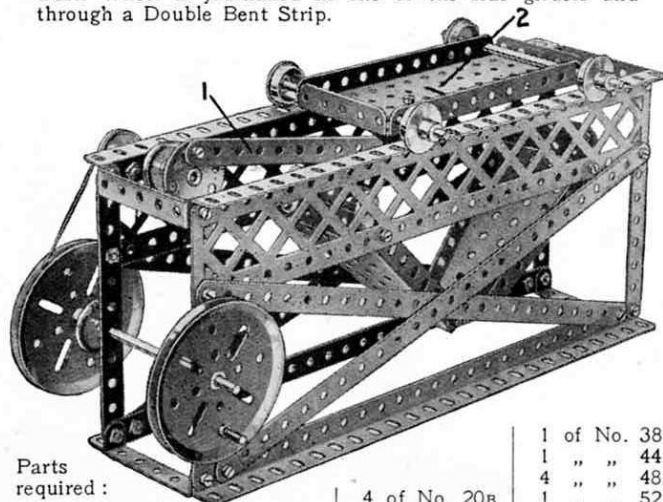


Parts required :

4 of No. 1	4 of No. 10	1 of No. 38
5 " " 2	2 " " 15	1 " " 44
4 " " 5	1 " " 15A	4 " " 48A
2 " " 6A	1 " " 17	1 " " 52
4 " " 8	2 " " 19B	2 " " 54
		2 " " 59
		2 " " 111c
		1 " " 115
		1 " " 126


Model No. 2.22 Tricycle

Parts required :

4 of No. 2	2 of No. 37A
6 " " 5	1 " " 111c
2 " " 10	1 " " 126A
3 " " 11	
2 " " 12	
1 " " 16	
1 " " 18A	
3 " " 19B	
2 " " 35	
15 " " 37	

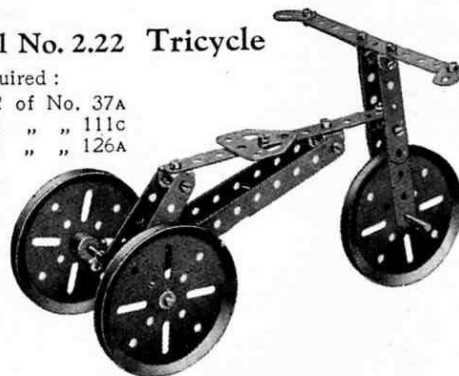

Model No. 2.23 Spinning Top

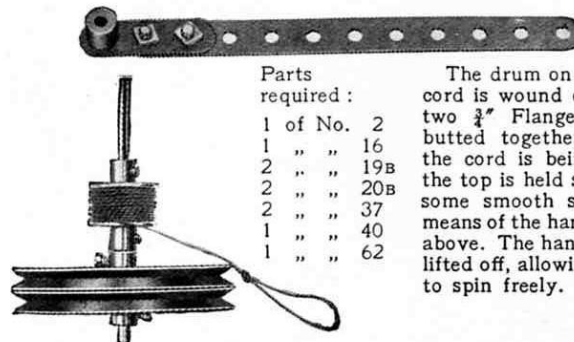

Parts required :


1 of No. 2	
1 " " 16	
2 " " 19B	
2 " " 20B	
2 " " 37	
1 " " 40	
1 " " 62	

The drum on which the cord is wound consists of two ½" Flanged Wheels butted together. While the cord is being pulled, the top is held steadily on some smooth surface by means of the handle shown above. The handle is then lifted off, allowing the top to spin freely.


Model No. 2.24 Ladder on Wheels

Parts required :

6 of No. 1	
7 " " 5	
4 " " 12	
2 " " 16	
4 " " 20B	
40 " " 37	
4 " " 38	
8 " " 48A	
1 " " 52	
2 " " 90A	

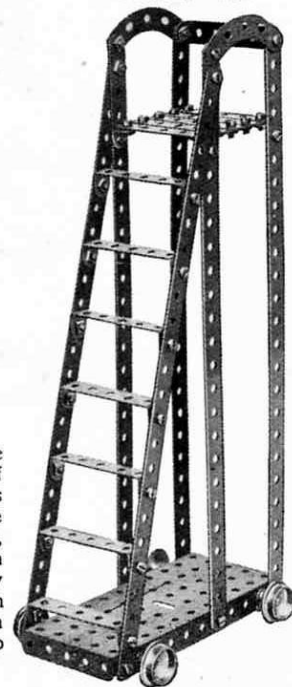


Model No. 2.25 Gong

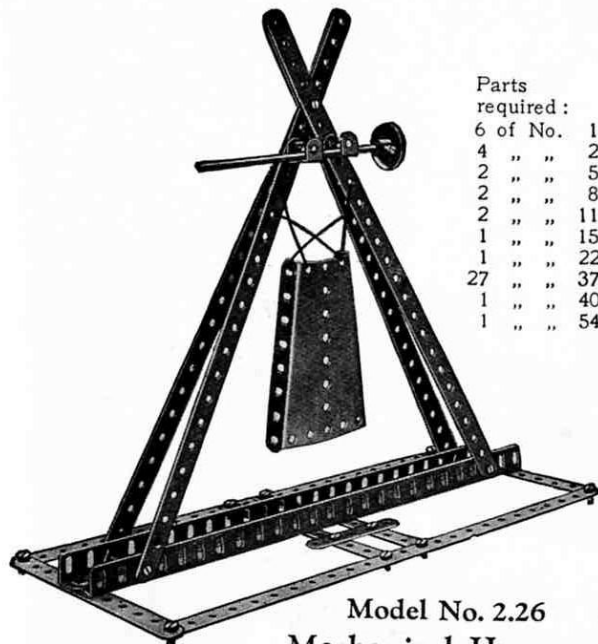

Parts required:

6 of No.	1
4 " "	2
2 " "	5
2 " "	8
2 " "	11
1 " "	15
1 " "	22
27 " "	37
1 " "	40
1 " "	54

Model No. 2.27 High Level Bridge

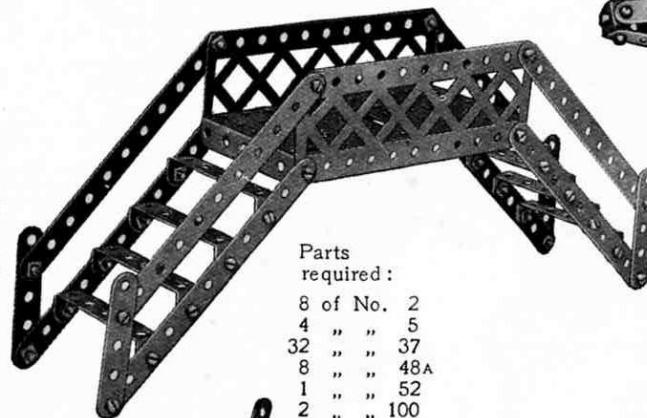

Parts required:

8 of No.	2
4 " "	5
32 " "	37
8 " "	48A
1 " "	52
2 " "	100

Model No. 2.28 Airship



Parts required:


4 of No.	1	2 of No.	11
3 " "	5	10 " "	12
3 " "	10	25 " "	37
3 of No. 48A			

Model No. 2.29 Treadle Lathe


The $2\frac{1}{2}$ " Strip 2, forming the treadle, is attached pivotally by means of a Bolt and two Nuts to the Angle Bracket 1. One end of a further $2\frac{1}{2}$ " Strip is connected by the same means to the $2\frac{1}{2}$ " Strip 2, and the other end is mounted on a Threaded Fin secured to the 3" Pulley Wheel.

Parts required:

7 of No.	2
1 " "	3
1 " "	5
2 " "	6A
4 " "	11
6 " "	12
2 " "	12A
1 " "	16
1 " "	17
3 " "	19B
4 " "	22
1 " "	24
1 " "	35
34 " "	37
2 " "	37A
4 " "	38
1 " "	40
1 " "	45
1 " "	52
4 " "	90A
1 " "	115
1 " "	125

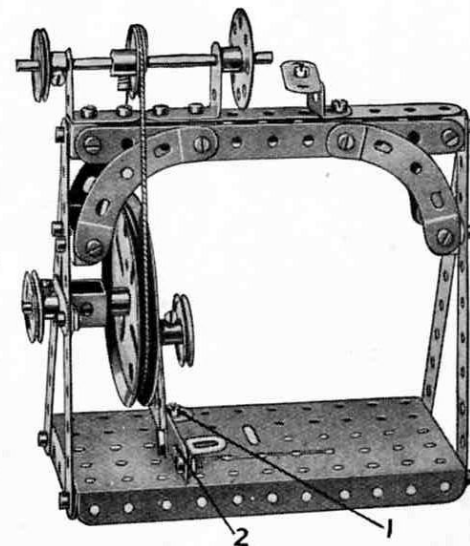

Model No. 2.26 Mechanical Hammer

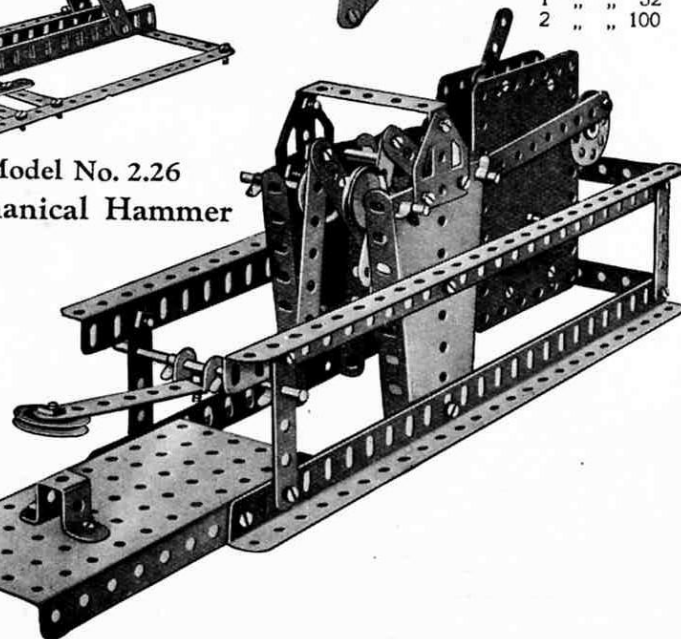


Parts required:

2 of No.	2	1 of No.	24
1 " "	3	8 " "	35
6 " "	5	32 " "	37
4 " "	8	1 " "	45
1 " "	11	3 " "	48A
1 " "	12	1 " "	52
3 " "	16	2 " "	54
4 " "	22	2 " "	126A
1 " "	22A		

Clockwork Motor
(not included in Outfit)

Model No. 2.30 Aeroplane

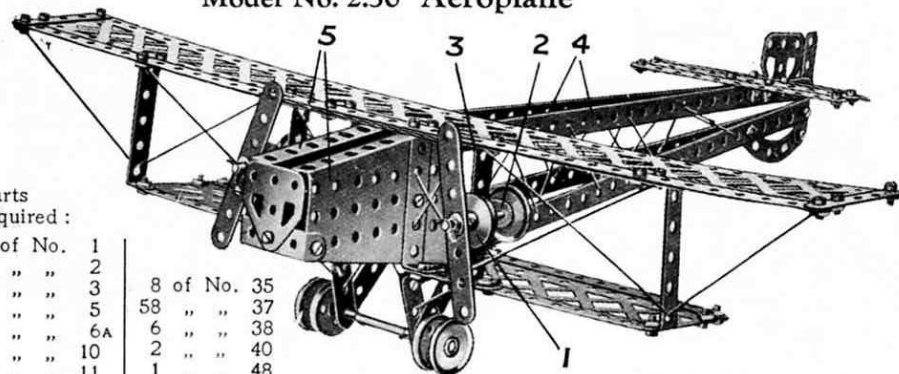


Parts required:

7 of No.	1	
2 "	2	
2 "	3	
7 "	5	
2 "	6A	
8 "	10	
2 "	11	
8 "	12	
1 "	16	
2 "	17	
4 "	20B	
4 "	22	
2 "	22A	
8 of No.	35	
58 "	37	
6 "	38	
2 "	40	
1 "	48	
6 "	48A	
2 "	54	
1 "	90A	
2 "	99	
2 "	100	
2 "	126A	

Each engine is represented by a $\frac{3}{4}$ " Flanged Wheel 1 and a $\frac{1}{2}$ " Pulley Wheel secured to a 2" Rod journalled in a Double Bracket 2, which is bolted to the $2\frac{1}{2}$ " x $\frac{1}{4}$ " vertical Double Angle Strip 3. The 12 $\frac{1}{2}$ " Strips 4 of the fuselage proper are bolted to the two Sector Plates 5, and also by means of Angle Brackets to the wings. The tail plane consists of two $5\frac{1}{2}$ " Strips to which a similar Strip, representing the movable portion of the plane, is attached by means of Flat Brackets.

Model No. 2.31 Motor Lorry

The driving spindle of the Clockwork Motor is removed and in its place is inserted a $3\frac{1}{4}$ " Rod forming the rear axle, the special Pinion inside the Motor being secured to this Rod, of course, instead of to the driving spindle. The steering is operated by a Bush Wheel on a vertical $3\frac{1}{4}$ " Rod journalled in a Double Bent Strip. Cord is wound round the lower part of this Rod and its ends are secured one to each end of a Double Angle Strip carrying the front axle. A Crank is bolted to this Double Angle Strip and carries a short Rod that is journalled in the boss of a further Crank bolted to the Flanged Plate.

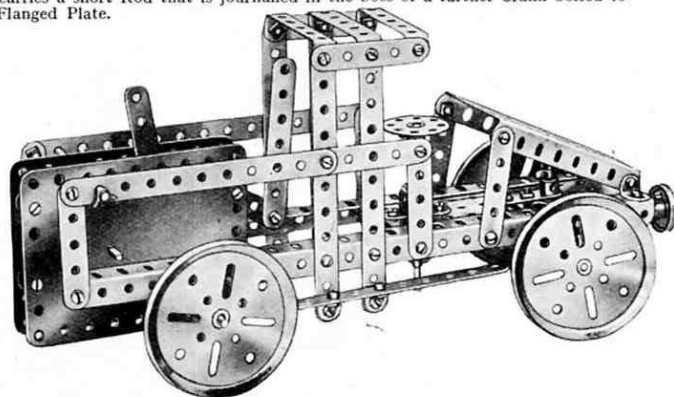

Parts required:

8 of No.	2
1 "	3
10 "	5
6 "	10
1 "	15
1 "	15A
2 "	16
1 "	18A
4 "	19B
2 "	22
1 "	24
12 "	35
49 "	37
3 "	38
1 "	45
4 "	48A
1 "	52
1 "	54
2 "	62
2 "	111c

Clockwork Motor
(not included in Outfit)

Model No. 2.32 Try-Your-Strength Machine

The Bush Wheel 1 is secured to a short Axle Rod 2, the lower end of which rests on a pair of Angle Brackets 3 bolted to the ends of four $5\frac{1}{2}$ " Strips 4. The Strips 4 are pivoted as shown (Fig. 2.32A) on a $1\frac{1}{2}$ " Rod 5, and on their opposite ends rests a $\frac{1}{2}$ " loose Pulley Wheel 6. When the Bush Wheel 1 is struck, the $5\frac{1}{2}$ " Strips fling the Pulley Wheel 6 upward, but the wheel is guided by the vertical 12 $\frac{1}{2}$ " Strips 7. The weight of the Strips 4 then causes the Bush Wheel to resume its original position.

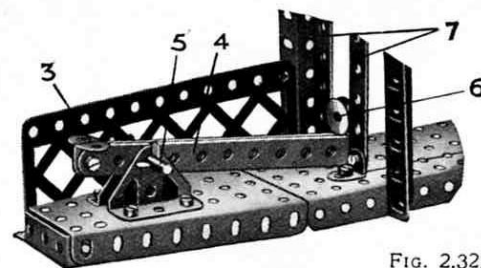


FIG. 2.32A

Parts required:

6 of No.	1	2 of No.	10
6 "	2	10 "	12
1 "	3	2 "	18A
2 "	5	1 "	23
2 "	6A	1 "	24
4 "	8	3 "	35
		60 "	37
		6 "	37A
		4 "	38
		1 "	45
		1 "	48
		1 "	48A
		1 "	52
		2 "	54
		3 "	90A
		2 "	100
		2 "	126






FIG. 2.32B

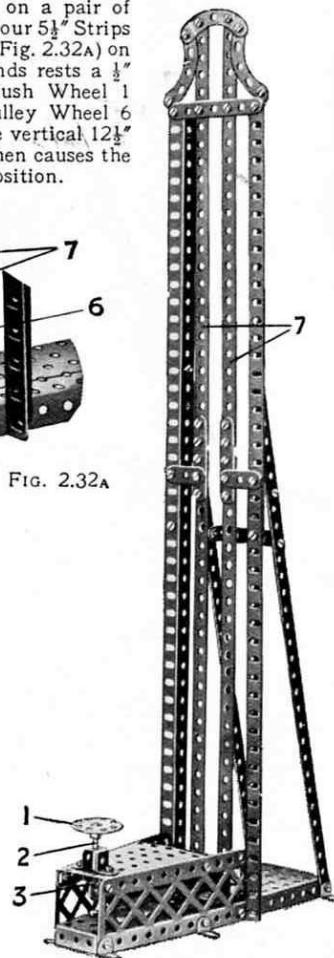

These Models can be built with MECCANO Outfit No. 2 (or No. 1 and No. 1A)

87

Model No. 2.33 Performing Meccanitian

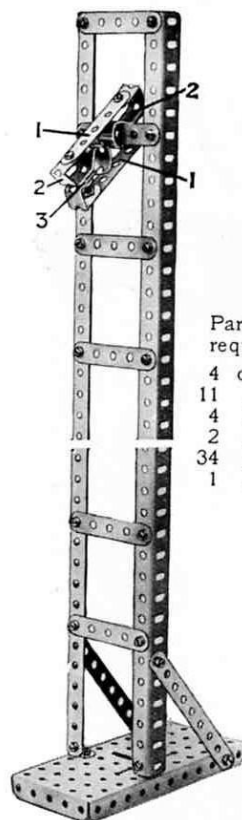

Parts
required :

4 of No.	2
11 " "	5
4 " "	8
2 " "	12
34 " "	37
1 " "	52


The Meccanitian consists of two $2\frac{1}{2}$ " Strips 1 to the ends of which two $5\frac{1}{2}$ " Strips 2, bent as shown, are bolted. The slot 3 should be passed over the top strip of the ladder, when the device will fall "head over heels" to the bottom.

Model No. 2.34 Baby Chair

Parts required :

8 of No.	2	4 of No.	35
2 " "	3	35 " "	37
12 " "	5	2 " "	37A
6 " "	12	4 " "	38
2 " "	16	1 " "	40
2 " "	17	8 " "	48A
4 " "	22	4 " "	90A
		1 of No.	111c


The Bolts 1 are all secured pivotally (see S.M. Nos. 262 and 263), and the height of the chair may be adjusted by fitting any hole in the Strip 2 over the shank of a Bolt that is secured in an Angle Bracket bolted to the Double Angle Strip 3.

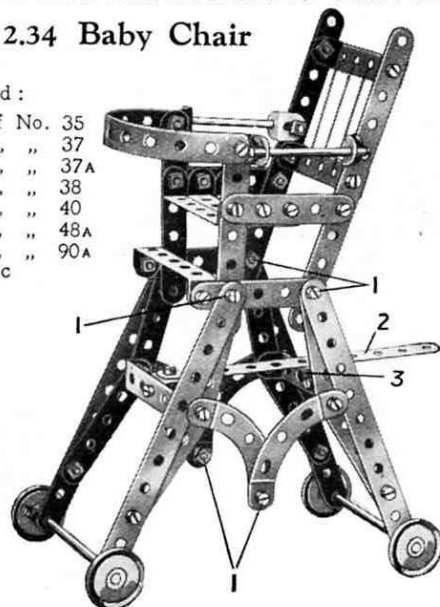


Model No. 2.35 Square-topsail Schooner

Parts
required :

4 of No.	1	41 of No.	37
6 " "	2	1 " "	40
1 " "	3	4 " "	48A
10 " "	5	2 " "	90A
4 " "	10		
1 " "	11		
5 " "	12		

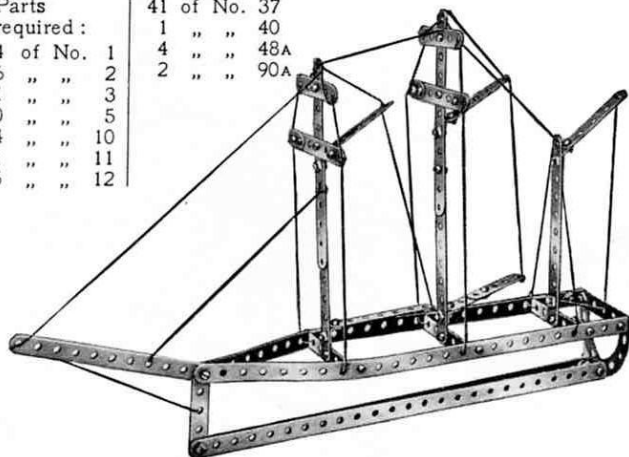

Model No. 2.36 Hay Tedder

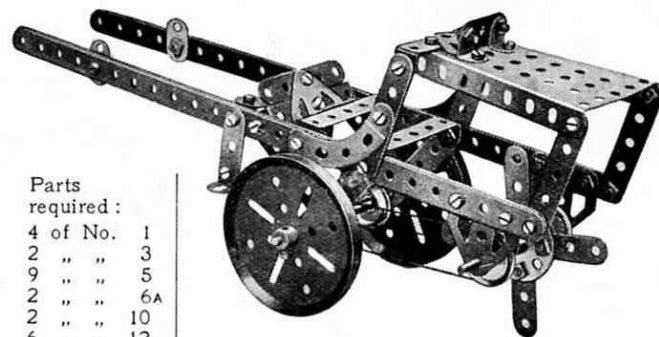

Parts
required :


4 of No.	1
2 " "	3
9 " "	5
2 " "	6A
2 " "	10
6 " "	12
1 " "	15A
1 " "	16
2 " "	19
2 " "	20B
2 " "	22

1 of No.	24	4 of No.	38	3 of No.	90A
2 " "	35	1 " "	40	6 " "	111c
2 " "	37	4 " "	48A	2 " "	126
6 " "	37A	1 " "	54	2 " "	126A

Model No. 2.37 Stamping Mill


Parts
required :

2 of No.	3
2 " "	6A
10 " "	12
2 " "	15
1 " "	15A
1 " "	17
2 " "	19B
1 " "	20B
4 " "	22
1 " "	24
1 " "	35
30 " "	37
2 " "	37A
11 " "	38
1 " "	48
1 " "	52
2 " "	54
2 " "	62
4 " "	90A
2 " "	111c
1 " "	115
1 " "	126

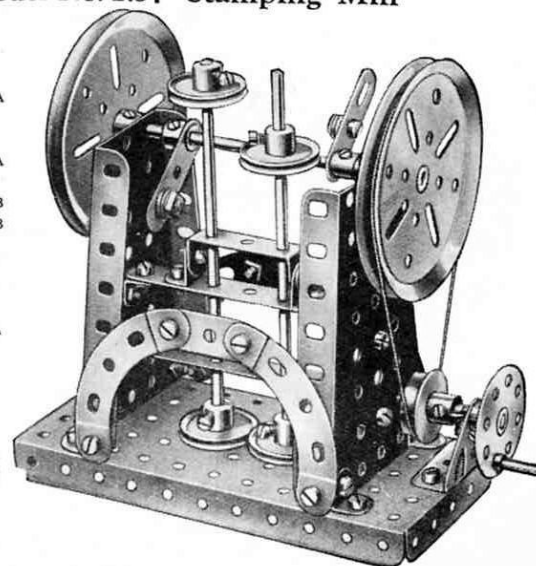

Model No. 2.38 Travelling Jib Crane (Electrically Operated)

The swivelling structure is bolted to the 3" Pulley Wheel 1, which rests on a second 3" Pulley bolted to the travelling base. A short Rod secured to the boss of the upper Pulley is free to rotate in the boss of the lower one. The Electric Motor 2 controls the hoisting gear and the arrangement of the drive will be clear from the photograph. The jib is luffed on operation of the Crank Handle 3, the cord of which passes round the Axle Rod 4 in the jib, then round the Rod 5 in the base, back round the Rod 4 and is finally secured to a Flat Bracket on the Rod 5.

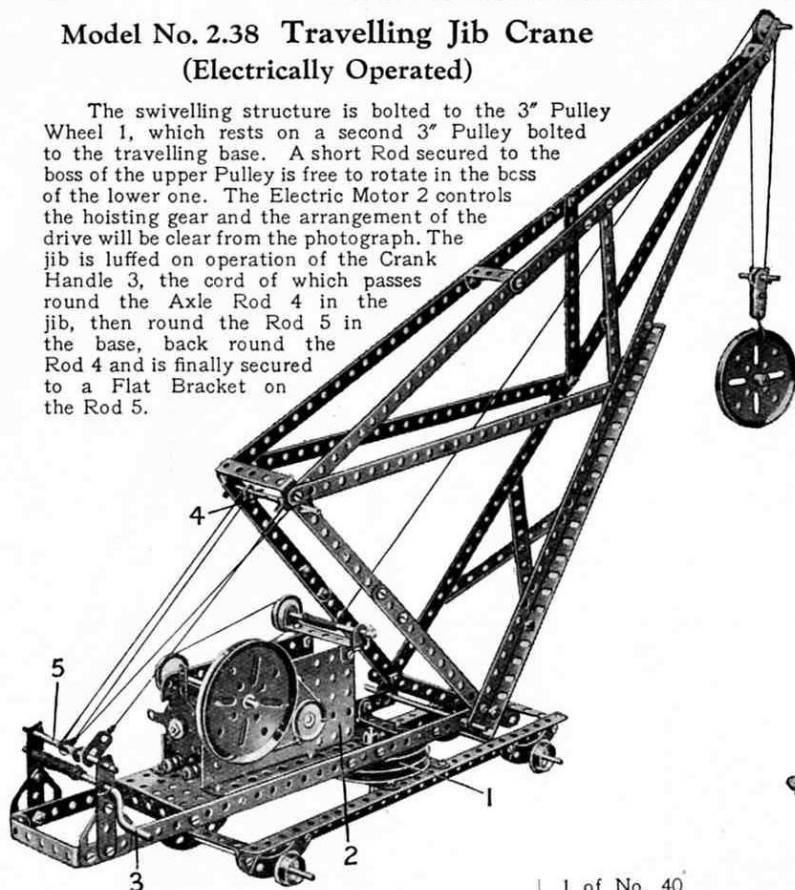


Parts required:		
10 of No. 1	2 of No. 12	4 of No. 20B
9 " " 2	2 " " 15	4 " " 22
2 " " 3	1 " " 15A	1 " " 23
2 " " 5	2 " " 16	1 " " 24
2 " " 6A	1 " " 17	14 " " 35
4 " " 8	2 " " 18A	60 " " 37
1 " " 10	1 " " 19	6 " " 37A
1 " " 11	4 " " 19B	14 " " 38

1 of No. 40
1 " " 48
7 " " 48A
1 " " 52
1 " " 57
4 " " 90A
5 " " 111c
2 " " 126A
Electric Motor
(not included in
Outfit)

Model No. 2.39 Travelling Jib Crane (Hand Operated)

This shows a section of Model No. 2.38 fitted for hand operation, thus dispensing with the necessity of the Electric Motor. In this case the hoisting cord is operated by the hand wheel 6, the Rod of which is controlled by a band brake 7. The end hole of the lever of the latter is pivotally mounted on the Rod 8. The luffing movement of the jib is effected by the Crank Handle 9. The operating cord passes round the Rod 10 attached to the jib, then round Rod 11 in the base of the model, again round Rod 10, back round Rod 11, and once more round Rod 10. The end of the cord is then tied to a Flat Bracket on the Rod 11.

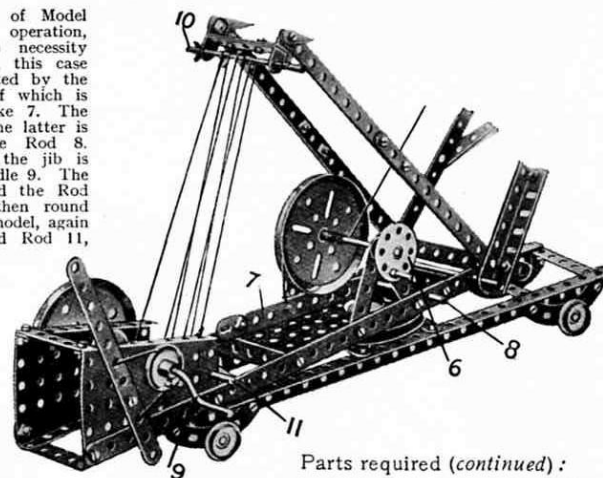


Parts required:

10 of No. 1	3 of No. 10
11 " " 2	1 " " 11
2 " " 3	1 " " 15
6 " " 5	1 " " 15A
2 " " 6A	5 " " 16
4 " " 8	2 " " 18A

Parts required (continued):

1 of No. 19	1 of No. 48
4 " " 19B	7 " " 48A
4 " " 20B	1 " " 52
4 " " 22	2 " " 54
1 " " 23	1 " " 57
1 " " 24	1 " " 62
12 " " 35	4 " " 90A
57 " " 37	1 " " 111c
1 " " 40	1 " " 115

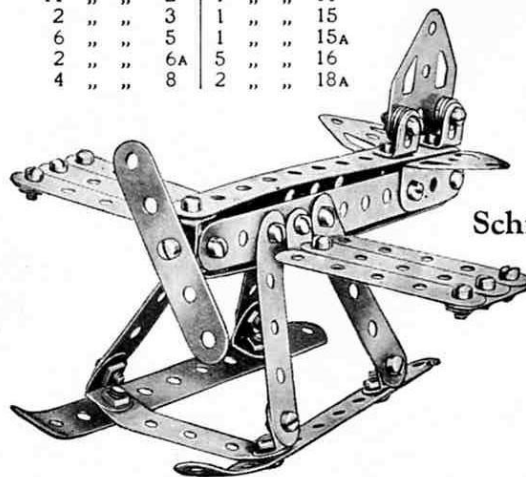

Model No. 2.40 Schneider Trophy Seaplane


Parts required:

6 of No. 2	34 of No. 37
12 " " 5	3 " " 37A
2 " " 6A	6 " " 38
2 " " 11	2 " " 111c
12 " " 12	2 " " 126
1 of No. 126A	


Model No. 2.41 Candy Puller

Parts required :

6 of No. 2	36 of No. 37
2 " " 8	4 " " 38
6 " " 12	1 " " 40
2 " " 15	4 " " 48A
2 " " 17	1 " " 52
2 " " 19B	2 " " 54
4 " " 22	2 " " 62
1 " " 24	4 " " 90A
3 " " 35	1 " " 115

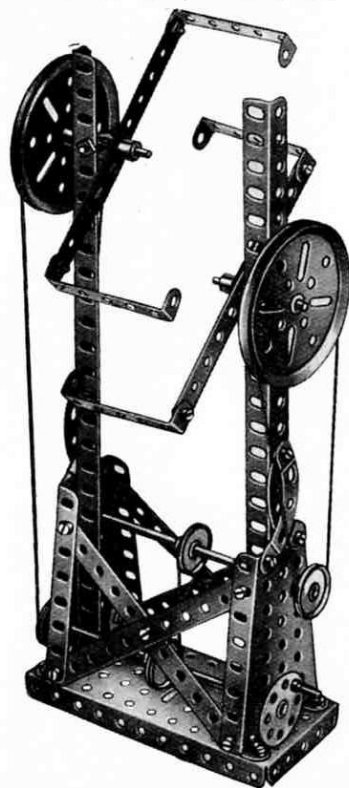

Model No. 2.42 Carrier Tricycle

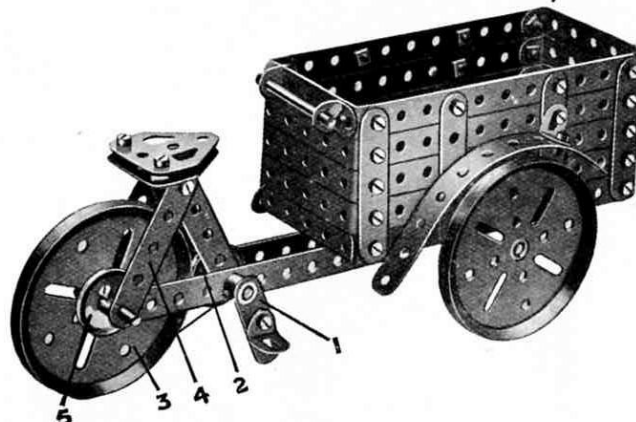

Each pedal of the tricycle consists of an Angle Bracket pivotally attached to a Crank 1 by means of a Bolt and two Nuts (see S.M. No. 262). The Cranks are secured to a $1\frac{1}{2}$ " Axle Rod carrying a 1" fast Pulley Wheel 2. A cord passes round this Pulley and around the 3" Pulley Wheel 3, which is spaced away from the $2\frac{1}{2}$ " Strips 4 by a 1" fast Pulley Wheel 5. The Double Bracket 6 (Fig. 2.42A) is attached pivotally to the lower framework by a Bolt and Lock-Nuts (S.M. 263).

Parts required :

12 of No. 2	2
12 " " 5	5
2 " " 11	11
6 " " 12	12
1 " " 16	16
1 " " 17	17
2 " " 18A	18A
3 " " 19B	19B
2 " " 22	22
45 " " 37	37
5 " " 37A	37A
1 " " 40	40
8 " " 48A	48A
1 " " 52	52
2 " " 62	62
3 " " 111c	111c
2 " " 126A	126A

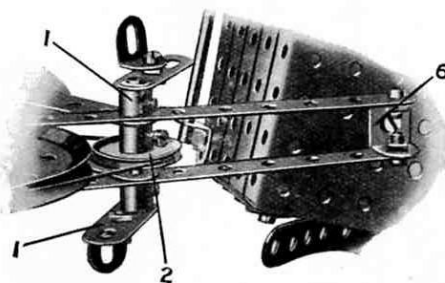


FIG. 2.42A


Model No. 2.43

Windmill

Parts required :

8 of No. 1	1
13 " " 2	2
2 " " 3	3
10 " " 5	5
4 " " 8	8

4 of No. 12	12
1 " " 15	15
1 " " 15A	15A
1 " " 16	16
1 " " 18A	18A
2 " " 19B	19B
1 " " 19S	19S
4 " " 20B	20B
2 " " 22	22
1 " " 22A	22A
1 " " 24	24
6 " " 35	35
60 " " 37	37
4 " " 37A	37A
7 " " 38	38
2 " " 40	40
2 " " 48A	48A
1 " " 52	52
2 " " 54	54
4 " " 90A	90A
2 " " 100	100
4 " " 111c	111c
2 " " 126	126

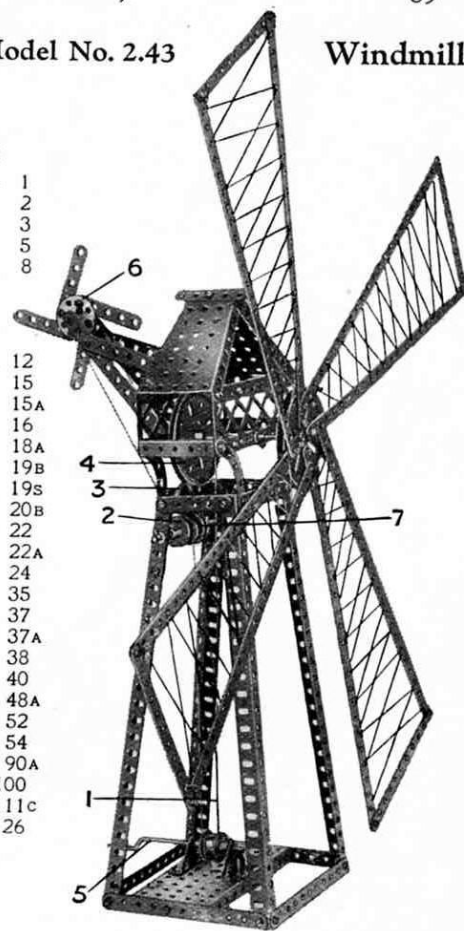


The operating cord 1 is given a complete turn round the pair of $\frac{3}{4}$ " Flanged Wheels 2. It is then led round the 1" Loose Pulley 3, over the 3" Pulley 4, then down and round the $\frac{3}{4}$ " Flanged Wheels secured to the Crank Handle 5. The vane 6 is rotated by a cord which passes round a 1" fixed Pulley 7 secured to the shaft of the Flanged Wheels 2.

Model No. 2.44 Fire Escape

Parts
required :

2 of No.	1
12 "	3
1 "	5
10 "	8
4 "	10
2 "	12
7 "	12A
2 "	16
4 "	19B
4 "	19S
1 "	22
3 "	23
1 "	24
5 "	35
60 "	37
6 "	37A
9 "	38
1 "	40
1 "	44
6 "	111c
1 "	115
2 "	125

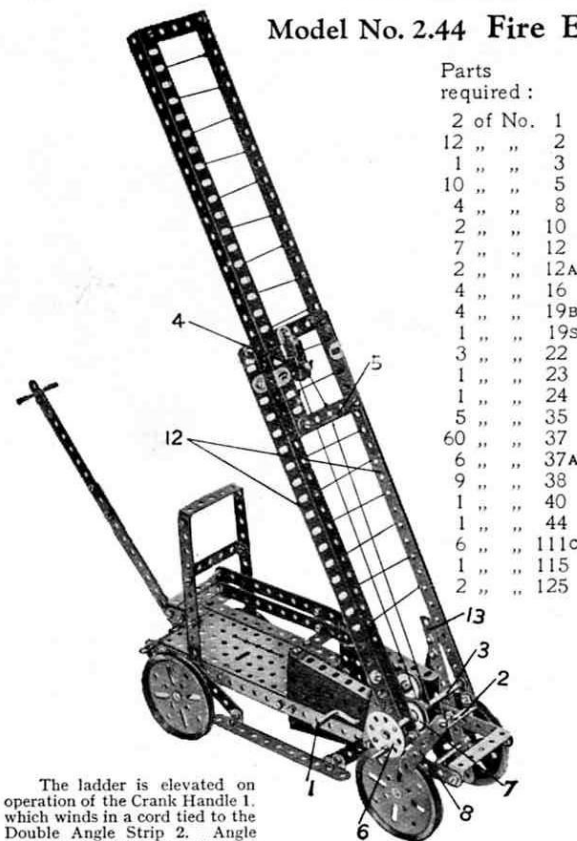

The ladder is elevated on operation of the Crank Handle 1, which winds in a cord tied to the Double Angle Strip 2. Angle Brackets bolted to the 12½" Angle Girders 12 are attached pivotally to the 5½" Strips 13 by means of Bolts and Nuts (S.M. 262), and the action of winding in the cord thus causes the ladder to swing upward. It is prevented from falling by the friction of the 1" Pulley Wheels 10 (Fig. 2.44A), which press against the two Sector Plates. When the ladder is fully elevated, its lower ends act as brakes to prevent the road wheels from revolving.

A second cord is wound upon the Rod 3. One end is then carried over the 1½" loose Pulley Wheel 4 and tied to the 2½" Strip 5, the opposite end being carried directly to the same Strip and secured to it. When the handle 6 is turned, the two ends of the cord are wound and unwound simultaneously, and the ladder is extended or shortened as required. A permanent brake is provided by a cord passing over the 1" Pulley Wheel 7 and having both its ends secured to the 2½" Strip 8. The Strip 8 is bolted firmly to the Angle Bracket 9 (Fig. 2.44A) and keeps the brake continuously in action.


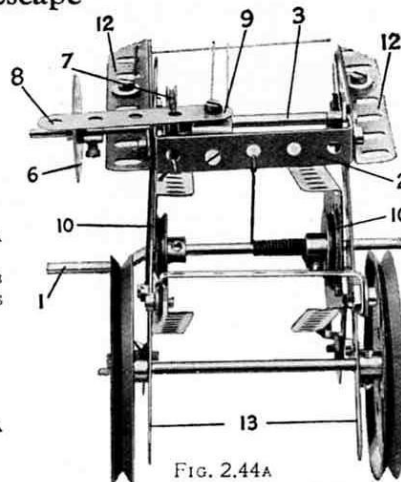


FIG. 2.44A

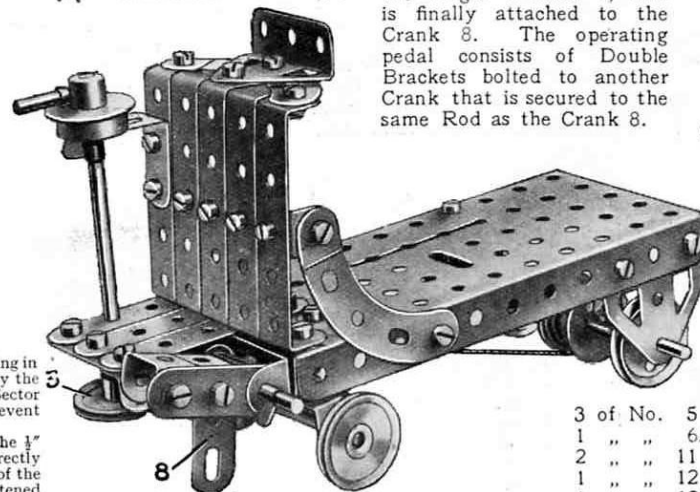

Model No. 2.45 Electric Truck

An underneath view of the truck is shown in Fig. 2.45A. The front axle is journalled in a 1½" x ½" Double Angle Strip 1 that is free to turn on a Double Bent Strip 2, from which it is spaced by a ½" loose Pulley. A length of cord is wrapped round the 1" Pulley 3, which is secured to the end of the steering column, and then passed through a Cranked Bent Strip 4 and secured to the Double Bent Strip 2, wrapped several times round the ½" Flanged Wheels 6, passed through the Angle Bracket 7, and is finally attached to the Crank 8. The operating pedal consists of Double Brackets bolted to another Crank that is secured to the same Rod as the Crank 8.

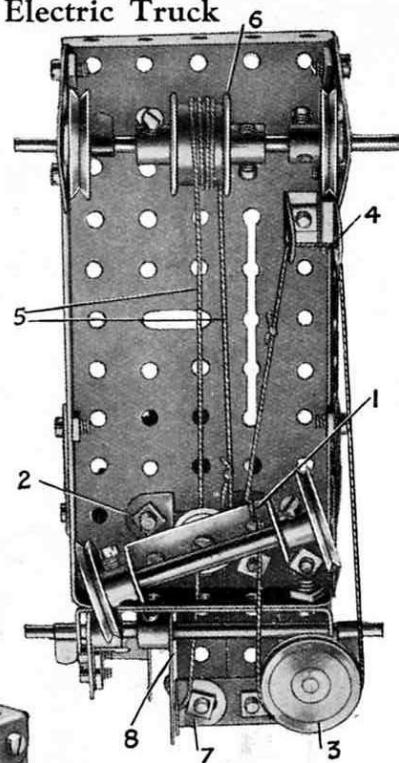


FIG. 2.45A

Parts required :


3 of No.	20B	1 of No.	45
4 "	22	1 "	48
1 "	22A	7 "	48A
1 "	23	1 "	52
4 "	35	2 "	62
35 "	37	3 "	90A
2 "	37A	1 "	111c
5 "	38	1 "	115
1 "	40	1 "	126
1 "	44	2 "	126A

These Models can be built with MECCANO Outfit No. 2 (or No. 1 and No. 1A)

91

Model No. 2.46 Pit Head Gear (Electrically Operated)


Parts required :	
8 of No.	1
8 " "	2
4 " "	5
4 " "	8
2 " "	12
3 " "	16
2 " "	19B
3 " "	22
1 " "	24
2 " "	35
60 " "	37
6 " "	37A
6 " "	38
8 " "	3A
1 " "	52
2 " "	54
2 " "	100
6 " "	111c
2 " "	126
Electric Motor (not included in Outfit)	

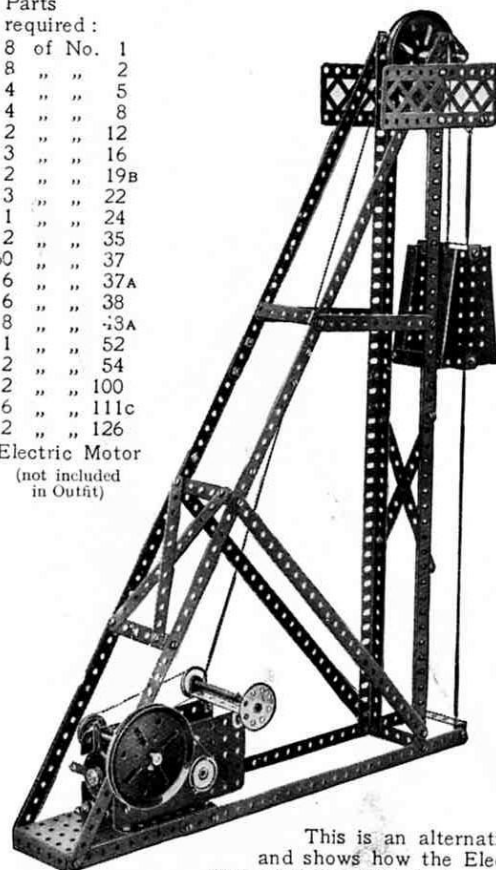

Parts required :		
2 of No.	3	4 of No. 20B
10 " "	5	3 " "
2 " "	10	1 " "
1 " "	11	1 " "
3 " "	12	5 " "
3 " "	16	60 " "
1 " "	17	5 " "
1 " "	18A	1 " "
2 " "	19B	8 " "
		1 of No. 52
		2 " "
		1 " "
		3 " "
		2 " "
		4 " "
		1 " "
		2 " "


Model No. 2.47 Pit Head Gear (Hand Operated)

Parts required :		
6 of No.	1	4 of No. 22
7 " "	2	1 " "
3 " "	5	1 " "
4 " "	8	3 " "
4 " "	11	60 " "
6 " "	12	6 " "
4 " "	16	8 " "
4 " "	19B	1 " "
		2 of No. 54
		2 " "
		2 " "
		2 " "
		6 " "
		1 " "
		2 " "

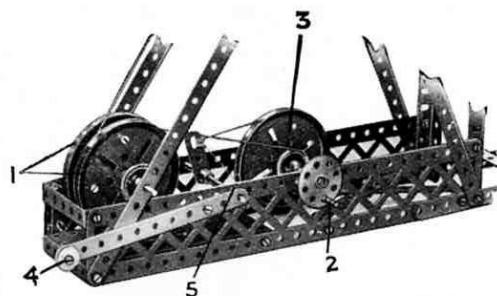

This is an alternative construction of the base of Model No. 2.46, and shows how the Electric Motor may be dispensed with if necessary. Two 3" Pulley Wheels 1 are bolted together by four Double Brackets to form a drum on which the hoisting cord is wound. The cage is raised or lowered on operation of the handle 2, which is connected to the winding drum by an ordinary belt drive. The cage is prevented from overhauling by a hand brake that acts on the groove of a third 3" Pulley Wheel 3. The brake normally is applied by the weight of the $\frac{1}{2}$ " loose Pulley Wheel 4, which is secured to the end of a $5\frac{1}{2}$ " Strip that is bolted to the crank 5.


Model No. 2.48 Steam Lorry

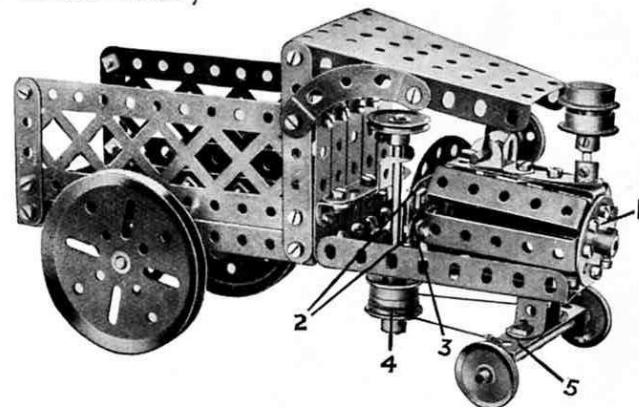

The boiler of the engine is built up of $2\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strips bolted to the Bush Wheel 1, and to two $2\frac{1}{2}$ " Strips 2, which are joined together by Flat Brackets 3. A $2\frac{1}{2}$ " Curved Strip (small radius) is bolted to the upper Strip 2. A cord is passed completely round two $\frac{3}{4}$ " Flanged Wheels 4 secured to the steering column, and its ends are tied to the $2\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strip 5. The Double Bent Strip bolted to the Strip 5 is pivoted by a bolt and two nuts to the Sector Plate.

Model No. 2.49 Revolving Truck


Parts required :		
1 of No.	16	2 of No. 22A
2 " "	17	4 " "
2 " "	22	6 " "
		1 of No. 52
		4 " "

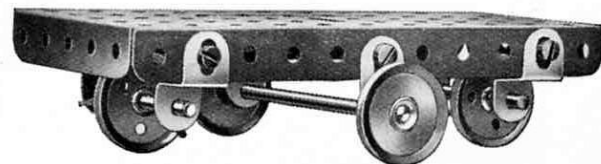

These Models can be built with MECCANO Outfit No. 2 (or No. 1 and No. 1A)

Model No. 2.50

Double Drop Hammer

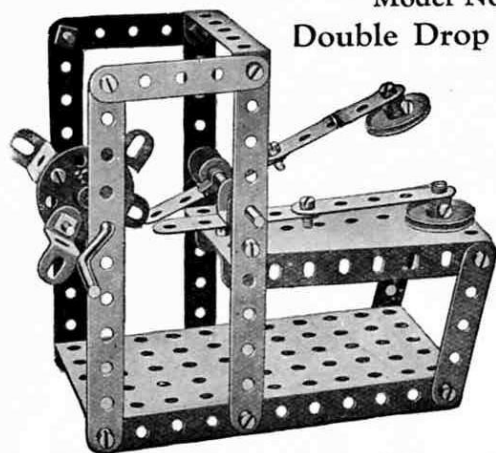

Parts required :

4 of No.	2
8 " "	5
2 " "	11
1 " "	16
1 " "	19s
2 " "	22
1 " "	24
6 " "	35
23 " "	37
2 " "	48A
1 " "	52
1 " "	54
4 " "	125

Model No. 2.51 Motor Van

The Axle Rod 1 is journalled in a $2\frac{1}{2} \times \frac{1}{4}$ Double Angle Strip 2. The latter is bolted to a Double Bent Strip that is pivoted to the Flanged Plate 3 by a Bolt and two Nuts. Steering is effected by a cord attached to the ends of the Double Angle Strip 2 and passed round a 1" Pulley Wheel fastened to the lower end of the steering Rod.

Parts required :

6 of No.	2	1 of No.	38	2 of No.	54
10 " "	5	1 " "	45	3 " "	111c
1 " "	10	1 " "	48	2 " "	125
2 " "	12	6 " "	48A	2 " "	126A
1 " "	15	1 " "	52		
1 " "	15A				
1 " "	16				
4 " "	19B				
1 " "	22				
1 " "	24				
1 " "	35				
35 " "	37				
2 " "	37A				

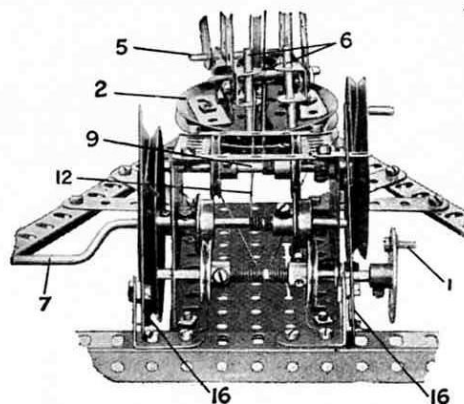
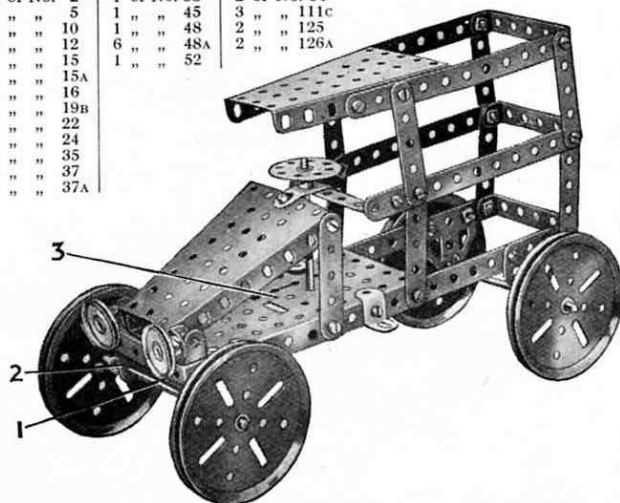


FIG. 2.52A


Model No. 2.52 Derrick

Parts required :

8 of No.	1
4 " "	2
2 " "	3
2 " "	5
8 " "	6A
1 " "	8
3 " "	10
2 " "	11
4 " "	12
2 " "	12A
3 " "	16
2 " "	17
4 " "	18A

4 of No.	19B
4 " "	20B
4 " "	22
1 " "	23
1 " "	24
11 " "	35
58 " "	37
3 " "	37A
5 " "	38

1 of No.	52
2 " "	54
1 " "	57
1 " "	111c
1 " "	115
2 " "	126

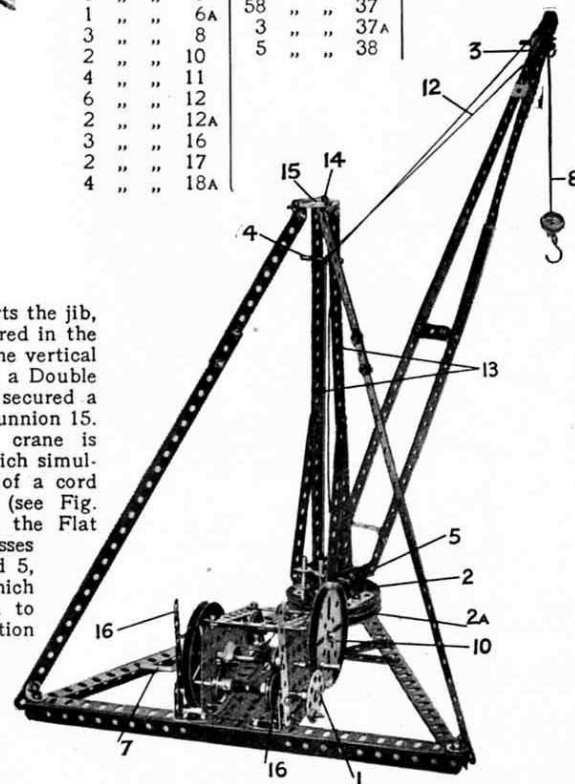


The 3" Pulley Wheel 2, which supports the jib, is free to turn on a short Axle Rod secured in the boss of the lower 3" Pulley Wheel 2a. The vertical $12\frac{1}{2}$ " Strips 13 are bolted at their tops to a Double Bracket, to the centre hole of which is secured a Bolt 14 that is free to turn in the Flat Trunnion 15.

The swivelling movement of the crane is carried out by turning the handle 1, which simultaneously winds and unwinds the ends of a cord passing round the 3" Pulley Wheel 2 (see Fig. 2.52A). The cord 12, which is tied to the Flat Bracket 3 at the head of the jib passes over the 2" Rod 4, under a similar Rod 5, and between two vertical 2" Rods 6, which act as guides, and is finally wound on to the Crank Handle 7. Hence on operation of the latter the jib is raised or lowered. The cord 8 also passes round the Rods 4, 5 and 6, and is wound on to the Rod 9. Operation of the handle 10 raises and lowers the hook. The cords 8 and 12 are prevented from unwinding by band-and-pulley brakes 16.

Model No. 2.53

Sewing Machine

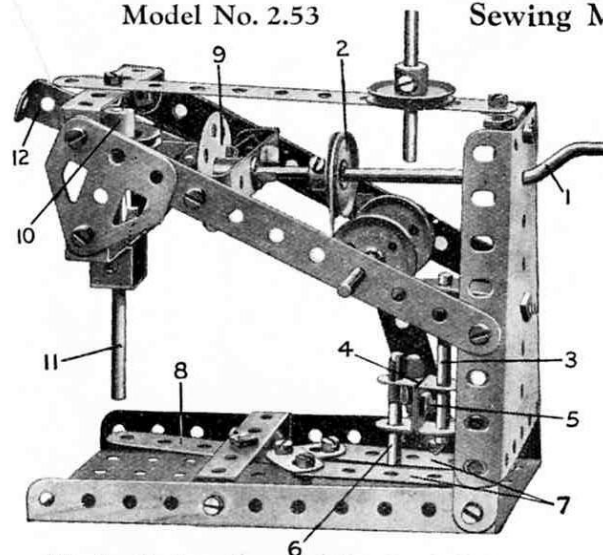

Parts required:

3 of No. 2	
6 " " 5	
3 " " 10	
2 " " 11	
3 " " 12	
2 " " 16	
2 " " 17	
1 " " 18A	
1 " " 19S	
4 " " 22	
2 " " 22A	
1 " " 24	
5 " " 35	
24 " " 37	
3 " " 38	
1 " " 44	
5 " " 48A	
1 " " 52	
1 " " 54	
2 " " 125	
2 " " 126A	

The handle 1 carries a 1" Pulley 2, which drives by means of a cord a similar Pulley on a 2" Rod 3 journalled in a Cranked Bent Strip bolted to the Sector Plate. Two Double Brackets 4 are secured together by a Bolt 5, the shank of which presses very tightly on the Rod 3. This locks the Double Brackets in position, and they revolve with the Rod 3. The outer Double Bracket carries a 1½" Rod 6, the end of which lies between two Strips 7, arranged at a short distance apart from each other and bolted to two Flat Brackets. These are secured to a further Strip 8 bolted pivotally to a transverse Double Angle Strip. As the shaft 3 rotates, the Rod 6 slides between the Strips 7 and so rocks the Strip 8 from side to side to represent the shuttle.

The Bush Wheel 9 carries two Angle Brackets placed together in the form of a Double Bracket, with their elongated holes overlapping, and in such a position that an imaginary line drawn through their opposite round holes, would cross the centre of the Bush Wheel. A Flat Bracket is bolted to the inner Angle Bracket in a line with the Crank Handle and forms a lever which engages 1" Pulley 10 mounted on a vertical sliding Rod 11. This Rod is journalled in a Double Angle Strip bolted between the lower holes of the two Flat Trunnions and is further supported by two ½" Reversed Angle Brackets secured to the Angle Strip. As the Bush Wheel rotates, the Flat Bracket imparts to the Rod 11 a movement corresponding to the action of the needle.

The outer Angle Bracket on the Bush Wheel strikes once in every revolution the end of a Double Angle Strip 12. This is pivotally mounted by a Bolt passed through its second hole from the Bush Wheel end to the centre hole of the Flat Trunnion on that side of the model. The resulting movement of the Strip 12 represents the apparatus that pays out the cotton from the reel.

Model No. 2.54 Anti-Aircraft Gun

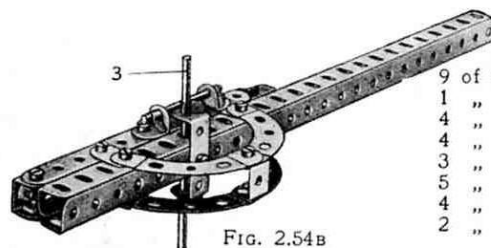


FIG. 2.54B

Parts required:

9 of No. 2	1 of No. 19B	4 of No. 48A
1 " " 6A	4 " " 20B	1 " " 52
4 " " 8	4 " " 22	2 " " 54
4 " " 10	1 " " 24	4 " " 90A
3 " " 11	8 " " 35	1 " " 115
5 " " 12	57 " " 37	2 " " 126
4 " " 16	6 " " 38	2 " " 126A
2 " " 17	1 " " 44	

The general construction of the model will be made clear by reference to Figures 2.54A and 2.54B. Rotation of the handle 1 causes the gun to revolve on the 3" Pulley Wheel 2. The barrel of the gun is so balanced on the Axle Rod 3 that it tends to fall by its own weight, but is prevented from doing so by a cord 4 tied to the gun close to the breech and wound on the 3½" Rod 5. By turning the Pulley Wheels 6 the muzzle is raised or allowed to fall.



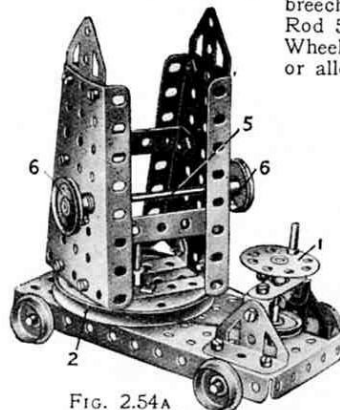



FIG. 2.54A

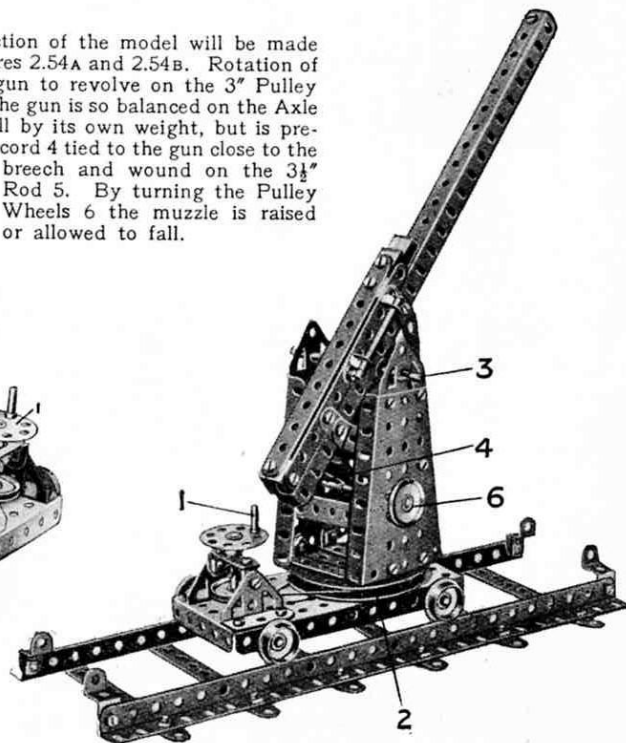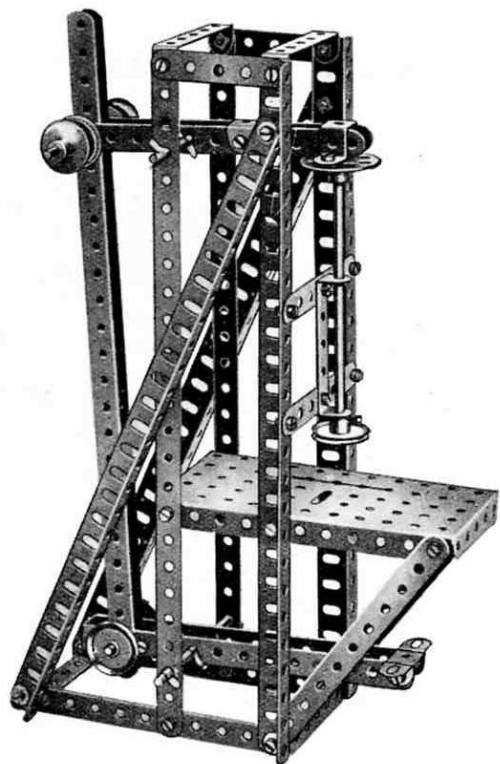

Model No. 2.55 Embossing Machine

Parts
required :

4 of No.	1
8 " "	2
2 " "	3
2 " "	5
4 " "	8
3 " "	11
2 " "	12
1 " "	15
3 " "	16
1 " "	18A
4 " "	20B
3 " "	22
1 " "	24
10 " "	35
34 " "	37
8 " "	38
1 " "	45
5 " "	48A
1 " "	52

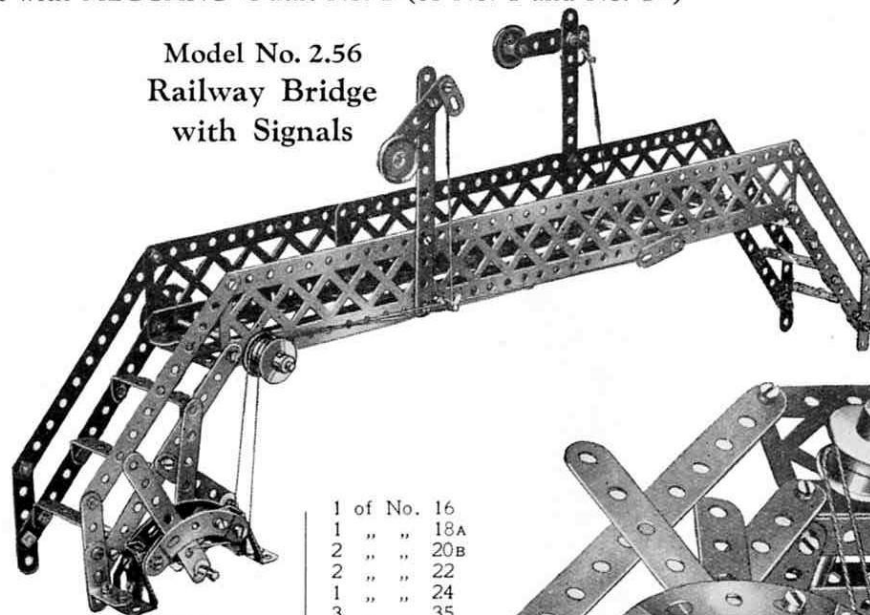Model No. 2.56
Railway Bridge
with SignalsParts
required :

2 of No.	1
10 " "	2
2 " "	3
10 " "	5
4 " "	8
4 " "	10
3 " "	11
2 " "	12A
1 " "	15A

1 of No.	16
1 " "	18A
2 " "	20B
2 " "	22
1 " "	24
3 " "	35
60 " "	37
3 " "	37A
6 " "	38
7 " "	48A
2 " "	62
4 " "	90A
2 " "	99
2 " "	100
3 " "	111c
1 " "	115
2 " "	126

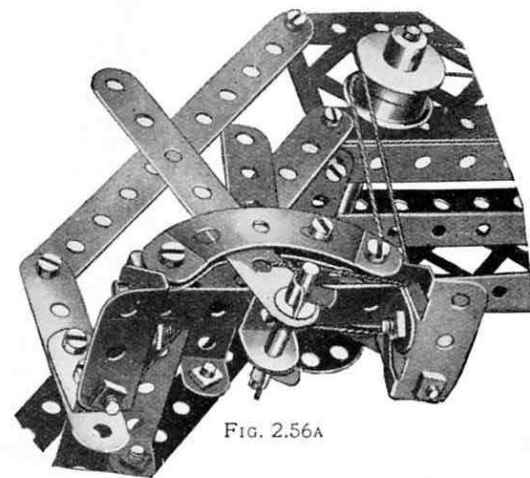



FIG. 2.56A

HOW TO CONTINUE

This completes our examples of models that may be made with MECCANO Outfit No. 2 (or No. 1 and No. 1A). The next models are a little more advanced, requiring a number of extra parts to construct them. The necessary parts are all contained in a No. 2A Accessory Outfit, the price of which may be obtained from any Meccano dealer.

These Models can be built with MECCANO Outfit No. 3 (or No. 2 and No. 2A)

Model No. 3.1 Drilling Machine

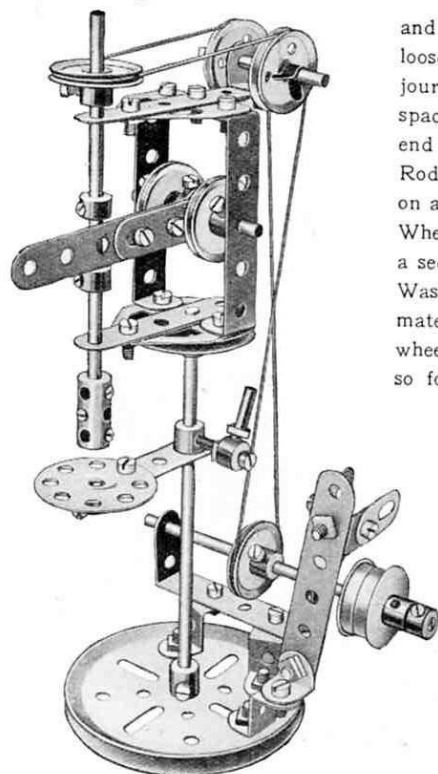

Parts required :


2 of No. 4	1 of No. 19B	1 of No. 46
2 " " 5	2 " " 20B	2 " " 48A
2 " " 10	1 " " 21	4 " " 59
2 " " 11	4 " " 22	2 " " 62
1 " " 12	2 " " 22A	1 " " 63
1 " " 15	1 " " 24	1 " " 111
2 " " 15A	3 " " 35	1 " " 115
2 " " 17	21 " " 37	3 " " 125
	1 " " 40	2 " " 126A

Model No. 3.2 Strip-Bending Machine

This model represents a device for bending bars or rods of metal to circular form, and may be put to practical purpose in shaping strips of tin or similar material. A loose Pulley 1 is spaced by a Collar and Washers in the centre of the short Rod 2 journaled in a $1\frac{1}{2}$ " Strip 3. The latter is secured to the end of a $\frac{3}{4}$ " Bolt 4 and spaced away from the 3" Pulley 5 by means of a number of Washers. The opposite end of the Rod is supported by a $5\frac{1}{2}$ " Strip 6. The handle 7 is secured to a $3\frac{1}{2}$ " Rod carrying a $\frac{1}{2}$ " Pinion 8. This engages with a 57-teeth Gear Wheel 9 mounted on another $3\frac{1}{2}$ " Rod which is free to revolve in the boss of the wheel 5. The Gear Wheel 9 carries a 3" Strip 10 forming one of the bearings for a short Rod carrying a second 1" loose Pulley 11. The latter is also spaced by means of a Collar and Washers so that it lies immediately above the groove of the Pulley Wheel 5. The material to be shaped is passed between the two loose Pulleys at the top of the wheel 5, and on rotation of the handle 7 the arm 10 is caused to move downward, so forcing the object to the same curvature as the circumference of the wheel.

Parts required :


1 of No. 2	2
2 " " 3	3
1 " " 4	4
1 " " 5	5
1 " " 6A	6A
2 " " 16	16
1 " " 17	17
2 " " 18B	18B
1 " " 19B	19B
2 " " 22A	22A
1 " " 26	26
1 " " 27A	27A

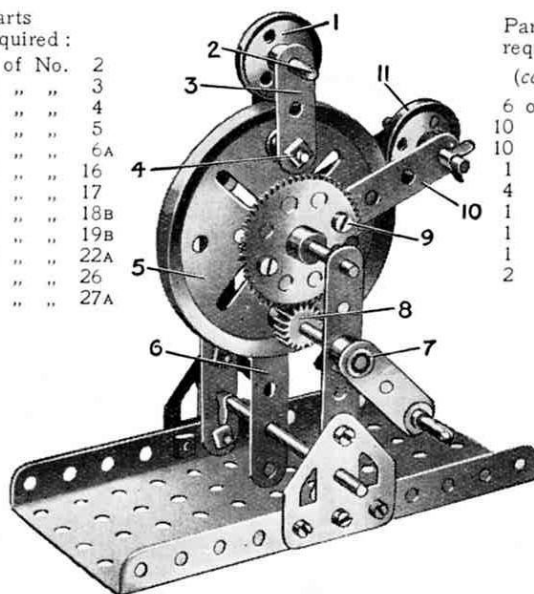

Parts required
(continued) :

6 of No. 35	35
10 " " 37	37
10 " " 38	38
1 " " 52	52
4 " " 59	59
1 " " 62	62
1 " " 111	111
1 " " 115	115
2 " " 126A	126A


Model No. 3.3 Letter Balance

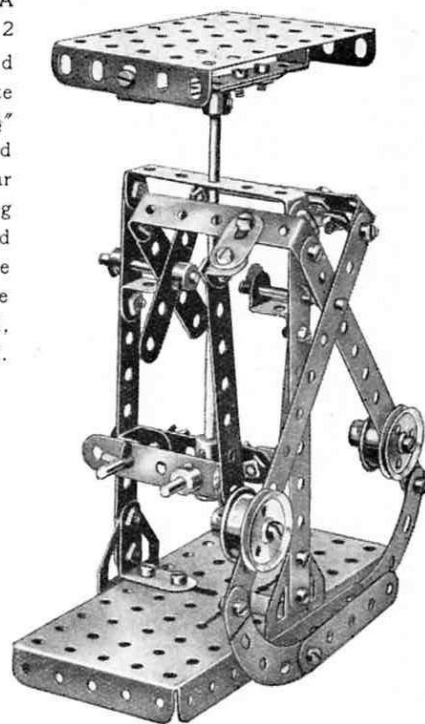

Parts required :

4 of No. 2	2 of No. 18A	1 of No. 53
2 " " 3	2 " " 20B	4 " " 59
5 " " 5	2 " " 22A	1 " " 62
2 " " 10	4 " " 35	1 " " 63
1 " " 11	37 " " 37	2 " " 90A
4 " " 12	6 " " 37A	2 " " 111
2 " " 12A	2 " " 48A	4 " " 111c
1 " " 15	1 " " 48B	2 " " 125
2 " " 17	1 " " 52	2 " " 126A

Model No. 3.4 Oil Cake Chopper

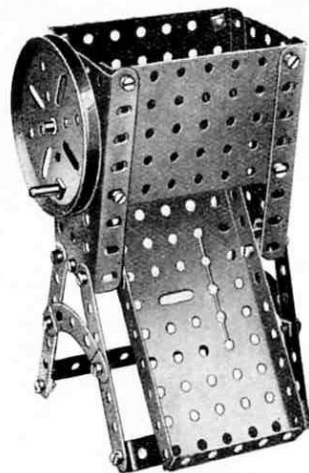

Parts required :

4 of No. 3	1 of No. 52
6 " " 10	2 " " 53
1 " " 15	2 " " 54
1 " " 19B	1 " " 59
4 " " 22	2 " " 90A
24 " " 37	1 " " 115
2 " " 48B	2 " " 125


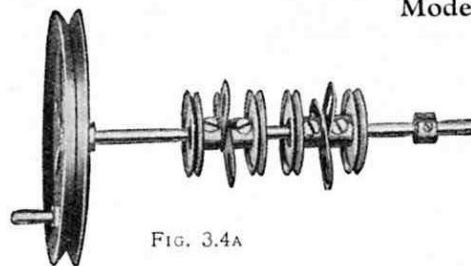


FIG. 3.4A

Fig. 3.4A shows the hand wheel and shaft removed from the model. It will be seen that the chopping mechanism is represented by Flat Brackets clamped between two pairs of 1" fast Pulley Wheels.

Model No. 3.5 Lawn Mower

The grass box 1 is retained in position by two Flat Brackets bolted to the $2\frac{1}{2} \times \frac{1}{2}$ " Double Angle Strip 2 but spaced from it by a Washer on each Bolt. The edge of the Double Angle Strip 3 may be slipped in the space between the Double Angle Strip 2 and the Flat Brackets, one of which is shown at 4.

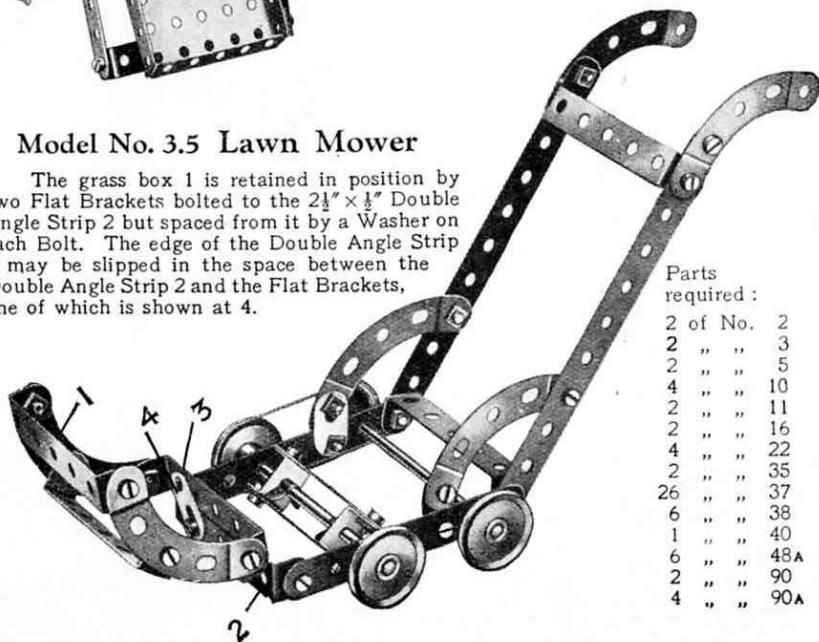


Parts required :

2 of No. 2	2
2 " " 3	3
2 " " 5	5
4 " " 10	10
2 " " 11	11
2 " " 16	16
4 " " 22	22
2 " " 35	35
26 " " 37	37
6 " " 38	38
1 " " 40	40
6 " " 48A	48A
2 " " 90	90
4 " " 90A	90A

Model No. 3.6

Ice Boat

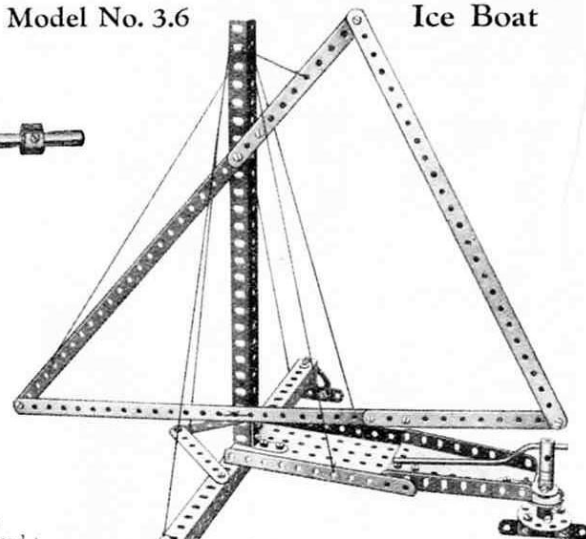

Parts required :


3 of No. 1	1
2 " " 2	2
2 " " 3	3
3 " " 5	5
2 " " 8	8
2 " " 12	12

3 of No. 12A	1 of No. 40
1 " " 17	1 " " 52
1 " " 19s	1 " " 54
1 " " 22	1 " " 59
1 " " 24	1 " " 62
36 " " 37	1 " " 63
2 of No. 126A	

Model No. 3.7 Toboggan

Parts required :

6 of No. 5	5
22 " " 37	37
1 " " 40	40
5 " " 48A	48A
1 " " 52	52
2 " " 90	90
1 " " 90A	90A

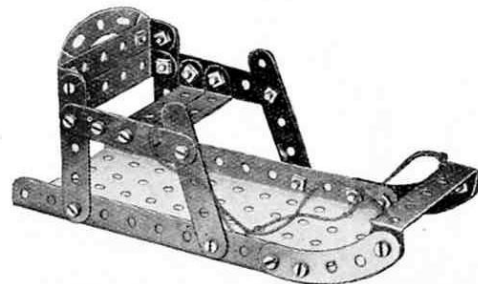


These Models can be built with MECCANO Outfit No. 3 (or No. 2 and No. 2A)

97

Model No. 3.8 Swing

Parts
required :


7	of No.	1
10	" "	2
1	" "	3
8	" "	5
8	" "	8
1	" "	10
2	" "	15
1	" "	19B
1	" "	24
2	" "	35
56	" "	37
4	" "	37A
6	" "	48A
1	" "	48B
2	" "	59
2	" "	62
4	" "	90A
2	" "	99
2	" "	111c
1	" "	115

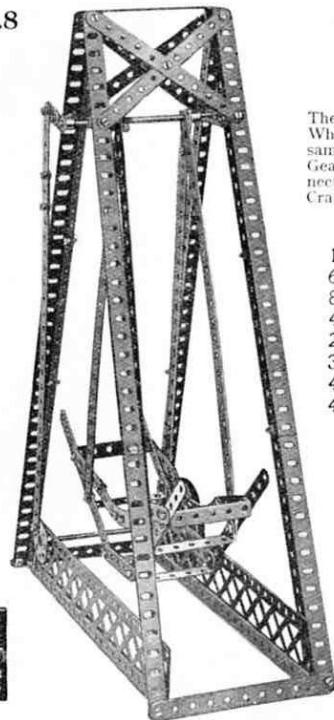

Model No. 3.9 Drafting Machine

Parts required :

4	of No.	1	2	of No.	5
3	" "	2	1	" "	24
1	" "	4	15	" "	37
		1	of No.	52	

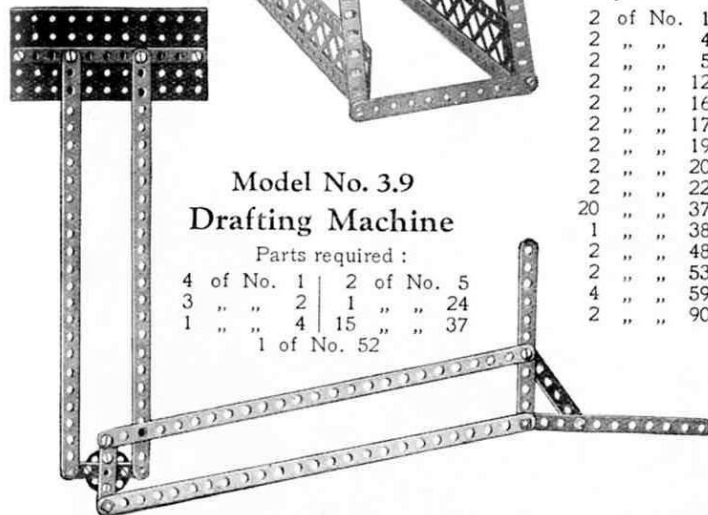


Model No. 3.10 Actuated See-Saw

The model is actuated by the motion of one pair of travelling wheels. The axle to which these wheels are secured carries two 1" fast Pulley Wheels, which are connected by endless cords to similar Pulleys on the same Rod as a $\frac{1}{2}$ " Pinion Wheel. This $\frac{1}{2}$ " Pinion meshes with a 57-teeth Gear Wheel secured to the Rod of a Bush Wheel, and the latter is connected by means of a $3\frac{1}{2}$ " Strip to an extended crank (a $2\frac{1}{2}$ " Strip and a Crank bolted together) secured to the pivotal Rod of the see-saw.

Parts required :

1	of No.	3	1	of No.	24	2	of No.	52
6	" "	5	1	" "	26	2	" "	53
8	" "	8	1	" "	27A	3	" "	59
4	" "	12	2	" "	35	2	" "	62
2	" "	15	43	" "	37	2	" "	90A
3	" "	15A	2	" "	37A	1	" "	111c
4	" "	19B	1	" "	40	1	" "	115
4	" "	22	2	" "	48B			

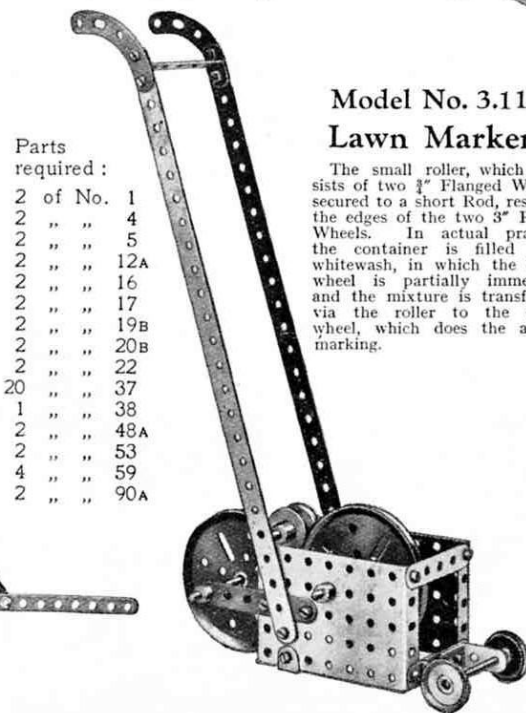

Model No. 3.11 Lawn Marker


The small roller, which consists of two $\frac{1}{2}$ " Flanged Wheels secured to a short Rod, rests on the edges of the two 3" Pulley Wheels. In actual practice the container is filled with whitewash, in which the inner wheel is partially immersed, and the mixture is transferred via the roller to the outer wheel, which does the actual marking.

Parts required :


2	of No.	1
2	" "	4
2	" "	5
2	" "	12A
2	" "	16
2	" "	17
2	" "	19B
2	" "	20B
2	" "	22
20	" "	37
1	" "	38
2	" "	48A
2	" "	53
4	" "	59
2	" "	90A

Parts
required :


2	of No.	2
1	" "	6A
2	" "	8
2	" "	11
2	" "	12
25	" "	37
1	" "	40
1	" "	52
2	" "	90A
2	" "	126
2	" "	126A

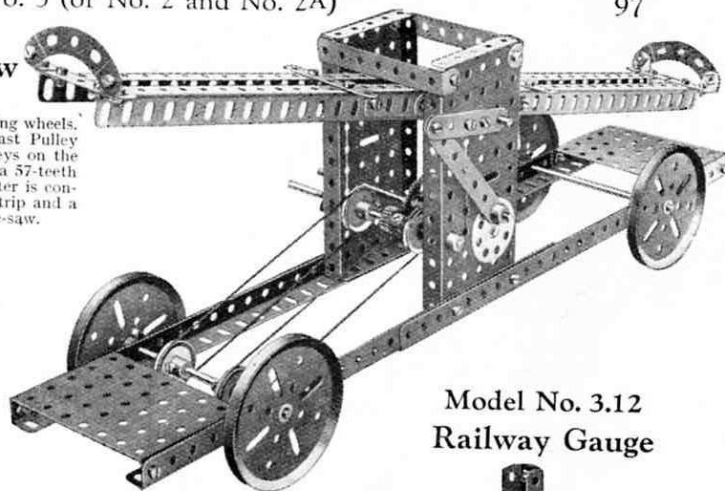

Model No. 3.12 Railway Gauge

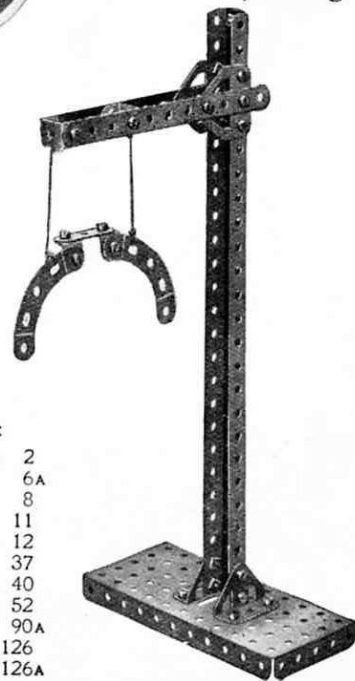

Model No. 3.13 Drop the Nigger

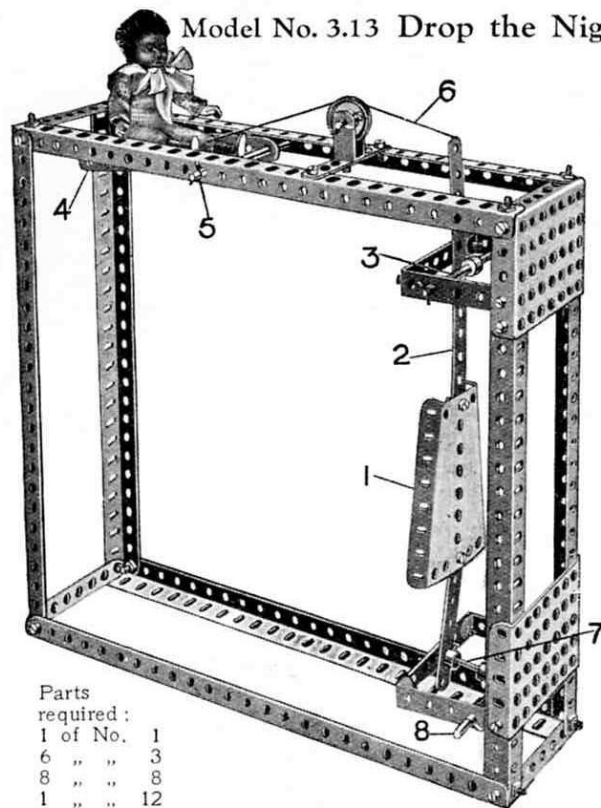


Parts required:

1 of No.	1
6 " "	3
8 " "	8
1 " "	12
3 " "	15A
2 " "	17
1 " "	22
6 " "	35
33 " "	37
1 " "	40
1 " "	44
4 " "	48A
2 " "	53
2 " "	54
3 " "	59
1 " "	63

The Sector Plate 1 is a target, which, when hit, allows the nigger to be dropped. The Plate 1 is carried on the Strip 2 pivoted at 3, and the weight of the nigger supported on another Sector Plate 4 pivoted at 5 by means of the cord 6 keeps the lower end of the Strip 2 hard against a short Rod 7 pivoted at 8. When the target is hit and knocked back the Rod 7 is released and falls about its pivot, allowing the Sector Plate 4 with the nigger to drop.

The hand levers 1 are each pivotally attached to the car by a Bolt and two Nuts (see Standard Mechanism No. 262) and are connected in a similar manner to two further levers, one of which, seen at 3, is pivoted to a Bush Wheel 4 while the other, on the further side of the model, is pivoted to a Coupling, which serves as a crank in the same way as the Bush Wheel 4. Both Bush Wheel and Coupling are secured to the Rod carrying the Gear Wheel 5, and motion is thus transmitted to the rear wheels. The steering foot lever 6 is secured by a Crank to a short vertical Rod which, in turn, is secured by another Crank to the Double Angle Strip carrying the front axle.


Model No. 3.14 Hand Car

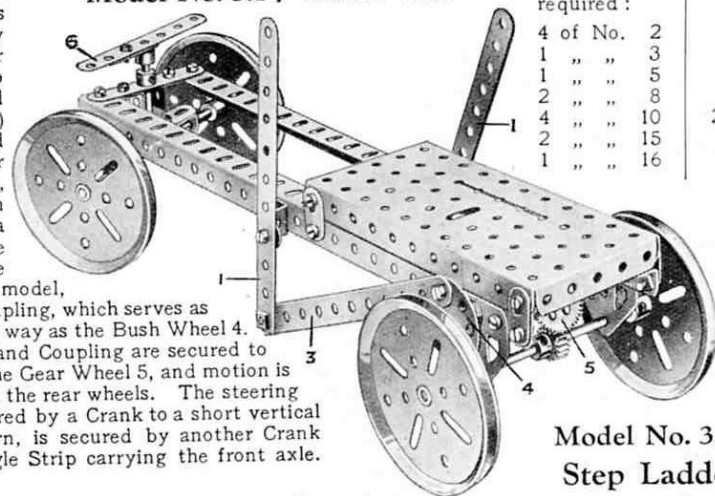

Parts required:

4 of No.	2	1 of No.	17
1 " "	3	4 " "	19B
1 " "	5	1 " "	24
2 " "	8	1 " "	26
4 " "	10	1 " "	27A
2 " "	15	4 " "	35
1 " "	16	26 " "	37
		5 " "	37A
		4 " "	38
		1 " "	45
		1 " "	48A
		1 " "	52
		1 " "	59
		2 " "	62
		1 " "	63
		1 " "	111C
		2 " "	125
		2 " "	126A


Model No. 3.16 Step Ladder

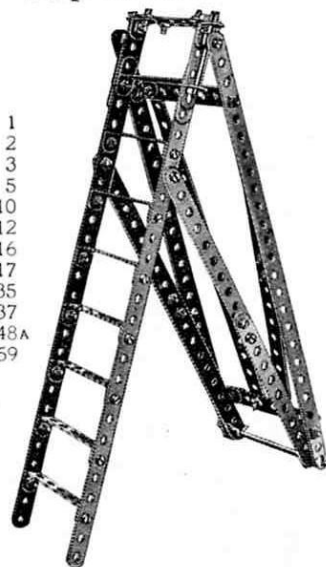

Parts required:

4 of No.	1
8 " "	2
2 " "	3
3 " "	5
2 " "	10
10 " "	12
1 " "	16
2 " "	17
10 " "	35
38 " "	37
8 " "	48A
2 " "	59

Model No. 3.15 Lace Jennier

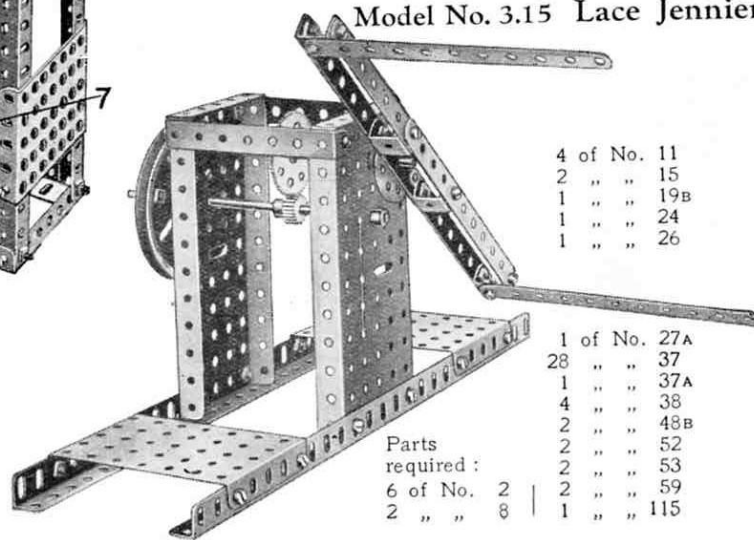

4 of No.


11
15
19B
24
26

Parts required:

1 of No.	27A
28 " "	37
1 " "	37A
4 " "	38
2 " "	48B
2 " "	52
2 " "	53
6 of No.	2
2 " "	8
1 " "	115

These Models can be built with MECCANO Outfit No. 3 (or No. 2 and No. 2A)


Model No. 3.17 Vertical Steam Engine

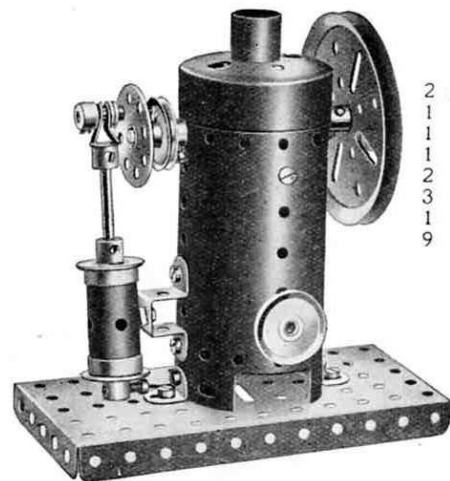

Parts required :

2 of No. 12	2 of No. 38
1 " " 16	1 " " 45
1 " " 17	1 " " 52
1 " " 19B	1 " " 59
2 " " 20B	1 " " 115
3 " " 22	1 " " 162
1 " " 24	1 " " 163
9 " " 37	1 " " 164
1 of No. 166	


Model No. 3.18 Steam Road Roller

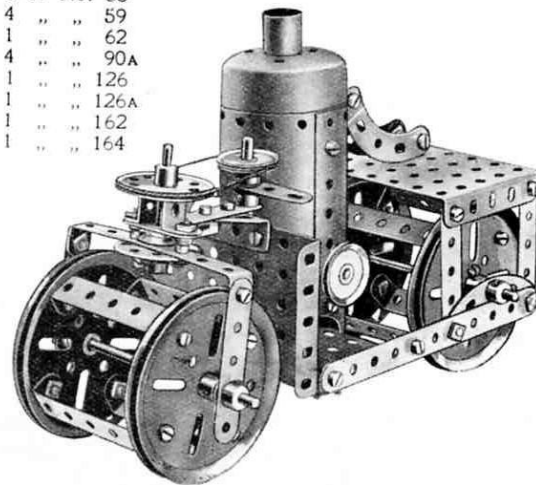

Parts required :

2 of No. 2	3 of No. 53
7 " " 5	4 " " 59
2 " " 11	1 " " 62
1 " " 12	4 " " 90A
2 " " 12A	1 " " 126
3 " " 16	1 " " 126A
1 " " 17	1 " " 162
1 " " 18A	1 " " 164
4 " " 19B	
1 " " 21	
3 " " 22	
1 " " 23	
1 " " 24	
57 " " 37	
11 " " 38	
1 " " 40	
1 " " 45	
8 " " 48A	
2 " " 48B	

Model No. 3.19 Lathe

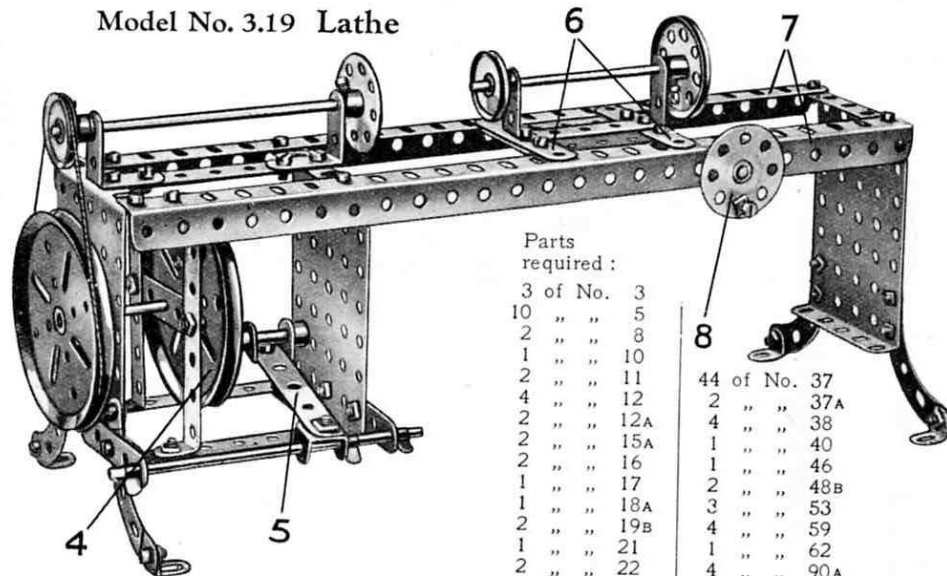

Parts required :

3 of No. 3	44 of No. 37
10 " " 5	2 " " 37A
2 " " 8	4 " " 38
1 " " 10	1 " " 40
2 " " 11	1 " " 46
4 " " 12	2 " " 48B
2 " " 12A	3 " " 53
2 " " 15A	4 " " 59
2 " " 16	1 " " 62
1 " " 17	4 " " 90A
1 " " 18A	1 " " 111C
2 " " 19B	1 " " 115
1 " " 21	
2 " " 22	
1 " " 24	
3 " " 35	

The arrangement of the treadle is shown in detail in Fig. 3.19A. The Crank 1 is provided with a Flat Bracket, the round hole of which coincides with the elongated hole of the Crank, and receives the short Rod 2. The Crank 1 is free to turn about a Threaded Pin 3, secured to the 3" Pulley Wheel 4, and once the latter is set in motion it can be kept in rotation by working the treadle 5. The Strips 6 of the saddle (Fig. 3.19) are duplicated and their ends form slots to receive the flanges of the Angle Girders 7. The hand wheel 8 is a dummy one, but if desired it may be arranged to operate the saddle by an endless rope device.


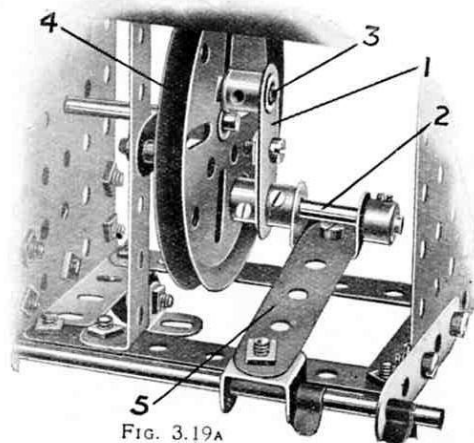


FIG. 3.19A

These Models can be built with MECCANO Outfit No. 3 (or No. 2 and No. 2A)

Model No. 3.20 Tank Wagon

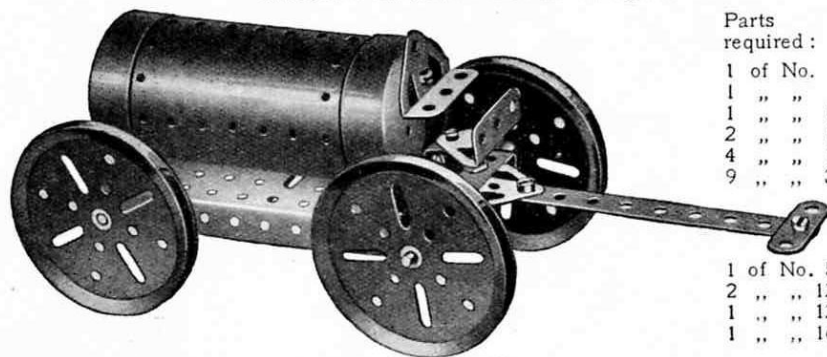

Parts required :

1	of No.	2
1	" "	6A
1	" "	12
2	" "	16
4	" "	19B
9	" "	37


1	of No.	52
2	" "	126
1	" "	126A
1	" "	162

Model No. 3.21 Flax Cleaner

The six $3\frac{1}{2}$ " Strips forming the rotating frame are fastened to a Bush Wheel that in turn is attached to the Rod 1. The $3\frac{1}{2}$ " Strips are braced by six $2\frac{1}{2}$ " Strips. The drive is transmitted from the operating shaft by means of endless cords. Two separate cords are used in order to secure a more positive drive.

Parts required :

4	of No.	2	1	of No.	19B
6	" "	3	4	" "	22
6	" "	5	1	" "	24
2	" "	8	1	" "	26
2	" "	12	1	" "	27A
3	" "	15A	1	" "	35
			34	" "	37
			3	" "	38
			1	" "	40
			2	" "	52
			3	" "	53
			4	" "	59
			1	" "	115

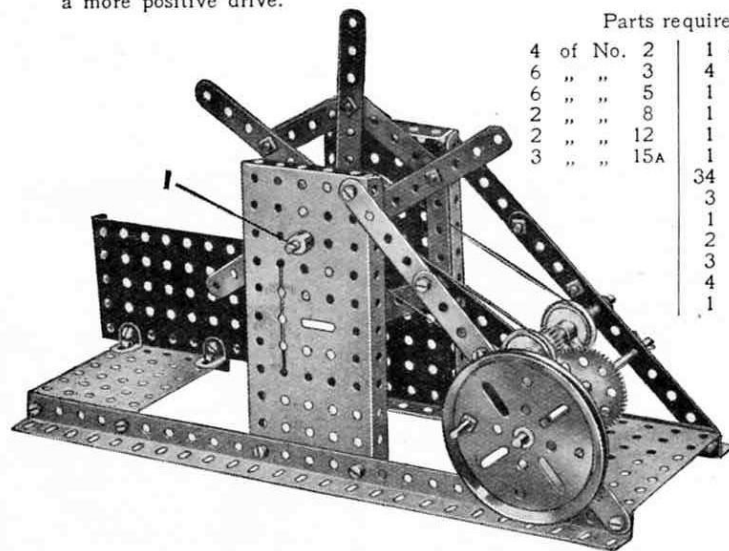


Model No. 3.22 Newton's Disc

This model demonstrates that the colours of the spectrum, which are most simply produced by directing a ray of white light through a prism, can be re-combined to form white light. The cardboard disc is divided into equal sectors, and the seven colours of the spectrum—red, orange, yellow, green, blue, indigo, and violet—are painted on separate sectors. If the disc is rotated at a high speed by means of the hand wheel and the gears shown, the disc appears to be of a greyish-white colour.

Parts required :


2	of No.	15	10	of No.	37
1	" "	19B	1	" "	38
1	" "	24	2	" "	52
1	" "	26	2	" "	53
1	" "	27A	2	" "	59
			1	of No.	115

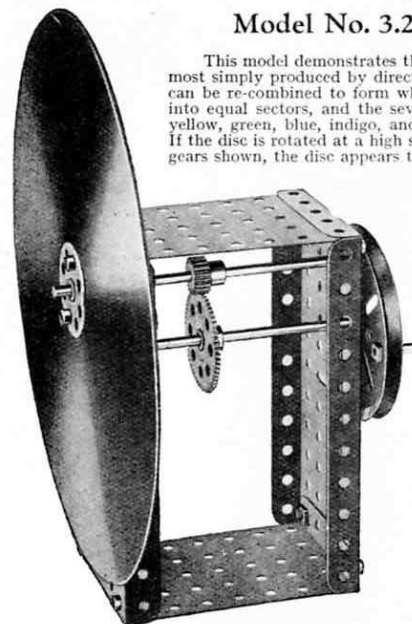


Model No. 3.23 Auto Dial Press

Parts required :

4	of No.	2	22	of No.	37
5	" "	5	1	" "	40
2	" "	15	5	" "	48A
1	" "	16	1	" "	52
1	" "	17	3	" "	59
1	" "	18A	1	" "	63
1	" "	19B	4	" "	90A
4	" "	20B	1	" "	115
1	" "	21			
1	" "	22			
1	" "	24			
1	" "	26			
1	" "	32			

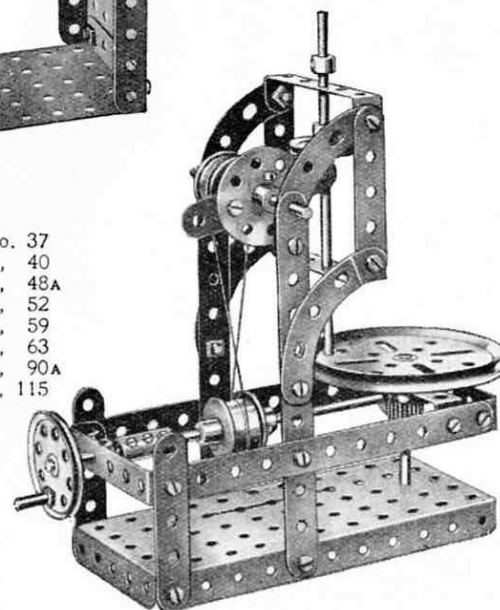

Model No. 3.24 Hand Trolley

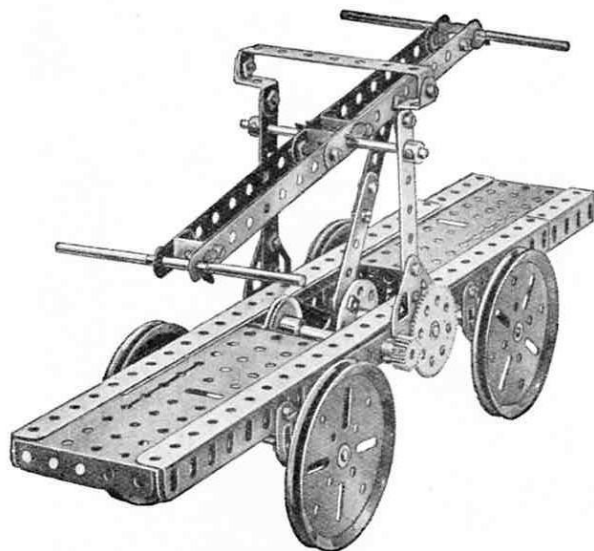

Parts required :

4 of No. 2	1 of No. 18A	1 of No. 40
3 " " 3	4 " " 19B	1 " " 45
2 " " 5	2 " " 22	1 " " 48B
4 " " 8	1 " " 24	2 " " 52
8 " " 10	1 " " 26	3 " " 59
4 " " 11	1 " " 27A	4 " " 90A
2 " " 15A	6 " " 35	2 " " 125
4 " " 16	40 " " 37	2 " " 126A


The connecting arm is pivoted at its lower end to the Bush Wheel and at its upper end to the hand lever, a bolt and two nuts being used to pivot the arm in each case. The drive is transmitted to a 1" Pulley Wheel on the axle of the road wheels by means of a crossed belt passing round another 1" Pulley that is secured to a Rod connected via a 3:1 gear ratio to the 1½" Rod carrying the Bush Wheel. This Rod is journaled in a 3½" Strip fastened to the side Angle Girder, and also in a Double Bent Strip secured to the inside of the Girder.

Model No. 3.25

Parts required :

5 of No. 5	3 of No. 48A
2 " " 8	2 " " 48B
2 " " 12	2 " " 52
3 " " 15A	3 " " 53
2 " " 19B	3 " " 59
1 " " 19S	1 " " 63
4 " " 20B	1 " " 116
1 " " 21	1 " " 125
1 " " 22	2 " " 126
2 " " 35	1 " " 162
32 " " 37	1 " " 163
1 " " 40	1 " " 164
1 " " 48	1 " " 166

Horizontal Engine

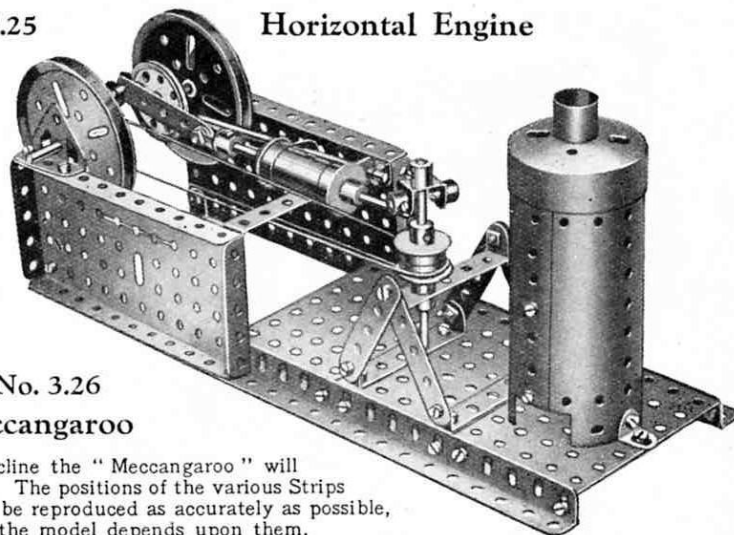


Model No. 3.26

The Meccangaroo

When placed upon an incline the "Meccangaroo" will "walk" with a quaint action. The positions of the various Strips in relation to the body should be reproduced as accurately as possible, for the successful working of the model depends upon them.

The animal rocks about a short Rod secured between the rocker-frame which does duty as "legs." This frame consists of two 3½" Strips 3 bolted at their upper ends to Cranks in which the short Rod is secured, and at their lower ends to two 2½" large radius Curved Strips 4, which are connected together at their ends by 1½" Strips 5 and braced to the Strips 3 by 2½" Strips.

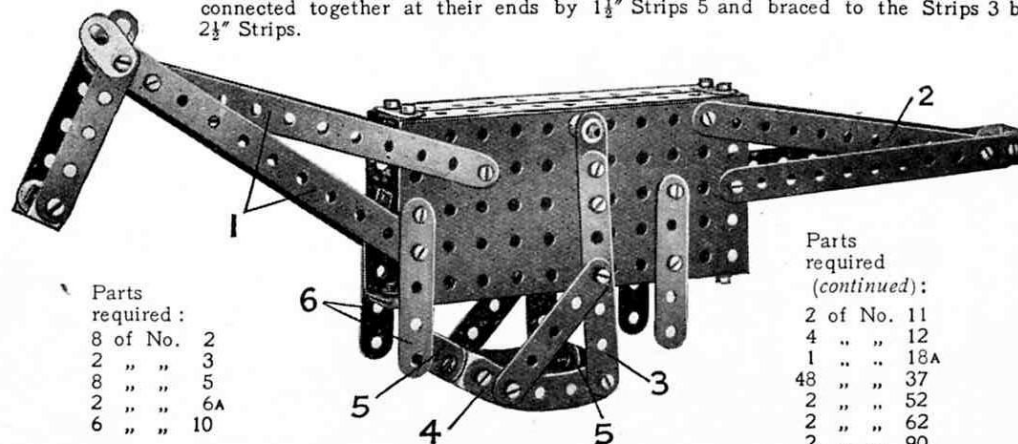

Parts required :


8 of No. 2
2 " " 3
8 " " 5
2 " " 6A
6 " " 10

Parts required (continued):

2 of No. 11
4 " " 12
1 " " 18A
48 " " 37
2 " " 52
2 " " 62
2 " " 90

These Models can be built with MECCANO Outfit No. 3 (or No. 2 and No. 2A)

**Model No. 3.27
Swinging Cot**

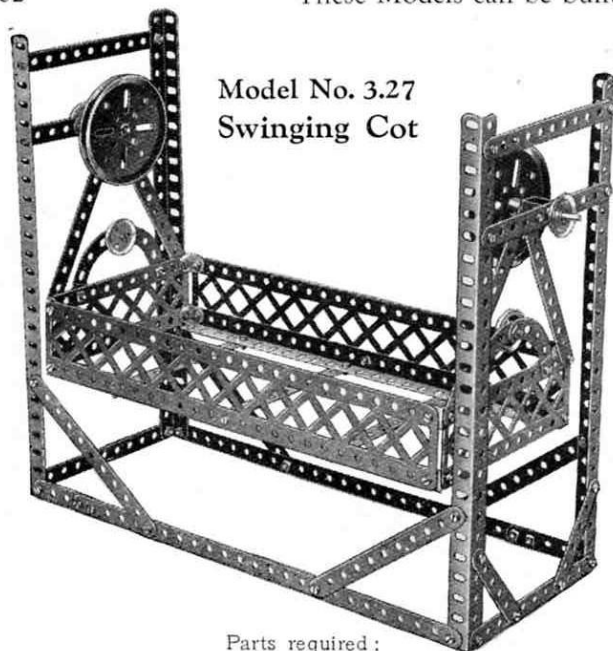

Parts required:

2 of No. 1	6 of No. 8	2 of No. 22	2 of No. 45
17 " " 2	8 " " 12	2 " " 22A	4 " " 90A
2 " " 4	2 " " 17	64 " " 37	2 " " 99
2 " " 5	2 " " 19B	2 " " 37A	2 " " 100
			2 " " 111c

Model No. 3.28 Horse Sleigh

Parts required:

3 of No. 2	13 of No. 37	1 of No. 57
4 " " 5	1 " " 48A	2 " " 90
1 " " 23	1 " " 52	1 " " 126A



Model No. 3.29 Pit Head Gear


The cage is raised and lowered by the cord 1 which is wound between two 3" Pulleys on the 4½" Axle Rod 2. The Rod also carries a further 3" Pulley which is provided with a Threaded Pin to form the operating handle, while a 5½" Strip 3 secured by an Angle Bracket to the 5½" x 2½" Flanged Plate bears against the periphery of the Pulley and so serves as a brake. The Strip must be depressed slightly with the fingers whilst winding.

A Bush Wheel 4 on the Rod 2 carries a Threaded Pin that serves as the crank pin of a dummy engine, which is formed by a Sleeve Piece 5 fitted at each end with a ½" Flanged Wheel. The Sleeve Piece is mounted on a Pivot Bolt that is passed through its centre hole and lock-nutted to the Plate, being spaced from the latter by a Collar. A 2" Rod passes through the boss of one of the Flanged Wheels and carries at one end a Swivel Bearing, the "spider" of which is mounted loosely on the Threaded Pin. The Bolts securing the Fork Piece to the "spider" should be provided with Nuts to prevent their shanks gripping the Pin. A Crank Handle representing the exhaust steam pipe is secured by Bolts passed through the Boiler, and inserted in the tapped holes of a Coupling and a Collar.


Parts required:

10 of No. 1	1
8 " " 2	2
4 " " 3	3
2 " " 4	4
8 " " 8	8
1 " " 11	11
14 " " 12	12
1 " " 12A	12A
1 " " 15	15
3 " " 15A	15A
2 " " 17	17
4 " " 19B	19B
1 " " 19s	19s
4 " " 20B	20B
1 " " 22	22
1 " " 24	24
4 " " 35	35
88 " " 37	37
3 " " 38	38
1 " " 40	40

2 of No. 48B	48B
2 " " 52	52
3 " " 53	53
2 " " 54	54
4 " " 59	59
1 " " 63	63
2 " " 100	100
2 " " 115	115
1 " " 147B	147B
1 of No. 162A	162A
1 " " 162B	162B
2 " " 163	163
1 " " 164	164
1 " " 165	165

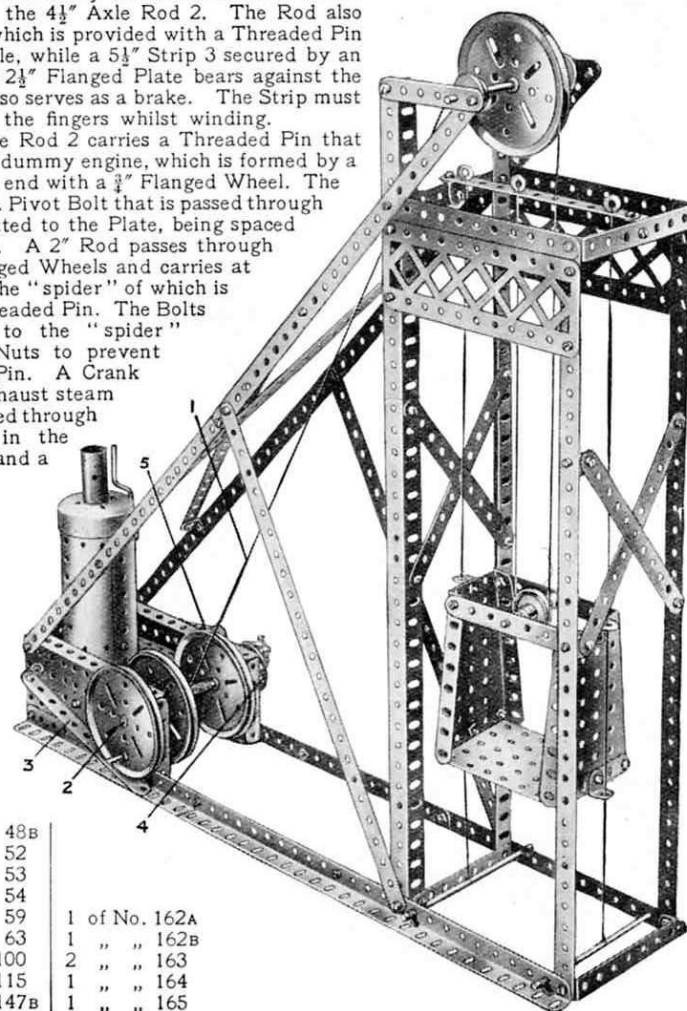

Model No. 3.30 Rattle

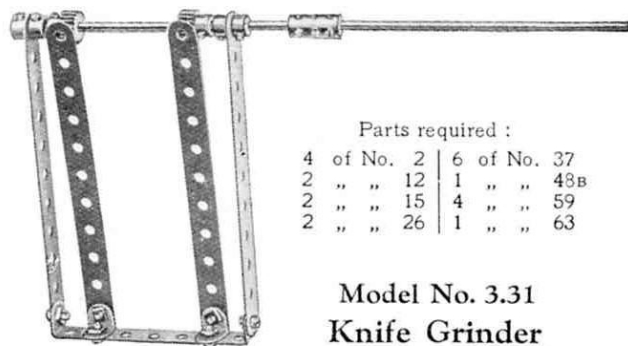


Parts required :

4 of No. 2	6 of No. 37
2 " " 12	1 " " 48B
2 " " 15	4 " " 59
2 " " 26	1 " " 63

Model No. 3.31
Knife Grinder

The body is a $2\frac{1}{2}$ " Strip, which is bolted at its lower end to a $1\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strip 1 and is held upright by a $\frac{1}{2}$ " Reversed Angle Bracket 2 secured to the Double Angle Strip. Both the latter parts are free to turn about a $3\frac{1}{2}$ " Axle Rod, and the Double Angle Strip is connected pivotally with the treadle 3 by means of a $2\frac{1}{2}$ " Strip. The treadle, in turn, is connected pivotally with the crankshaft by two further $2\frac{1}{2}$ " Strips, each of the Bolts 7 being secured by two Nuts as in Standard Mechanism No. 262.

The Collar 4 is mounted loosely on a $\frac{1}{2}$ " Bolt secured rigidly to the Crank 5, and forms a handle by means of which the model may be set in motion. The grinding wheel 6 is driven from the 3" Pulley 6 is driven from the 3" Pulley Wheel by an endless belt.

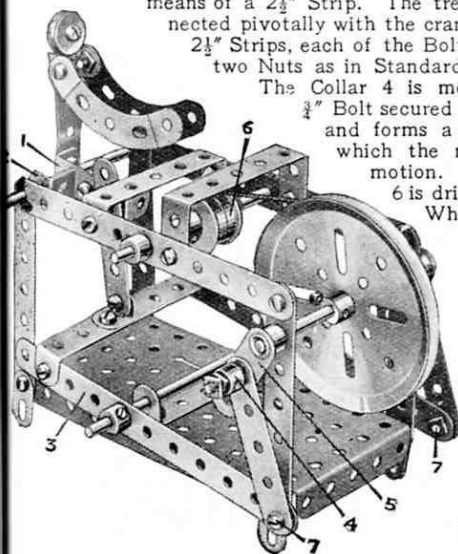


Parts required :

4 of No. 2	9 of No. 37A
4 " " 3	1 " " 38
4 " " 5	1 " " 40
4 " " 10	1 " " 46
1 " " 11	1 " " 48
1 " " 12	2 " " 48A
1 " " 15A	1 " " 48B
3 " " 16	1 " " 52
1 " " 19B	4 " " 59
2 " " 20B	2 " " 52
1 " " 23	2 " " 90A
3 " " 35	1 " " 111
27 " " 37	1 " " 125

Model No. 3.32 Railway Breakdown Crane

Parts required :

2 of No. 1	12 of No. 5	3 of No. 15A	2 of No. 22A	3 of No. 48A
11 " " 2	6 " " 8	1 " " 16	1 " " 23	2 " " 48B
2 " " 3	10 " " 10	2 " " 17	1 " " 24	3 " " 53
2 " " 4	2 " " 11	2 " " 18A	1 " " 27A	2 " " 54
	3 " " 12	1 " " 19	1 " " 32	1 " " 57
	2 " " 12A	2 " " 19B	6 " " 35	3 " " 59
	1 " " 15	1 " " 19S	84 " " 37	4 " " 90A
		4 " " 20B	6 " " 37A	1 " " 111
		1 " " 21	8 " " 38	6 " " 111C
		4 " " 22	1 " " 40	1 " " 115
			1 " " 45	1 " " 116
			1 " " 46	1 " " 116A
				4 " " 125
				2 " " 126A
				1 " " 147B

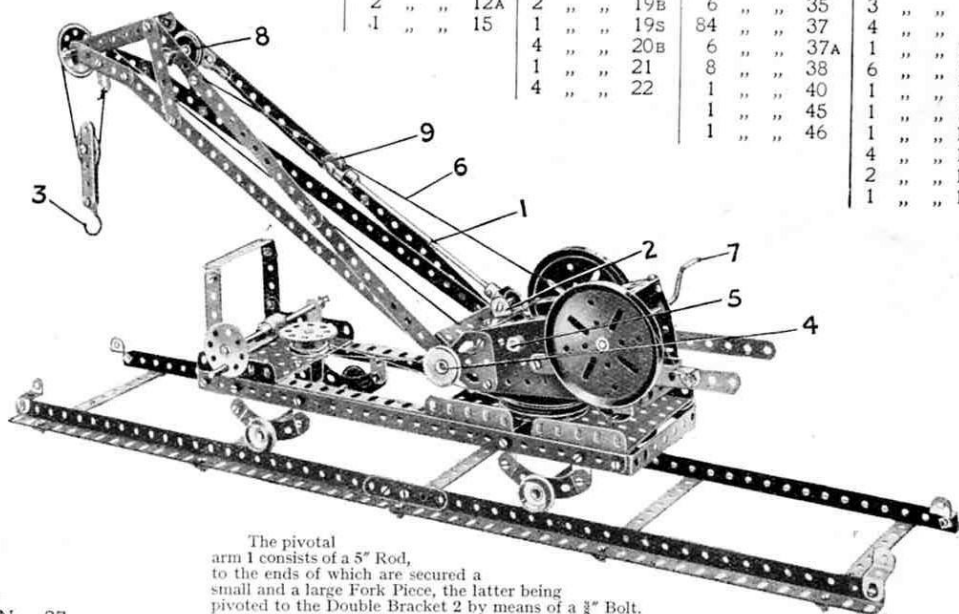

The pivotal

arm 1 consists of a 5" Rod,

to the ends of which are secured a small and a large Fork Piece, the latter being pivoted to the Double Bracket 2 by means of a $\frac{3}{8}$ " Bolt.


The hoisting cord controlling the Hook 3 passes under a $3\frac{1}{2}$ " Rod 4 and is wound on a Crank Handle 5. The cord 6, which raises the jib, is operated by a second Crank Handle 7. It passes over the 1" loose Pulley Wheel 8, round the $\frac{1}{2}$ " loose Pulley 9 (which is mounted on a Pivot Bolt) and is then led back again and tied to a Flat Bracket on the $1\frac{1}{2}$ " Rod that carries the Pulley 8. Each Crank Handle 5, 7 is provided with a permanent band-and-pulley brake to prevent the jib or the load on the Hook 3 from falling when the handles are released. The method of rotating the crane about its pivot is as follows:

The hand wheel consisting of a Bush Wheel fitted with a Threaded Pin is fastened to a $3\frac{1}{2}$ " Rod journaled in two $1" \times 1"$ Angle Brackets which are bolted to the $2\frac{1}{2}" \times 3\frac{1}{2}"$ Flanged Plate. This Rod carries a Worm Wheel that meshes with a 57-teeth Gear Wheel fastened to a 2" Rod. The support for this Rod is formed by a Double Bent Strip. Connection between this Rod and the body of the crane is made by means of a 1" Pulley Wheel, a 3" Pulley Wheel fastened to the base of the crane, and a crossed belt joining these two wheels. On rotation of the hand wheel the jib of the crane is, therefore, slowly rotated.

The 3" Pulley to which the swivelling portion of the crane is attached, slides on the rim of a second 3" Pulley secured to the base of the model by means of $\frac{3}{8}"$ Bolts. These Bolts have Washers on their shanks to prevent damage to the rim of the Pulley.

These Models can be built with MECCANO Outfit No. 3 (or No. 2 and No. 2A)

Model No. 3.33 Fire Escape

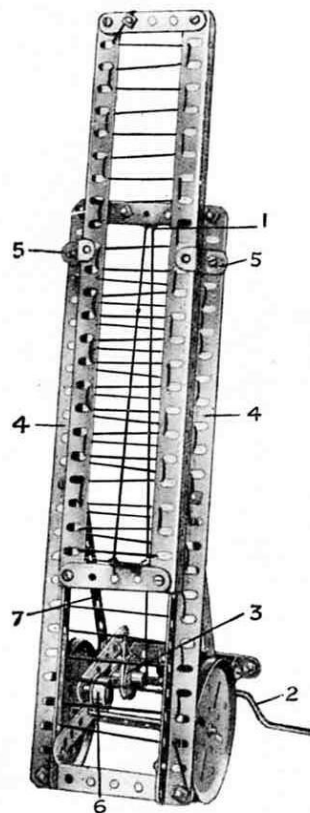

Parts
required :

4	of No.	2
3	" "	3
"	" "	4
2	" "	5
4	" "	8
3	" "	12
1	" "	16
1	" "	19s
2	" "	19B
1	" "	20B
1	" "	22
1	" "	23
26	" "	37
6	" "	37A
5	" "	38
2	" "	40
2	" "	48A
3	" "	59
5	" "	111C
2	" "	125
1	" "	126A

The moving portion of the escape slides on the 124" Angle Girders 4 of the fixed ladder and is guided by two $\frac{1}{2}$ " Reversed Angle Brackets 5. The cord for extending the ladder passes over the $\frac{1}{2}$ " loose Pulley 1 and is wound on the

Crank Handle 2. The Pulley 1 revolves freely on a $\frac{3}{4}$ " Bolt that is secured by two Nuts to an Angle Bracket bolted to the $3\frac{1}{2}$ " Strip.

A 3" Strip, weighted with a $\frac{3}{4}$ " Flanged Wheel 6 to form a brake lever, is pivoted by a $\frac{3}{4}$ " Bolt to the 5 $\frac{1}{2}$ " Strip 7, and a piece of cord is passed round the 1" Pulley 3 on the hoisting shaft, and tied to the Strip. The pressure of the weighted lever is sufficient to keep the ladder raised in any position.


Model No. 3.34 Auto Swing Boat

The connecting Strip 1 is attached pivotally at one end to a Threaded Pin secured to the Bush Wheel 2 on the driving spindle of the motor, and at the other end by means of Bolt and Lock-Nuts to a Crank 3 mounted on the shaft 4, which operates the swing boat.


Parts required :

3 of No. 1	1 of No. 10	86 of No. 37	2 of No. 90A
16 " " 2	12 " " 12	2 " " 37A	2 " " 99
6 " " 3	2 " " 15	1 " " 59	2 " " 100
8 " " 5	1 " " 24	2 " " 62	1 " " 111c
8 " " 8	2 " " 35	1 " " 63	1 " " 115
2 of No. 126A			

Clockwork Motor (not included in Outfit)

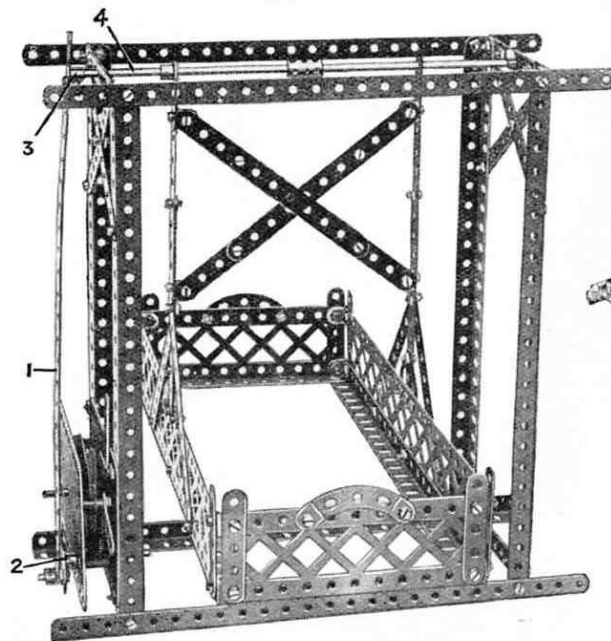

Model No. 3.35 Scales

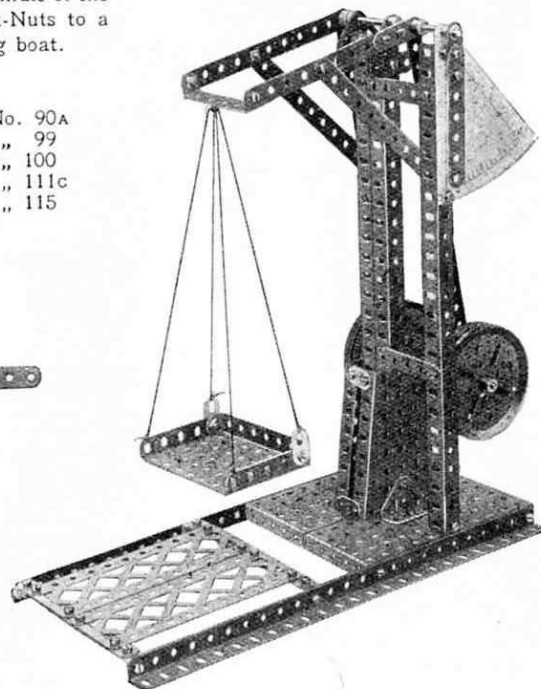


Parts required :

10 of No.	2	2 of No.	48A
1	3	1	48B
2	5	2	52
5	8	1	53
7	10	2	54
5	12	4	59
2	15A	2	62
4	19B	2	100
67	37	2	126
2	38	2	126A

These Models can be built with MECCANO Outfit No. 3 (or No. 2 and No. 2A)

105

Model No. 3.36 Car Lifting Apparatus

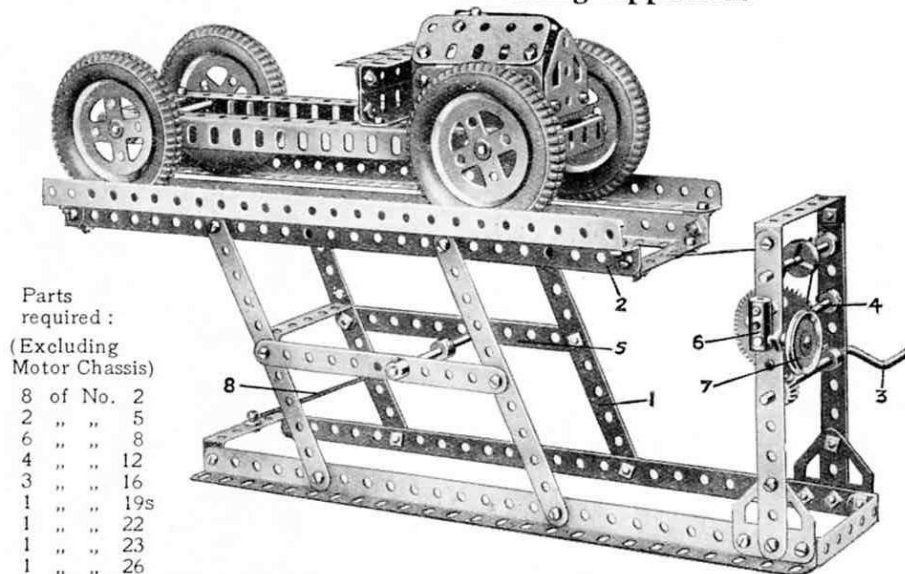


Parts
required :
(Excluding
Motor Chassis)

8	of	No. 2
2	"	5
6	"	8
4	"	12
3	"	16
1	"	19s
1	"	22
1	"	23
1	"	26
1	"	27A
5	"	35
36	"	37
12	"	37A
1	"	40
4	"	48A
4	"	59
1	"	63
2	"	115
2	"	126A

Four $5\frac{1}{2}$ " Strips 1 are attached pivotally by lock-nutted Bolts to the $12\frac{1}{2}$ " Angle Girders, which form the base of the model, and to the carrier 2, which receives the car. The Crank Handle 3 carries a $\frac{1}{2}$ " Pinion meshing with a 57-teeth Gear on the Rod 4, which forms a drum for a length of cord attached to the carrier. The Rod runs freely in the transverse hole of a Coupling 6 that is secured to the upright Strip by a $\frac{3}{8}$ " Bolt. A Threaded Pin carries the 1" Pulley 7 and its shank is inserted in the tapped hole of the Coupling, so that when the Pulley is rotated clockwise the Pin nips the Rod. The carrier 2 is returned to its original position by a length of elastic or Spring Cord 8.

Model No. 3.37 Pastry Designer

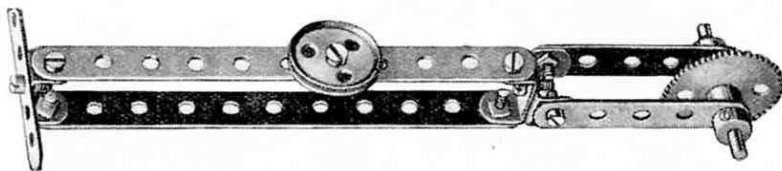

Parts
required :


2	of	No. 2
3	"	5
3	"	11
1	"	17
1	"	22A
1	"	27A
9	"	37
2	"	59

Model No. 3.38 Two-Cylinder Vertical Steam Engine

Parts
required :


2	of	No. 3
2	"	8
2	"	11
3	"	12
4	"	16
2	"	19B
4	"	20B
1	"	22
1	"	27A
40	"	37
7	"	38
1	"	40
2	"	48B
2	"	52
3	"	53
3	"	59
2	"	115
1	"	116A

Electric Motor
(not included
in Outfit)

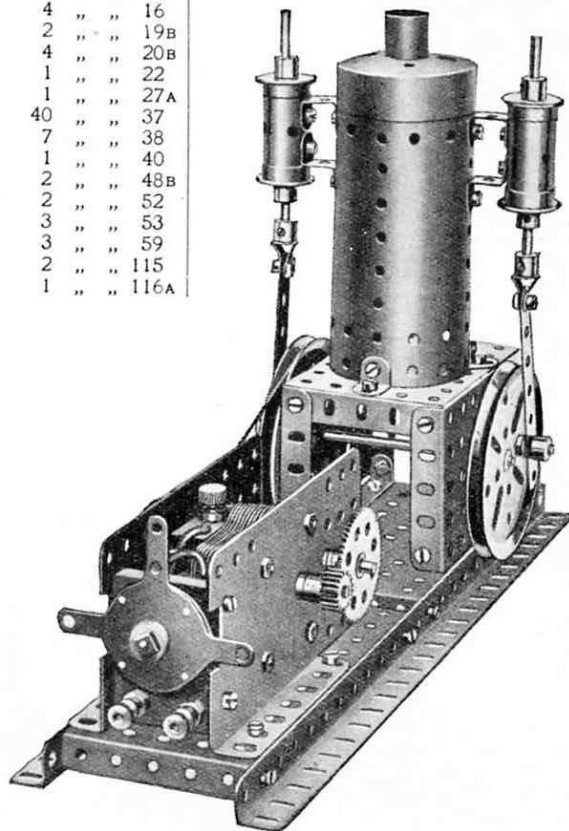

Model No. 3.39

Tank Lorry

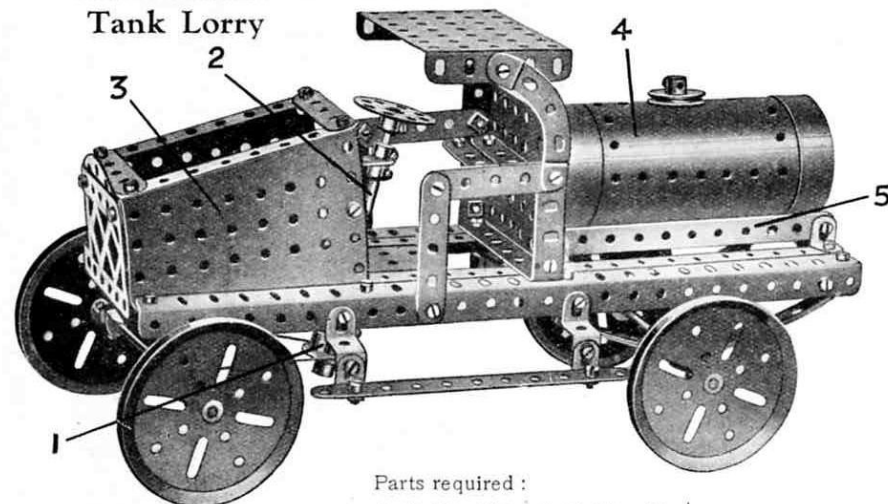

Parts required :

2 of No. 1	2 of No. 11	2 of No. 20B	1 of No. 48	
8 " " 2	14 " " 12	1 " " 22	1 " " 48A	3 of No. 90A
3 " " 3	2 " " 12A	1 " " 24	2 " " 48B	1 " " 98
6 " " 5	2 " " 15	4 " " 35	1 " " 52	2 " " 111c
1 " " 6A	1 " " 15A	60 " " 37	2 " " 53	4 " " 125
2 " " 8	4 " " 19B	1 " " 37A	2 " " 54	2 " " 126
		4 " " 38	4 " " 59	1 " " 162

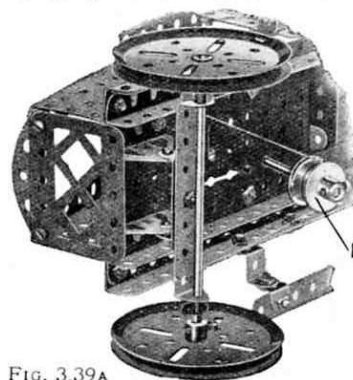



FIG. 3.39A

It should be noted that the steering cord is given a complete turn around the two $\frac{3}{4}$ " Flanged Wheels 1 to prevent slipping. The steering column 2 is journaled in the end of a $1\frac{1}{2}$ " Strip, the other end of which is bolted to a $2\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strip secured between the two Sector Plates 3. The front road wheels are secured to a 5" Rod that is journaled in the end holes of a $3\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strip. The ends of the steering cord are tied to this Strip, which is pivoted by means of a Bolt and Lock-nuts (S.M. 263) to the central hole of a $1\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strip. The latter is bolted between a pair of Trunnions attached to the underside of the $5\frac{1}{2}$ " \times $2\frac{1}{2}$ " Flanged Plate. The tank 4 merely rests on the $5\frac{1}{2}$ " Strips 5.

Model No. 3.40 Coffee Grinder

Parts required :

2 of No. 2	1 of No. 27A
6 " " 3	16 " " 37
2 " " 4	2 " " 54
2 " " 16	3 " " 59
1 " " 19B	1 " " 115
1 " " 26	4 " " 125

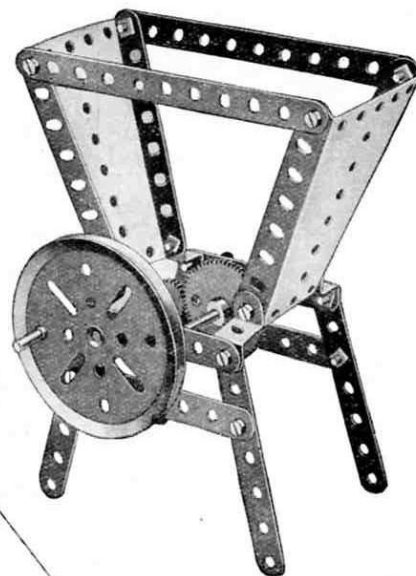


Model No. 3.41


Land Yacht

Parts required :

1 of No. 1	1 of No. 15	1 of No. 40
1 " " 3	3 " " 16	1 " " 45
4 " " 8	1 " " 18A	2 " " 48A
1 " " 10	4 " " 19B	1 " " 48B
1 " " 13	1 " " 24	1 " " 54
	6 " " 35	4 " " 59
	19 " " 37	2 " " 62
	1 " " 37A	1 " " 63
	2 of No. 111c	

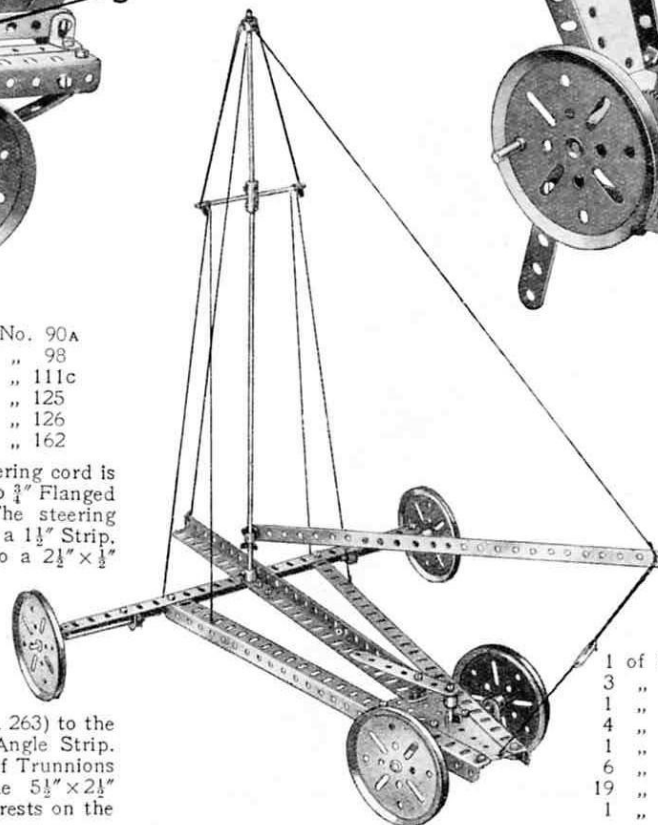

Model No. 3.42 Roundabout

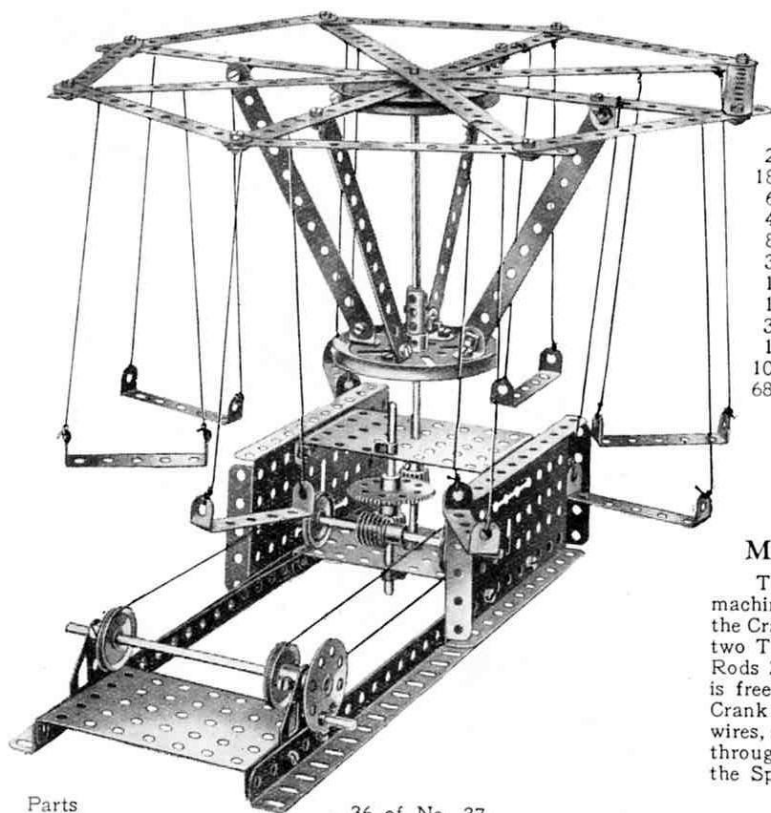
Parts
required :

4 of No. 1	2 of No. 19B	36 of No. 37
12 " " 2	4 " " 22	2 " " 40
2 " " 8	1 " " 24	8 " " 48A
8 " " 12	2 " " 26	2 " " 52
1 " " 15	1 " " 27A	3 " " 53
3 " " 15A	1 " " 32	2 " " 59
1 " " 16	2 " " 35	1 " " 63
		1 " " 115
		2 " " 126A

Model No. 3.43
Swing Boat

Parts required :

2 of No. 1	6 of No. 37A
18 " " 2	8 " " 38
6 " " 3	1 " " 45
4 " " 5	3 " " 48A
8 " " 8	1 " " 52
3 " " 12	4 " " 59
1 " " 15	2 " " 62
1 " " 15A	1 " " 63
3 " " 16	1 " " 98
1 " " 22	2 " " 99
10 " " 35	2 " " 100
68 " " 37	4 " " 111c

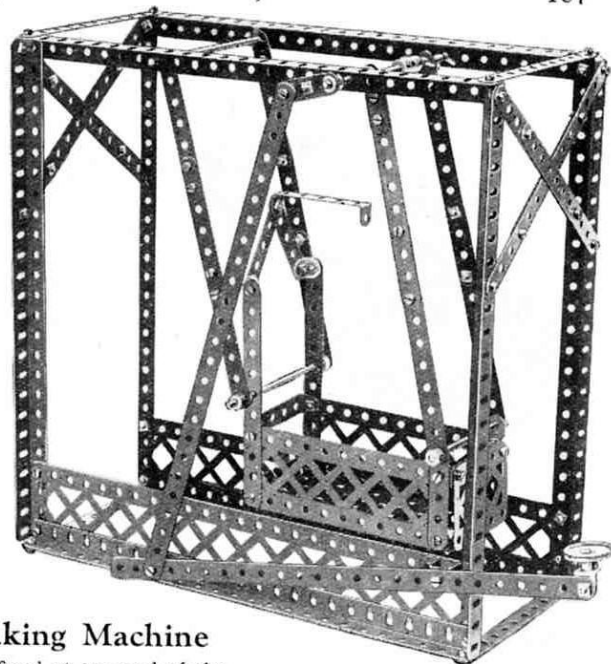


Model No. 3.44 Flex Making Machine

The two wires to be twisted are fixed at one end of the machine to a Hook 1 which is attached by an End Bearing to the Crank Handle. At the other end the wires are looped over two Threaded Pins fixed by Collars to the spring controlled Rods 2. The $3\frac{1}{2} \times 2\frac{1}{2}$ " Flanged Plate 3 carrying a $3\frac{1}{2}$ " Rod is free to slide in the built-up channel girders, and as the Crank Handle is turned it is pushed ahead of the twisting wires, so keeping the finished flex even. As the wires shorten through twisting, the Rods 2 slide longitudinally, extending the Spring.

Parts required :

3 of No. 5	2 of No. 35
1 " " 6A	32 " " 37
4 " " 8	2 " " 38
4 " " 12	1 " " 40
2 " " 15A	1 " " 43
1 " " 16	1 " " 45
1 " " 19s	2 " " 48A
	2 " " 52
	3 " " 53
	1 " " 57
	3 " " 59
	2 " " 115
	1 " " 166

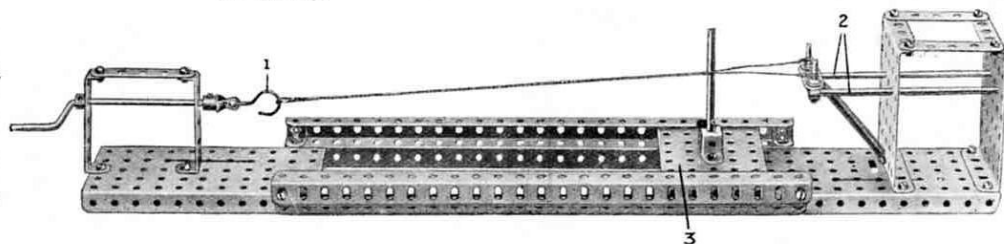


These Models can be built with MECCANO Outfit No. 3 (or No. 2 and No. 2A)

Model No. 3.45 Scarifier

Parts
required :

7 of No.	2
1 " "	3
4 " "	5
1 " "	10
1 " "	11
11 " "	12

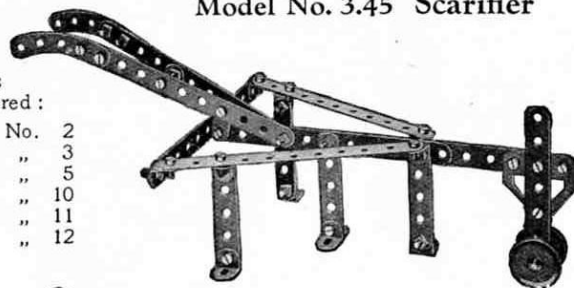


Parts
required
(continued) :

1 of No.	18A
2 " "	22
29 " "	37
2 " "	38
2 " "	90
1 " "	126A


Model No. 3.46 Electric Tramcar

Parts required :

14 of No.	2	4 of No.	20B	2 of No.	53
12 " "	5	2 " "	22	2 " "	54
4 " "	11	1 " "	23	3 " "	59
4 " "	12	1 " "	24	2 " "	62
4 " "	12A	2 " "	35	1 " "	63
1 " "	15	87 " "	37	2 " "	100
4 " "	16	1 " "	40	2 " "	111c
2 " "	17	1 " "	43	1 " "	115
		2 " "	48	1 " "	116A
		4 " "	48A	4 " "	125
		2 " "	52	1 " "	147B

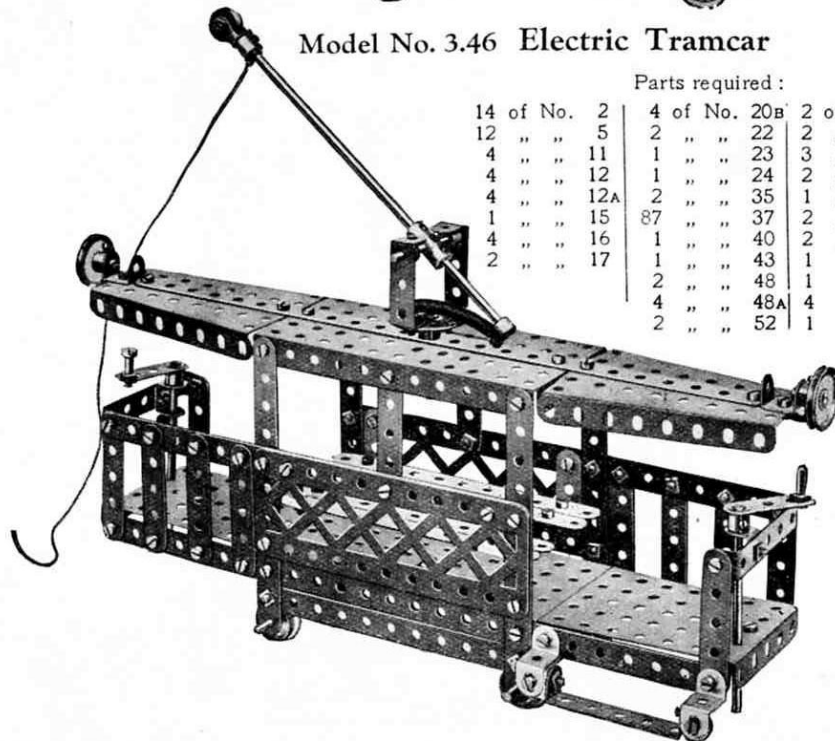

Model No. 3.47 Demonstration Scales

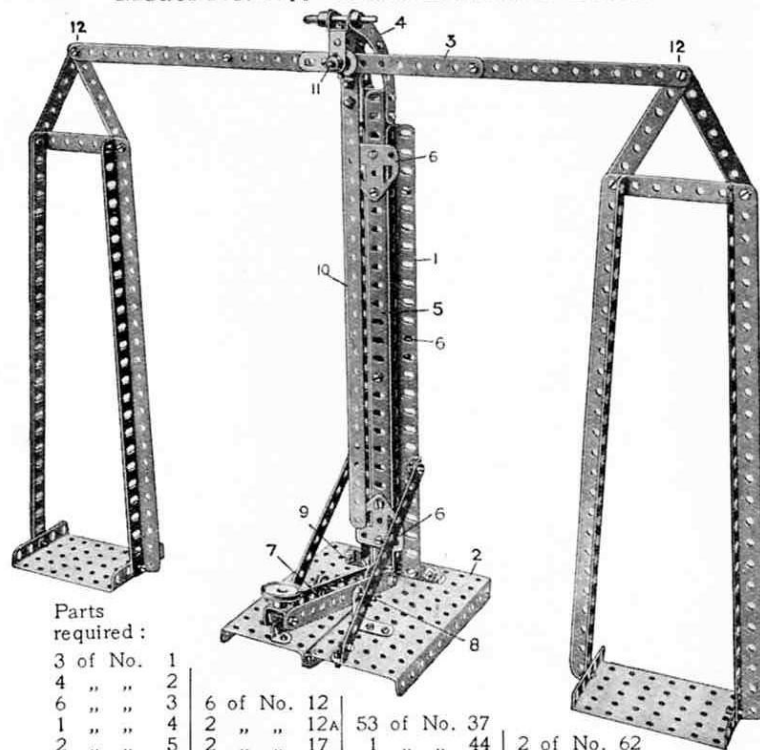

Parts
required :

3 of No.	1	6 of No.	12	53 of No.	37
4 " "	2	2 " "	12A	1 " "	44
6 " "	3	2 " "	17	2 " "	52
1 " "	4	1 " "	18A	2 " "	53
2 " "	5	1 " "	22	2 " "	59
1 " "	6A	2 " "	35		
8 " "	8				
4 " "	11				
				2 of No.	62
				4 " "	90
				1 " "	125
				2 " "	126A

The only feature of this model which needs description is the standard, which is built up of two Angle Girders 1 bolted to the base 2 by Angle Brackets and spaced apart at the top by a 2½" Strip obliquely disposed. The balance lever 3 is pivotally carried in Curved Strips 4 bolted to the top of two Angle Girders 5 sliding between the Girders 1. The Girders 5 are themselves bolted together and in order to guide them as they slide vertically two Flat Trunnions 6 and two 1½" Strips are bolted at the front and rear. The balance is raised by depressing the lever 7 pivoted at 8 and pivotally connected at 11 to the vertically sliding Girders 5. The indicator 10 is bolted to a Crank at the rear, the boss of which is fitted on the pivot Rod 11. The connections at 12 are lock-nutted to allow free action.

Model No. 3.48 Fire Truck

The front axle is journalled in a $2\frac{1}{2}$ " Double Angle Strip that is pivoted through its centre hole to a Double Bent Strip secured to the Flanged Plate 15. Steering is effected from the Pulley 13 secured on a $3\frac{1}{2}$ " Rod that is passed through the $3\frac{1}{2}$ " x $2\frac{1}{2}$ " Flanged Plate 16, and held in position by Collars. On the lower end of the Rod is a Bush Wheel 14, which is connected to the pivoted Double Angle Strip by cords tied to opposite holes in the Bush Wheel and to the ends of the Double Angle Strip.

The lower part of the escape is mounted pivotally on Bolts 10 passed through the upturned ends of a $2\frac{1}{2}$ " x $1\frac{1}{2}$ " Double Angle Strip that is bolted to a $3\frac{1}{2}$ " x $\frac{1}{2}$ " Double Angle Strip which, in turn, is supported on two vertical $2\frac{1}{2}$ " x $\frac{1}{2}$ " Double Angle Strips. The upper or moving portion of the escape slides between the $12\frac{1}{2}$ " Angle Girders 9 and is held freely in position by the Nuts of the Bolts 11.

The ladder is extended from the Crank Handle 2 (Fig. 3.48A) that is journalled in a $2\frac{1}{2}$ " x $\frac{1}{2}$ " Double Angle Strip bolted to a $5\frac{1}{2}$ " Strip that, in turn, is bolted across the flanges of the Sector Plates. A Cord 7 is wound on to the Crank Handle and one of its ends is tied to a $2\frac{1}{2}$ " Strip that spans the inner end of the $12\frac{1}{2}$ " Strips forming the sides of the extending ladder.

Its other end 7A is then led towards the outer end of the fixed ladder, round a $\frac{1}{2}$ " loose Pulley held on a Bolt in the centre hole of a $2\frac{1}{2}$ " Double Angle Strip that spans the outer ends of the $12\frac{1}{2}$ " Girders 9, and finally is tied to the same $2\frac{1}{2}$ " Strip to which the end 7 is already attached. Thus by turning the handle 2 the escape is pulled inward or outward.

The Crank Handle 1 carries a $\frac{1}{2}$ " Pinion 3 that engages a 57-teeth Gear 4 secured to a Rod 12. A Cord 8 is wound a few turns round the Rod 12 and is then led to the $2\frac{1}{2}$ " Strip 5 where it is secured. By turning the Crank Handle the Cord is wound in, thus raising the pivoted escape.

On turning the handle in the opposite direction, the escape is lowered by its own weight.

Parts required:

4 of No. 1	3 of No. 20B	2 of No. 48B
6 " " 2	1 " " 21	2 " " 52
3 " " 3	2 " " 22	2 " " 53
4 " " 5	1 " " 23	2 " " 54
8 " " 8	1 " " 24	4 " " 59
4 " " 11	1 " " 26	1 " " 63
1 " " 12	1 " " 27A	2 " " 90A
2 " " 12A	4 " " 35	2 " " 99
2 " " 15	87 " " 37	2 " " 100
2 " " 15A	8 " " 37A	4 " " 111c
2 " " 16	10 " " 38	2 " " 126A
1 " " 18A	2 " " 40	1 " " 162A
1 " " 19	1 " " 45	1 " " 162B
1 " " 19S	1 " " 46	1 " " 165
4 " " 19B	8 " " 48A	

4 3" Dunlop Tyres (not included in Outfit)


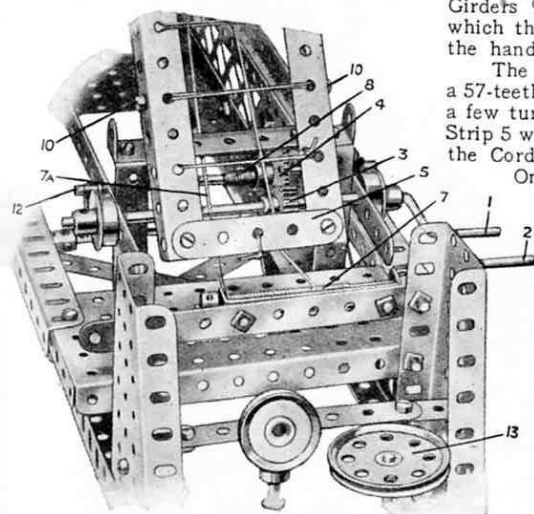


FIG. 3.48A

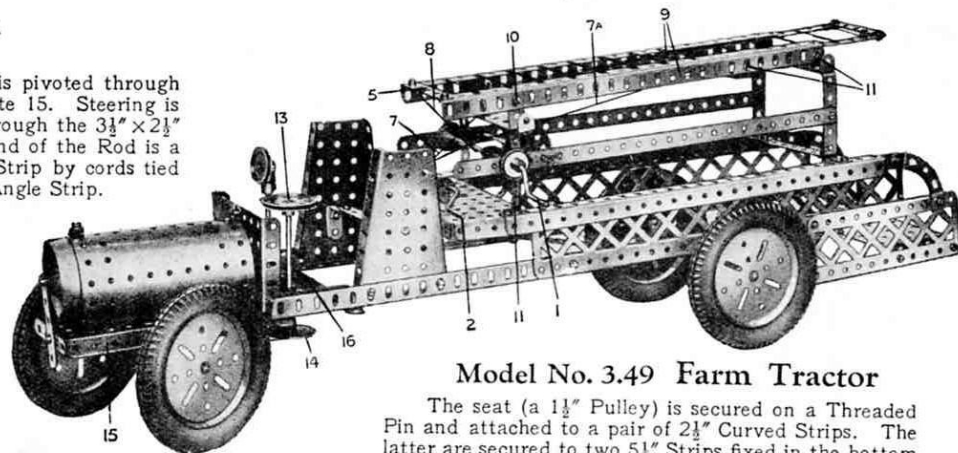


Model No. 3.49 Farm Tractor

The seat (a $1\frac{1}{2}$ " Pulley) is secured on a Threaded Pin and attached to a pair of $2\frac{1}{2}$ " Curved Strips. The latter are secured to two $5\frac{1}{2}$ " Strips fixed in the bottom row of holes of the motor plates. A $2\frac{1}{2}$ " Strip is pivoted to the Motor reversing lever by means of a Reversed Angle Bracket, and is supported by a $1\frac{1}{2}$ " Strip which is attached pivotally to the Motor.


Parts required:

2 of No. 2	4 of No. 11	1 of No. 17	1 of No. 27A
5 " " 5	5 " " 12	2 " " 19B	1 " " 32
1 " " 6A	1 " " 15	2 " " 20A	28 " " 37
2 " " 10	2 " " 16	1 " " 21	7 " " 37A
		1 " " 22	5 " " 38
		1 " " 24	1 " " 48A
		2 " " 26	2 " " 59
			1 " " 63
			4 " " 90A
			2 " " 111
			1 " " 111c
			1 " " 115
			1 " " 125

Clockwork
Motor
(not included
in Outfit)

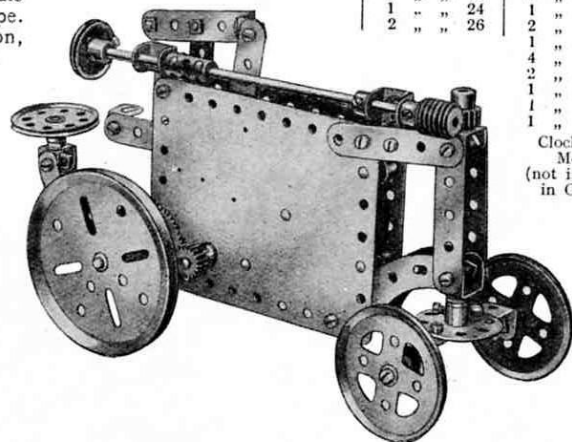

Model No. 3.50 Pile Driver

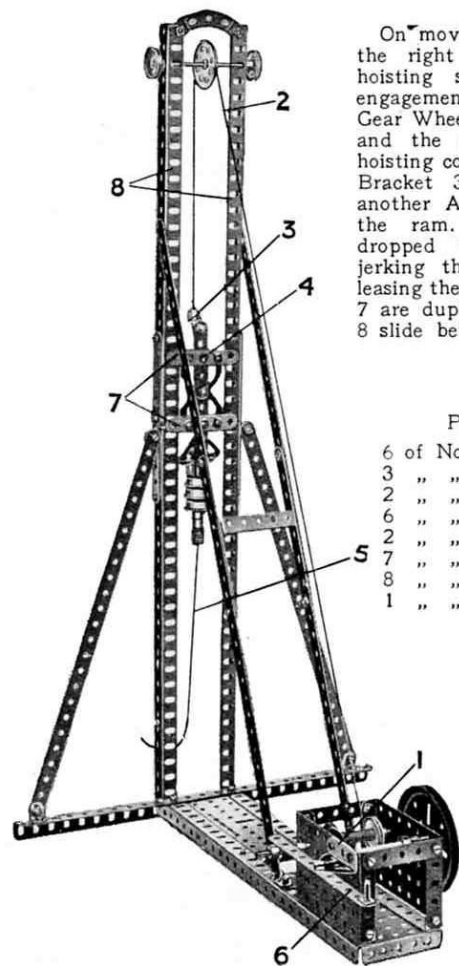


On moving the hand lever 6 to the right a $\frac{1}{2}$ " Pinion on the hoisting shaft is brought into engagement with the 57-teeth Gear Wheel 1 on the driving shaft and the ram 4 is raised. The hoisting cord 2 is tied to an Angle Bracket 3, which lodges under another Angle Bracket bolted to the ram. The latter may be dropped whenever required by jerking the cord 5, thereby releasing the Brackets 3. The Strips 7 are duplicated, and the Girders 8 slide between their ends.

Parts required :

6 of No. 1	3 of No. 16
3 " " 2	1 " " 19B
2 " " 3	3 " " 20B
6 " " 5	1 " " 21
2 " " 6A	2 " " 22
7 " " 8	1 " " 26
8 " " 12	1 " " 27A
1 " " 15A	1 " " 32
	2 " " 35
	60 " " 37
	2 " " 37A
	1 " " 38
	1 " " 40
	1 " " 45
	1 " " 46
	1 " " 48A
	2 " " 48B
	2 " " 52
	2 " " 53
	4 " " 59
	1 " " 90A
	1 " " 111c
	1 " " 115
	2 " " 126
	2 " " 126A

Model No. 3.51 Railway Wagon Swivel Crane

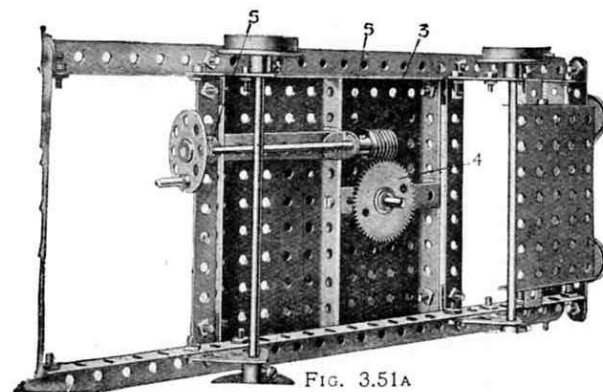


The flanges of the Sector Plates 1 are bolted to the 3" Pulley Wheel 2 upon which the crane swivels, and the spindle of the Pulley Wheel is rotated by the Worm 3 engaging the Gear Wheel 4 (Fig. 3.51A). In order to bring the Worm centrally over the teeth of the Gear Wheel 4, Washers are placed beneath the Angle Brackets 5 in which the spindle of the Worm is journaled.

FIG. 3.51A

Parts required :

4 of No. 1	2 of No. 48A
6 " " 2	2 " " 52
1 " " 3	2 " " 53
2 " " 5	2 " " 54
4 " " 8	1 " " 57
3 " " 11	3 " " 59
14 " " 12	1 " " 63
2 " " 15	1 " " 115
1 " " 15A	4 " " 125
2 " " 17	2 " " 126
1 " " 19	2 " " 126A
1 " " 19B	
4 " " 20B	
4 " " 22	
1 " " 22A	
1 " " 24	
1 " " 27A	
1 " " 32	
3 " " 35	
70 " " 37	
2 " " 38	
1 " " 40	

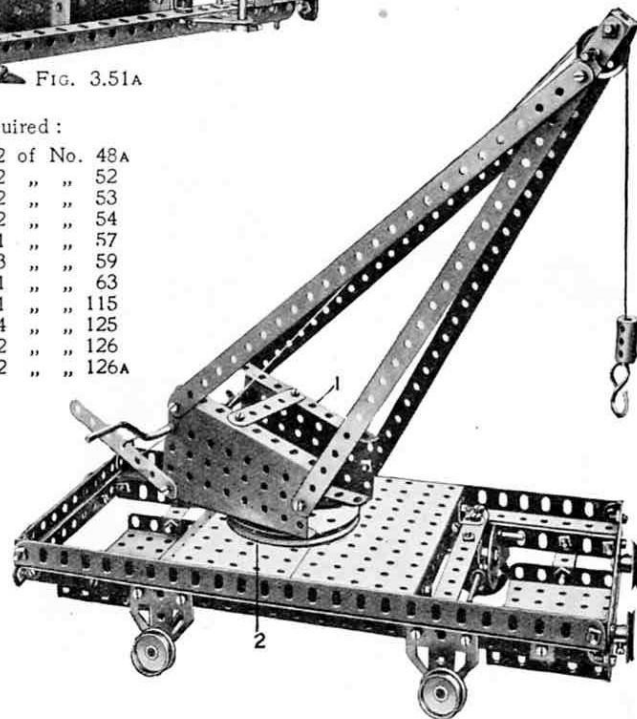


These Models can be built with MECCANO Outfit No. 3 (or No. 2 and No. 2A)

111

Model No. 3.52 Hand Punch

Parts required :

4 of No. 2	21 of No. 37
1 " " 5	3 " " 37A
2 " " 6A	1 " " 43
4 " " 11	1 " " 59
4 " " 12	1 " " 62
1 " " 18A	2 " " 90
1 of No. 111c	

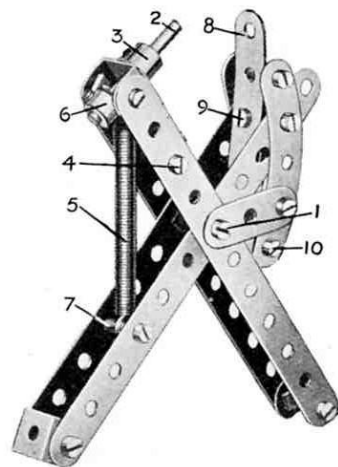

Two pairs of $5\frac{1}{2}$ " Strips are connected loosely towards their centres by means of Nuts and Bolts 1. The punch 2 consists of a $1\frac{1}{2}$ " Rod secured in the boss of a Crank 3, which is bolted to a Double Bracket secured at 4. A Spring 5 serves to open the handles after the punch has been used; it is placed on the Rod 2 and held in position by means of a Collar 6, while its other end is attached to a $\frac{3}{8}$ " Bolt 7 passed through one pair of $5\frac{1}{2}$ " Strips. After passing through the paper the punch enters the end hole of a 3" Strip 8. The latter is bolted at 9 to a Double Bracket, while its other end passes beneath a similar bracket at 10.

Model No. 3.53 Paddle Steamer

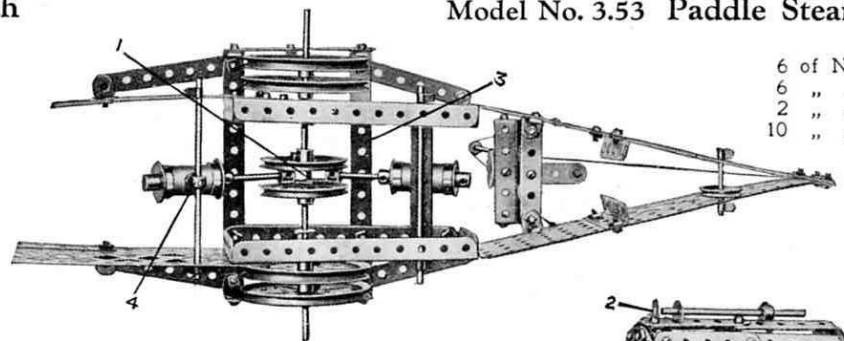


FIG. 3.53A

The 3" Pulley Wheels forming the paddles are attached to $3\frac{1}{2}$ " Rods, to the inner ends of which 2" Pulleys are fixed (Fig. 3.53A), and the 2" Pulleys are connected together rigidly by a $\frac{1}{2}$ " Bolt 1 that is locked in position by nuts. The Bolt 1 forms also a pivot for two small Fork Pieces (one of which is taken from a Swivel Bearing) to which the piston rods of the oscillating cylinders are fixed. The cylinders pivot about $4\frac{1}{2}$ " Rods, one cylinder being mounted on a $3\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strip while the other is attached rigidly to a Collar 4 by a Bolt on which are placed two Washers. The Collar is secured, of course, to the Rod.

The funnel is built up of eight $2\frac{1}{2}$ " Strips and eight $2\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strips, which are attached at the top to a $1\frac{1}{2}$ " Pulley and at the bottom to a Bush Wheel. It is attached to the hull by the lower hole of the Double Bracket 2, Fig. 3.53A. The top hole of this Double Bracket forms a support for the lower end of the escape pipe.

The bridge consists of a $2\frac{1}{2}$ " \times $1\frac{1}{2}$ " Double Angle Strip and two $2\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strips, and the complete assembly is bolted to a Double Bent Strip. The latter is attached to a transverse $2\frac{1}{2}$ " Strip. The Bolt holding the bridge to the $2\frac{1}{2}$ " Strip serves also to retain a Crank in which the foot of the mast is secured.

The steering wheel 5 consists of a 1" fast Pulley mounted by its set-screw hole on the end of a $\frac{3}{8}$ " Bolt that is secured to the floor of the bridge. The binnacle is merely a Threaded Pin on which is fixed a Collar.


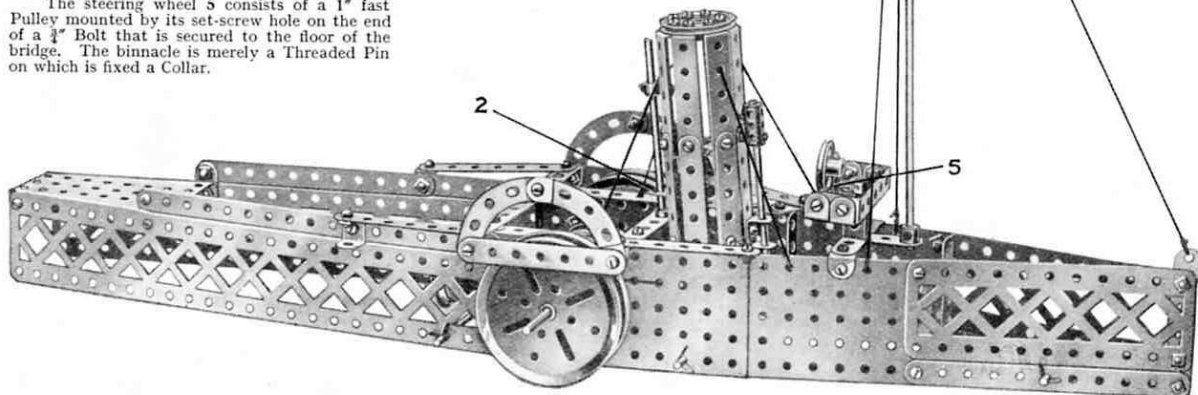


FIG. 3.53B

Parts required :

6 of No. 2	5 of No. 10	1 of No. 22A
6 " " 3	4 " " 11	1 " " 24
2 " " 4	14 " " 12	6 " " 35
10 " " 5	1 " " 13	93 " " 37
	2 " " 15A	4 " " 37A
	4 " " 16	14 " " 38
	2 " " 17	1 " " 40
	1 " " 18A	1 " " 45
	4 " " 19B	1 " " 46
	2 " " 20A	10 " " 48A
	4 " " 20B	1 " " 48B
	1 " " 21	2 " " 52
	1 " " 22	2 " " 53
		1 " " 54
		4 " " 59
		1 " " 62
		1 " " 63
		4 " " 90A
		2 " " 99
		2 " " 100
		2 " " 111
		1 " " 115
		1 " " 116A
		2 " " 125
		2 " " 163
		1 " " 165

Model No. 3.54 Kinetograph

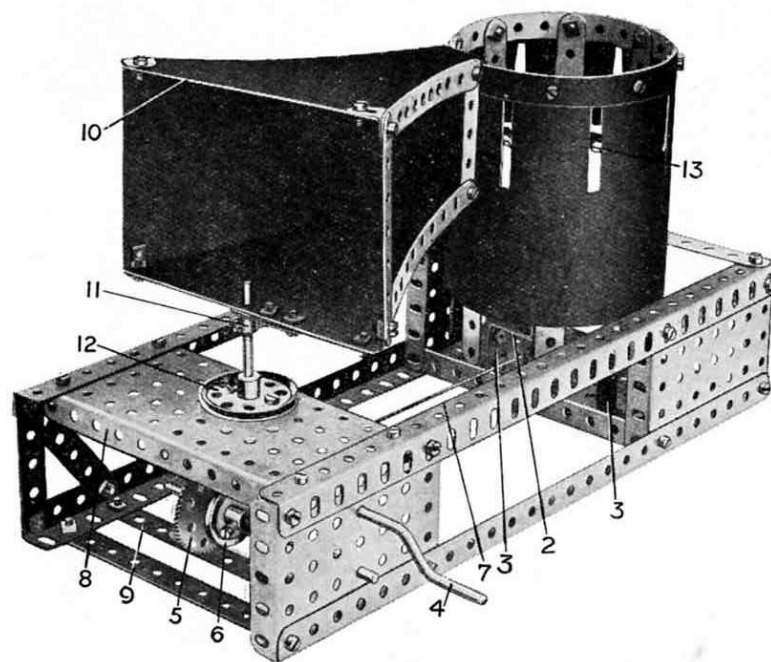

Parts required :

1 of No. 1	1 of No. 15A	12 of No. 38
17 " " 2	2 " " 16	1 " " 40
6 " " 3	1 " " 19s	1 " " 45
1 " " 4	1 " " 21	1 " " 46
3 " " 5	2 " " 22	1 " " 48A
4 " " 8	1 " " 24	2 " " 52
2 " " 11	1 " " 26	3 " " 53
12 " " 12	1 " " 27A	4 " " 59
2 " " 12A	60 " " 37	2 " " 62

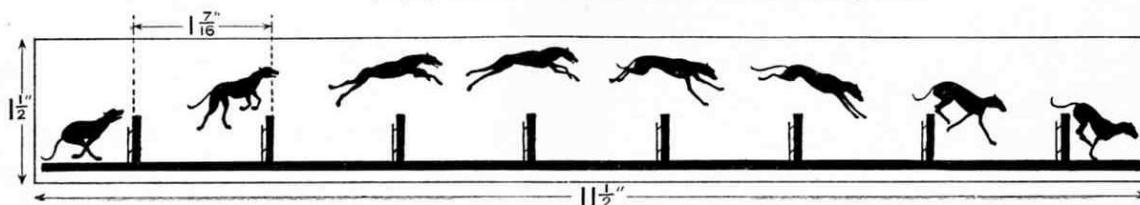


FIG. 3.54A

Most Meccano boys probably are aware of the principles of the Kinetograph, but for the benefit of those who have not seen one in action, we may mention that it is a device which imparts an appearance of animation to a series of pictures, each differing slightly from the other and passed in rapid succession before the eyes. In this respect it resembles the remarkable principle upon which the modern cinematograph is based.

In constructing the Meccano model the following details will prove useful:—The drum consists of a $12\frac{1}{2}$ " Strip bent to form a circle, with its ends overlapping one hole, and bolted to eight vertical $5\frac{1}{2}$ " Strips forming the sides. Two pairs of opposite $5\frac{1}{2}$ " Strips are connected by $3\frac{1}{2}$ " Strips and Angle Brackets bolted in the third holes from their lower ends. The $3\frac{1}{2}$ " Strips cross at right angles to one another and are bolted in the centre to a Bush Wheel, in the boss of which is secured a short Rod forming the pivot of the revolving drum. This Rod is journaled in a Double Bent Strip bolted to a $2\frac{1}{2}$ " \times 1 " Double Angle Strip 2. This, in turn, is secured to the base of the model by two 1 " \times 1 " Angle Brackets 3. A further bearing for the short Rod consists of a Crank bolted to the base of the model.


The drum is rotated from the Crank Handle 4, on which is mounted a $\frac{1}{2}$ " Pinion engaging a 57-teeth Gear Wheel 5 secured to a $3\frac{1}{2}$ " Rod carrying a Pulley Wheel 6. The latter is connected by means of a cord 7 to a similar wheel nipped to the vertical spindle of the drum. Bearings are provided for the inner ends of the Crank Handle and $3\frac{1}{2}$ " Rod by a Double Angle Strip bolted between the Plate 8 and $5\frac{1}{2}$ " Strip 9. The sighting box 10 is built up from a framework of Strips and is secured by means of a Crank 11 to a short vertical Rod rigidly mounted in the boss of the $1\frac{1}{2}$ " Pulley 12. The four sides of the framework 10 are covered with some black material; stiff black paper suitable for this purpose may be obtained from any stationers. The drum is enclosed in the same way, but the covering paper should be cut in a strip measuring $12\frac{1}{2}$ " \times $4\frac{1}{2}$ " and pierced with slots spaced $1\frac{1}{2}$ " apart (from centre to centre) so that they fall exactly between the upright $5\frac{1}{2}$ " Strips. The slots should measure $1\frac{1}{2}$ " \times $\frac{1}{4}$ ".

The type of drawing suitable for use in this model is shown in Fig. 3.54A, and the dimensions indicated therein should be followed carefully. No doubt Meccano boys will be able to devise numerous amusing pictures of a similar kind for themselves. The strip of stout white paper carrying the sketches is inserted in the bottom of the drum, as indicated at 13. The model is now ready for operation. Placing the frame 10 over the eyes, the line of vision is directed through the narrow end, where the Strips are held apart by means of Double Brackets, and through the slots in the drum. The latter should be rotated rapidly by operating the handle 4, and as it revolves, the little dog shown in Fig. 3.54A will be seen jumping over the fence with a most realistic and amusing action.

Model No. 3.55 Crossbow

Parts required :


5 of No. 1	1 of No. 18A
2 " " 2	2 " " 35
1 " " 3	25 " " 37
4 " " 5	1 " " 40
2 " " 8	1 " " 38
2 " " 11	1 " " 48A
1 " " 12	1 " " 63
1 " " 17	

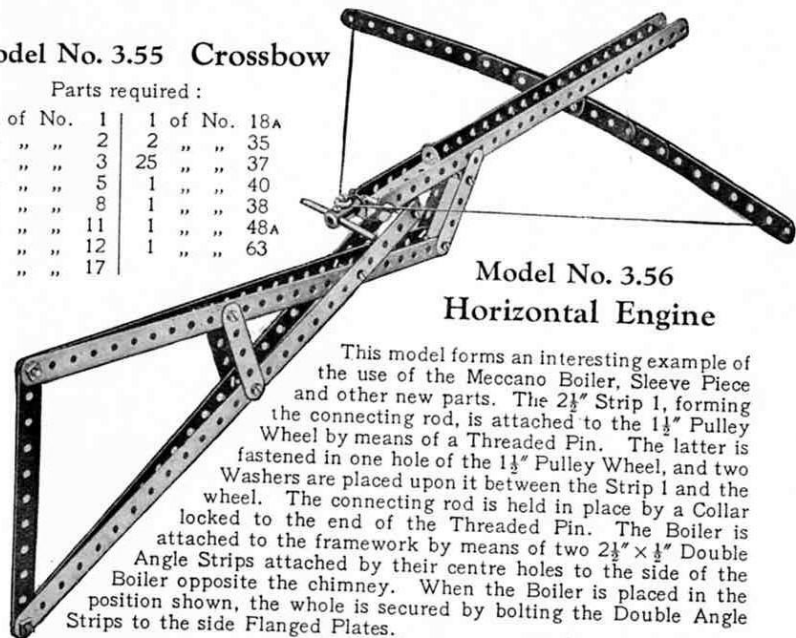Model No. 3.56
Horizontal Engine

This model forms an interesting example of the use of the Meccano Boiler, Sleeve Piece and other new parts. The $2\frac{1}{2}$ " Strip 1, forming the connecting rod, is attached to the $1\frac{1}{2}$ " Pulley Wheel by means of a Threaded Pin. The latter is fastened in one hole of the $1\frac{1}{2}$ " Pulley Wheel, and two Washers are placed upon it between the Strip 1 and the wheel. The connecting rod is held in place by a Collar locked to the end of the Threaded Pin. The Boiler is attached to the framework by means of two $2\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strips attached by their centre holes to the side of the Boiler opposite the chimney. When the Boiler is placed in the position shown, the whole is secured by bolting the Double Angle Strips to the side Flanged Plates.

Parts required :

1 of No. 5	1 of No. 115
2 " " 12A	1 " " 116
2 " " 15A	
1 " " 16	
1 " " 19B	
1 " " 19S	
4 " " 20B	
1 " " 21	
3 " " 22	
1 " " 35	
25 " " 37	
7 " " 38	
1 " " 40	2 of No. 126
1 " " 45	1 " " 126A
1 " " 48	1 " " 162
4 " " 48A	1 " " 163
2 " " 52	1 " " 164
4 " " 59	1 " " 166

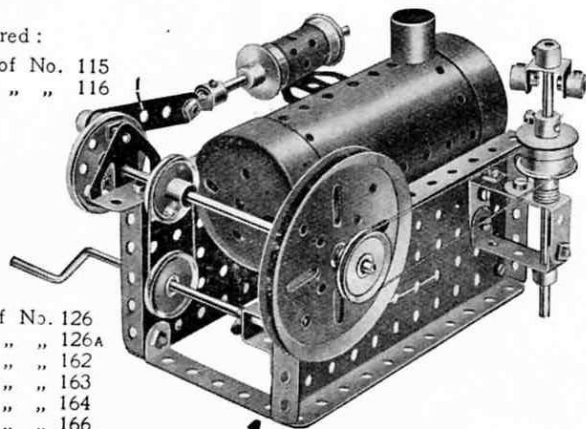


Model No. 3.57 Tower Wagon


When operated the handle 1 winds in the cord 2, which passes over a 1" fast Pulley Wheel 3 and is tied to the Rod 4. The upper part of the tower is thus raised or lowered as required, being guided by the $\frac{3}{4}$ " Flanged Wheels 5 and two pairs of Reversed Angle Brackets 6. The steering cords 7 are tied to the 57-teeth Gear Wheel 8 and to the end of a $2\frac{1}{2}$ " \times $\frac{1}{2}$ " Double Angle Strip bolted to a Double Bent Strip, which is pivoted to the Sector Plate 9. The front axle is journaled through the ends of the Double Angle Strip

Parts required :

4 of No. 1	1 of No. 53
2 " " 4	2 " " 54
6 " " 5	3 " " 59
2 " " 6A	4 " " 90A
8 " " 8	1 " " 98
8 " " 12	2 " " 100
1 " " 15	1 " " 111c
3 " " 15A	1 " " 115
4 " " 16	4 " " 125
1 " " 17	
4 " " 19B	
4 " " 20B	
1 " " 21	
2 " " 22	
1 " " 24	
1 " " 26	
1 " " 27A	
1 " " 32	
3 " " 35	
84 " " 37	
2 " " 37A	
1 " " 40	
1 " " 45	
8 " " 48A	
2 " " 52	

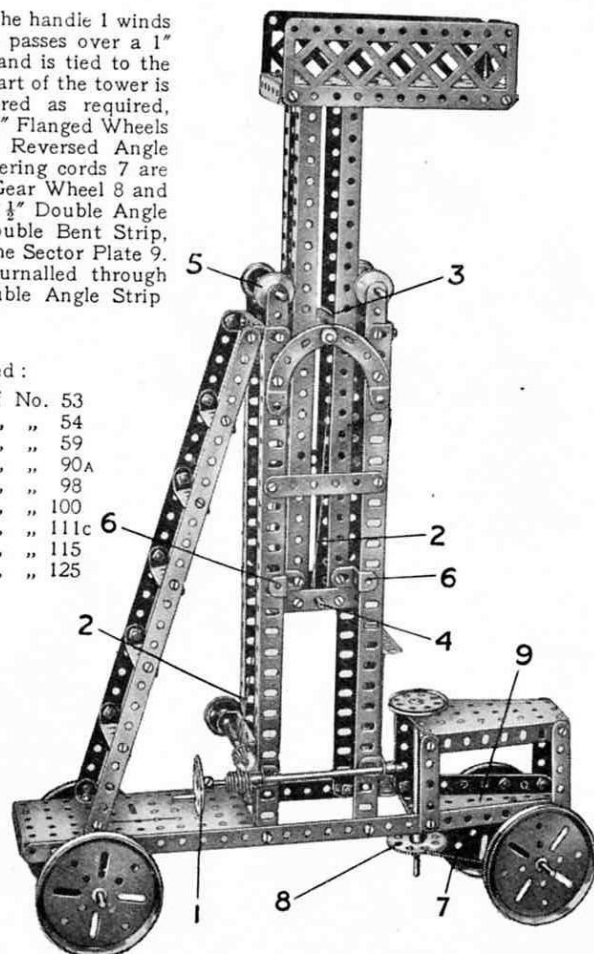

Model No. 3.58 Steam Wagon

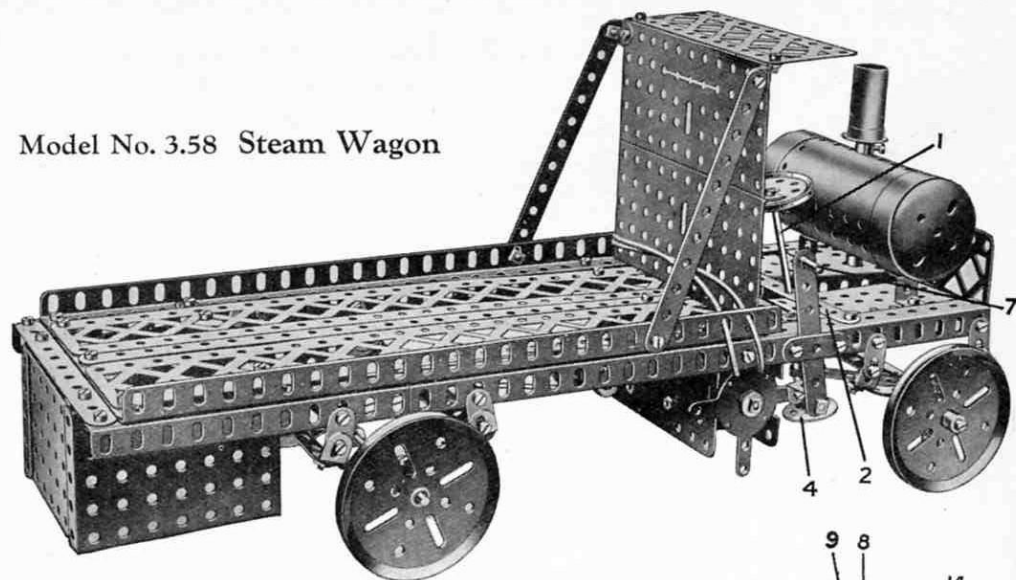

The steering column 1 is journaled in bearings consisting of a $5\frac{1}{2}$ " Strip 2 and two $2\frac{1}{2}$ " Strips 3 (Fig. 3.58A), and carries the Bush Wheel 4, which is secured rigidly to it. A $\frac{3}{4}$ " Flanged Wheel 5 supports the weight of the steering column 1. The stub axles of the front road wheels consist of $\frac{3}{4}$ " Bolts, on which the road wheels are spaced by Washers 14. These Bolts serve in the place of set screws to secure two collars to the 1" Rods 8. A pair of Cranks 9, 9a secured to the Rods 8 are joined by two $5\frac{1}{2}$ " Strips 15 overlapped eight holes. A $1\frac{1}{2}$ " Strip 10, bolted to the face of the Bush Wheel 4, is connected pivotally by a composite $4\frac{1}{2}$ " Strip 11 (a $3\frac{1}{2}$ " Strip and a $2\frac{1}{2}$ " Strip overlapped three holes) to the end of the Crank 9. When the steering wheel is turned, the Strip 11 moves the Cranks 9 9a, thereby deflecting the front road wheels.

The electric motor 6 is controlled by raising and depressing the handle 7. Duplicate drive transmission belts 12 and 13 are used in order to secure a more dependable drive to the rear axle.

Parts required :

14 of No. 2	4 of No. 19B	2 of No. 54
6 " " 3	3 " " 20B	4 " " 59
6 " " 5	1 " " 21	2 " " 62
2 " " 6A	4 " " 22	1 " " 63
6 " " 8	1 " " 23	2 " " 99
8 " " 10	1 " " 24	2 " " 100
3 " " 11	1 " " 26	2 " " 111
10 " " 12	79 " " 37	1 " " 115
2 " " 12A	10 " " 38	4 " " 125
1 " " 15	2 " " 48B	1 " " 147B
3 " " 16	2 " " 52	1 " " 162
2 " " 18A	3 " " 53	1 " " 163

Electric Motor
(not included in Outfit)


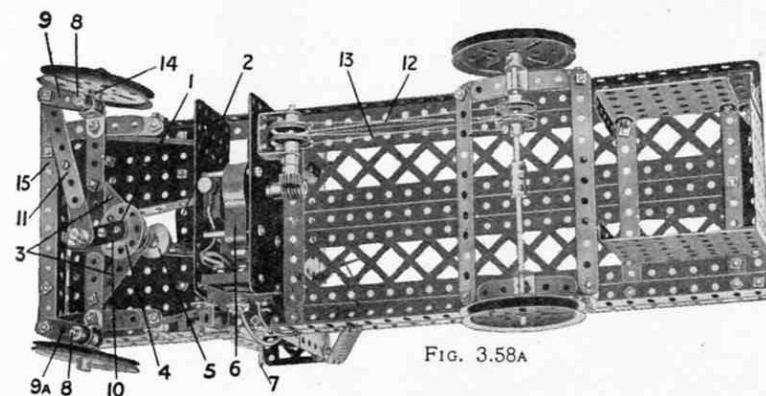


FIG. 3.58A


HOW TO CONTINUE

This completes our examples of models that may be made with MECCANO Outfit No. 3 (or No. 2 and No. 2A). The next models are a little more advanced, requiring extra parts to construct them. The necessary parts are all contained in a No. 3A Accessory Outfit, the price of which may be obtained from any Meccano dealer.


Build Bigger and Better Models

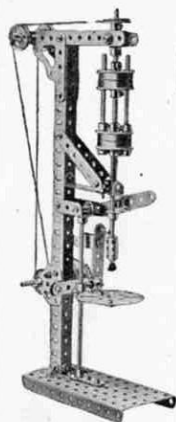


Vertical Drill,
built with
Outfit No. 5.

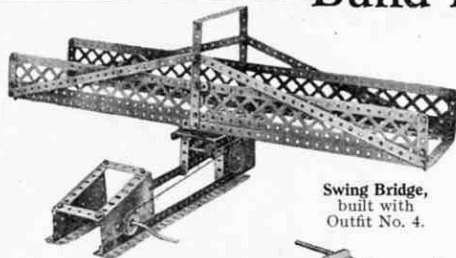

Swing Bridge,
built with
Outfit No. 4.

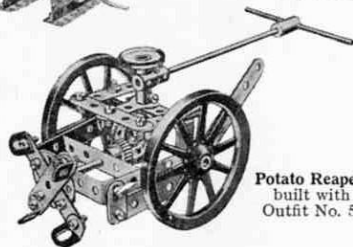


Potato Reaper,
built with
Outfit No. 5.

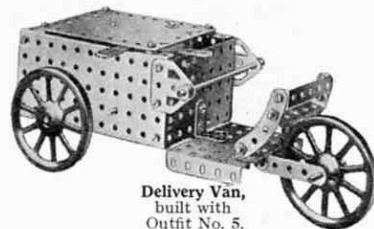

Delivery Van,
built with
Outfit No. 5.



Girder Crane,
built with
Outfit No. 4.

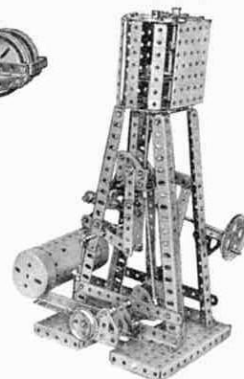

Vertical
Marine Engine,
built with
Outfit No. 5.

Keep Adding to Your Outfit


The more Meccano parts you have, the bigger and better the models you are able to build. Keen and enthusiastic model-builders keep adding to their Outfits, until they are able to build all the wonderful models shown in the Meccano Manuals.

The model-building possibilities of the Meccano System are limitless. All the fine models illustrated on this page are examples of the types you will be able to build as your Outfit develops.


You can purchase separate Meccano parts as you require them, or, if you prefer, you can purchase Accessory Outfits that connect all the main Outfits.




Naval
Quick-firing
Gun,
built with
Outfit No. 4.

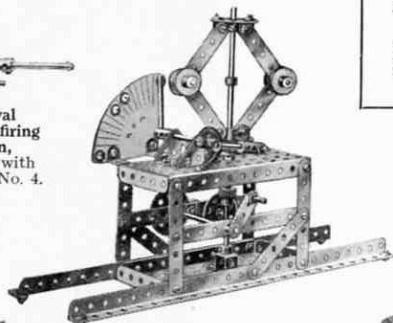

Speed Indicator,
built with
Outfit No. 4.

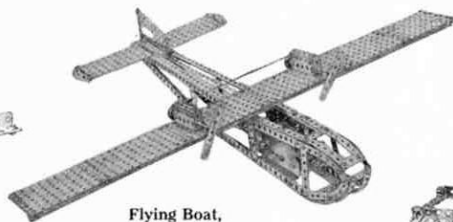


Flying Boat,
built with
Outfit No. 5.

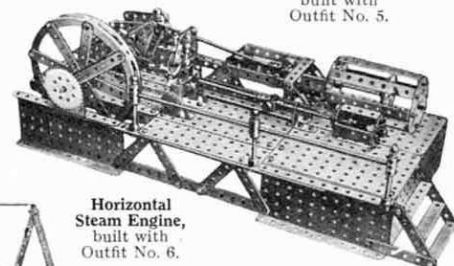


Horizontal
Steam Engine,
built with
Outfit No. 6.




Tipping
Steam Wagon,
built with
Outfit No. 5.

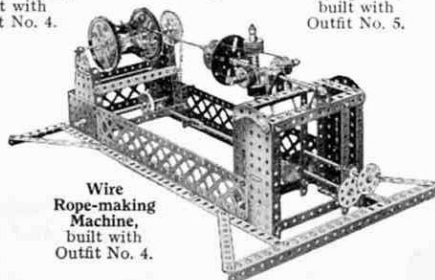

Wire
Rope-making
Machine,
built with
Outfit No. 4.

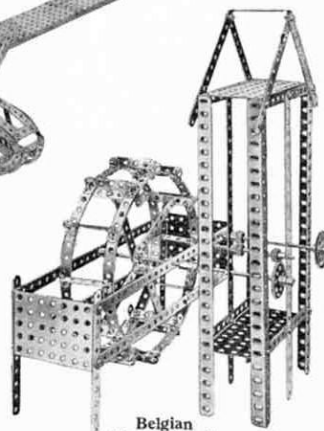


Belgian
Water Wheel,
built with
Outfit No. 5.

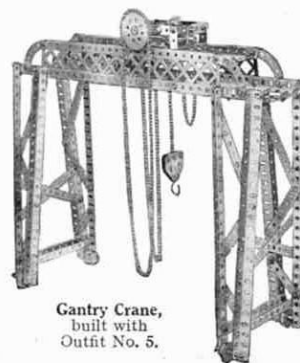


Gantry Crane,
built with
Outfit No. 5.


The Possibilities of Meccano are Unlimited

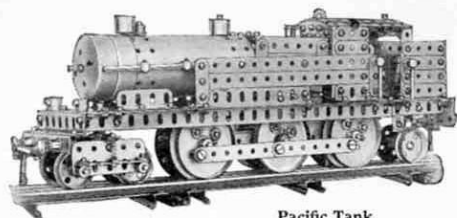


Pacific Tank Locomotive,
built with
No. 7 Outfit.

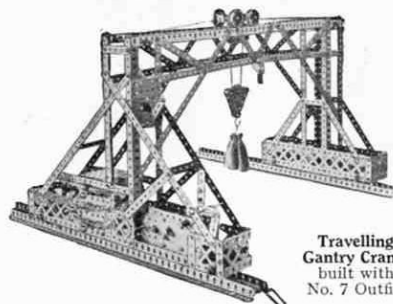


Travelling Gantry Crane,
built with
No. 7 Outfit.

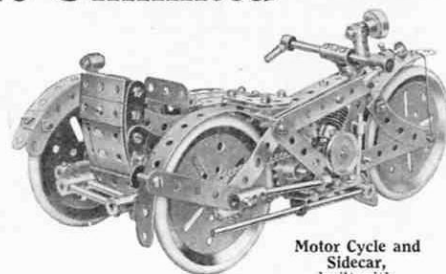


Motor Cycle and Sidecar,
built with
No. 7 Outfit.




Grandfather Clock,
built with
No. 7 Outfit.

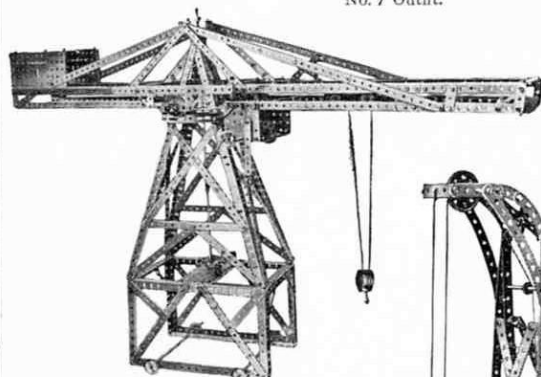


Radial Travelling Crane,
built with
No. 6 Outfit.

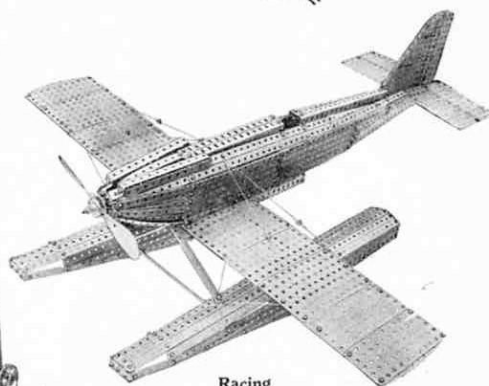


Racing Seaplane,
built with
No. 7 Outfit.

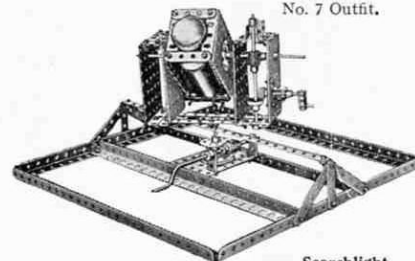


Searchlight,
built with
No. 6 Outfit.

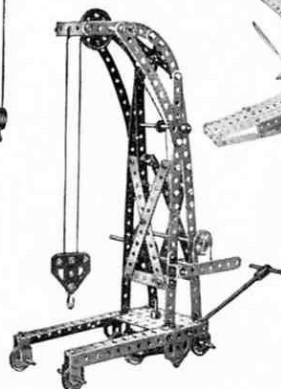


Portable Crane,
built with
No. 6 Outfit.




Punching Press,
built with
No. 6 Outfit.

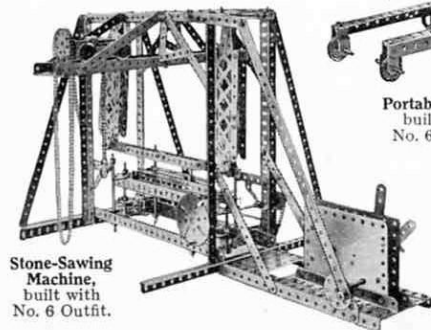

Stone-Sawing Machine,
built with
No. 6 Outfit.

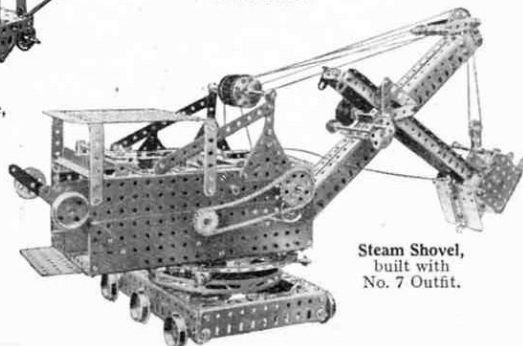

Steam Shovel,
built with
No. 7 Outfit.

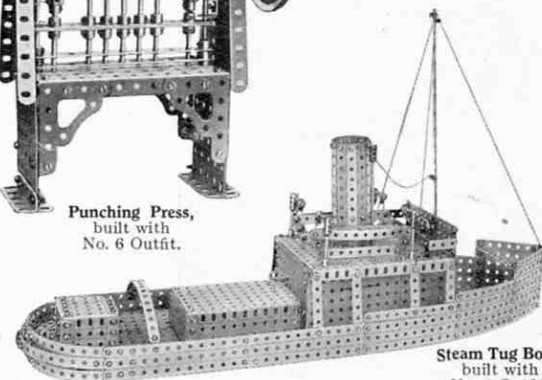

Steam Tug Boat,
built with
No. 6 Outfit.

CONTENTS OF OUTFITS

No.	DESCRIPTION OF PART.	00	00A	0	0A	1	1A	2	2A	3	3A	4	4A	5	5A	6	6A	7
1	Perforated Strips, 12 $\frac{1}{2}$ "	4	6	10	...	10	...	10	6	16	14	30	8	38
1A	" " 9 $\frac{1}{2}$ "	6	10	16
1B	" " 7 $\frac{1}{2}$ "	8	10	13
2	" " 5 $\frac{1}{2}$ "	4	...	4	4	8	6	14	4	18	3	21	5	26	2	28	12	40
2A	" " 4 $\frac{1}{2}$ "	2	2	2	4	4	4	8	12
3	" " 3 $\frac{1}{2}$ "	1	1	1	2	4	6	...	6	6	12	12	24	24	24
4	" " 3"	2	2	4	6	2	8	4	12	12	24
5	" " 2 $\frac{1}{2}$ "	6	3	9	...	9	3	12	...	12	6	18	18	36	...	36	84	120
6	" " 2"	2	2	...	2	...	2	4	6	8	14	14	14
6A	" " 1 $\frac{1}{2}$ "
7	Angle Girders, 24 $\frac{1}{2}$ "
7A	" " 18 $\frac{1}{2}$ "
8	" " 12 $\frac{1}{2}$ "	4	4	4	8	1	9	5	14	12	26	...	26
8A	" " 9 $\frac{1}{2}$ "	8	9	17
8B	" " 7 $\frac{1}{2}$ "
9	" " 5 $\frac{1}{2}$ "	4	4	14	18	24
9A	" " 4 $\frac{1}{2}$ "	2	2	13
9B	" " 3 $\frac{1}{2}$ "
9C	" " 3"
9D	" " 2 $\frac{1}{2}$ "
9E	" " 2"
9F	" " 1 $\frac{1}{2}$ "
10	Flat Brackets,...
11	Double Brackets	5	3	8	...	1	9	3	12	4	16	14	30
12	Angle Brackets, 1 $\frac{1}{2}$ " x 1 $\frac{1}{2}$ "	2	2	4	...	4	1	5	3	8	...	8	12
12A	" " 1 $\frac{1}{2}$ " x 1 $\frac{1}{2}$ "
12B	" " 1 $\frac{1}{2}$ " x 1 $\frac{1}{2}$ "
13	Axle Rods, 11 $\frac{1}{2}$ "
13A	" " 8"
14	" " 6 $\frac{1}{2}$ "
15	" " 5"
15A	" " 4 $\frac{1}{2}$ "
16	" " 3 $\frac{1}{2}$ "
16A	" " 2 $\frac{1}{2}$ "
16B	" " 3"
17	" " 2"
18	" " 1 $\frac{1}{2}$ "
18A	" " 1"
18B	" " 1"
19	Crank Handles (5" shaft)
19A	" " (3 $\frac{1}{2}$ " ")
19B	" " 3"
20	Pulley Wheels, 3"
20A	Flanged Wheels, 1 $\frac{1}{2}$ "
20B	Pulley Wheels, 2"
21	Flanged Wheels, 1 $\frac{1}{2}$ "
21A	Pulley Wheels, 1 $\frac{1}{2}$ "
22	" " 1" (fast)
22A	" " 1" (loose)
23	" " 1 $\frac{1}{2}$ " (fast)
23A	" " 1 $\frac{1}{2}$ " (fast)
24	Bush Wheels
25	Pinion Wheels, 1 $\frac{1}{2}$ " diam., 1 $\frac{1}{2}$ " wide
25A	" " 1 $\frac{1}{2}$ "
26	" " 1 $\frac{1}{2}$ "
26A	" " 1 $\frac{1}{2}$ "
27	Gear Wheels, 50-teeth
27A	" " 57
27B	" " 133 (3 $\frac{1}{2}$ " diam.)
28	Contrate Wheels, 1 $\frac{1}{2}$ "
29	" " 1 $\frac{1}{2}$ "
30	Bevel Gears, 1 $\frac{1}{2}$ "
30A	" " 1 $\frac{1}{2}$ "
30C	" " 1 $\frac{1}{2}$ "
31	Gear Wheels, 1 $\frac{1}{2}$, 38-teeth
32	Worms
34	Spanners
35	Spring Clips
36	Screw Drivers
36B	" " (special)
37	Nuts and Bolts, 7/32"
37A	Nuts
38	Washers
40	Hanks of Cord
41	Propeller Blades

CONTINUED OVERLEAF

Contents of Outfits—continued

[illegible]

Contents of Outfits—continued

No.	DESCRIPTION OF PART.	00	00A	0	0A	1	1A	2	2A	3	3A	4	4A	5	5A	6	7
118	Hub Discs (5½" diam.)
119	Channel Segments (8 to circle)
120A	Spring Buffers
120B	Compression Springs
121	Train Couplings
124	Reversed Angle Brackets, 1"
125	" " "
126	Trunnions
126A	Flat Trunnions
128	Boss Bell Cranks
129	Rack Segments (3" diam.)
130	Eccentrics, Triple Throw
131	Dredger Buckets
132	Flywheels, 2½"
133	Cornor Brackets
135	Theodolite Protractors
136	Handrail Supports
137	Wheel Flanges
140	Universal Couplings
141	Wire Lines
142	Rubber Rings, 3" diam.
142A	Dunlop Tyres, 2" internal diam.
142B	" " " "
143	Circular Girders (5½" diam.)
144	Dog Clutches...
145	Circular Strips (7½" diam. overall)
146	Plates, 6"
147A	Pawls
147B	Pivot Bolts with two nuts
148	Ratchet Wheels
155	Rubber Rings, ½"
157	Fans, 2" diam.
159	Circular Saws
160	Channel Bearings, 1½" x 1" x ½"
161	Groder Brackets, 2" x 1" x ½"
162	Boilers, Complete with Ends
162A	Boiler Ends
163	Sleeve Pieces...
164	Chimney Adaptors
165	Swivel Bearings
166	Ball
168	Eccentrics, 1" throw
170	Socket Couplings...
171	Penultima Connection
301	Bobbins
302	Bushes, Insulating
303	Washers
304	6 B.A. Screws
305	" Nuts
306	Terminals
307	Conical Screws
308	Port Pucks
309	Coil Chucks
310	Lamp Holders
311	Leads
312	27 Gauge B.I. Wire, 30" coils
313	25 " S.C.C. Wire, reel 50 yds.
314	Bare Copper Wire, 4 yds. coils
315	Clockwork Motor, 4 yds. coils
	Electric Motor No. E6 (6 volt)
	Instruction Leads
No.	1—Motor Chassis
"	2—High-speed Ship-Cooler
"	3—Motor Cycle and Sidecar
"	5—Dredger
"	6—Stiff Leg Derrick
"	7—Platform Scales
"	9—Bagatelle Table
"	10—Log Saw
"	11—Horizontal Steam Engine
"	12—Stone-sawing Machine
"	13—Mecanograph
"	14A—New Grandfather Clock
"	16A—New Loom
"	17—Planing Machine
"	18—Revolving Crane
"	19—Steam Shovel
"	20—Electric Mobile Crane
"	21—Transporter Bridge
"	22—Traction Engine
"	23—Vertical Log Saw
"	24—Travelling Gantry Crane
"	25—Hydraulic Crane
"	26—Twin-elliptic Harmonograph
"	28—Pontoon Crane
"	29—Hammerhead Crane
"	30—Breakdown Crane
"	31—Warehouse
"	35—Automatic Grabbing Crane
"	36—Electric Derrick Crane
"	37—Howitzer Limber and Tractor

Full instructions for building a fine range of models are included with each Outfit.

INDEX TO MODELS

Description.	Model No.	Description.	Model No.	Description.	Model No.
Acrobat	2-1	Church	0-16	Flying Machine	1-79
Aerial	0-66; 1-56	Chute	00-38	Footbridge	0-84
Aerial Flight	0-66; 1-89	Clock	0-79	Foot Hammer	1-154
Aerial Race	00-106	Grandfather	00-63	Fork	00-2
Aerial, Direction	00-114	Clothes Drying Frame	00-159	Friction Grip Tongs	00-78; 1-41
"	00-109	Hanger	00-22	Frog	0-81
"	00-108	Horse	00-81		
"	00-112	Cool Sifter	2-3	Gallows	00-165
"	00-113	Cutter	1-169	Gambonometer	0-68
Aeroplane	0-20; 0-119; 1-29;	Coaster	1-132; 1-149; 2-20	Gandva	0-34; 1-37
0-146; 1-126; 2-30		Coast Guard	0-76	Gardner Roller	00-167
0-120; 2-28		Coast Hanger	00-9; 1-200	Gates	00-80; 1-80
00-168		Coco-nut Shy	1-147	Gauge	00-80; 1-80
00-73; 0-105		Cot	0-26; 0-129	Gauger	00-142
0-15		" on Wheels	3-27	Glider	1-85
0-33		Couch	1-87	Glider, Bow	00-48
00-160; 1-43		Cow and Milkmaid	0-47	Gondola	2-18
00-1		Crane	0-58	Gong	1-90; 2-25
00-60		" Breakdown	0-77	Goose	0-18
00-21		" Derracking	0-115	Governor, Centrifugal Engine	0-63; 1-223
0-83		" Elevated	1-225	Governor, Inverted Centrifugal	1-68
0-52; 1-6		" Grab	1-181	Gramophone	0-40; 1-126
1-106		" Jib	0-86	Grass Cutter	0-89
1-96		" Lorry	0-6; 1-222	Gradient Indicators	00-127 to 00-134
0-50		" Mobile	1-117	Gradient Sifter	00-74
0-84		" Overhead	1-64	Gristy Conveyor	1-157
00-81		" Patent Luffing	1-205	Grill	00-11
0-69; 1-229		" Radial Travelling	0-96	Gritter, Coffee	3-40
0-23; 0-142; 1-59		" Railway Breakdown	3-32	Guillotine	3-31
0-116; 1-164		" Revolving Wagon Swivel	3-51	Gun, Anti-Aircraft	00-182; 1-118; 2-54
1-230		" Rotating Hammerhead	00-107; 1-204	" Field, and Carriage	00-177
1-15; 1-19; 1-20		" Rotating	1-124	" Low	0-31
0-18; 0-144		" Swivelling	1-103; 1-216	" Machine	00-42
0-46; 1-135		" Swivelling Jib	1-62; 1-63	" Old Style	0-108
0-150		" Travelling Jib	1-94; 1-134	" Quick Firing	0-140
0-83		" " " " " " " "	2-38; 2-39	" Gymnast Revolving	1-99
00-179; 1-167		Crib	00-66	" " " " " " " "	0-24; 1-137
1-170		Crocodile	0-28	Gyroscope	1-228
00-36; 0-36		Crossbow	0-85; 3-55	" " " " " " " "	1-180
0-91; 1-108		Crosshead Demonstration Model	1-165	Hack Saw, Power	0-139
00-155		Cum-bak	1-113	Hammer, Double Drop	2-80
0-38		Cutlery Basket	00-158	" Helve	1-208
1-179		" Rest	00-144	" Mechanical	1-33; 2-26
00-4		Dancer, The Meccano	1-162	Hammock	0-134
00-98		Dancers, Eccentric	1-163	Hand Punch	3-52
1-123		Derrick	2-52	Hatchet	1-24
0-73		Desk	00-28	Hat Rack	0-129
1-83		Devil Wall	00-76	Hay Feeder	2-86
1-104		Dignity and Impudence	1-213	" " " " " " " "	0-88
1-3; 1-127		Dinosaur	0-92	" " " " " " " "	1-4
0-154		Disappearing Mechanism	1-212	" " " " " " " "	2-27
1-148		Dividers	00-17; 00-55	High-level Bridge	00-13
2-56		Dog Kennel	00-139	Holding Block	1-206
0-32		Drift Machine	0-7	Hooke's Coupling	1-184
00-153		Drilling Machine	3-9	Horse	00-3
1-67		" Automatic	1-195	" and Cart	1-203
1-69		" Rock	0-131	" Francing	0-133
0-54		" " " " " " " "	1-201	" Toy	00-124
00-103		Drinking Trough	0-125; 1-173; 3-1	Horseman	0-40
1-32		Drop the Nigger	00-57	Horseman's Fall	0-70
00-26		Dump Car	3-13	Howitzer	1-131
00-49; 1-42		" " " " " " " "	0-116	Hurdler	0-60
0-45		Easel	2-5	Inclined Plane	1-159
0-67		" Electric	0-75	Invalid, The	1-122
00-19		Electric Tower	00-61	Inverted Truss	1-81
0-4		Electric Loco	00-29	Jockey Pulley	1-1
0-3		Elevator	1-49; 1-215; 2-16	Joy Wheel	00-175
00-26		" Car	00-90	Jumping Jack	00-110
00-49; 1-42		Embroidering Machine	2-55	Key, Double Cable	1-169
0-45		Energy Wheel	1-129	Kinetrograph	3-54
0-67		Engine, Beam	1-91	King Meccano	1-93
00-19		" Horizontal	1-112	Lace Joiner	3-15
0-4		" Two-cylinder Vertical	0-146; 3-25; 3-56	Ladder	00-24
1-207		Execution, The	3-38	" " on Wheels	00-85; 1-121;
00-178; 0-53		Extended Ash Tip	0-56	" " " " " " " "	1-183; 2-24
0-8		Fan	1-102	" " " " " " " "	00-148; 3-16
1-185		Farm Sight	0-61	" " " " " " " "	1-178
0-37; 0-102		Farmers, The	00-29	" " " " " " " "	1-189
2-34		Fire Alarm	1-125	" " " " " " " "	0-111; 3-19
00-161; 0-148; 1-55		" Engine, Manual	1-35	" " " " " " " "	0-143
1-46		" Escape	00-154; 2-44; 3-33	" " " " " " " "	2-29
0-136		Flax Cleaner	3-21	" " " " " " " "	3-11
1-21		Flex Making Machine	3-44	" " " " " " " "	1-31; 3-5
0-153		Flip-Flap	1-115	" " " " " " " "	0-22; 1-38
0-65		Flower Pot Stand	00-172	" " " " " " " "	
00-99		Fly Boats	0-93; 1-54; 1-145	" " " " " " " "	

INDEX TO MODELS (continued)

Description.	Model No.	Description.	Model No.	Description.	Model No.
Letter Balance	00-174; 1-22; 3-3	Rat Trap	1-187	Table, Bed	00-166; 1-153
Level Crossing Barrier	00-170	Rattle	0-103; 3-30	" Collapsible	00-39
Lever of the First Order	00-65	Razor	00-50	" Drafting	0-101
" Second	1-7	Refreshment Wagon	00-67	Tapet Valve Demonstration	1-150
" Third	1-8	Revolving Mechanisms	2-4	Model	00-183
Light Cruiser	0-9	Rickshaw	0-90	Telegraph Key	00-79
Liner	00-72	Rifle with Bayonet	00-32	Pole	1-143
Locomotive	1-60; 1-138	Road Sign	00-47; 00-119	Telescope	0-49; 1-210
Loom, Hand	1-209	Rocking Horse	0-25	Telescopic Mast	0-182
Lorry, Motor	1-57; 1-211; 2-31	Roller, Field	00-94; 1-214	Tennis Span	0-12
" Steam	2-48	Roman Balance	00-6	Three Wheel Auto...	0-10
" Tank	3-39	Roulette Wheel	00-6	Tica Gharry	1-23
Loud Speaker	0-45	Roundabout	00-77; 1-92; 2-17; 3-42	Tight Rope Walker	1-97
Luggage Cart	1-48	Safety Catch for Winding Gear	1-218	Timber Drag	1-30; 1-65
Machine for tracing a locus	1-71	Sand Yacht	1-39; 1-82; 2-11	Tin Opener	00-64
Magic Plate	00-100	Saw, Band	00-181; 1-66	Tipping Motor Wagon	2-19
Mail Bag Hanger	00-75; 00-117	" Circular	00-185; 1-139	Toast Rack	1-188
Man and Boy	1-72	" Meat	0-16	Toboggan	3-7
" Climbing Pole	1-220	" Mechanical	1-26	Top	1-194
Master and Student	1-133	" Two-hub	00-8	Spinning	00-40; 2-23
Mat Frame	2-7	Sawing Machine	00-150	Towel Horse	00-104; 2-13
Meccanaroo	3-26	Saxophone	1-34	Tractor, Farm	3-49
Meccano Boy	0-48	Scales	00-71; 00-97; 0-126; 0-127; 1-101; 1-155; 2-10; 3-35; 3-47	Motor	1-105; 1-175
Man	00-82	Scarifier	0-1; 0-55; 1-95	Tramway Car	0-35
Meccanograph	1-119	Schooner, Square Topsail	00-88	Tramcar, Electric	3-46
Mechanical Gong	1-142	Scoop Reel	2-40	Treadle Grindstone	1-140
Medal	0-13	Seaplane, Schneider Trophy	00-93	Triangle of Forces	1-2
Milk Maid	0-41	Searchlight	0-93	Tricycle	0-61; 2-22
Missing Link, The	0-70	Seat, Garden	1-52	Carrier	2-42
Monoplane	2-14	Seating	1-144	Tricyclist, Revolving	1-196
Mono Rail	00-156	Sedan Chair	0-124; 1-51	Trip Hammer	00-163
Motor Car	00-140; 1-176	See-Saw	1-198; 3-10	Tripod	00-122
" Racing	1-174	Revolution	0-124; 1-51	Trolley	00-12; 00-41; 0-30; 0-95
" Cycle and Sidecar	0-44	Roundabout	0-124; 1-51	Hand	3-24
" Cyclist and Pillion Rider	1-151	Seismograph	2-8	Porter's	00-146
Mountain Transport	1-78	Semaphore	1-221	Mason's	00-30
Mounted Cowboy	1-130	Set-Square, 45°	00-121	Truck	00-44
Music Stand	0-122	Set-Square, 60°	1-12	" Baggage	00-116
Newton's Disc	3-22	Sewing Machine	1-13	" Cattle	0-21
Notice Board	0-121	Sheep's Head	2-53	" Electric	2-45
Oil Cake Chopper	3-4	Ship's Lamp	0-104	" Fire	3-48
Ore Crusher	00-173	Shipyard Bogie	1-61	" Flat	00-33
Organ	00-95	Shovel, Mechanical	00-27	" Hand	00-169; 00-180
Ostrich	00-147	Shifter	2-21	" Lumber	00-5; 00-152
Panograph	1-190	Signal	1-75	" Lugage	0-2; 0-100; 1-136
Parallel Bars	0-149	Automatic	1-202	" Motor	1-227; 2-12
Pastry Designer	3-37	" French Railway	00-102	" Revolving	2-49
Pecking Hen	0-59	" Junction	0-141	" Timber	00-62
Pen Rack	00-91; 0-11; 1-44	Sign Post, one-way	00-52	" with Sides	1-25
Performing Mechanism	2-33	" three-way	00-56	Truss, Compound Triangulated	1-9
Piano	0-39	" four-way	00-58	" Howe	1-10
Pistol	1-153; 3-50	Ski-Runner	00-25; 00-151; 0-138	Triangulated	1-11
Pie Driver	0-57	Sled	3-28	Turn-strength Machine	1-168; 2-32
Piston Connection, Double Action	1-98	Sleigh, Horse	2-6	Turnstile	00-87; 2-2
Pithead Gear	00-138; 2-46; 3-29	Snake	0-78	Turntable	2-15
Planing Bench	00-14	Spade	00-54	Tweezers	00-58
Plasterer's Hawk	00-37	Spindle, Boring	1-217	Umbrella Stand	00-126
Pliers	0-62	Stamp, Drop	1-166	Van, Motor	1-171; 2-51
Plough	00-20; 0-118	Stamping Machine	1-50	Velocipede	00-23
Pneumatic Grain Elevator	0-82	Steam Engine, Vertical	00-184; 2-37	Viaduct	0-113
Polishing Spindle	2-9	Steamer, Paddle	3-17	Violin	00-92
Portal	0-106	Steamer, Chaser	1-20; 3-53	" and Bow	1-111
Potato Chopper	0-46	Stool	00-69	Wagon, Dinner	00-149; 1-27
Potter's Wheel	1-47	Street Lamp	00-123	" Stearn	3-58
Prehistoric Animal	0-152	Strip Bending Machine	3-2	" Tank	3-20
" Armadillo	0-43	Strong Man	00-135	" Tea	00-162; 0-110
" Bird	00-105; 0-14	Sudden Appearance, A	0-17; 1-53	" Timber	00-111
Press, Automatic Dial	3-23	Sulky	0-145	" Tip	1-28
Print Trimmer	00-143	Swing	00-115; 0-117; 3-8	Tower 1-88; 1-114; 1-191; 3-57	0-97
Propeller	00-89	" Boat	3-43	Walking Man	00-141
Pulley Block	0-114; 1-16; 1-17; 1-18	Switch	00-43	Watch and Chain	00-137
" Single Sheave	00-7; 00-189	Sword	00-125; 0-42	Weather Vane	00-188
Pullman Car	00-176	Table	00-15; 00-70; 0-27	Well Driller	0-112; 1-110
Pump	0-98			Windlass	0-132
" Double Action	1-86			Windmill	1-73
" Windmill	1-177			Chinese	1-152
Punching Bag Stand	0-137			Wire Rope Maker	00-164; 0-80; 2-43
" Machine	0-147; 1-100			Wiretail	0-51
Quick Delivery Chute	1-141			Wrestlers	0-64; 1-109
" Return Device	1-107			Yacht	00-118
Rake	00-68; 00-136; 1-84			" Ice	00-145
" Horse	0-5; 1-156			" Land	3-41
" Large...	1-219				

Patents and Designs

Great Britain

250,378	671,485
253,236	671,534
290,121	671,790
323,234	680,416
671,484	682,208

MECCANO

THE TOY THAT MADE ENGINEERING FAMOUS

Millions of boys in every country throughout the world play with Meccano.

These are the Meccano Factories and distributing centres.

Patents and Designs

Great Britain

682,209	718,404
682,934	718,731
683,011	733,541
686,112	733,542
698,054	740,413
740,723	

Canadian Office and Warehouse:

Meccano Ltd.,

34, St. Patrick Street, Toronto.




London Office and Warehouse :

Meccano Ltd.,

Walnut Tree Walk.

Kennington Road, London, S.E.11.

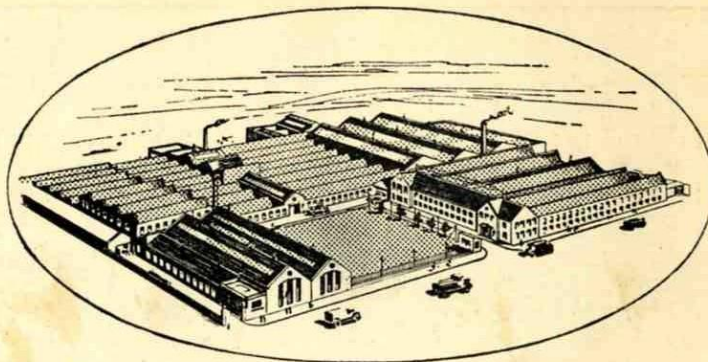

Head Office and Factory :
OLD SWAN, LIVERPOOL.

Meccano Agencies :

Amsterdam,
Asuncion,
Auckland,
Barcelona,
Basle,
Batavia,
Bogota,
Bombay,
Brussels,

Buenos Aires,
Calcutta,
Cape Town,
Caracas,
Colombo,
Constantinople,
Durban,
Genoa,
Guayaquil,

Helsingfors,
Hong Kong,
Iquitos,
Jerusalem,
Johannesburg,
Karachi,
Mexico,
Monte Video,
Oslo,

Rio de Janeiro,
Santiago,
Sao Paulo,
Shanghai,
Stockholm,
Sydney,
Trinidad,
Vienna.

Meccano G.m.b.H.,
Berlin SW.68, Alte Jakobstrasse 20-22.



Meccano (France) Ltd.,

78-80, Rue Rébeval,
Paris XIXeme.