


# MECCANO

INSTRUCTIONS FOR  
No. 2a ACCESSORY OUTFIT

No.  
41.2a






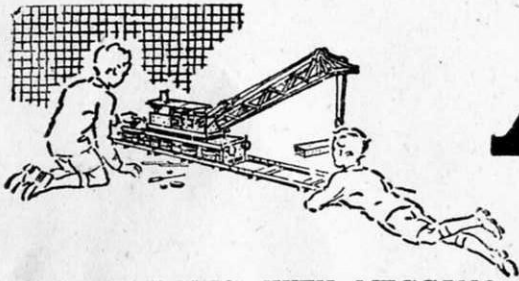

# MECCANO

*Real Engineering in Miniature*

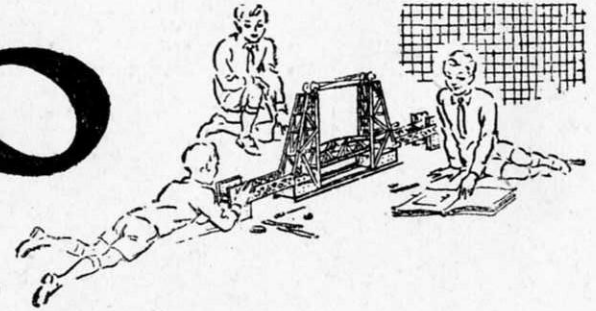

## MODEL-BUILDING WITH MECCANO

There is no limit to the number of models that can be built with Meccano—Cranes, Clocks, Motor Cars, Ship Coalers, Machine Tools, Locomotives—in fact everything that interests boys. A screwdriver and a spanner, both of which are provided in each Outfit, are the only tools necessary.

When you have built all the models illustrated in the Manuals of Instruction the fun is not over, but is just beginning. Now comes the chance to make use of your own ideas. First of all, re-build some of the models with small changes in construction that may occur to you; then try building models entirely of your own design. In doing this you will feel the real thrill of the engineer and the inventor.

## HOW TO BUILD UP YOUR OUTFIT

Meccano is sold in eleven different Outfits, ranging from No. 0 to No. 10. Each Outfit from No. 1 upwards can be converted into the next one larger by the purchase of an Accessory Outfit. Thus, Meccano No. 1 Outfit can be converted into No. 2 Outfit by adding to it a No. 1a Accessory Outfit. No. 2a Outfit would then convert it into a No. 3 and so on. In this way, no matter with which Outfit you commence, you can build it up by degrees until you possess a No. 10 Outfit.

All Meccano parts are of the same high quality and finish, but the larger Outfits contain a greater quantity and variety, making possible the construction of more elaborate models.

As shown in the illustrations, the realism of many models can be increased by the inclusion of the figures, motor vehicles and other items from the Dinky Toys Series; pilots and drivers from the Aeroplane and Motor Car Constructor Outfits; trees and hedges from the Hornby Railway Series; Meccano sacks, cable drums, etc. These items are not included in any of the Outfits. A Clockwork Motor is included in Outfits 7a, 8, 9 and 10 only, and an Electric Motor in Outfits 9a and 10 only.

## ELECTRIC LIGHTING OF MECCANO MODELS

It is great fun to illuminate your Meccano models by electric light, and a special Meccano Lighting Set can be obtained from your dealer for this purpose. This consists of two spot lights with plain and coloured imitation glass discs, one stand lamp, two special brackets, and two pea lamps, operated from a 4-volt flash-lamp battery (not included in the Set). The stand lamp is used for decorative purposes, and the spot lights can be used as headlamps, floodlights on cranes, and in countless other ways.

## THE "MECCANO MAGAZINE"

The "Meccano Magazine" is published specially for Meccano boys. Every month it describes and illustrates new Meccano models for Outfits of all sizes, and deals with suggestions from readers for new Meccano parts and for new methods of using the existing parts. There are model-building competitions specially planned to give an equal chance to the owners of small and large Outfits. In addition, there are splendid articles on such subjects as Railways, Famous Engineers and Inventors, Electricity, Chemistry, Bridges, Cranes and Aeroplanes, and special sections dealing with the latest Engineering, Aviation, Shipping and Road and Track News. Other pages deal with Stamp Collecting, and Books of interest to boys; and a feature of outstanding interest is the section devoted to short articles from readers.

The "Meccano Magazine" is the finest of all papers for boys who are interested in the wonderful things going on in the world around them. It is published on the first of each month. If you are not already a reader write to the Editor for full particulars, or order a copy from your Meccano dealer, or from any news-agent.

## THE MECCANO GUILD


Every owner of a Meccano Outfit should join the Meccano Guild. This is a world-wide organisation, started at the request of Meccano boys. Its primary object is to bring boys together and to make them feel that they are all members of a great brotherhood, each trying to help others to get the very best out of life. Its members are in constant touch with Headquarters, giving news of their activities and being guided in their hobbies and interests. Write for full particulars and an application form to the Secretary, Meccano Guild, Binns Road, Liverpool 13.

Clubs founded and established under the guidance of the Guild Secretary provide Meccano boys with opportunities of enjoying to the utmost the fun of model-building. There are nearly 200 active clubs in Great Britain, and nearly 100 in countries overseas, each with its Leader, Secretary, Treasurer and other officials. With the exception of the Leader, all the officials are boys, and as far as possible the proceedings of the clubs are conducted by boys.

Recruiting Medallions are awarded to members who are successful in securing recruits for the Guild, and good work on behalf of Meccano clubs, or of the Guild generally, is recognised by the presentation of special Merit Medallions. Full particulars of both these awards will be sent post free on request.


## MECCANO SERVICE

The service of Meccano does not end with selling an Outfit and an Instruction Manual. If ever you are in any difficulty with your models, or if you want advice on anything connected with this great hobby, write to us. We receive every day hundreds of letters from boys in all parts of the world, and each of these is answered personally by one of our staff of experts. Whatever your problem may be, write to us about it.

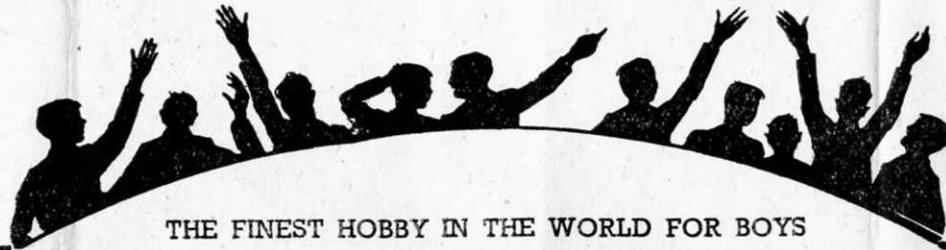

THE FINEST HOBBY IN THE WORLD FOR BOYS



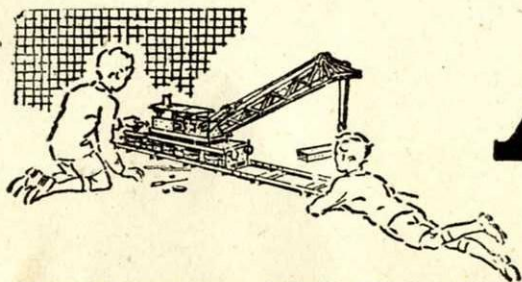

## MODEL-BUILDING WITH MECCANO

### IMPORTANT

Wartime conditions and restrictions have made necessary certain alterations in the introductory page of this Manual. The most important are the following:—

The Meccano Lighting Set has been withdrawn, but the models shown with lighting arrangements can readily be built with only slight changes.

The Aeroplane and Motor Car Constructor Outfits also are withdrawn, and the miniature pilots and drivers shown in certain models are no longer available.

The Meccano Plates (Flanged, Flat, Curved, etc.) are shown in the Manuals with diagonal lines. On the new Meccano Plates these lines are omitted.

The only Meccano Motor at present available is the "MAGIC" Clockwork Motor. It is not included in Outfits.


MECCANO LIMITED

### ELECTRIC LIGHTING OF MECCANO MODELS

It is great fun to illuminate your Meccano models by electric light, and a special Meccano Lighting Set can be obtained from your dealer for this purpose. This consists of two spot lights with plain and coloured imitation glass discs, one stand lamp, two special brackets, and two pea lamps, operated from a 4-volt flash-lamp battery (not included in the Set). The stand lamp is used for decorative purposes, and the spot lights can be used as headlamps, floodlights on cranes, and in countless other ways.

# MECCANO

*Real Engineering in Miniature*

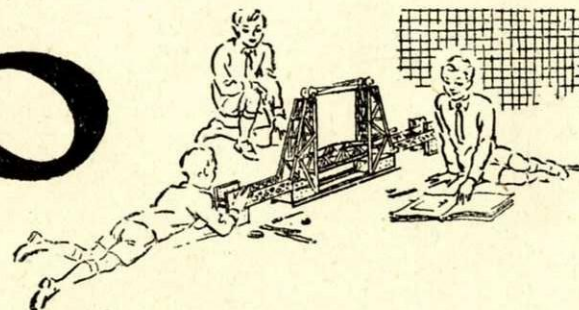

### THE "MECCANO MAGAZINE"

The "Meccano Magazine" is published specially for Meccano boys. Every month it describes and illustrates new Meccano models for Outfits of all sizes, and deals with suggestions from readers for new Meccano parts and for new methods of using the existing parts. There are model-building competitions specially planned to give an equal chance to the owners of small and large Outfits. In addition, there are splendid articles on such subjects as Railways, Famous Engineers and Inventors, Electricity, Chemistry, Bridges, Cranes and Aeroplanes, and special sections dealing with the latest Engineering, Aviation, Shipping and Road and Track News. Other pages deal with Stamp Collecting, and Books of interest to boys; and a feature of outstanding interest is the section devoted to short articles from readers.

The "Meccano Magazine" is the finest of all papers for boys who are interested in the wonderful things going on in the world around them. It is published on the first of each month. If you are not already a reader write to the Editor for full particulars, or order a copy from your Meccano dealer, or from any news-agent.

### THE MECCANO GUILD


Every owner of a Meccano Outfit should join the Meccano Guild. This is a world-wide organisation, started at the request of Meccano boys. Its primary object is to bring boys together and to make them feel that they are all members of a great brotherhood, each trying to help others to get the very best out of life. Its members are in constant touch with Headquarters, giving news of their activities and being guided in their hobbies and interests. Write for full particulars and an application form to the Secretary, Meccano Guild, Binns Road, Liverpool 13.

Clubs founded and established under the guidance of the Guild Secretary provide Meccano boys with opportunities of enjoying to the utmost the fun of model-building. There are nearly 200 active clubs in Great Britain, and nearly 100 in countries overseas, each with its Leader, Secretary, Treasurer and other officials. With the exception of the Leader, all the officials are boys, and as far as possible the proceedings of the clubs are conducted by boys.

Recruiting Medallions are awarded to members who are successful in securing recruits for the Guild, and good work on behalf of Meccano clubs, or of the Guild generally, is recognised by the presentation of special Merit Medallions. Full particulars of both these awards will be sent post free on request.

### MECCANO SERVICE


The service of Meccano does not end with selling an Outfit and an Instruction Manual. If ever you are in any difficulty with your models, or if you want advice on anything connected with this great hobby, write to us. We receive every day hundreds of letters from boys in all parts of the world, and each of these is answered personally by one of our staff of experts. Whatever your problem may be, write to us about it.

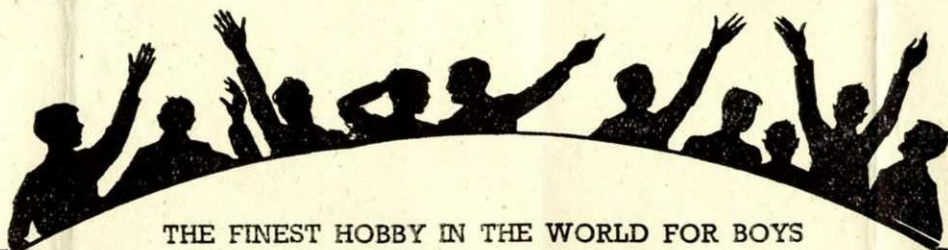

THE FINEST HOBBY IN THE WORLD FOR BOYS



## 3.1 "BLUEBIRD" RACING CAR

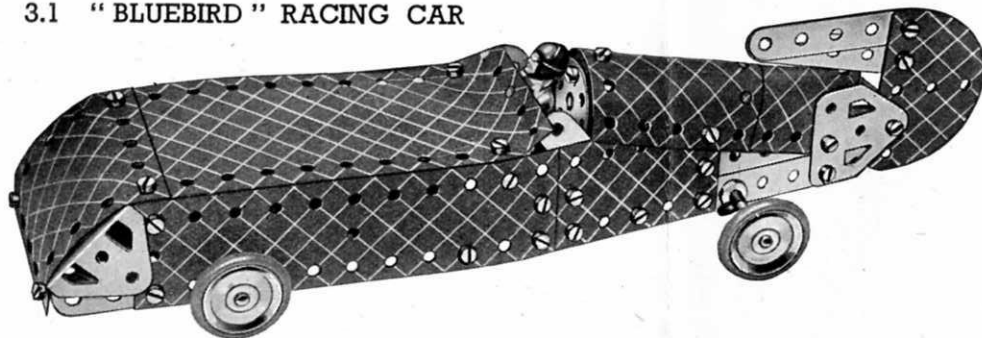


The  $5\frac{1}{2}'' \times 2\frac{1}{2}''$  Flanged Plate is used for the front end of the chassis, and the two  $5\frac{1}{2}'' \times 1\frac{1}{2}''$  Flexible Plates are bolted on each side in the third hole from the front end of the chassis. The two  $5\frac{1}{2}''$  Strips forming the rear end of the chassis overlap the  $5\frac{1}{2}'' \times 1\frac{1}{2}''$  Flexible Plates one hole.

## Parts required

2 of No. 2	2 of No. 35	2 of No. 126	1 of No. 192
6 " " 5	39 " " 37	2 " " 126a	2 " " 199
2 " " 10	4 " " 38	4 " " 155a	1 " " 200
3 " " 12	1 " " 48a	2 " " 188	2 " " 214
2 " " 16	1 " " 52	2 " " 189	1 " " 217a
4 " " 22			

## 3.2 AIRCRAFT CARRIER

Flat Trunnions are used to fasten the  $5\frac{1}{2}'' \times 2\frac{1}{2}''$  Flanged Plate to the Strips that form the sides.

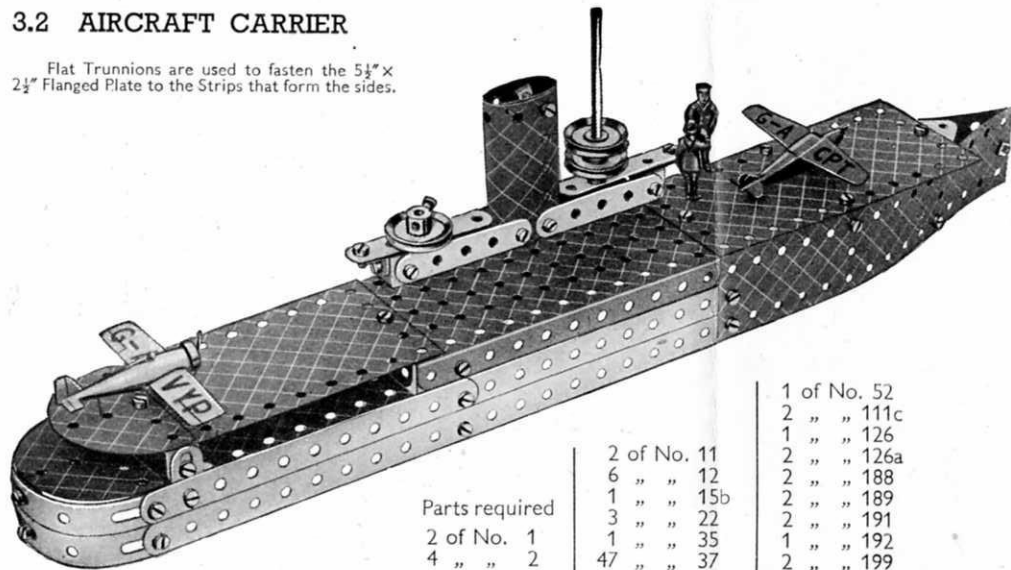

Parts required	2 of No. 11	1 of No. 52
	6 " " 12	2 " " 111c
2 of No. 1	1 " " 15b	1 " " 126
4 " " 2	3 " " 22	2 " " 126a
6 " " 5	1 " " 35	2 " " 188
4 " " 10	47 " " 37	2 " " 189
	2 " " 37a	2 " " 191
	1 " " 48a	1 " " 192
		2 " " 199
		2 " " 214
		4 " " 215

## 3.3. MARINE ENGINE


## Parts required

2 of No. 1	1
4 " " 2	2
5 " " 5	5
8 " " 12	12
2 " " 15b	15b
3 " " 16	16
3 " " 22	22
1 " " 24	24
4 " " 35	35
47 " " 37	37
9 " " 37a	37a
6 " " 38	38
2 " " 48a	48a
1 " " 52	52
3 " " 90a	90a
3 " " 111c	111c
2 " " 125	125
2 " " 126	126
1 " " 126a	126a
1 " " 155a	155a
2 " " 187	187
2 " " 188	188
2 " " 189	189
1 " " 190	190
1 " " 191	191
2 " " 199	199
2 " " 200	200
1 " " 212	212
1 " " 213	213
2 " " 217a	217a

Bolts 1 are lock-nutted. The Bolts 3 are  $\frac{3}{8}''$  long and are lock-nutted twice as shown. The  $2\frac{1}{2}''$  Strips 4 must be quite free to move when the crankshaft is rotated.

The left-hand piston rod is held by two Spring Clips, one at each side of the Angle Bracket pivotally fastened by the Bolts 1. Inside the cylinder the Rods slide through holes in a  $2\frac{1}{2}''$  Strip and a Trunnion 2. In order to show the construction clearly part of the cylinder has been cut away in the illustration.

The Rod carrying two 1" Pulleys passes through the centre hole in the outer  $1\frac{1}{2}''$  Disc. A  $\frac{1}{2}'' \times \frac{1}{2}''$  Angle Bracket is bolted to the Disc in such a position that when the Disc is turned the Angle Bracket engages with a Spring Clip on the Rod. It is important that all nuts and bolts are made quite secure with the Spanner and Screwdriver.

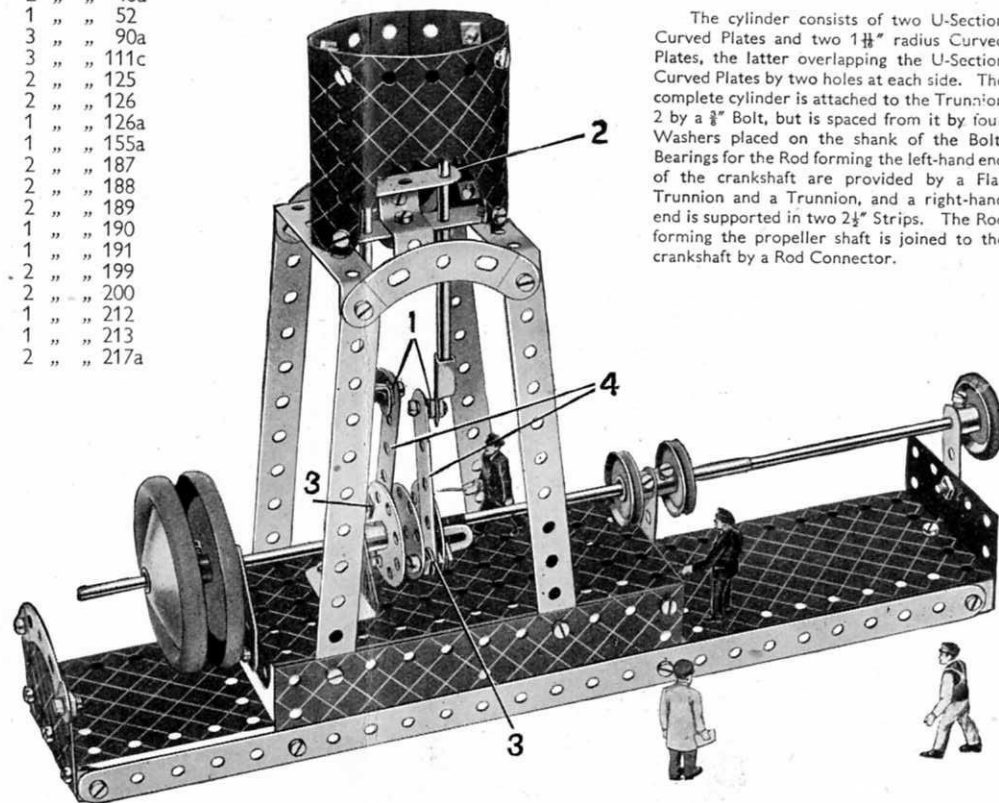

The cylinder consists of two U-Section Curved Plates and two  $1\frac{1}{8}''$  radius Curved Plates, the latter overlapping the U-Section Curved Plates by two holes at each side. The complete cylinder is attached to the Trunnion 2 by a  $\frac{3}{8}''$  Bolt, but is spaced from it by four Washers placed on the shank of the Bolt. Bearings for the Rod forming the left-hand end of the crankshaft are provided by a Flat Trunnion and a Trunnion, and a right-hand end is supported in two  $2\frac{1}{2}''$  Strips. The Rod forming the propeller shaft is joined to the crankshaft by a Rod Connector.




### 3.4 SWIVELLING JIB CRANE


A 1" fast Pulley 1 is fastened to the lower end of a 2" Rod, which passes into and is held in the boss of the Bush Wheel. The Pulley rests on the tyre of Pulley Wheel 2, which is fastened on Rod 3. When the Rod 3 is rotated the jib is caused to swivel. Bearings for Rod 3 are formed by Flat Brackets, which are bolted through their elongated holes to the 2½" Strips shown in the illustration. The roof of the cab is fastened by means of Angle Brackets to two Flat Trunnions, and these in turn are bolted to the compound Strips bracing the jib.

#### Parts required

2 of No. 1	1 of No. 18a	4 of No. 90a
6 " " 2	1 " " 19g	4 " " 111c
9 " " 5	4 " " 22	2 " " 126
4 " " 10	1 " " 23	2 " " 126a
1 " " 11	1 " " 24	2 " " 155a
8 " " 12	4 " " 35	1 " " 176
2 " " 16	50 " " 37	2 " " 187
1 " " 17	4 " " 37a	2 " " 188
	3 " " 38	2 " " 189
	1 " " 40	1 " " 190
	2 " " 48a	2 " " 191
	1 " " 52	1 " " 199
	1 " " 57c	2 " " 200

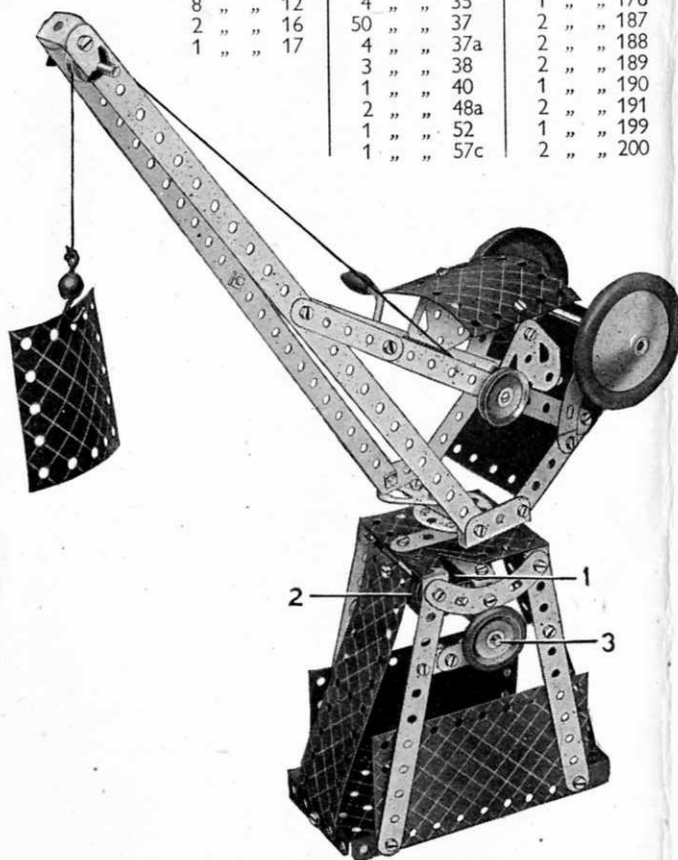

### 3.5 NOAH'S ARK

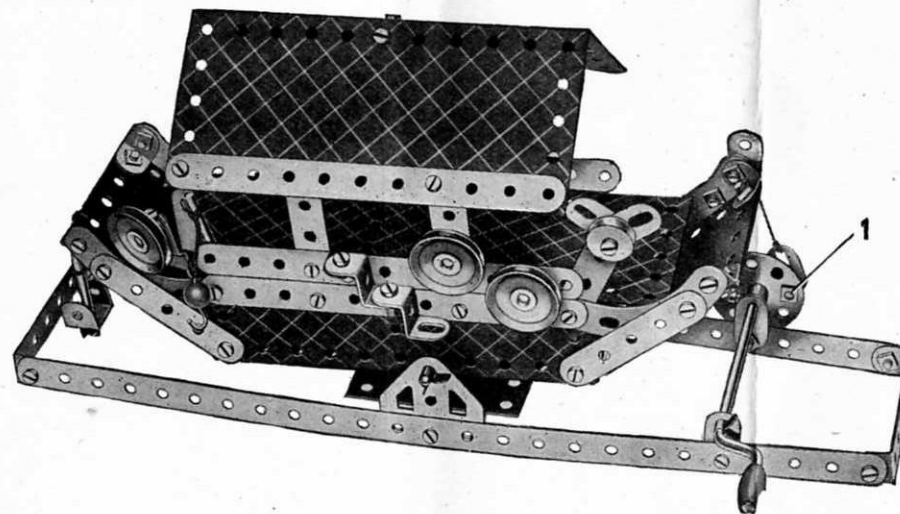

#### Parts required

2 of No. 1	1 of No. 18a	1 of No. 40	2 of No. 126
6 " " 2	1 " " 19g	1 " " 44	2 " " 126a
9 " " 5	3 " " 22	2 " " 48a	1 " " 176
5 " " 10	1 " " 23	1 " " 52	2 " " 188
2 " " 11	1 " " 24	1 " " 57c	2 " " 189
8 " " 12	6 " " 35	4 " " 90a	2 " " 190
1 " " 16	50 " " 37	5 " " 111c	2 " " 191
1 " " 17	3 " " 37a	2 " " 125	2 " " 192

A 5½" x 2½" Flanged Plate is used for the bottom of the ark and 5½" x 2½" Flexible Plates and 5½" Strips form the sides. The deck is fastened to the sides by ½" x ½" Angle Brackets.


The ark is pivoted on a 3½" Rod journalled in Flat Trunnions, the Rod passing through the flanges of the baseplate at the fifth holes from the end near the Crank Handle. The Crank Handle carries a Bush Wheel, and to this a Flat Bracket is lock-nutted at 1. A length of Cord is attached to the free hole of the Flat Bracket and is then tied to a Double Bracket bolted to the side of the ark. When the Crank Handle is rotated, the downward motion of the Flat Bracket causes one end of the ark to be pulled down, but as the Flat Bracket rises again, the ark returns to its original position.

### 3.6 SWING

Two 2½" Strips overlapped one hole are attached to the tops of the 12½" Strips by ½" x ½" Angle Brackets.

#### Parts required

2 of No. 1	2 of No. 48a
6 " " 5	1 " " 52
2 " " 10	2 " " 90a
8 " " 12	2 " " 126
34 " " 37	2 " " 190
1 " " 40	2 " " 191

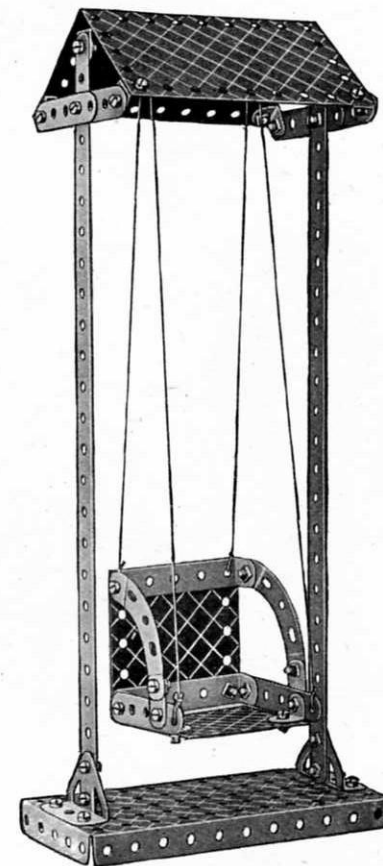




## 3.7 DENTIST'S CHAIR


## Parts required

4 of No. 2	1 of No. 52
8 " " 5	3 " " 90a
2 " " 10	1 " " 190
4 " " 12	1 " " 191
1 " " 24	1 " " 200
38 " " 37	Lighting Set
1 " " 37a	(Not included in
1 " " 48a	Outfit)

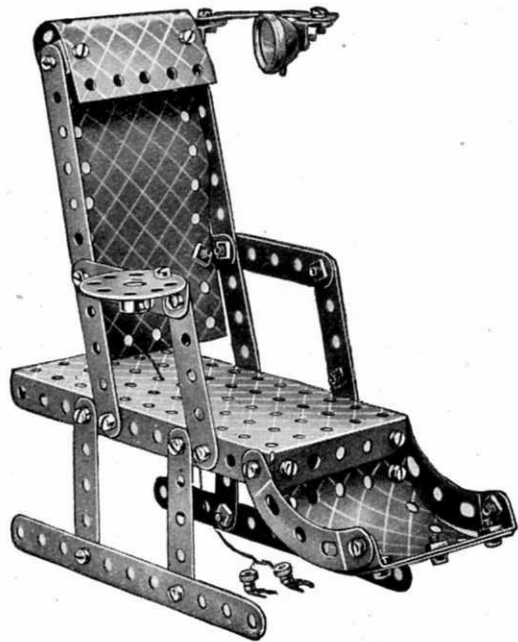

This model is fitted with a Spotlight from the Meccano Lighting Set.

## 3.8 BALANCE

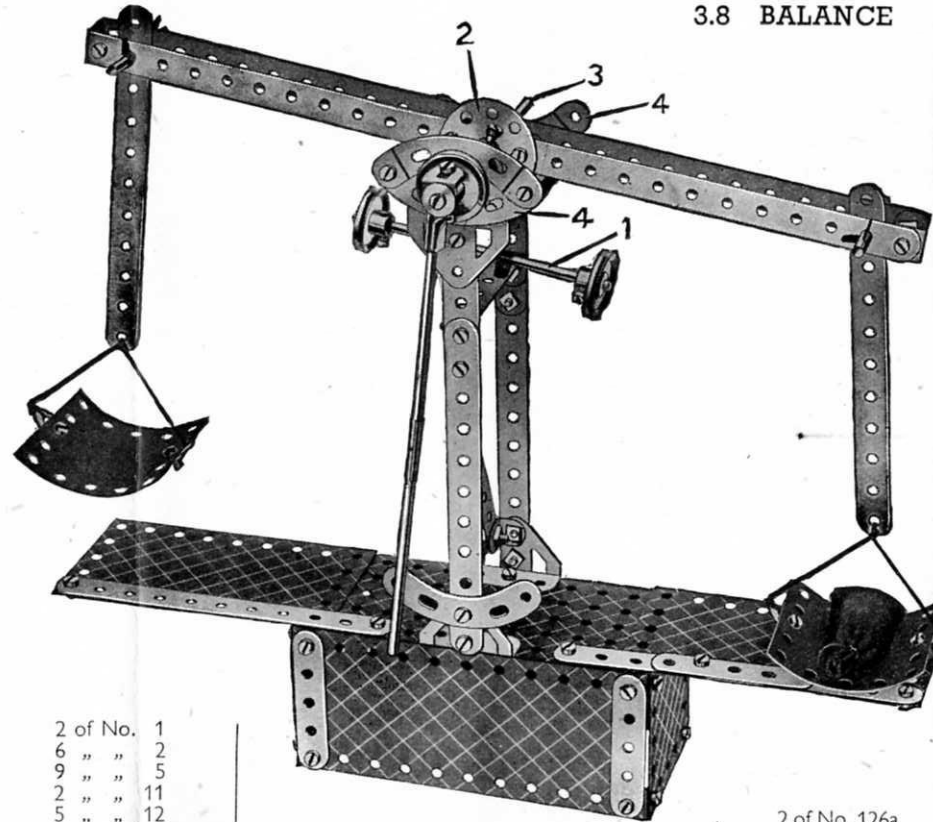

2 of No. 1
6 " " 2
9 " " 5
2 " " 11
5 " " 12
2 " " 15b
2 " " 16
2 " " 17
4 " " 22
1 " " 24
6 " " 35
50 " " 37

## Parts required

4 of No. 37a	1 of No. 52
5 " " 38	4 " " 90a
1 " " 40	4 " " 111c
1 " " 44	1 " " 125
2 " " 48a	2 " " 126


2 of No. 126a
2 " " 190
2 " " 191
2 " " 192
2 " " 200
1 " " 212
1 " " 213
2 " " 215

One of the  $12\frac{1}{2}$ " Strips that form the beam of the balance is bolted across a Bush Wheel 2. The  $3\frac{1}{2}$ " Rod 3 that is locked in the boss of the Bush Wheel rests on the two Curved Strips 4.

The Rod 1, by which the balance is adjusted, is pushed through the two holes of a Cranked Bent Strip fastened to the Bush Wheel 2 by a Reversed Angle Bracket. The  $5\frac{1}{2}$ " Strips from which the scale pans are suspended are pivoted at their upper ends on 2" Rods, which are passed through holes in the  $12\frac{1}{2}$ " Strips of the beam.

## 3.9 TOWER WAGON

A Cranked Bent Strip 1 is bolted in a horizontal position in the centre of the Flanged Plate, and a  $2\frac{1}{2}$ " Curved Strip is bolted on top of it by the centre hole to form a seat. A Reversed Angle Bracket 2 is then bolted in one of the elongated holes of the Curved Strip to form a bearing for the Rod carrying the Bush Wheel.

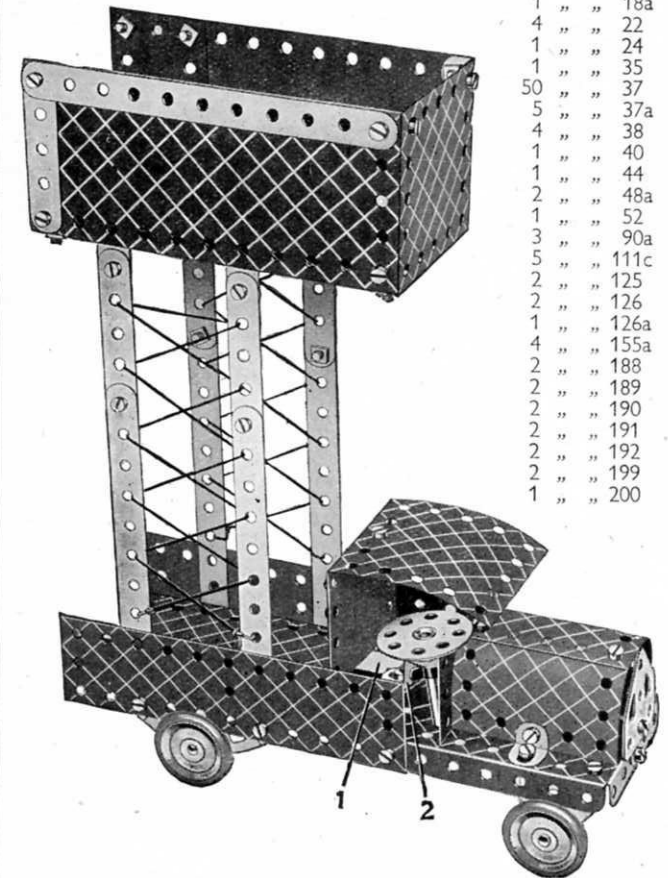


## Parts required

6 of No. 2
6 " " 5
1 " " 10
2 " " 11
8 " " 12
2 " " 16
1 " " 18a
4 " " 22
1 " " 24
1 " " 35
50 " " 37
5 " " 37a
4 " " 38
1 " " 40
1 " " 44
2 " " 48a
1 " " 52
3 " " 90a
5 " " 111c
2 " " 125
2 " " 126
1 " " 126a
4 " " 155a
2 " " 188
2 " " 189
2 " " 190
2 " " 191
2 " " 192
2 " " 199
1 " " 200



## 3.10 ELECTRIC GENERATING SET

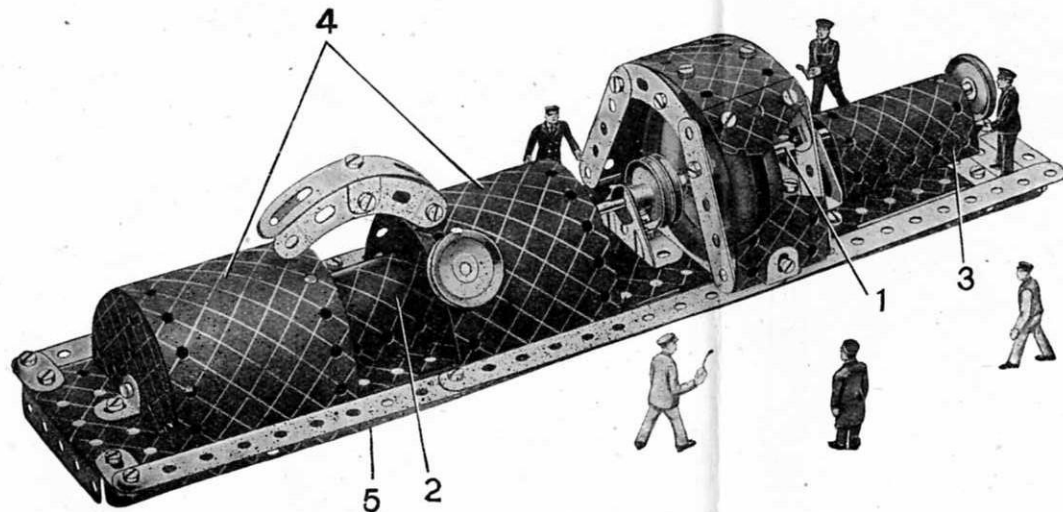

The base is constructed by bolting two 12½" Strips to the flanges of a 5½"×2½" Flanged Plate 5, and joining them at their free ends by a 2½"×½" Double Angle Strip. The space between the 12½" Strips is then filled in by Flexible Plates and 2½" Strips. The Rods that form the shaft of the machine are joined together at 1 by a Rod Connector. The bearings for the shaft are formed by two Trunnions. In the illustration part of the Flexible Plate has been cut away to show the structure of the armature and the commutator. The commutator consists of two 1" Pulleys and the armature of two Road Wheels, the bosses of which are placed in contact with each other.

The connecting pipe is formed from two 2½" Curved Strips and one 3" Formed Slotted Strip joined together at their centre holes by a Double Bracket, and is fastened to the turbine by means of an Angle Bracket. The U-Section Curved Plate 2 is held by a Spring Clip slipped on the upper end of a 2" Rod. One end of the Rod is passed through the middle hole in the top of the Plate, and its other end is then pushed through the Flexible Plate forming the base. The Rod is held by a Spring Clip underneath the Plate. The U-Section Curved Plate 3 is fixed to the base by an Angle Bracket on the rear side of the model. The two Flexible Plates 4 are bolted to the flanges of the 5½"×2½" Flanged Plate 5. The 1" Pulley representing the steam control is held by a ¾" Bolt, which passes through a hole in one of the Flexible Plates 4, and is locked in the boss of the Pulley.

## Parts required

2 of No. 1	1 of No. 16	1 of No. 52	1 of No. 189
6 " " 2	1 " " 18a	4 " " 90a	1 " " 190
8 " " 5	4 " " 22	1 " " 111c	1 " " 191
3 " " 10	4 " " 35	2 " " 125	2 " " 192
2 " " 11	50 " " 37	2 " " 126	2 " " 199
8 " " 12	1 " " 38	2 " " 187	1 " " 213
1 " " 15b	2 " " 48a	1 " " 188	2 " " 214
	1 of No. 215		

## 3.11 TROTTING CAR

The seat of the car consists of two 2½"×1½" Flexible Plates, overlapped two holes, and it carries at each end a Trunnion. The 3" Formed Slotted Strips that form the mudguards are supported by Reversed Angle Brackets 2, which are spaced from the Flexible Plate by three Washers. The axle consists of two 2" Rods joined by a Rod Connector, and is journaled in the Trunnions.


Each of the horses is built up as follows. Four 2½" Strips are bolted to a U-Section Curved Plate in the positions shown to form the legs, and two 2½" small radius Curved Strips represent the neck. A Rod is pushed through the centre holes of the U-Section Curved Plates and is supported in the end holes of the shafts. Two 3½" Rods carrying 1" Pulleys at each of their ends are journaled in the end holes of two of the forelegs, and two of the hind-legs of the horses, as shown.

The driver's body is made with two Flat Trunnions, which are bolted together and then fitted with 2½"×½" Double Angle Strips to represent legs. The Bolt that fixes the Cranked Bent Strip to the body holds also a Flat Bracket that supports a 1½" Disc representing the head. An Angle Bracket bolted to the Disc secures a Bush Wheel that has a ¾" Bolt fixed in its boss by the set-screw.

The whip is a 2" Rod held by Spring Clips in a Double Bracket, and the lash is attached to it by a Cord Anchoring Spring. The reins are fastened to the Flat Brackets that form the horses' heads, and also to the Double Bracket to which the whip is fixed. Short lengths of Cord fastened to the U-Section Curved Plates represent the horses' tails.

## Parts required

4 of No. 2	33 of No. 37	1 of No. 176
8 " " 5	2 " " 37a	2 " " 187
5 " " 10	6 " " 38	2 " " 188
1 " " 11	1 " " 40	2 " " 199
1 " " 12	1 " " 44	1 " " 213
1 " " 15b	2 " " 48a	4 " " 215
2 " " 16	4 " " 90a	1 " " 217a
2 " " 17	3 " " 111c	
1 " " 18a	2 " " 125	
4 " " 22	2 " " 126	
1 " " 24	2 " " 126a	
6 " " 35	4 " " 155a	

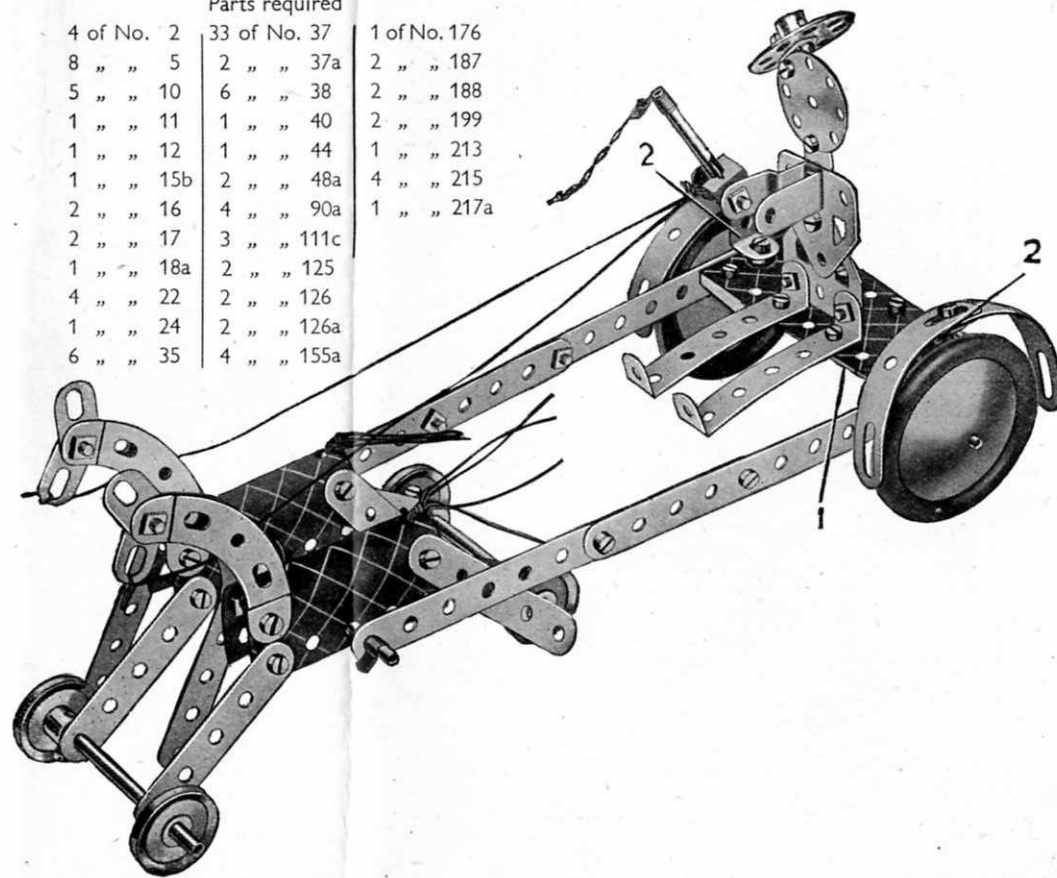




### 3.12 STEAM TRACTOR AND TRAILER

The steering column, a  $3\frac{1}{2}$ " Rod, is supported in the holes of a Double Bracket and a Reversed Angle Bracket bolted to the side of the cab. Cord is wound round the lower part of the Rod and its ends are tied to the  $2\frac{1}{2}$ "  $\times$   $\frac{1}{2}$ " Double Angle Strip that carries the front axle. Care must be taken that the Cord is wound tightly round the Rod, or it will slip when the steering wheel is rotated. The Rod 2 is supported in holes in the Flexible Plates that form the sides of the cab.


The Bush Wheel that forms the front of the boiler has two Angle Brackets bolted to it and a Rod passes through the free holes of these Brackets to hold the Bush Wheel in position. This Rod is joined by a Rod Connector to a 2" Rod that forms the chimney. The roof of the cab consists of a  $5\frac{1}{2}$ "  $\times$   $2\frac{1}{2}$ " Flexible Plate, and is held in position by Spring Clips placed on the two Rods that pass through it. The Flat Brackets 3 are bolted in the centre holes of the  $2\frac{1}{2}$ " Curved Strips. The Bolts 1 are lock-nutted in position and the Discs turn freely on them.

#### Parts required

4 of No. 2	1 of No. 23	2 of No. 90a	2 of No. 191
9 " " 5	1 " " 24	4 " " 111c	1 " " 192
5 " " 10	4 " " 35	2 " " 125	2 " " 199
2 " " 11	43 " " 37	2 " " 126	2 " " 200
8 " " 12	8 " " 37a	2 " " 126a	1 " " 212
2 " " 15b	6 " " 38	3 " " 155a	1 " " 213
2 " " 16	1 " " 40	1 " " 176	1 " " 214
2 " " 17	1 " " 44	2 " " 187	2 " " 217a
1 " " 18a	2 " " 48a	2 " " 188	2 " " 217b
4 " " 22	1 " " 52	2 " " 190	

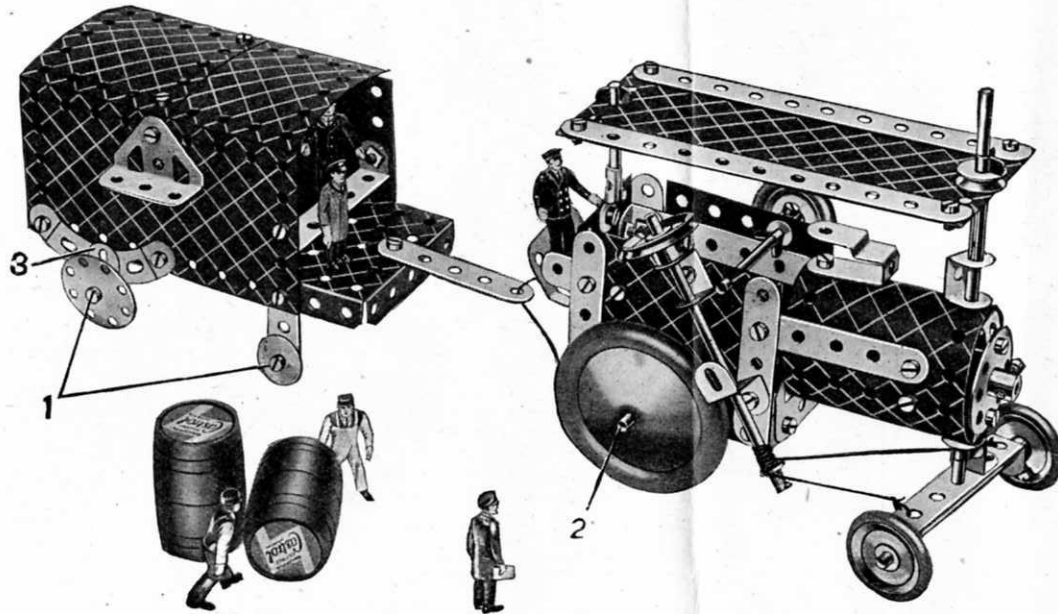


### 3.13 MECHANICAL HORSE AND TRAILER

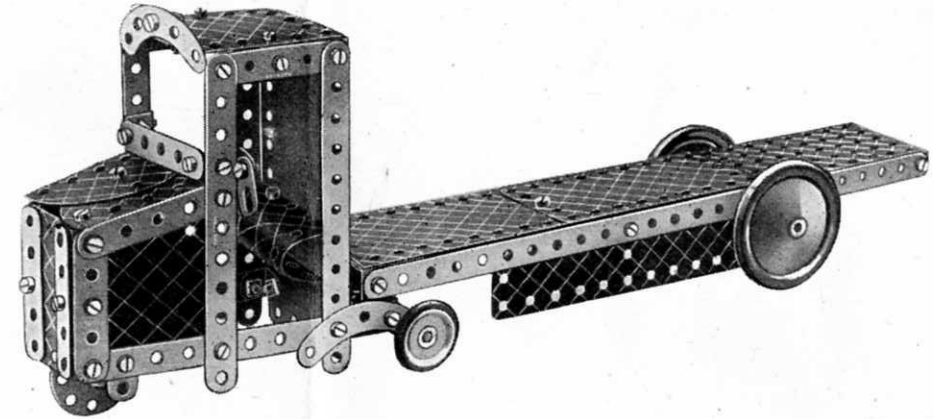

#### Parts required

2 of No. 1	4 of No. 90a
6 " " 2	6 " " 111c
9 " " 5	2 " " 125
4 " " 10	2 " " 126
2 " " 11	2 " " 126a
8 " " 12	2 " " 155a
2 " " 16	1 " " 176
1 " " 17	2 " " 187
1 " " 18a	1 " " 188
3 " " 22	2 " " 189
1 " " 24	2 " " 190
4 " " 35	2 " " 191
56 " " 37a	1 " " 192
50 " " 37b	1 " " 199
2 " " 38	1 " " 200
2 " " 48a	2 " " 214
1 " " 52	1 " " 127a


The chassis of the mechanical horse is built up on two  $5\frac{1}{2}$ " Strips, extended at the rear by  $2\frac{1}{2}$ " Curved Strips that provide bearings for the rear axle. The method of building up the bonnet and cab is clear from the illustration. The rear ends of the  $5\frac{1}{2}$ " Strips are joined by a Curved Strip and two Double Brackets. At the centre of the Curved Strip is bolted a  $1\frac{1}{4}$ " Disc through which passes a  $1\frac{1}{2}$ " Rod 1. This Rod engages in the centre hole of the Plate at the front of the trailer, and is retained in place by a Spring Clip and a Cord Anchoring Spring. A 1" Pulley and two Washers space the end of the trailer from the  $1\frac{1}{4}$ " Disc. Bearings for the rear axle are provided by Flat Trunnions.

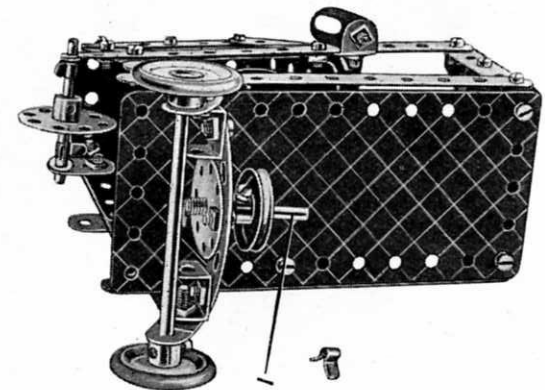



## 3.14 GIANT LORRY

The bonnet is made up of two U-Section Curved Plates overlapped three holes and attached to the  $5\frac{1}{2} \times 2\frac{1}{2}$ " Flanged Plate by two Angle Brackets. The front of the cabin is a  $2\frac{1}{2} \times 1\frac{1}{2}$ " Flexible Plate, which is attached to the chassis by a Reversed Angle Bracket. Bearings for the  $3\frac{1}{2}$ " Rods forming the front and rear axles are provided by Flat Brackets bolted to the flanges of the Flanged Plate.

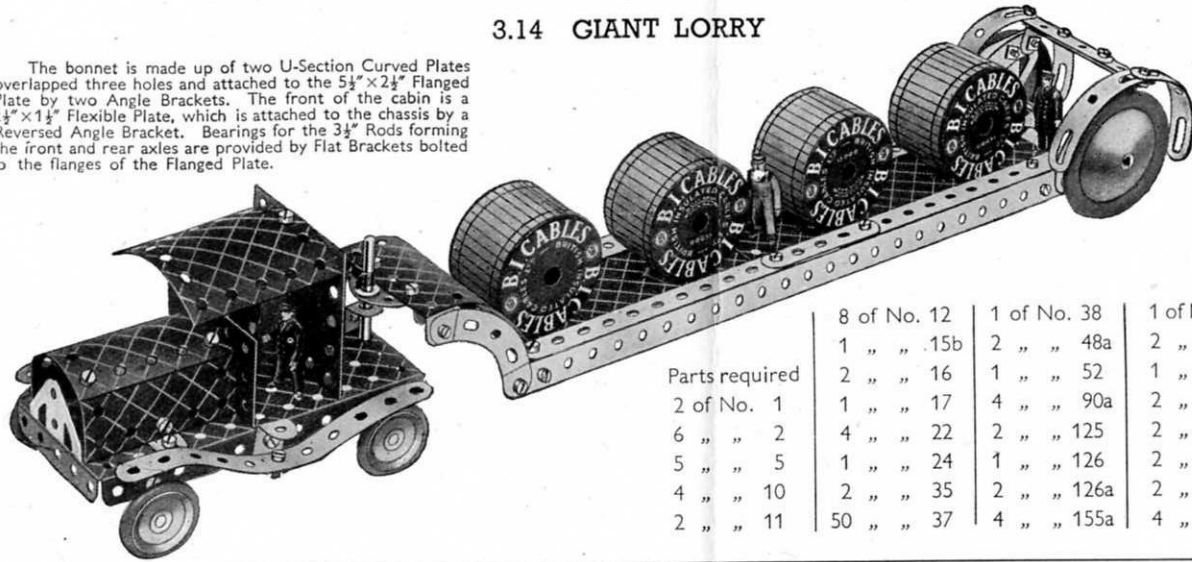


Parts required	8 of No. 12	1 of No. 38	1 of No. 176
2 of No. 1	1 " " 15b	2 " " 48a	2 " " 187
6 " " 2	2 " " 16	1 " " 52	1 " " 188
5 " " 5	1 " " 17	4 " " 90a	2 " " 190
4 " " 10	4 " " 22	2 " " 125	2 " " 192
2 " " 11	1 " " 24	1 " " 126	2 " " 199
	2 " " 35	2 " " 126a	2 " " 200
	50 " " 37	4 " " 155a	4 " " 215

## 3.15 BATTLE CRUISER

Bolts 1 fasten the Strips to a Flat Trunnion so that the Strips are held rigid. Trunnion 2, which holds the rear guns, is fastened by a  $\frac{1}{2} \times \frac{1}{2}$ " Angle Bracket to the centre hole of  $2\frac{1}{2} \times \frac{1}{2}$ " Double Angle Strip 3. The forward guns also are held by a Trunnion, but this is fastened to a Double Bracket that in turn is bolted to the  $5\frac{1}{2} \times 2\frac{1}{2}$ " Flanged Plate.

The base of the turret is formed by a Bush Wheel, which is bolted to the deck. A  $3\frac{1}{2}$ " Rod is fastened in the boss of the Bush Wheel, and two Road Wheels are placed on it as shown.

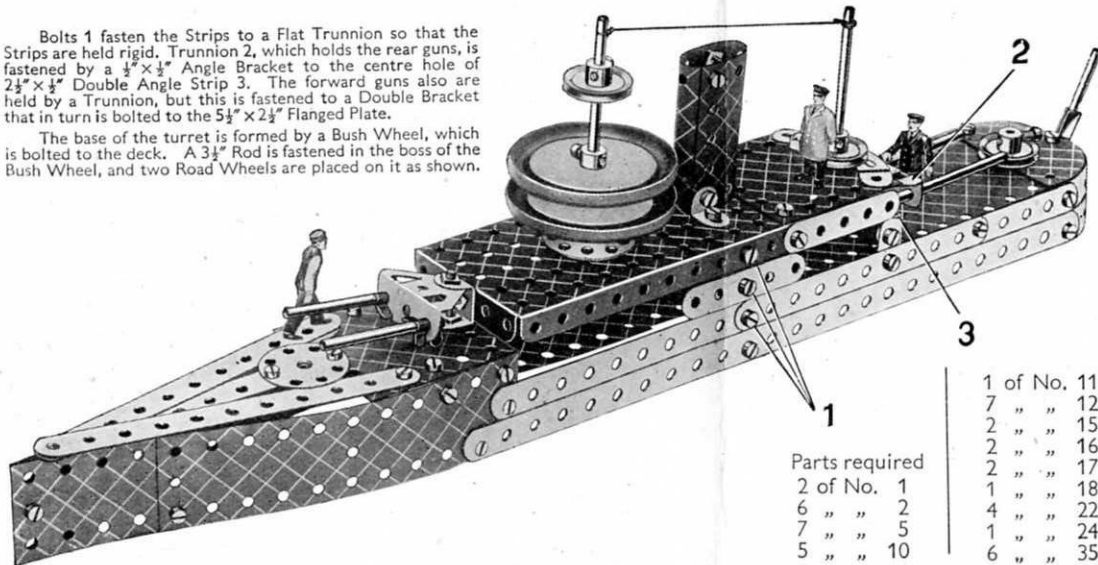


Parts required	1 of No. 11
2 of No. 1	7 " " 12
6 " " 2	2 " " 15b
7 " " 5	2 " " 16
5 " " 10	2 " " 17
	1 " " 18a
	4 " " 22
	1 " " 24
	6 " " 35

50 of No. 37	1 " " 37a
6 " " 37a	1 " " 40
1 " " 40	2 " " 48a
2 " " 48a	1 " " 52
1 " " 52	1 " " 90a
1 " " 90a	6 " " 111c
6 " " 111c	2 " " 126
2 " " 126	2 " " 126a
2 " " 126a	1 " " 176
1 " " 176	2 " " 187
2 " " 187	2 " " 188
2 " " 188	2 " " 189
2 " " 189	2 " " 190
2 " " 190	1 " " 191
1 " " 191	1 " " 192
1 " " 192	1 " " 199
1 " " 199	2 " " 200
2 " " 200	1 " " 212
1 " " 212	1 " " 214
1 " " 214	4 " " 215
4 " " 215	1 " " 217a
1 " " 217a	1 " " 217b

## 3.16 NAVAL GUN

Parts required

2 of No. 1	5 " " 2
5 " " 2	3 " " 5
3 " " 5	3 " " 10
3 " " 10	2 " " 11
2 " " 11	2 " " 12
2 " " 12	1 " " 16
1 " " 16	2 " " 17
2 " " 17	4 " " 22
4 " " 22	1 " " 24
1 " " 24	4 " " 35
4 " " 35	28 " " 37
28 " " 37	2 " " 37a
2 " " 37a	5 " " 38
5 " " 38	1 " " 40
1 " " 40	2 " " 48a
2 " " 48a	1 " " 52
1 " " 52	2 " " 111c
2 " " 111c	2 " " 126
2 " " 126	2 " " 126a
2 " " 126a	1 " " 155a
1 " " 155a	1 " " 176
1 " " 176	1 " " 187
1 " " 187	1 " " 188
1 " " 188	1 " " 189
1 " " 189	2 " " 191
2 " " 191	2 " " 199
2 " " 199	1 " " 217a

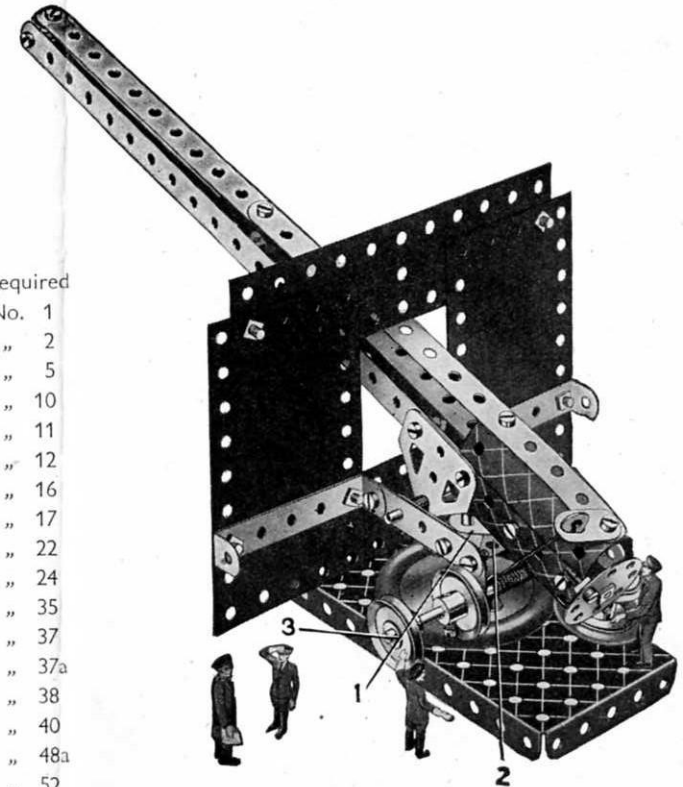


The Flexible Plates forming the gun shield are fastened by means of Double Angle Strips and  $2\frac{1}{2}$ " Strips to two Trunnions 1. The Trunnions are bolted to Bush Wheel 2. A 2" Rod held in the boss of the Bush Wheel passes through a Road Wheel and the centre hole of the  $5\frac{1}{2} \times 2\frac{1}{2}$ " Flanged Plates. The Rod is fastened underneath the Flanged Plate by a Cord Anchoring Spring so that the gun is free to swivel.

The elevation of the gun is controlled by Rod 3. Cord is wound round the Rod, then passed through the hole of a Flat Bracket fastened at the rear end of the gun, and knotted to a Washer as shown. The 14" Disc at the end of the gun is fastened by an Angle Bracket to the U-Section Curved Plates representing the breech.



## 3.17 FIRE-ENGINE

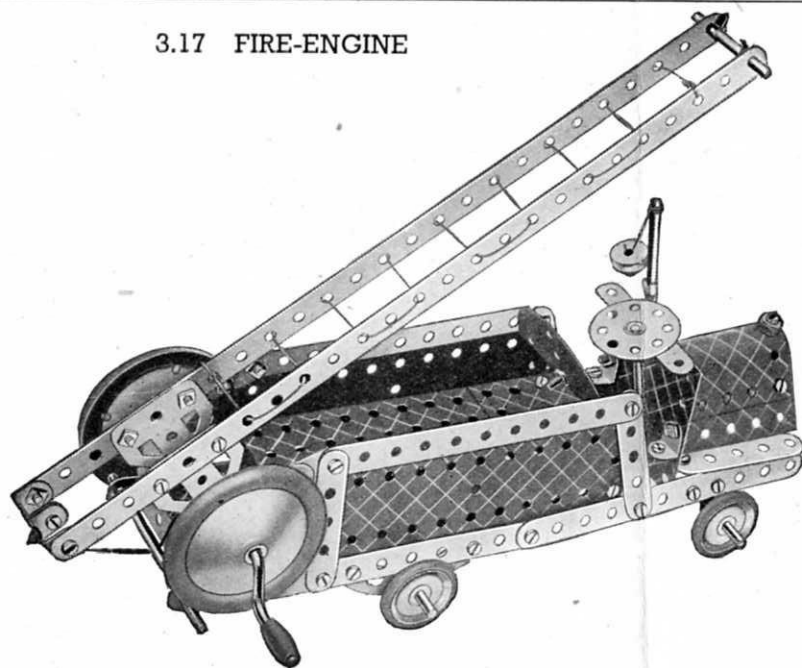

## Parts required

2 of No. 1	2 of No. 125
6 " " 2	2 " " 126
8 " " 5	2 " " 126a
5 " " 10	4 " " 155a
2 " " 11	1 " " 176
7 " " 12	2 " " 187
2 " " 15b	2 " " 188
2 " " 16	2 " " 189
1 " " 17	2 " " 190
1 " " 19g	1 " " 192
4 " " 22	1 " " 199
1 " " 23	1 " " 212
1 " " 24	1 " " 214
6 " " 35	
50 " " 37	
6 " " 37a	
5 " " 38	
1 " " 40	
2 " " 48a	
1 " " 52	
4 " " 90a	
6 " " 111c	

Two Flat Trunnions are bolted to the bottom of the ladder, and the shaft of the Crank Handle shown in Fig. 3.17a passes through the holes at their narrow ends. The bonnet, which is formed from a U-Section Curved Plate and two  $2\frac{1}{2} \times 1\frac{1}{2}$  Flexible Plates, is fastened to the frame by Reversed Angle Brackets. These latter also support the  $2\frac{1}{2}$  Strips at the side of the bonnet.

The  $3\frac{1}{2}$  Rod representing the steering column passes through the free hole of a Flat Bracket bolted to the dashboard, then through a hole in the Flexible Plate at the bottom of the cab. It is fastened in position by a Cord Anchoring Spring.


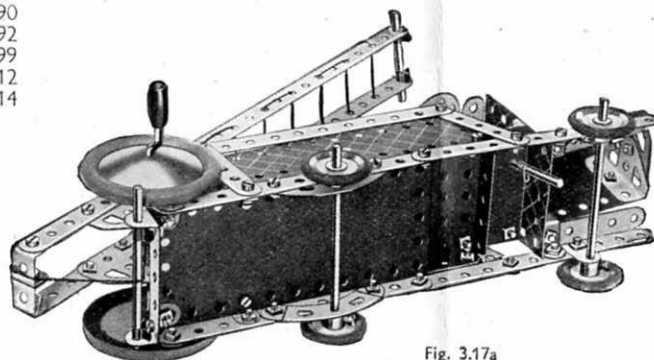


Fig. 3.17a

## 3.18 CABIN MONOPLANE

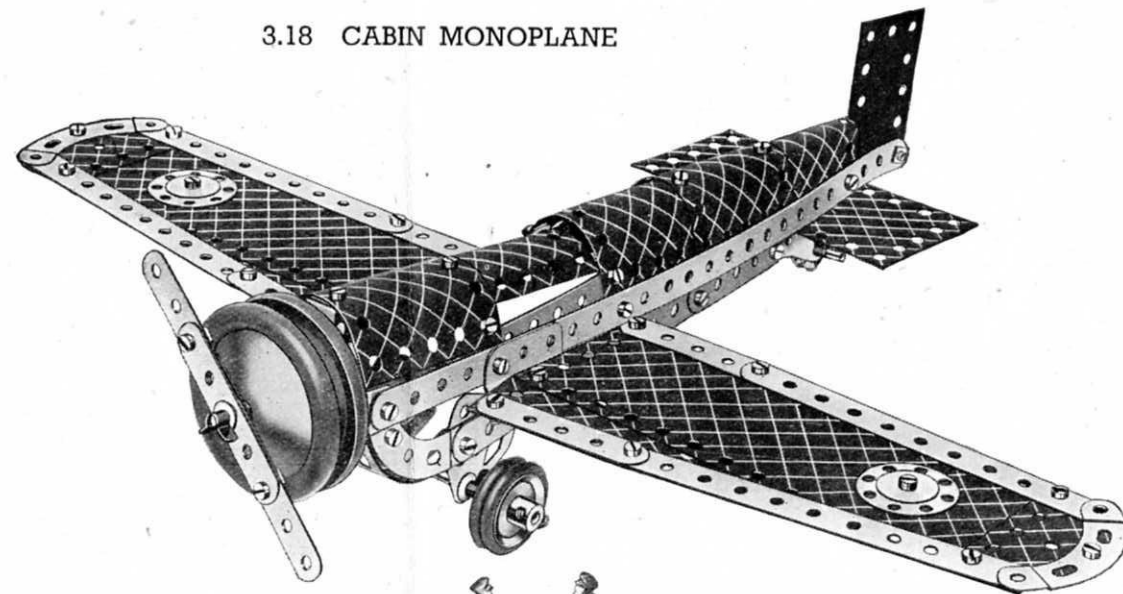

## Parts required

2 of No. 1	4 of No. 22	4 of No. 90a	2 of No. 190
6 " " 2	1 " " 23	6 " " 111c	1 " " 191
9 " " 5	1 " " 24	2 " " 125	2 " " 192
5 " " 10	5 " " 35	2 " " 126	2 " " 199
1 " " 11	50 " " 37	2 " " 126a	2 " " 200
8 " " 12	6 " " 37a	4 " " 155a	2 " " 214
1 " " 16	5 " " 38	2 " " 187	2 " " 215
1 " " 17	1 " " 44	2 " " 188	2 " " 217a
1 " " 18a	2 " " 48a	2 " " 189	2 " " 217b


The engine and propeller are attached by fastening a Bush Wheel to the nose of the fuselage by two Angle Brackets. A 2" Rod is locked in the boss of the Bush Wheel and forms the support for the Road Wheels and the compound strip representing the propeller.

The wings are attached to the fuselage by  $\frac{1}{2} \times \frac{1}{2}$  Angle Brackets and Trunnions. The tail wheel is supported on a  $1\frac{1}{2}$  Rod journaled in the holes of a Cranked Bent Strip fastened to the fuselage by a Double Bracket.

The Rod on which the double landing wheels are mounted passes through the holes in the narrow ends of two Flat Trunnions bolted to the fuselage.



## 3.19 BLOCK-SETTING CRANE

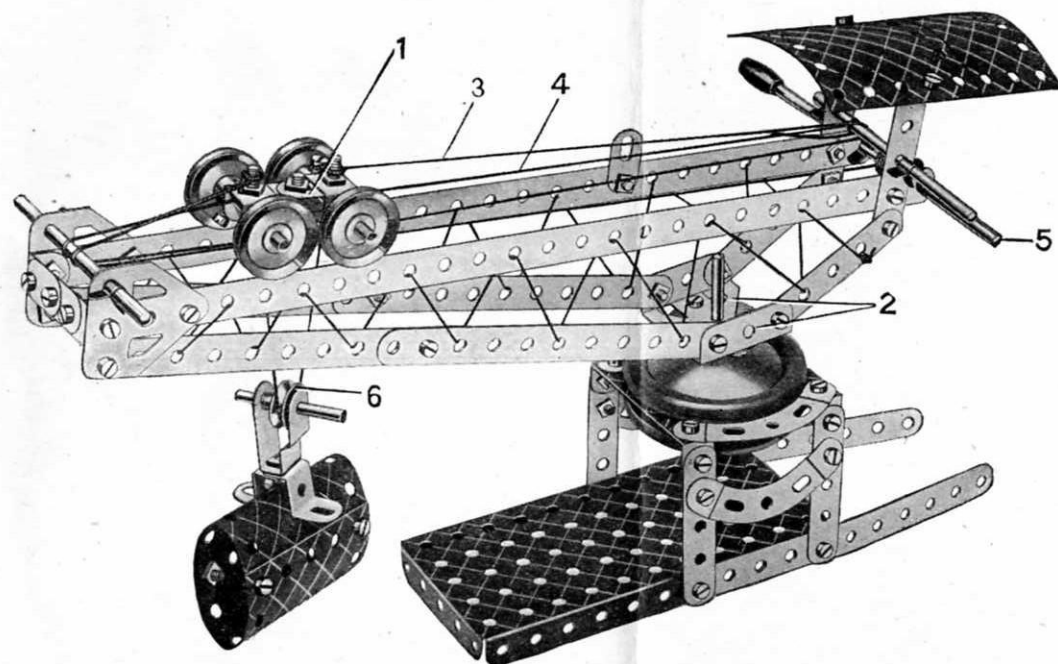

## Parts required

2 of No. 1	4 of No. 37a
6 " " 2	6 " " 38
8 " " 5	1 " " 40
5 " " 10	1 " " 44
2 " " 11	2 " " 48a
4 " " 12	1 " " 52
1 " " 15b	4 " " 90a
2 " " 16	4 " " 111c
2 " " 17	2 " " 125
1 " " 18a	2 " " 126
1 " " 19g	2 " " 126a
4 " " 22	1 " " 176
1 " " 23	2 " " 187
1 " " 24	2 " " 188
6 " " 35	2 " " 199
50 " " 37	2 " " 200

The travelling bogie 1 consists of two Flat Brackets bolted together by their elongated holes, and at each end of it Double Brackets are fastened by  $\frac{1}{2}$ " Bolts. Two 2" Rods are pushed through the Double Brackets and carry 1" fast Pulleys spaced so that their grooves fit on the two  $12\frac{1}{2}$ " Strips that form the top of the jib. The Trunnions 2 at the base of the bogie, are secured to a Bush Wheel mounted on a Rod held in the bosses of two Road Wheels. The Road Wheels are placed one above and one below the  $2\frac{1}{2}$ " x  $1\frac{1}{2}$ " Flexible Plates that form the top of the tower.

Cord 3 is first fastened to the  $\frac{1}{2}$ " Bolt at the rear end of the travelling bogie, and then wound three times around the Crank Handle. It is then led around the Rod journalled in the Flat Trunnion at the front end of the jib, and brought back and tied to another  $\frac{1}{2}$ " Bolt at the front of the bogie.

Cord 4 is first fastened to Rod 5, which is passed through the end holes of the  $12\frac{1}{2}$ " Strips, and then over the rear axle of the bogie. It is then passed around the  $\frac{1}{2}$ " Pulley 6, led over the front axle of the bogie, around the Rod at the front end of the jib, and finally tied to the bogie. The  $\frac{1}{2}$ " loose Pulley 6 and its Rod are held in the Cranked Bent Strip by a Cord Anchoring Spring.

## 3.20 PITHEAD GEAR


## Parts required

2 of No. 1	1
6 " " 2	2
8 " " 5	5
1 " " 10	10
1 " " 11	11
7 " " 12	12
1 " " 15b	15b
2 " " 16	16
1 " " 18a	18a
1 " " 19g	19g
4 " " 22	22
1 " " 24	24
6 " " 35	35
41 " " 37	37
1 " " 37a	37a
6 " " 38	38
1 " " 40	40
2 " " 48a	48a
1 " " 52	52
2 " " 111c	111c
2 " " 125	125
2 " " 126	126
2 " " 126a	126a
1 " " 176	176
2 " " 187	187
2 " " 188	188
2 " " 189	189
1 " " 190	190
2 " " 192	192
2 " " 200	200
1 " " 214	214

A  $3\frac{1}{2}$ " Rod is journalled in the top holes of the  $12\frac{1}{2}$ " Strips. Between the two Road Wheels on this Rod is a 1" fast Pulley, over which the cord controlling the cage passes. A Cord Anchoring Spring is pushed on one end of the Rod, and a Bush Wheel is fixed to the other end. The cage is built up from Trunnions and Flat Trunnions, and the  $2\frac{1}{2}$ " x  $1\frac{1}{2}$ " Flexible Plates that form its sides are fastened to the Flat Trunnions by Angle Brackets.


A  $\frac{1}{2}$ " Bolt is passed through the holes of Reversed Angle Brackets bolted to the top of the cage, and Washers are placed on its shank for spacing purposes.

The guides 1 for the cage consist of a piece of Cord which is passed over two Rods as shown and then led downward and through two holes in the Flanged Plate that forms the base. Washers are tied to each end of the Cord underneath the Plate, to maintain it in tension.

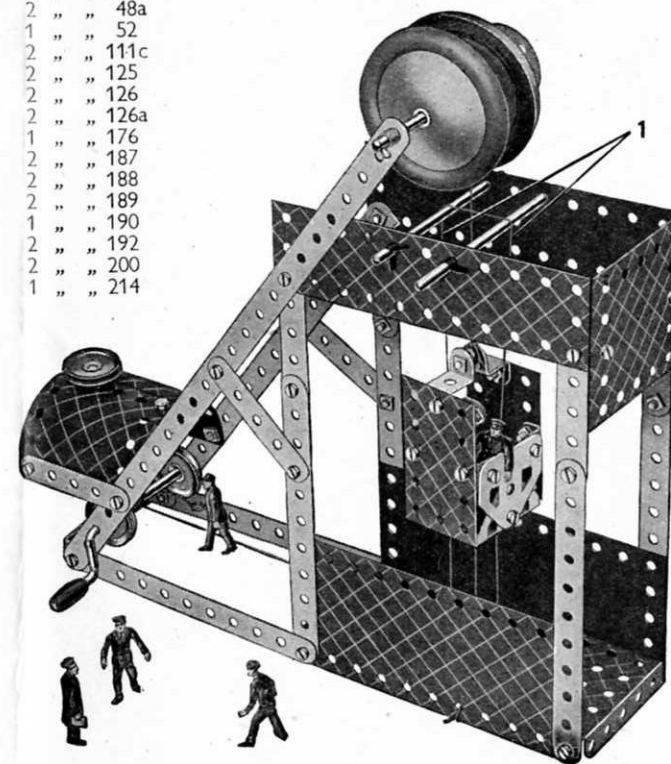



## 3.21 TANK

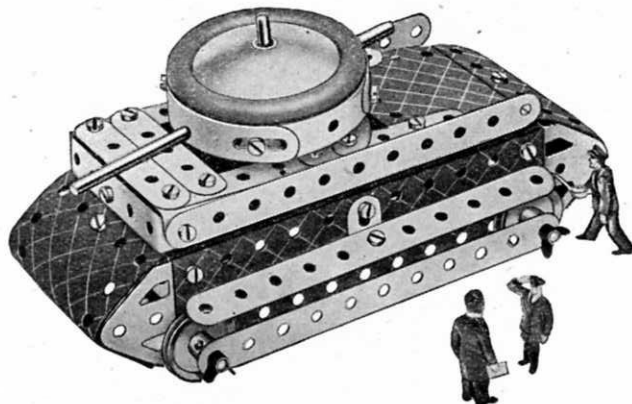

Construction of the gun turret is commenced by bolting a  $2\frac{1}{2}$ " Strip across a Bush Wheel. Four 3" Formed Slotted Strips are bolted together to form a circle and fastened to the  $2\frac{1}{2}$ " Strip by means of Angle Brackets. Next two Angle Brackets are bolted to the Bush Wheel in the positions shown in Fig. 3.21a. Two Rods are pushed through holes in the Formed Slotted Strips and through the free holes of the Angle Brackets, and are fastened in position by means of Spring Clips. The turret is held in place by a  $3\frac{1}{2}$ " Rod that is locked in the boss of the Bush Wheel and then passed through the  $5\frac{1}{2}$ " x  $2\frac{1}{2}$ " Flanged Plate and through a hole in a Reversed Angle Bracket. A Cord Anchoring Spring is then screwed on to it to hold it in position. To complete the turret a Road Wheel is fastened on the upper end of the  $3\frac{1}{2}$ " Rod. The Reversed Angle Bracket is bolted to the  $5\frac{1}{2}$ " x  $2\frac{1}{2}$ " Flanged Plate.

The *Magic Motor* is bolted to the Flanged Plate, and the drive is taken to the back axle by means of a Driving Band.

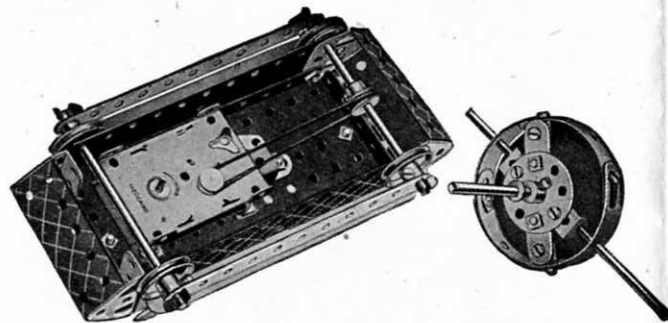


Fig. 3.21a


## Parts required

6 of No. 2
7 " " 5
2 " " 10
8 " " 12
2 " " 15b
2 " " 16
1 " " 17
4 " " 22
1 " " 24
6 " " 35
40 " " 37
1 " " 38
1 " " 48a
1 " " 52
1 " " 90a
1 " " 125
2 " " 126
2 " " 126a
1 " " 176
1 " " 187
2 " " 189
1 " " 190
2 " " 199
4 " " 215
1 <i>Magic Motor</i>

## Parts required

2 of No. 2	2 of No. 48a
7 " " 5	1 " " 52
2 " " 10	4 " " 90a
2 " " 12	1 " " 125
2 " " 16	1 " " 126
1 " " 17	1 " " 126a
1 " " 23	2 " " 187
4 " " 35	1 " " 188
35 " " 37	2 " " 189
2 " " 38	2 " " 199
1 " " 40	4 " " 215
1 " " 44	1 <i>Magic Motor</i>

## 3.22 HORSE AND CART

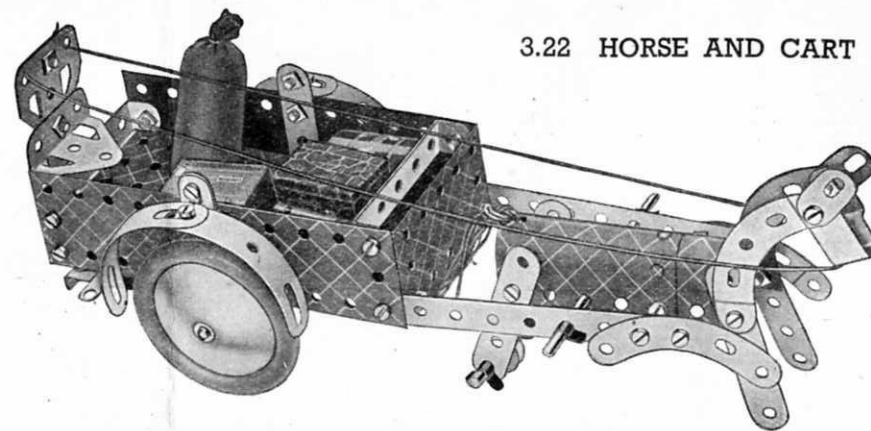

The model is driven by a *Magic Motor* fastened underneath the  $5\frac{1}{2}$ " x  $2\frac{1}{2}$ " Flanged Plate that forms the bottom of the cart. The drive is taken by a Driving Band from the pulley of the Motor to a  $\frac{1}{2}$ " fast Pulley on the back axle. A  $\frac{1}{2}$ " loose Pulley is fitted on a 2" Rod journalled in the bottom holes of the Strips forming the hind-legs of the horse, so that the model will travel smoothly along the ground.

## 3.23 ROUNDABOUT

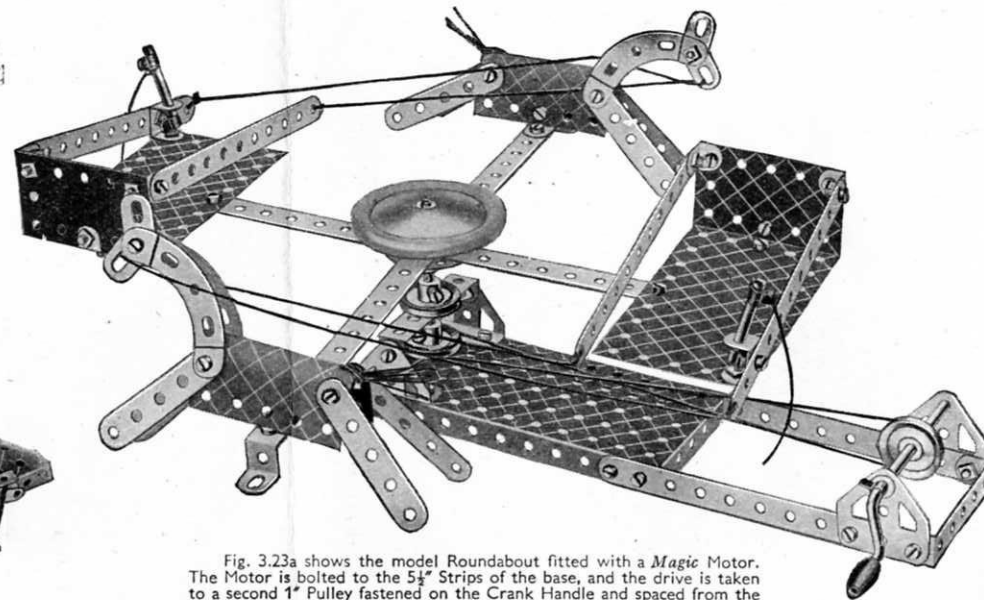


Fig. 3.23a shows the model Roundabout fitted with a *Magic Motor*. The Motor is bolted to the  $5\frac{1}{2}$ " Strips of the base, and the drive is taken to a second 1" Pulley fastened on the Crank Handle and spaced from the Flat Trunnion by a Spring Clip and a Washer. This Pulley is removed from the end of the pivot rod of the roundabout underneath the  $5\frac{1}{2}$ " x  $2\frac{1}{2}$ " Flanged Plate.

## Parts required

2 of No. 1	4 of No. 37a
6 " " 2	4 " " 38
8 " " 5	1 " " 40
4 " " 10	2 " " 48a
2 " " 11	1 " " 52
8 " " 12	4 " " 90a
1 " " 16	4 " " 111c
1 " " 17	2 " " 125
1 " " 18a	2 " " 126
1 " " 19g	2 " " 126a
4 " " 22	1 " " 187
1 " " 24	2 " " 188
6 " " 35	2 " " 191
50 " " 37	2 " " 199

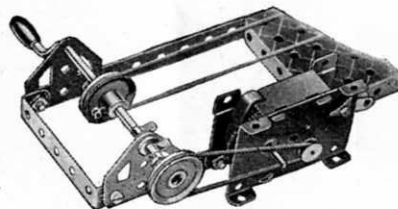


Fig. 3.23a



## 3.24 WINDMILL PUMP

Up and down motion of the pumping shaft is obtained from a crank fastened to the end of the Crank Handle. The crank is formed by securing an Angle Bracket to the boss of a 1" Pulley, two Washers being used between the Bracket and the boss. A 2½" Strip is pivoted to the crank and to the pumping beam, the other end of which is pivotally attached to a Double Bracket on the pump rod. The Bolts 1 are lock-nutted. The 1" Pulley on the Crank Handle is connected by a belt of Cord to the shaft carrying the sails. The *Magic Motor* is bolted by its flanges to the baseplate, and the drive is taken from the pulley of the Motor to a ½" Pulley fixed on the shaft of the Crank Handle, if desired the Motor may be dispensed with and the model operated by hand.


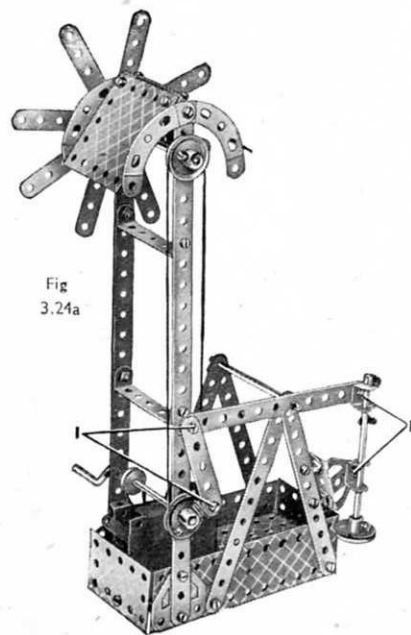


Fig. 3.24a

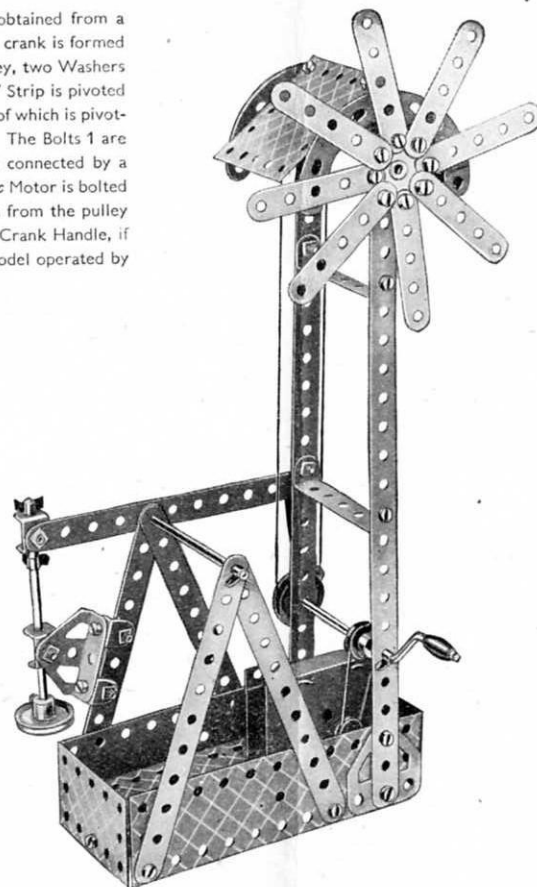


## Parts required

2 of No. 1	2 of No. 11
5 " " 2	7 " " 12
9 " " 5	1 " " 15b

2 of No. 16	2 of No. 48a
1 " " 19g	1 " " 52
3 " " 22	4 " " 90a
1 " " 24	1 " " 126
4 " " 35	2 " " 126a
39 " " 37	2 " " 188
3 " " 37a	2 " " 189
2 " " 38	2 " " 190
1 " " 40	1 <i>Magic Motor</i>

## 3.25 TRACTOR AND HARROW

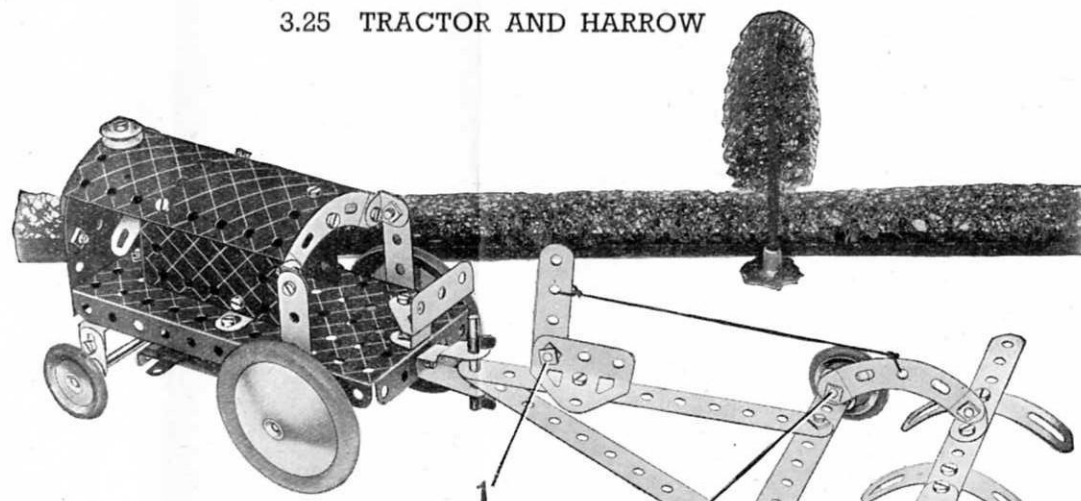

The rear axle is passed through the bottom holes of two 2½" Strips that are bolted to the flanges of the 5½" x 2½" Flanged Plate forming the chassis. The construction of the bonnet and radiator is clearly shown in the illustration.

The fan consists of two Flat Brackets held against the head of a ¾" Bolt by a Nut. The ¾" Bolt is fastened to the radiator by means of two more Nuts. The engine itself is represented by two U-Section Curved Plates, bolted together so that they overlap two holes, and then fastened to the Flanged Plate by two Angle Brackets.

The wheels of the harrow are held by ¾" Bolts in Reversed Angle Brackets at each end of a 5½" Strip. Small radius Curved Strips are fastened to the Reversed Angle Brackets by lock-nutted Bolts, and Cord is attached to the centre hole of one of these and also to the operating lever, which is held by lock-nuts to a Trunnion. By moving the lever forward the harrow may be raised from the ground when not in use.

The Bolts 1 shown in both illustrations are lock-nutted.

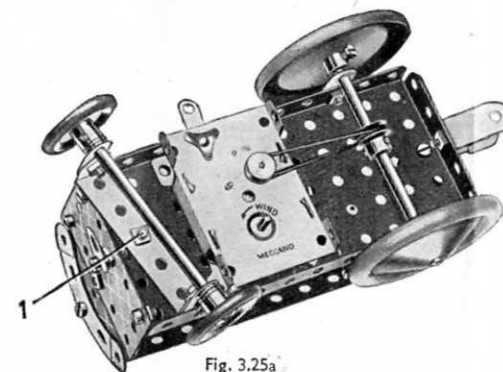


Fig. 3.25a

## Parts required


5 of No. 2	4 of No. 22	2 of No. 125
3 " " 5	1 " " 23	2 " " 126
5 " " 10	2 " " 35	4 " " 155a
2 " " 11	46 " " 37	2 " " 187
8 " " 12	10 " " 37a	1 " " 188
2 " " 16	6 " " 38	2 " " 199
1 " " 18a	1 " " 44	2 " " 200
	1 " " 48a	1 " " 214
	1 " " 52	4 " " 215
	4 " " 90a	1 <i>Magic Motor</i>
	5 " " 111c	

### BUILD BIGGER AND BETTER MODELS


When you have built all the models shown in this Manual you will be keen to build bigger and more elaborate models. Your next step is to purchase a Meccano No. 3a Accessory Outfit containing all the parts required to convert your No. 3 into a No. 4 Outfit. You will thus be able to build the full range of No. 4 Outfit Models, a selection of which is illustrated on this page.

If you prefer to do so, you can build up and develop your Outfit quite easily by adding various parts to it from time to time. The model-building possibilities of the Meccano System are limitless, and the more Meccano parts you have the bigger and better the models you will be able to build.


Ask your dealer to post to you regularly the latest Meccano parts lists and other Meccano literature.

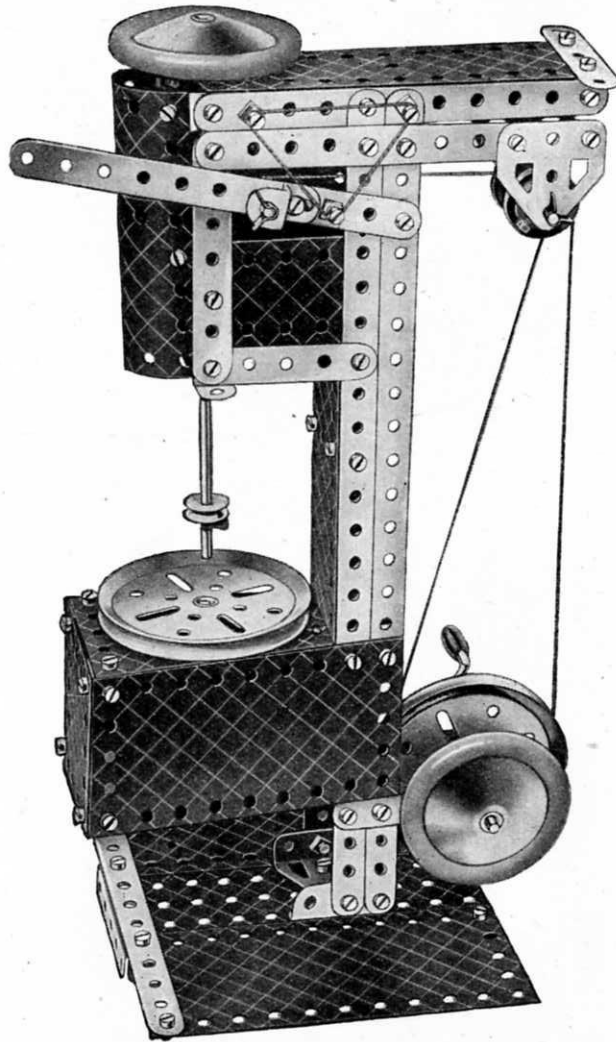

*Drilling Machine*

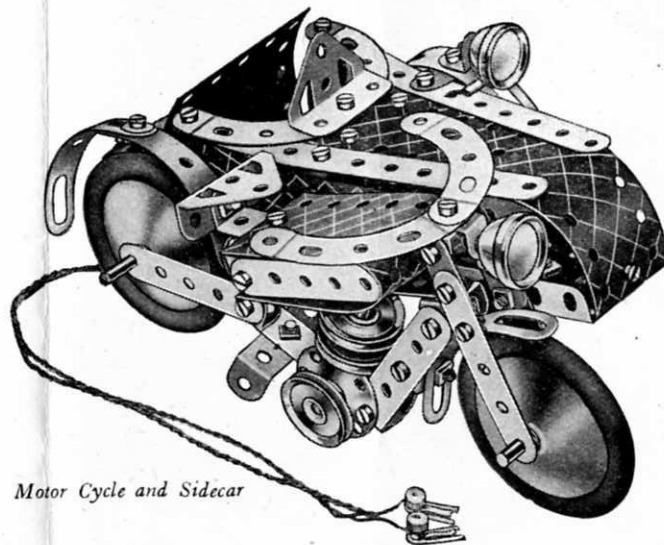

*Motor Cycle and Sidecar*

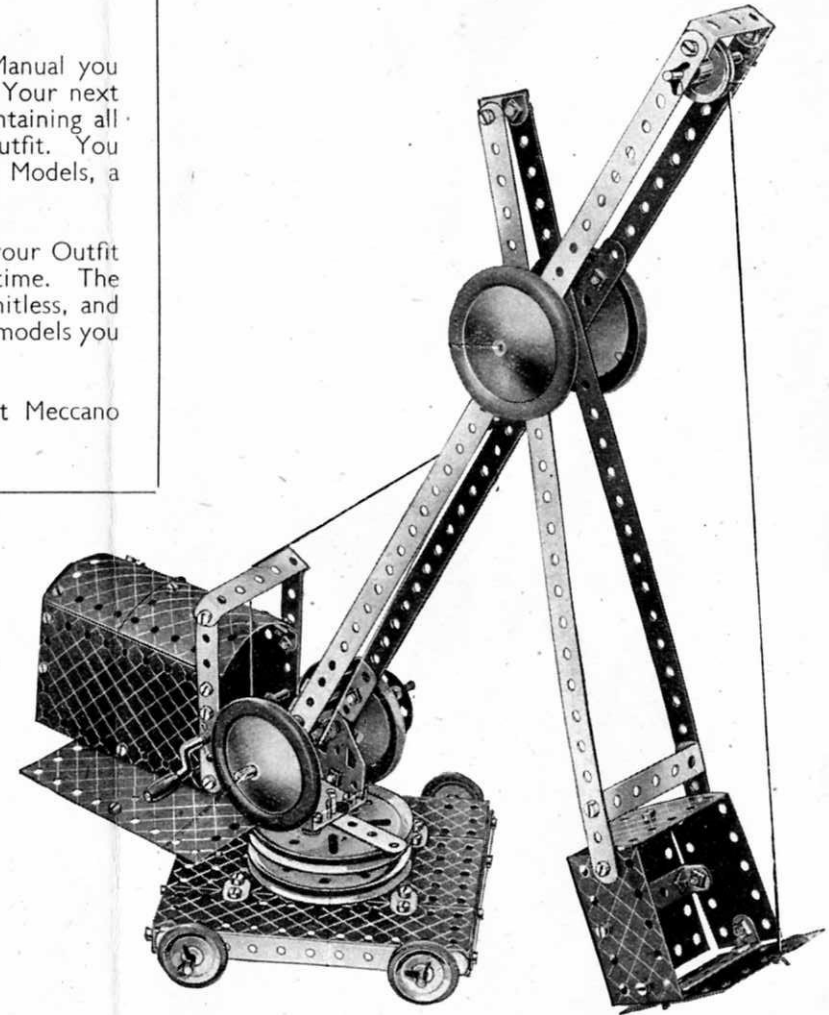

*Giant Excavator*



Here are a few simple and interesting movements showing how easily real mechanisms can be reproduced with Meccano.

### WORM AND PINION BEARING




The compact rear axle drive unit illustrated above is intended chiefly for use in small models of motor cars. Two Corner Angle Brackets are secured by Bolts passing through their elongated holes to a  $1\frac{1}{2}$ " Strip, to which a Double Bent Strip also is secured. The Rod carrying the Worm is passed through the centre hole of the Strips and held in position by a Collar.

The driven Rod is journalled in the Corner Angle Brackets and carries a Pinion that engages with the Worm.

A feature of this bearing that should not be overlooked is that the useful gear ratio of 25:1 is provided by employing a  $\frac{3}{4}$ " Pinion.


### GEARS

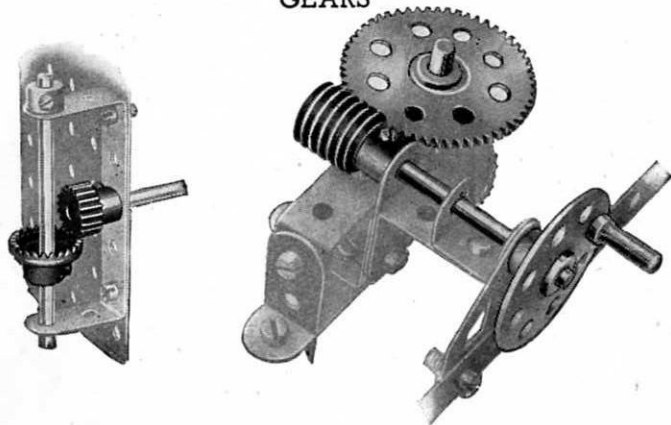

The Meccano system includes a wide range of Gear Wheels, Bevel Gears, Pinion Wheels, Contrate Wheels and Worms in various sizes. All manner of interesting movements can be obtained by the use of these gears.

How a drive can be transmitted from a vertical to a horizontal shaft or vice versa, is shown on the left. On the right the Worm engaged with a Gear Wheel, gives a very great reduction in shaft speed.


### BELT AND CHAIN DRIVES

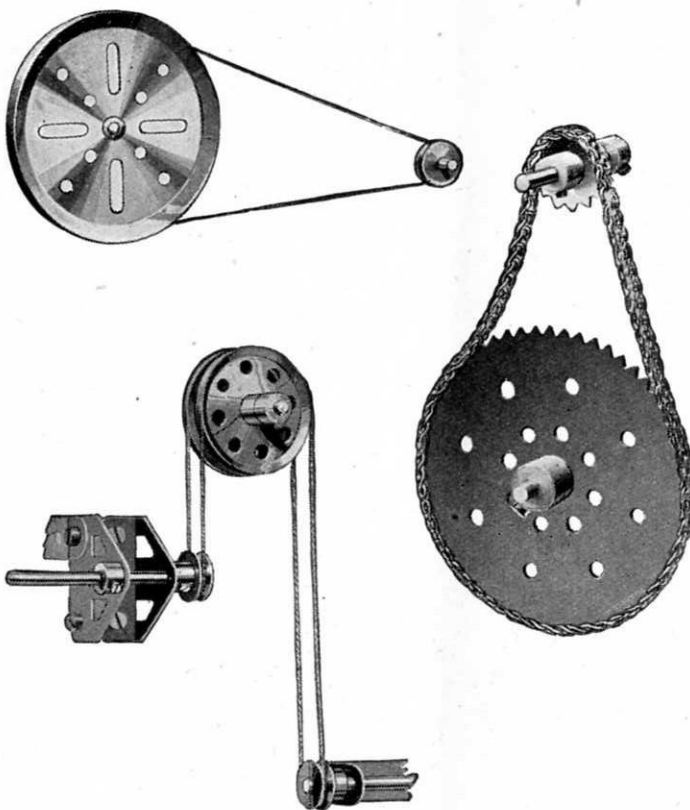

Above we show examples of belt and chain drive. The movements illustrated require no explanation excepting, perhaps, the lower belt drive, which shows a simple method for transmitting the drive from one shaft to another when the shafts are not in line.

Cords usually take the place of belts in Meccano models but miniature belting can be made from strips of canvas, indiarubber, etc., in which case Flanged Wheels should be used instead of grooved Pulleys.

### EPICYCLIC TRANSMISSION GEAR

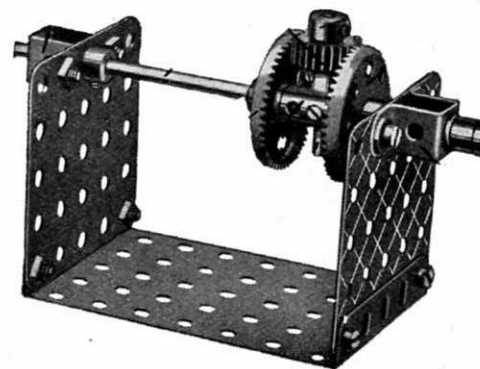

Practically every type of mechanical power transmission gear can be reproduced with Meccano

The device illustrated is designed to provide a gear ratio between two shafts mounted in direct line with one another. Its chief merit lies in the compactness of its construction and lack of external bearings.

### STEERING GEARS



The various types of steering mechanism commonly in use on vehicles of all descriptions can readily be reproduced with Meccano.

In the example illustrated, the road wheels are controlled by an endless Sprocket Chain operated by a Worm and Pinion mechanism.

- 3**  
Perforated Strips
- |     |        |         |     |        |        |
|-----|--------|---------|-----|--------|--------|
| No. | 1.     | 12 1/2" | No. | 3.     | 3 1/2" |
| 1a. | 9 1/2" |         | 4.  | 3"     |        |
| 1b. | 7 1/2" |         | 5.  | 2 1/2" |        |
| 2.  | 5 1/2" |         | 6.  | 2"     |        |
| 2a. | 4 1/2" |         | 6a. | 1 1/2" |        |

- 9a**  
Angle Girders
- |     |         |     |        |
|-----|---------|-----|--------|
| 7.  | 24 1/2" | 9a. | 4 1/2" |
| 7a. | 18 1/2" | 9b. | 3 1/2" |
| 8.  | 12 1/2" | 9c. | 3"     |
| 8a. | 9 1/2"  | 9d. | 2 1/2" |
| 8b. | 7 1/2"  | 9e. | 2"     |
| 9.  | 5 1/2"  | 9f. | 1 1/2" |

- 10** Flat Brackets  
**11** Double Brackets  
**12** Angle Brackets, 1/2" x 1/2"  
12a. " " 1" x 1/2"  
12b. " " 1" x 1"  
12c. Obtuse Angle Brackets, 1/2" x 1"

- 13** Axle Rods.  
13a. 11 1/2"  
13b. 8"  
14. 6 1/2"  
15. 5"  
15a. 4 1/2"  
15b. 4"

- 19h**  
19g. Crank Handles, 3 1/2" with Erinoid grip  
19h. " " 5"  
19s. " " 3 1/2" without "

- 20**  
19a. Wheels, 3" diam., with set-screws  
20. Flanged Wheels, 1 1/2" diam.  
20b. " " 1"

- 19c**  
19a. Wheels, 3" diam., with set-screws  
20. Flanged Wheels, 1 1/2" diam.  
20b. " " 1"

- 19b**  
19b. 3" diam. with centre boss & set-screw  
19c. 6" " " " "  
20a. 2 1/2" " " " "  
21. 1 1/2" " " " "  
22. 1" " " " "  
22a. 1" " without " and grub-screw  
22a. 1" " without " and grub-screw  
23. 1/2" " " " "

- 24** Bush Wheels

- 26a**  
25. Pinion Wheels, 1" diam., 1/2" face  
25a. " " " " "  
25b. " " " " "  
25c. " " " " "  
25d. " " " " "  
25e. " " " " "  
25f. " " " " "

- 27**  
27. 50 teeth, to gear with 1" pinion  
27a. 57 " " " (3 1/2" diam.)  
27b. 133 " " " (2 1/2" diam.)  
27c. 95 " " " "

- 28**  
28. Contrate Wheels, 1 1/2" diam.  
29. " " " "

- 30**  
30. Bevel Gears, 1 1/2", 26 teeth  
30a. " " 1 1/2", 16 " (Can only be used together)  
30c. " " 1 1/2", 48 " "

- 31**  
31. Gear Wheels, 1", 38 teeth  
32. Worms.

- 34**  
34. Spanners  
34b. Box Spanners

- 35**  
35. Spring Clips ... box of 20  
35s. " " " box of 60  
36. Screwdrivers  
36a. " Extra Long  
36b. " Special  
37. Nuts and Bolts, 1/2" box of 12  
37af. Nuts " " box of 50  
37bf. Bolts, 1/2" " box of 50  
37f. Nuts and Bolts, 1/2" box of 50  
37g. " " " box of 144  
38. Washers " " pkt. of 20  
38s. " " " box of 60  
40. Hanks of Cord

- 41** Propeller Blades

- 43** Springs  
44. Cranked Bent Strips  
45. Double  
46. Double Angle Strips, 2 1/2" x 1"  
47. " " " 2 1/2" x 1 1/2"  
47a. " " " 2 1/2" x 1 1/2"  
48. " " " 1 1/2" x 1 1/2"  
48a. " " " 2 1/2" x 1 1/2"  
48b. " " " 3 1/2" x 1 1/2"  
48c. " " " 5 1/2" x 1 1/2"  
48d. " " " 5 1/2" x 1 1/2"

- 50a** Eye Pieces, with boss  
51. Flanged Plates, 2 1/2" x 1 1/2"  
52. " " 5 1/2" x 2 1/2"  
52a. Flat Plates, " 5 1/2" x 3 1/2"  
53. Flanged Plates, 3 1/2" x 2 1/2"  
53a. Flat Plates, 4 1/2" x 2 1/2"

- 54a** Flanged Sector Plates, 4 1/2" long  
55. Perforated Strips, slotted, 5 1/2" long  
55a. " " " 2 1/2" long

- 57**  
57. Hooks  
57a. " Scientific  
57b. " Loaded, Large  
57c. " Loaded, Small

- 58**  
58. Spring Cord, 40" Length  
58a. Coupling Screws for Spring Cord  
58b. Hooks for Spring Cord

- 59** Collars, with grub-screws  
61. Windmill Sails

- 62**  
62. Cranks  
62a. Threaded Cranks  
62b. Double Arm Cranks  
63. Couplings  
63a. Octagonal Couplings  
63b. Strip Couplings  
63c. Threaded Couplings

- 64**  
64. Threaded Bosses  
65. Centre Forks  
66. Weights, 50 grammes  
67. " 25 "  
68. Woodscrews, 1/2" "  
69. Set Screws  
69a. Grub Screws, 1/2" "  
69b. " 3/8" "  
69c. " 1/4" "

- 70**  
70. Flat Plates, 5 1/2" x 2 1/2"  
72. " " 2 1/2" x 2 1/2"  
73. " " 3" x 1 1/2"  
76. Triangular Plates, 2 1/2" "  
77. " " 1"

- 80a**  
80a. 11 1/2"  
80b. 8"  
80c. 6"  
80d. 5"  
80e. 3 1/2"

- 89**  
89. 5 1/2" Curved Strips, 10" radius  
89a. 3" " " cranked, 1 1/2" radius  
89b. 4" Curved Strips, cranked, 4 1/2" radius, 8 to circle  
90. 2 1/2" Curved Strips, 2 1/2" radius  
90a. 2 1/2" " " cranked, 1 1/2" radius, 4 to circle

- 94**  
94. Sprocket Chain, per 40" length  
95. " " " 36 teeth, 2" diam.  
95a. " " " 28 " 1 1/2" "  
95b. " " " 56 " 3" "  
96. " " " 19 " 1" "  
96a. " " " 14 " 3/4" "

- 99**  
99. 3 1/2" long  
99a. 3" " " 9 1/2" long  
99b. 2 1/2" " " 7 1/2" "  
99c. 2" " " 5 1/2" "  
99d. 1 1/2" " " 4 1/2" "

- 101**  
101. Heads, for looms  
102. Single Bent Strips  
103. 5 1/2" long  
103a. 9 1/2" " " 103f. 3" long  
103b. 12 1/2" " " 103g. 2 1/2" "  
103c. 4 1/2" " " 103h. 1 1/2" "  
103d. 3 1/2" " " 103k. 7 1/2" "

- 106**  
106. Wood Rollers  
106a. Sand Rollers  
107. Tables for designing machines  
108. Architraves  
109. Face Plates, 2 1/2" diam.

- 110**  
110. Rack Strips, 3 1/2" long  
110a. " " 6 1/2" "  
111. Bolts, 1/2" " 111c. Bolts, 3/8" "  
111a. " " 1/2" " 111d. " 1 1/2" "

- 113**  
113. Girder Frames  
114. Hinges  
115. Threaded Pins  
116. Fork Pieces, Large  
116a. " Small  
117. Steel Balls, 3/8" diam.

- 118**  
118. Hub Discs, 5 1/2" diam.



## MECCANO PARTS

- No. 120. Buffers  
120b. Compression Springs
- 120a. Spring Buffers  
120b. Compression Springs
121. Train Couplings  
122. Miniature Loaded Sacks
123. Cone Pulleys  
124. Reversed Angle Brackets, 1"  
125. " " " "
126. Trunnions  
126a. Flat Trunnions
127. Simple Bell Cranks  
128. Boss Bell Cranks
129. Rack Segments, 3" diam.
130. Eccentrics, Triple Throw
131. Dredger Buckets  
132. Flywheels, 2½" diam.
133. Corner Brackets, 1½"  
133a. " " " "
134. Crank Shafts, 1" stroke  
135. Theodolite Protractors
136. Handrail Supports  
136a. Handrail Couplings  
137. Wheel Flanges
137. Wheel Flanges

- No. 138. Ships' Funnels  
138a-z. " " Raked
139. Flanged Brackets (right)  
139a. " " (left)
140. Universal Couplings  
141. Wire Lines (for clock weights)
142. Rubber Rings (to fit 3" diam. rims)  
142a. Motor Tyres (to fit 2" diam. rims)  
142b. " " " 3"  
142c. " " " 1"  
142d. " " " ½"
143. Circular Girders, 5½" diam.
144. Dog Clutches
145. Circular Strips, 7½" diam. overall  
146. " Plates, 6"  
146a. " " 4"
147. Pawls, with Pivot Bolt and Nuts  
147a. Pawls  
147b. Pivot Bolts with 2 Nuts  
147c. Pawls without boss  
148. Ratchet Wheels
149. Collecting Shoes for Electric Locos  
150. Crane Grabs

- No. 151. Pulley Blocks, Single Sheave  
151. " " Two  
152. " " Three  
153. " " " "
- 154a. Corner Angle Brackets, ½"  
(right-hand)  
154b. Corner Angle Brackets, ½"  
(left-hand)  
155. Rubber Rings (for 1" Pulleys) Black  
155a. " " " White
156. Pointers (with boss) 2½" overall
157. Fans, 2" diam.  
158a. Signal Arms, Home  
158b. " " Distant
160. Channel Bearings, 1½" x 1" x ½"  
161. Girder Brackets, 2" x 1" x ½"
162. Boilers, complete, with ends  
162a. " " Ends  
162b. " " without ends  
163. Sleeve Pieces  
164. Chimney Adaptors
165. Swivel Bearings  
166. End "
167. Geared Roller Bearings  
167a. Roller Races, geared, 192 teeth  
167b. Ring Frames for Rollers  
167c. Pinions for Roller Bearings (16 teeth)

- No. 168. Ball Bearings, 4" diam.  
168a. " Races, flanged discs  
168b. " " toothed  
168c. " Casings, complete with balls
169. Digger Buckets
170. Eccentrics, ½" throw  
171. Socket Couplings
172. Pendulum Connections  
173. Rail Adaptors
174. Grease Cups
175. Flexible Coupling Units
176. Anchoring Springs for Cord
177. Shafting Standards, Large  
178. " " Small  
179. Rod Sockets  
180. Toothed Gear Rings, 3½" diam.  
181. Bobbins  
182. Insulating Bushes  
182a. Insulating Washers
183. Lamp Holders  
184a. 2½-volt Lamps  
184b. 3½ " " "
- 184c. 6-volt Lamps  
184d. 10 " " "  
184e. 20 " " "

- No. 185. Steering Wheels, 1½" diam.  
186. Driving Bands, 2½" (Light)  
186a. " " 6"  
186b. " " 10"  
186c. " " 10" (Heavy)  
186d. " " 15"  
186e. " " 20"  
187. Road Wheels
191. 4½" x 2½"  
192. 5½" x 2½"  
Strip Plates.  
196. 9½" x 2½"  
197. 12½" x 2½"
198. Hinged Flat Plates, 4½" x 2½"  
199. Curved Plates, U-Section 2½" x 2½" x ½"  
200. " " 2½" x 2½", 1½" radius
201. Lamps with Flex (3½ volts)  
202. Angle Brackets (for Headlamps)  
203. Headlamps  
203a. Headlamp Rims  
203b. " Bodies  
204. " Nuts  
205. " Glasses  
206. Lampshades  
207. Lamp Bases  
207a. Lamp with Standard and Flex  
208. Battery Tags and Studs  
208a. Washers for Battery Studs  
210. Nuts for Battery Studs
- 211a. Helical Gear ½" { Can only be  
211b. " " 1½" used together
212. Rod and Strip Connectors  
213. Rod Connectors
214. Semi-Circular Plates 2½"  
215. Formed Slotted Strips 3"
216. Cylinders, 2½"
- 217A. Discs, 1½"  
217B. Discs ¾"