


Built with  
Meccano  
Outfit K

# Meccano Platform Scales

A Model that will  
Accurately Register  
Any Weight from  
 $\frac{1}{2}$  oz. to  $4\frac{1}{2}$  lb.

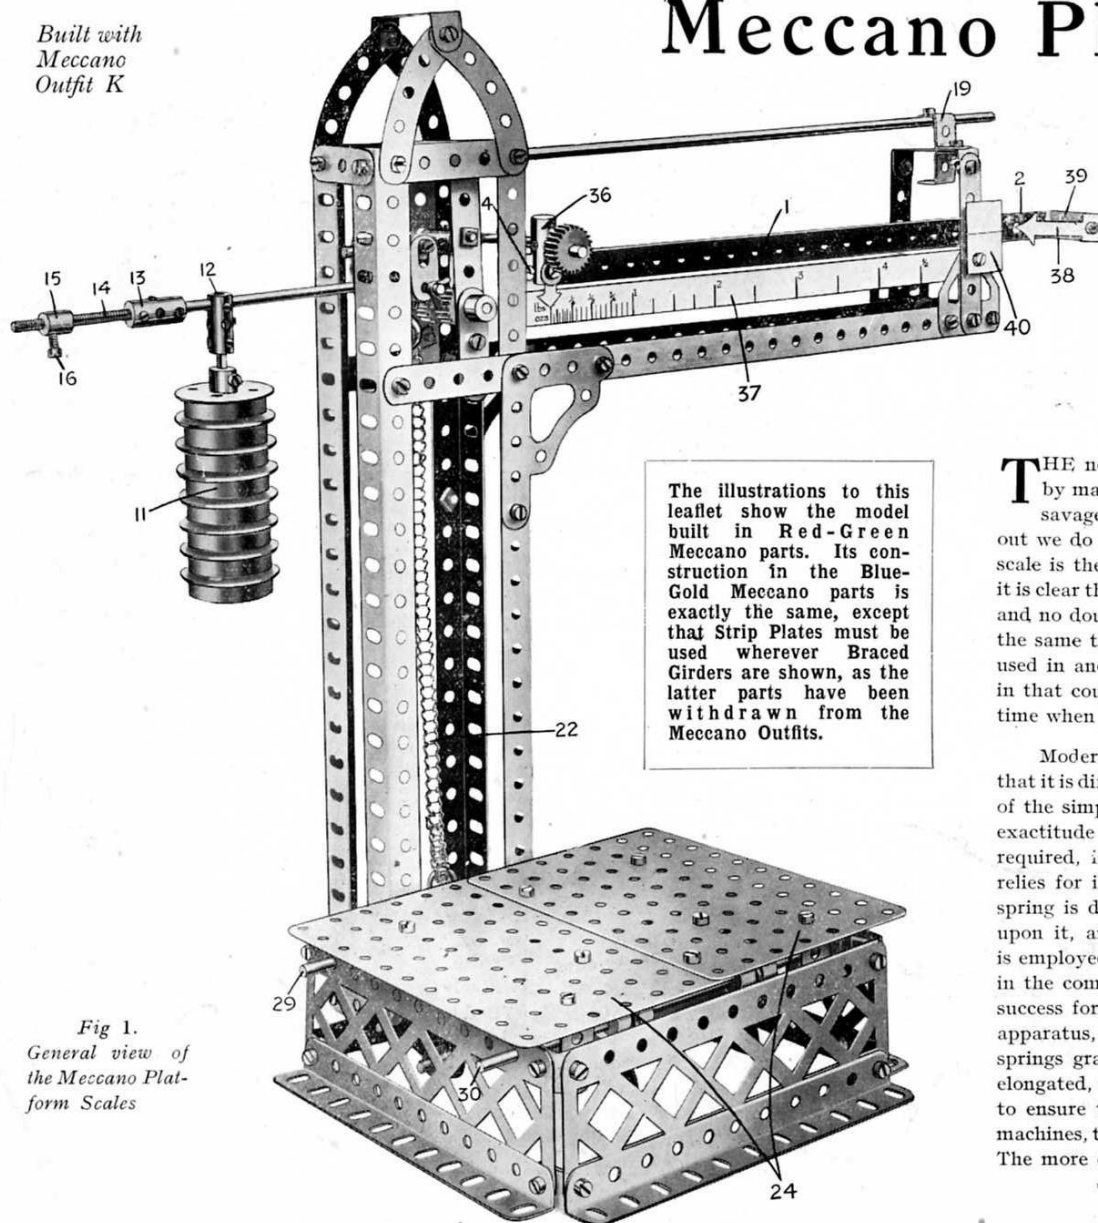

The illustrations to this leaflet show the model built in Red-Green Meccano parts. Its construction in the Blue-Gold Meccano parts is exactly the same, except that Strip Plates must be used wherever Braced Girders are shown, as the latter parts have been withdrawn from the Meccano Outfits.

Fig 1.  
General view of  
the Meccano Plat-  
form Scales

THE necessity for some means of weighing must have been felt by man from the time he emerged from a condition of primitive savagery. How the earliest weighing operations were carried out we do not know, but it appears certain that the oldest form of scale is the equal-armed balance. From drawings still in existence it is clear that this form of balance was used by the ancient Egyptians, and no doubt the balance referred to frequently in the Bible was of the same type. In all probability the same means of weighing was used in ancient China long before the Christian era, for civilisation in that country had reached a comparatively high standard by the time when it was only beginning to dawn on the nations of Europe.

Modern weighing machines present such a variety of forms that it is difficult to recognise in some of them any of the characteristics of the simple oil-fashioned scales. In cases where a high degree of exactitude is unnecessary, and where a small compact machine is required, it is customary to make use of a spring balance, which relies for its action upon the fact that the extent to which a coil spring is drawn out varies in accordance with the weight imposed upon it, and is constant for each definite weight. This principle is employed in the Meccano Automatic Weighing Machine described in the complete Manual of Instructions, and is used with complete success for measuring tensional forces in various kinds of scientific apparatus, but all spring balances have the disadvantage that the springs gradually lose some of their elasticity and become slightly elongated, and consequently have to be frequently calibrated in order to ensure their accuracy. The majority of balances and weighing machines, therefore, are constructed without using springs of any kind. The more complicated types incorporate a system of levers, but in

almost every case the essential mechanism consists of some variation of the original balanced arm.

### Importance of the "Knife-edge"

The ordinary balance consists of a lever of the first order called the beam, supported at its centre on a fulcrum. At each end of the beam is hung a scale-pan, one of these pans being for the weights and the other for the object that is to be weighed.

It is necessary that the beam should be able to swing quite freely on its support, and in order to ensure this, the fulcrum consists of a steel or agate prism or "knife-edge," with its sharp edge at right angles to the direction of the beam and resting upon a plane of polished steel or agate. This construction reduces friction to the minimum. A pointer fixed to the centre of the beam indicates—by coming to rest in the line of direction from the fulcrum to the centre of gravity of the beam or by swinging evenly on each side of that line—when the balance is horizontal, which occurs when the weights in one scale pan exactly balance the object in the other.

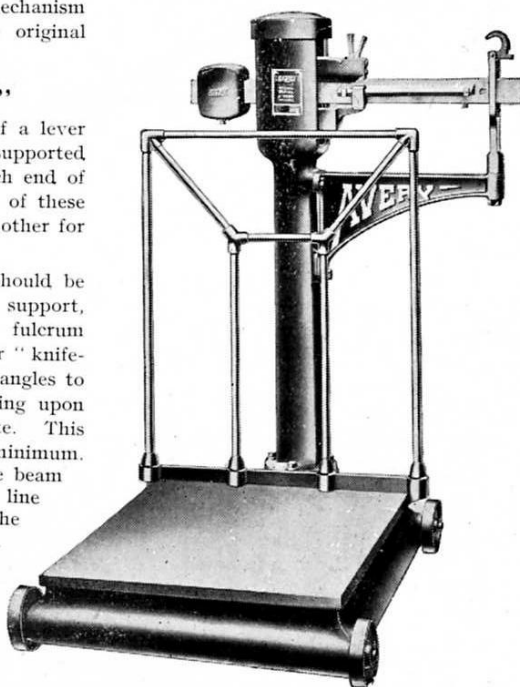


Photo courtesy

Messrs. W. & T. Avery Ltd.

Fig. 2. Portable Platform Weigher

### The Roman Balance

A very important modification of the equal-armed balance is the steelyard or Roman balance. This consists essentially of a bar of steel suspended near one of its ends from which hangs the object to be weighed. A weight used as a counterpoise moves along the longer arm of the bar. The result of placing the counterpoise on the longer arm is to enable a small weight to balance a very heavy object, thus doing away with the necessity for using heavy weights. The position of the counterpoise when the arm is level indicates the weight of the object balanced on the shorter arm.

A simple model of a Roman Balance, with which the principle of the model about to be described may be demonstrated, is shown in Fig. 3. Before using this little model, a counterpoise should be added to the short arm of the lever so that the longer arm is maintained in a horizontal position when the sliding weight is pushed as closely as possible to the fulcrum. The counterpoise may consist of a series of Strips, etc., and once the correct weight has been ascertained it can be secured in position. The smallest additional weight on the short arm of the balance will then cause the longer arm to rise vertically and the sliding weight must be moved outward to restore it to its original position. The distance through which the sliding weight is moved indicates the weight of the object.

### Roman Balance in its Modern Form

From the simple steelyard has developed the modern commercial platform weighing machine, which is a familiar object in the warehouses and factories of our industrial towns.

In this type of balance the object to be weighed is not hung directly from the steelyard, but rests upon a low platform. This arrangement enables heavy and bulky objects, such as sacks full of various materials, to be weighed quickly and with the greatest ease. The whole machine usually is mounted on wheels and thus can be moved easily about a warehouse and operated in any position required.

A typical high-class platform weighing machine is shown in Fig. 2. Such machines are made in various sizes having capacities of from 3 cwt. to 20 cwt. For weighing certain kinds of material the back rail of the platform shown in the photograph is apt to be inconvenient, and therefore machines may be obtained without this rail.

The same type of machine is used in railway stations, and in other places, without the wheels. In many cases the weighing platform is sunk until level with the station platform, so that heavy loads may be moved on to it with the greatest ease. It is generally found arranged in this way in the parcel offices, and larger machines of a similar type are employed in the goods yards and in the yards of mills and factories.

Although differing in outward details from the design of the weigher shown in Fig. 2, the Meccano model nevertheless closely resembles in principle that machine. The Avery weigher is fitted with wheels so that it may be moved about as required, and, if desired, the Meccano model may be made portable by mounting the base on 1" Pulley Wheels or Flanged Wheels, etc.

The model was perfected only after much experimental work, and it may well be regarded as still another triumph for the Meccano system. Its internal details, although necessarily of a complicated nature, have been designed with a view to reducing friction to a minimum, with the result that the model will weigh objects ranging from  $\frac{1}{2}$  oz. to  $4\frac{1}{2}$  lbs. with remarkable accuracy provided that it is carefully calibrated.

### The Steelyard

The framework of the model requires no detailed explanation, for it is shown clearly in Figs. 1 and 5. The steelyard 1, Fig. 1, consists of a  $12\frac{1}{2}$ " Strip, and an  $11\frac{1}{2}$ " Rod extending along the back of this Strip is attached to it by means of Couplings. The Coupling at the outer end is in a horizontal position, and is secured to the steelyard by means of an ordinary bolt entering one of its transverse threaded bores, the  $11\frac{1}{2}$ " Rod being made fast in the longitudinal bore. The  $12\frac{1}{2}$ " Strip is similarly attached to the Coupling 5, Fig. 6, the same bolt serving to attach the Strip and to secure the end of the  $11\frac{1}{2}$ " Rod in the lowest transverse hole of the Coupling. The Coupling 5 is carried on the end of a 3" Rod 6 which passes through further Couplings 7 and 8 and enters another Coupling in which a  $3\frac{1}{2}$ " Axle Rod 10 is mounted. This Rod carries the balance weights 11, which may be secured at any point along its length by means of the Coupling 12.

The Rod 10 is extended at its outer

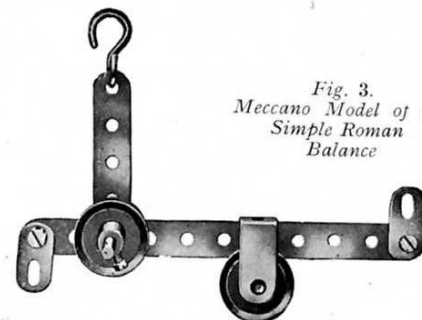


Fig. 3.  
Meccano Model of a  
Simple Roman  
Balance

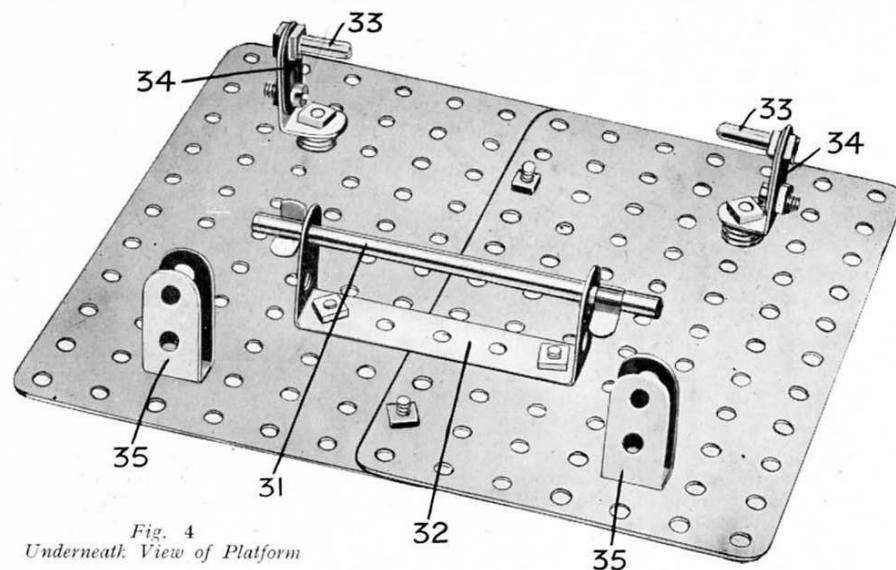


Fig. 4  
Underneath View of Platform

end by a Coupling 13 and a 2" Threaded Rod 14 on which is screwed a Threaded Boss 15. Very accurate balance adjustments can be made by turning this Threaded Boss, and when the steelyard is exactly balanced the Boss is secured in position by the bolt 16.

### The Knife-edge Bearing

Almost all accurate balances incorporate some form of knife-edge bearing; in the smaller instruments, as we have already remarked, this usually consists of a triangular prism of agate, an exceedingly hard semi-precious stone, but in the case of large machines this is obviously impracticable owing to the brittle nature of agate and the amount of this material that it would be necessary to use, and steel therefore often takes the place of agate. In the Meccano model a very efficient knife-edge bearing is obtained without any deviation from the standard system of parts.

The Coupling 7, Fig. 6, carries two Centre Forks 17, the points of which rest between the teeth of two  $\frac{1}{2}$ " Pinion Wheels. Thus the whole weight of the balance arm, including the load imposed upon it, rests on the six hard steel points of the Centre Forks with the result that an unusually delicate balance is obtainable. The two  $\frac{1}{2}$ " Pinions are secured to a 2" Rod rigidly held in two Cranks, which are attached to a pair of  $3\frac{1}{2}$ " Strips pivoted to the ends of a Coupling. The central transverse hole of this Coupling carries an  $11\frac{1}{2}$ " Rod 18, which passes through the middle hole of a horizontal  $1\frac{1}{2}$ " Strip that forms part of the framework. Collars are secured to the Rod 18 on both sides of this  $1\frac{1}{2}$ " Strip, but are spaced sufficiently far apart to allow the Rod a certain amount of freedom to pivot. A stop 19 for the Rod 18 is provided at the outer end of the framework, Fig. 1, and consists of a Reversed Angle Bracket to which a nut and bolt are attached.

Two Flat Brackets 20 suspended from the ends of the Coupling 8 carry in their lower holes a 1" Rod, which is retained in position by Clips. A Hook suspended from this 1" Rod is connected with the levers 23 in the base of the model by the Sprocket Chain 22 and

another Hook, which passes under a 1" Rod held in the end holes of the levers 23, Fig. 5.

### Platform Mechanism.

The levers 23, Fig. 5, are pivoted on Hooks 24, which are held in position on the  $6\frac{1}{2}$ " Rod 30 by means of Collars. A central 3" Rod 25 journaled in the Strips 23 is also retained in place by Collars, and carries a special suspension link 26 consisting of a Double Bracket and a  $\frac{3}{4}$ " Bolt. This link supports a 5" Rod 27, to the ends of which two further levers 28, consisting of 2" Strips, are attached by means of Collars and Spring Clips, the opposite ends of the levers being pivoted to Hooks 28a on the  $6\frac{1}{2}$ " Rod 29.

The platform, which is shown inverted in Fig. 4, is composed of two  $5\frac{1}{2}$ "  $\times$   $3\frac{1}{2}$ " Flat Plates overlapped one hole and bolted together. A  $2\frac{1}{2}$ "  $\times$  1" Double Angle Strip 32 attached to the underside carries a  $3\frac{1}{2}$ " Axle Rod 31, which is retained in position by Clips. When the platform is in position, this Rod rests on the levers 23, Fig. 5, while two Threaded Pins 33, secured to the  $1"$   $\times$   $\frac{1}{2}"$  Angle Brackets 34, rest on the levers 28.

Four Washers are placed between each of the Angle Brackets 34 and the underside of the platform, and two Washers are placed on each of the bolts that secure the Double Angle Strip 32. Single Bent Strips 35 bolted to the  $5\frac{1}{2}$ "  $\times$   $3\frac{1}{2}"$  Flat Plates fit over the Rod 30 in the base, Fig. 5, and form vertical guides for the platform.

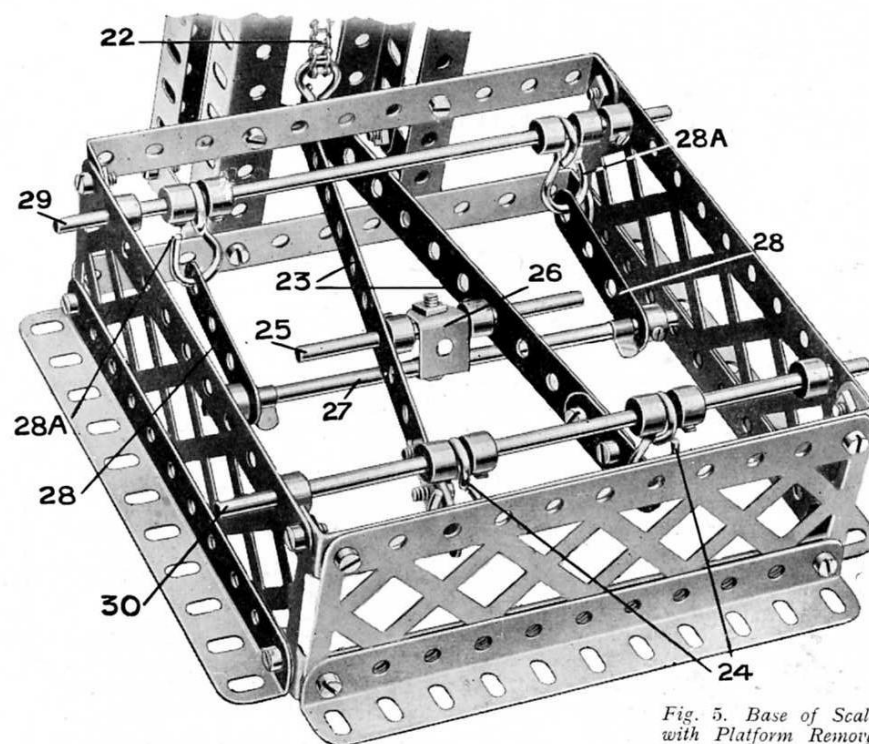


Fig. 5. Base of Scales  
with Platform Removed

The arrangement of the levers underneath the Platform is specially designed to make the machine respond to the slightest pressure, and to ensure that the same weight placed on any part of the platform (except at the extreme edges) will produce an equal pull on the Chain 22, whether the load is transmitted to the Chain by way of the Rod 31 and the levers 23 or by the Threaded Pins 33 and the levers 28.

#### Details of Indicator, etc.


A weight 36, Fig. 1, consisting of a Strip Coupling, a short Rod, and a  $\frac{3}{4}$ " Pinion, slides along the steelyard 1 and carries a small pointer cut from cardboard, which indicates the load being weighed by means of the graduated scale 37. A piece of cardboard 38 should be cut in the form of an arrow and bolted to a Reversed Angle Bracket 39 in such a position that it comes to rest opposite a line on the cardboard indicator 40 when the steelyard is exactly horizontal. An upper and lower stop should be provided for the steelyard, consisting of a Reversed Angle Bracket and a  $1" \times \frac{1}{2}"$  Angle Bracket respectively. The upper stop is clearly seen in Fig. 1 immediately below the stop 19.

In building the model, care should be taken that each part is in the exact position shown. When the scales are complete, the steelyard should be balanced carefully by moving the weight 11 and minute adjustment made by means of the Threaded Boss 15 until the arrow 38 is exactly on the line on the indicator 40 when the sliding weight is in its innermost position. The bolt 16 should then be tightened up to secure the Threaded Boss on the Threaded Rod 14.

The scale 37 is cut from cardboard, and is provided with extensions at each end by means of which it may be bolted to the  $12\frac{1}{2}"$  Strip 1 of the steelyard. To graduate the scale, known weights are placed on the platform, and the sliding weight 36 is moved along the steelyard until the arrow 38 points once more to the line on the indicator 40. The exact position of the pointer attached to the weight should be noted on the scale in each case, and the magnitude of the weight marked against it. The need for exactitude, both in calibrating (*i.e.*, graduating the scale) and in the actual process of weighing, cannot be stressed too greatly, for a slight variation on the scale represents a considerable difference in the weight on the platform.

The steelyard is lifted into weighing position by placing the  $11\frac{1}{2}"$  Rod 18 under the stop 19 (see Fig. 1). The object to be weighed is then placed on the platform, and the weight 36 adjusted as explained until the pointer 38 is opposite the line on the indicator 40. The pointer attached to the sliding weight will then be found to indicate on the scale 37 the exact weight of the object. When not in use the

Fig. 6.  
Sectional View of  
Platform Scales,  
Upper Portion,  
Showing Knife-  
edge Bearing

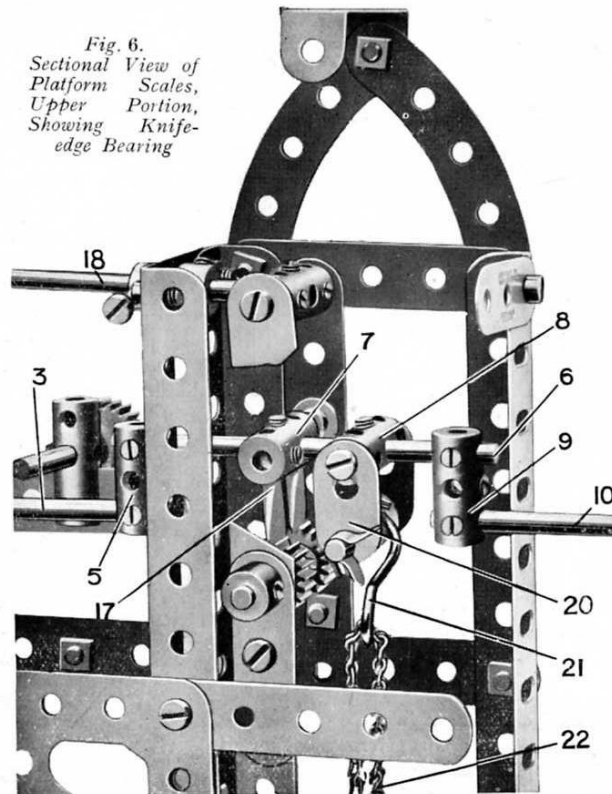

scales should always be put out of action by releasing the Rod 18 from under the stop 19.

#### Miscellaneous Points

The model should be oiled at frequent interval and all working parts must be kept clean and perfectly free to move. The Coupling 7 of the fulcrum in particular should not be allowed to touch the suspended  $3\frac{1}{2}"$  Strips on either side of it.

The appearance of the model may be improved considerably by filling in the sides of the upright member with a number of Strip Plates. The framework enclosing the steelyard may also be covered with either Strips or Flat Girders. This will not only give the model a more solid and workmanlike appearance, but will protect the knife edge and the other working parts from possible disarrangement, and, in addition, will help to eliminate from the bearings dust and other foreign matter which, if allowed to accumulate, would increase friction and impair the efficiency of the Scales.

In addition to affording a very interesting model to build, the Meccano Platform Scales form a really useful household article. To the more studious Meccano boy further interest attaches in that the model illustrates clearly and simply the general principles of the lever when used as a mechanical power and as a means of changing the direction of a force. Although the internal arrangements are perhaps a little complicated, it is a model that any Meccano boy can build. It will amply repay the little extra time and concentration that may be required to make it efficient and accurate.

#### List of Parts Required for Building the Meccano Platform Scales

3 of No.	1	1 of No.	12A	2 of No.	26	1 of No.	63B
2 " "	2	3 " "	12B	8 " "	35	1 " "	64
2 " "	3	2 " "	13	78 " "	37	2 " "	65
2 " "	4	2 " "	14	14 " "	38	1 " "	81
3 " "	5	1 " "	15	1 " "	46	4 " "	90
2 " "	6	3 " "	16	3 " "	48	2 " "	102
6 " "	6A	2 " "	16B	4 " "	48D	2 " "	108
4 " "	8	1 " "	17	2 " "	52A	1 " "	111
2 " "	9	2 " "	18A	6 " "	57C	1 " "	111A
4 " "	10	1 " "	18B	20 " "	59	2 " "	115
1 " "	11	8 " "	20	2 " "	62	2 " "	126A
2 " "	12	1 " "	25	8 " "	63	3 " "	195